

IOS INTERCHANGEABLE OPTICAL SYSTEM
 99.99% pure aluminium reflector; twist lock fixing system;
 tempered safety glass (clear, microsphere or shaped);
 4 beams available: narrow, medium, wide, narrow and long.



fivespot

**pendant with IOS optics
 adjustable via universal joint
 for metal halide lamps, 35W G12**

Body painted steel with die-cast aluminium tilting optics.
 4 steel suspension cables

Adjustment horizontal 356° - vertical 50°


Control gear technologies HF control gear (housed in the central body)

Installation ceiling mounted

www.reggiani.net/code no.




Standard finish .28 metallised grey



OPTICS ADJUSTABLE
 VIA UNIVERSAL JOINT

HORIZONTAL
 ROTATION
 356°


VERTICAL
 ADJUSTMENT
 50°

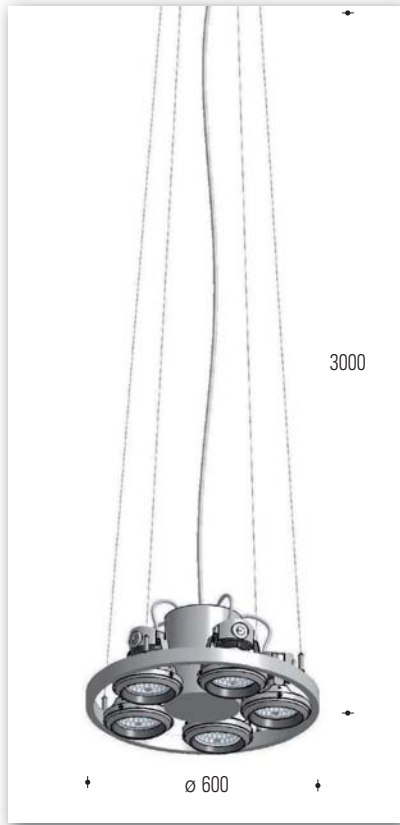

S4978

CONTROL GEAR
 HF

W
 5 x 35



2x37°	35W	
∅/m	h/m	LUX
1,52	2	1202
3,04	3	301
4,56	4	134
6,08	5	75
7,61	5	48

IP
 20



KG
 12

Can be purchased separately in the desired finish in order to change the width and colour of the light beam

FINISHES

	.00		.59		.79		.65		.66		.67		.74		.75		.76		.77		FINISHES
CLEAR		I R		ANTI UV		BLUE SELECTIVE FILTER		RED SELECTIVE FILTER		PINK SELECTIVE FILTER		BLUE DICHROIC		GREEN DICHROIC		YELLOW DICHROIC		RED DICHROIC		IOS MIRA	CLEAR
11305	2x 6°																			11308	
11306	2x 11°																				
11307	2x 37°																				

ANTI-GLARE LOUVRE

11316.21



INTERCHANGEABLE OPTICAL SYSTEM

