

IOS INTERCHANGEABLE OPTICAL SYSTEM
 99.99% pure aluminium reflector; twist lock fixing system;
 tempered safety glass (clear, microsphere or shaped);
 4 beams available: narrow, medium, wide, narrow and long.



triSio double - up

adjustable projectors
for metal halide lamps, 35W/70W G8.5



In order to achieve the desired lighting configuration, the luminaire is supplied without IOS optics. When ordering, the luminaire code no., the IOS optics code no. must be indicated.









www.reggiani.net/code no.

- Body** die-cast aluminium, with integral anti-glare shield, base in die-cast aluminium (housing the control gear technologies)
- Adjustment** horizontal 356° - vertical 100° (friction device with screw lock)
- Control gear technologies** HF control gear
- Installation** on 3-circuit track (codes 2230/40/44), luminaire complete with adapter (2270), which provides the electrical connection; snap-on mechanical connection.

Standard finishes .10 white .21 black .28 metallised grey

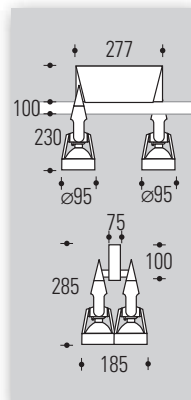

	CONTROL GEAR	W				IP
S5076	HF	2x70	CDM-TC	G 8.5		20
S5075	HF	1x35 - 1x70	CDM-TC	G 8.5		20
S5074	HF	2x35	CDM-TC	G 8.5		20

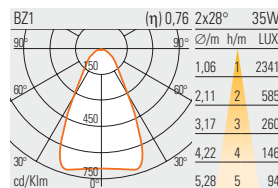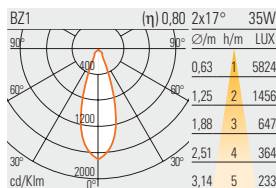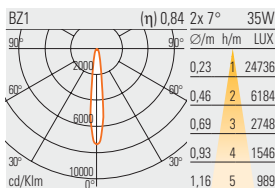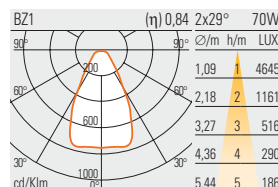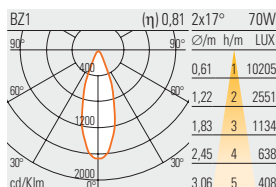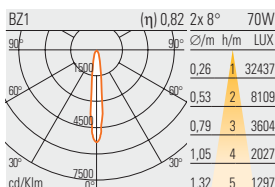

Can be purchased separately in the desired finish in order to change the width and colour of the light beam

FINISHES	FINISHES
.00 CLEAR	.00 CLEAR
.59 I R	
.79 ANTI UV	
.65 BLUE SELECTIVE FILTER	
.66 RED SELECTIVE FILTER	
.67 PINK SELECTIVE FILTER	
.74 BLUE DICHROIC	
.75 GREEN DICHROIC	
.76 YELLOW DICHROIC	
.77 RED DICHROIC	

11300 2x 7° / 8°
11301 2x 17°
11302 2x 28° / 29°

11303 IOS MIRA



INTERCHANGEABLE OPTICAL SYSTEM

