

The evolution of accent lighting

Yori Evo



Reggiani





YoriEvo



Yori Evo

- Yori Evo
- Yori Evo Ghosttrack

EN The Yori Evo series extends the Yori family of projectors, and launches the Yori Evo Ghosttrack. A new series of game changing track projectors. Mini or medium, visible or invisible. Single or cluster, lenses or reflectors . The optical technologies and the new invisible driver and adapters for 3-circuit standard tracks provide unique configuration ideas that were not possible until now.

IT

La famiglia dei proiettori Yori si allarga con la serie Yori Evo che lancia Yori Evo Ghosttrack. Questa nuova rivoluzionaria gamma di proiettori da binario, dalle dimensioni piccole o medie, è disponibile in versione visibile o invisibile, con disposizione singola o in cluster e offre un'ampia scelta di lenti o riflettori. Le tecnologie ottiche adottate, i nuovi driver e adattatori invisibili per binari standard a 3 accensioni consentono configurazioni uniche, mai realizzate fino ad ora.

Availability: July 2017
Disponibilità: Luglio 2017

Yori Evo



Finishes:



Embossed
matt white

12













Embossed
matt black

31

Yori Evo Ghostrack




Finishes:

									
Embossed matt white	Embossed matt black	Royal matt white	Royal matt black	Brushed copper	Brushed brass	Brushed gold	Antiqued brushed bronze	Chrome plated	Brushed aluminium
12	31	C0	B0	N0	D0	E0	L0	01	M0



Yori Evo

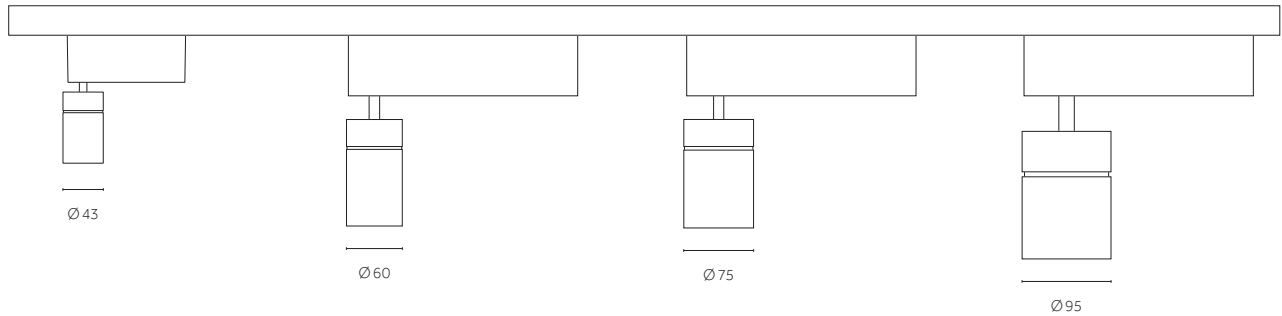

Ø43
4W, 9W
Lumen: 480-850
Lumen delivered up to 645 lm
Efficacy up to 83 lm/w


Ø60
9W, 12W, 17W
Lumen: 1305-2320
Lumen delivered up to 1880 lm
Efficacy up to 100 lm/w

Ø75
9W, 12W, 17W, 24W
Lumen: 1260-3485
Lumen delivered up to 2825 lm
Efficacy up to 110 lm/w

Ø95
12W, 17W, 24W, 33W
Lumen: 1485-4350
Lumen delivered up to 3610 lm
Efficacy up to 110 lm/w

K: 2700, 3000, 4000; CRI: > 80, > 90, > 95
Warm dimming version available: 2000K-3000K; CRI>95
Phosphor LED Module available: 2700K, 3000K, 4000K; CRI > 95; SDCM < 2
Control: On/Off, Dimm 1-10V, Dali, Bluetooth

Yori Evo Ghostrack

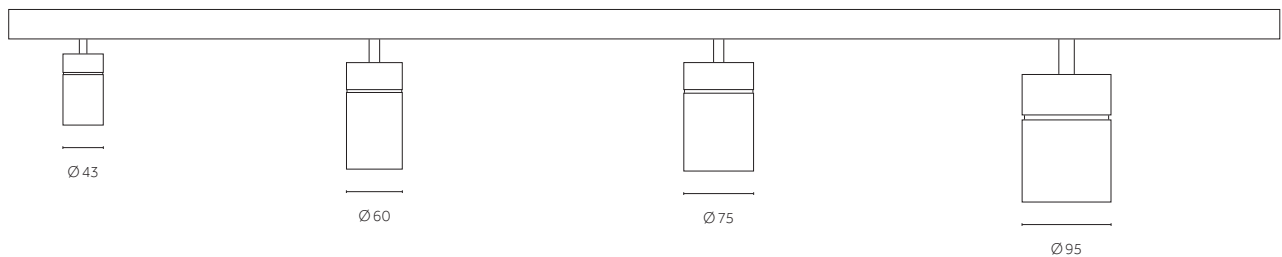

Ø43
4W, 9W
Lumen: 480-850
Lumen delivered up to 645 lm
Efficacy up to 83 lm/w

Ø60
9W, 12W, 17W
Lumen: 1150-2320
Lumen delivered up to 1880 lm
Efficacy up to 100 lm/w


Ø75
9W, 12W, 17W, 24W
Lumen: 1260-3485
Lumen delivered up to 2825 lm
Efficacy up to 110 lm/w

Ø95
12W, 17W, 24W, 33W
Lumen: 1485-4350
Lumen delivered up to 3610 lm
Efficacy up to 110 lm/w

K: 2700, 3000, 4000; CRI: > 80, > 90, > 95
Warm dimming version available: 2000K-3000K; CRI>95
Phosphor LED Module available: 2700K, 3000K, 4000K; CRI > 95; SDCM < 2
Control: On/Off, Dali, Bluetooth (available from November 2017)

New ranges of interchangeable optics: Precision for high candela values and super narrow beams, Performance for high lumen output and efficacy.


Precision



TIR LENS

Beam: super narrow (7°), narrow, medium
High intensity peak up to 52.000 cd
No field angle

Performance



REFLECTOR

Beam: narrow, medium, wide
Lumen delivered up to 3610 lm
Efficacy up to 110lm/W



Yori Evo Ghosttrack. Minimal lighting at its best.



YoriEvo


EN Yori Evo Ghosttrack lets you create unique lighting schemes and configurations. Thanks to its brand new patented technology it features an invisible adapter and driver for single or cluster installations on a standard 3-circuit track. The series includes new optics that allow outstanding light output, beam angles and intensity peaks. The range now offers a wider choice of accessories for flexibility and 10 brand new finishes to make your scheme unique.

IT

Yori Evo Ghosttrack offre la possibilità di creare configurazioni e layout illuminotecnici straordinari. Grazie ad una innovativa tecnologia brevettata, è dotato di adattatore e driver invisibili per un'installazione singola o in cluster su binari standard a 3 accensioni. Le nuove ottiche garantiscono un eccellente rendimento, diverse aperture del fascio e un'intensità ottimale. Molto più ampia la scelta degli accessori disponibili che rende la gamma estremamente versatile; inoltre le 10 nuovissime finiture renderanno unici i vostri progetti illuminotecnici.


Single

Standard
3-circuit
Track

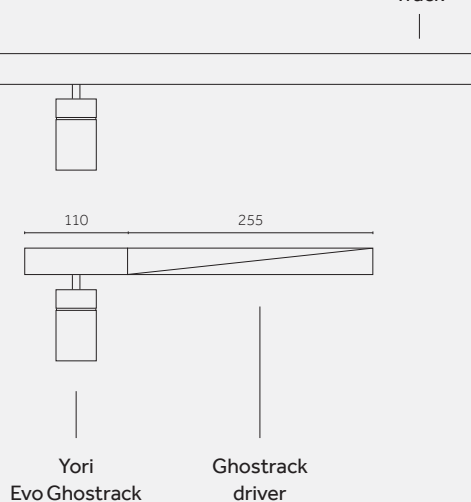

Cluster (Patent pending)


Standard
3-circuit
Track

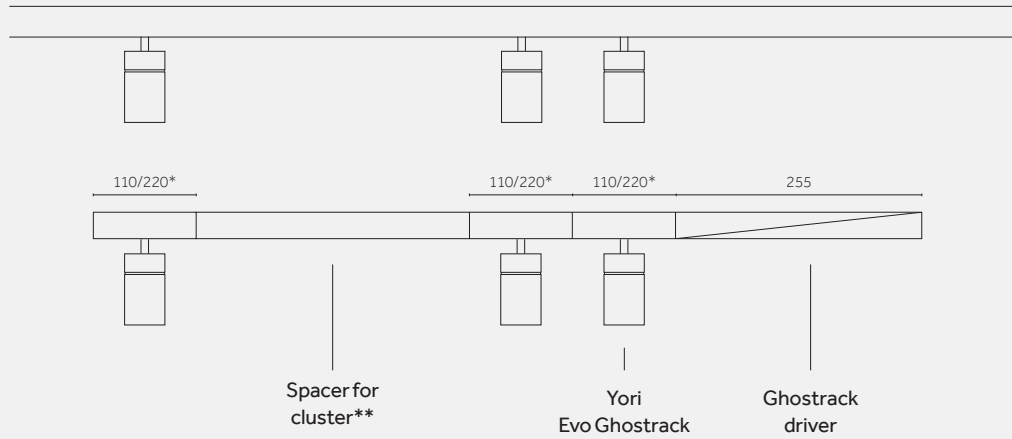

Range:

	Ø43	Ø60	Ø75	Ø95
	4W, 9W	9W, 12W, 17W	9W, 12W, 17W	12W, 17W
	4W, 9W	9W	9W, 12W	12W
	4W, 9W	9W		

Examples of cluster configurations:

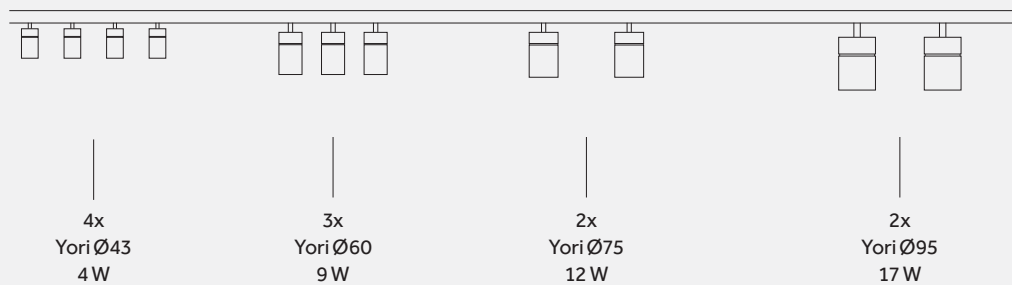

* Cluster configuration: 110mm adapter for 43mm and 60mm Yori versions, 220 adapter for 75mm and 95mm Yori versions.
Configurazione cluster: adattatore da 110mm per le versioni Yori da 43mm e 60mm, adattatore da 220mm per le versioni Yori 75mm e 95mm.
** Spacer for cluster available in: 200, 300, 400, 600, 800, 1000mm
Distanziali per cluster disponibili in: 200, 300, 400, 600, 800, 1000mm

Accessories:



YoriEvo



Honeycomb
(dense and wide texture)



Holder for colored filters



Cross louver



Diffusing lens



Elliptical lens



Opal cylinder



Wall washer visor



Barn doors

EN

Zoom+Lightshaper: this integrates perfectly with the Yori projector and offers both square and round light frames.

IT


Zoom+Lightshaper: si integra perfettamente con i proiettori della serie Yori, per creare sagome di luce quadrate e tonde.




Finishes:
Finiture:




Product range:
Gamma di prodotto:

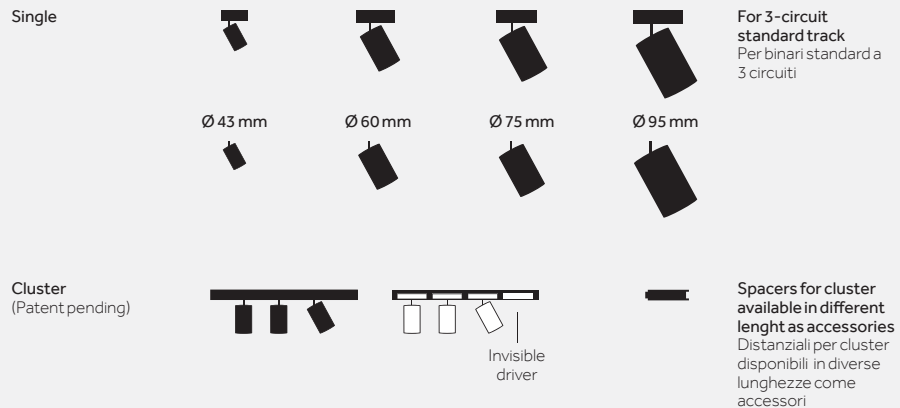

Optics:
Ottiche:

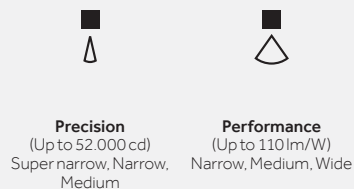

Accessories:
Accessori:

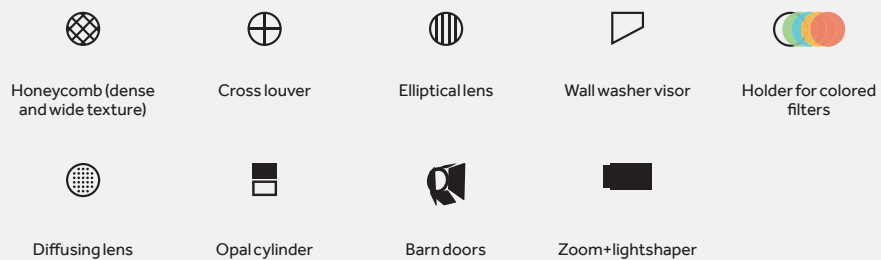

Technical features:
Caratteristiche
www:

<p>Ø 43 mm Watt: 4W, 9W Lumen: 480 - 850</p>	<p>Ø 60 mm Watt: 9W, 12W, 17W Lumen: 1150 - 2320</p>	<p>Ø 75 mm Watt: 9W, 12W, 17W, 24W Lumen: 1260 - 3485</p>	<p>Ø 95 mm Watt: 12W, 17W, 24W, 33W Lumen: 1485 - 4350</p>
------------------------------------------------------	--------------------------------------------------------------	-------------------------------------------------------------------	--------------------------------------------------------------------

K: 2700, 3000, 4000; **CRI:** > 80, > 90, > 95
Warm dimming version available (2000K-3000K; CRI>95).
Phosphor LED Module available: (2700K, 3000K, 4000K; CRI > 95; SDCM <2)
Control: On/Off, Dimm 1-10V, Dali, Bluetooth



Worldwide contacts

HEADQUARTERS

ITALY

Reggiani Spa Illuminazione

Viale Monza 16 P.O. Box 99
20845 Sovico (MB), Italy
T. (+39) 039 20711
F. (+39) 039 2071999
contact@reggiani.net

UNITED KINGDOM

Reggiani Ltd

12 Chester Road
Borehamwood
Herts, WD6 1LT - UK
T. (+44) 0208 236 3000
F. (+44) 0208 236 3099
reggiani@reggiani.co.uk

USA

Reggiani Lighting USA, inc.

372 Starke Road
Carlstadt NJ 07072, USA
T. (+1) 201 372 1717
F. (+1) 201 372 1616
info@reggianiusa.com
www.reggianiusa.com

CHINA

Reggiani Ningbo ITG Lighting co. Ltd

Shenjia Village - Qiuai Town - Yinzhou
315010 Ningbo, China
T. (+86) 574 88418655 - 88412627
F. (+86) 574 88364186
info@itglight.com

FRANCE

Showroom

Showroom Bureau Projets
35 Bd. Richard Lenoir, Bastille
75011 Paris, France
T. (+33) 01 43382704
F. (+33) 01 43382720
france@reggiani.net

RUSSIA

Showroom

Kalanchevskaya Street, 16,
Building 1, Room 4A, 129090 Moscow
T. (+7) 495 2690113 - 846 3320266
F. (+7) 495 2690112
russia@reggiani.net

Worldwide distributors

For the worldwide distributors list visit
www.reggiani.net



Reggiani