



LOW VOLTAGE

48V

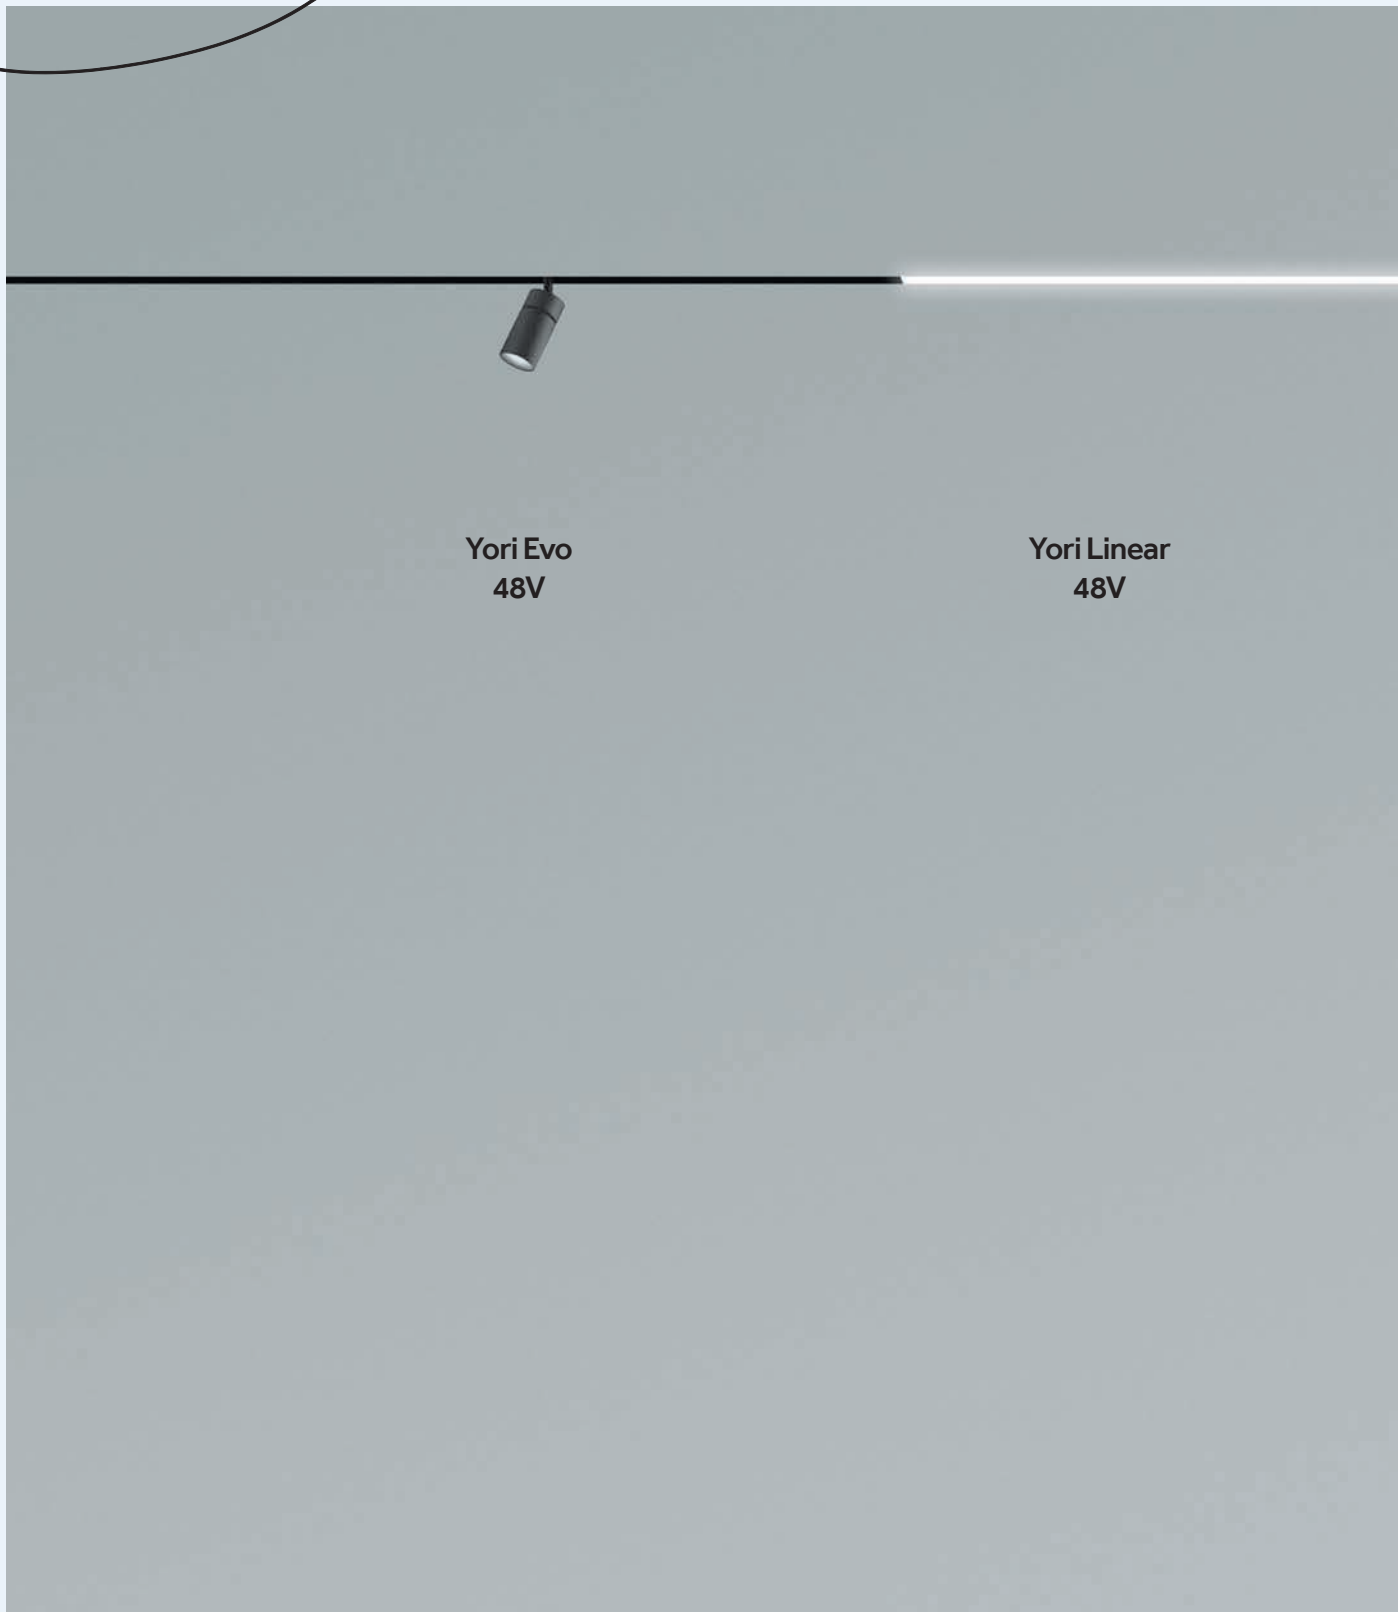

Yori Evo
48V

Yori Linear
48V

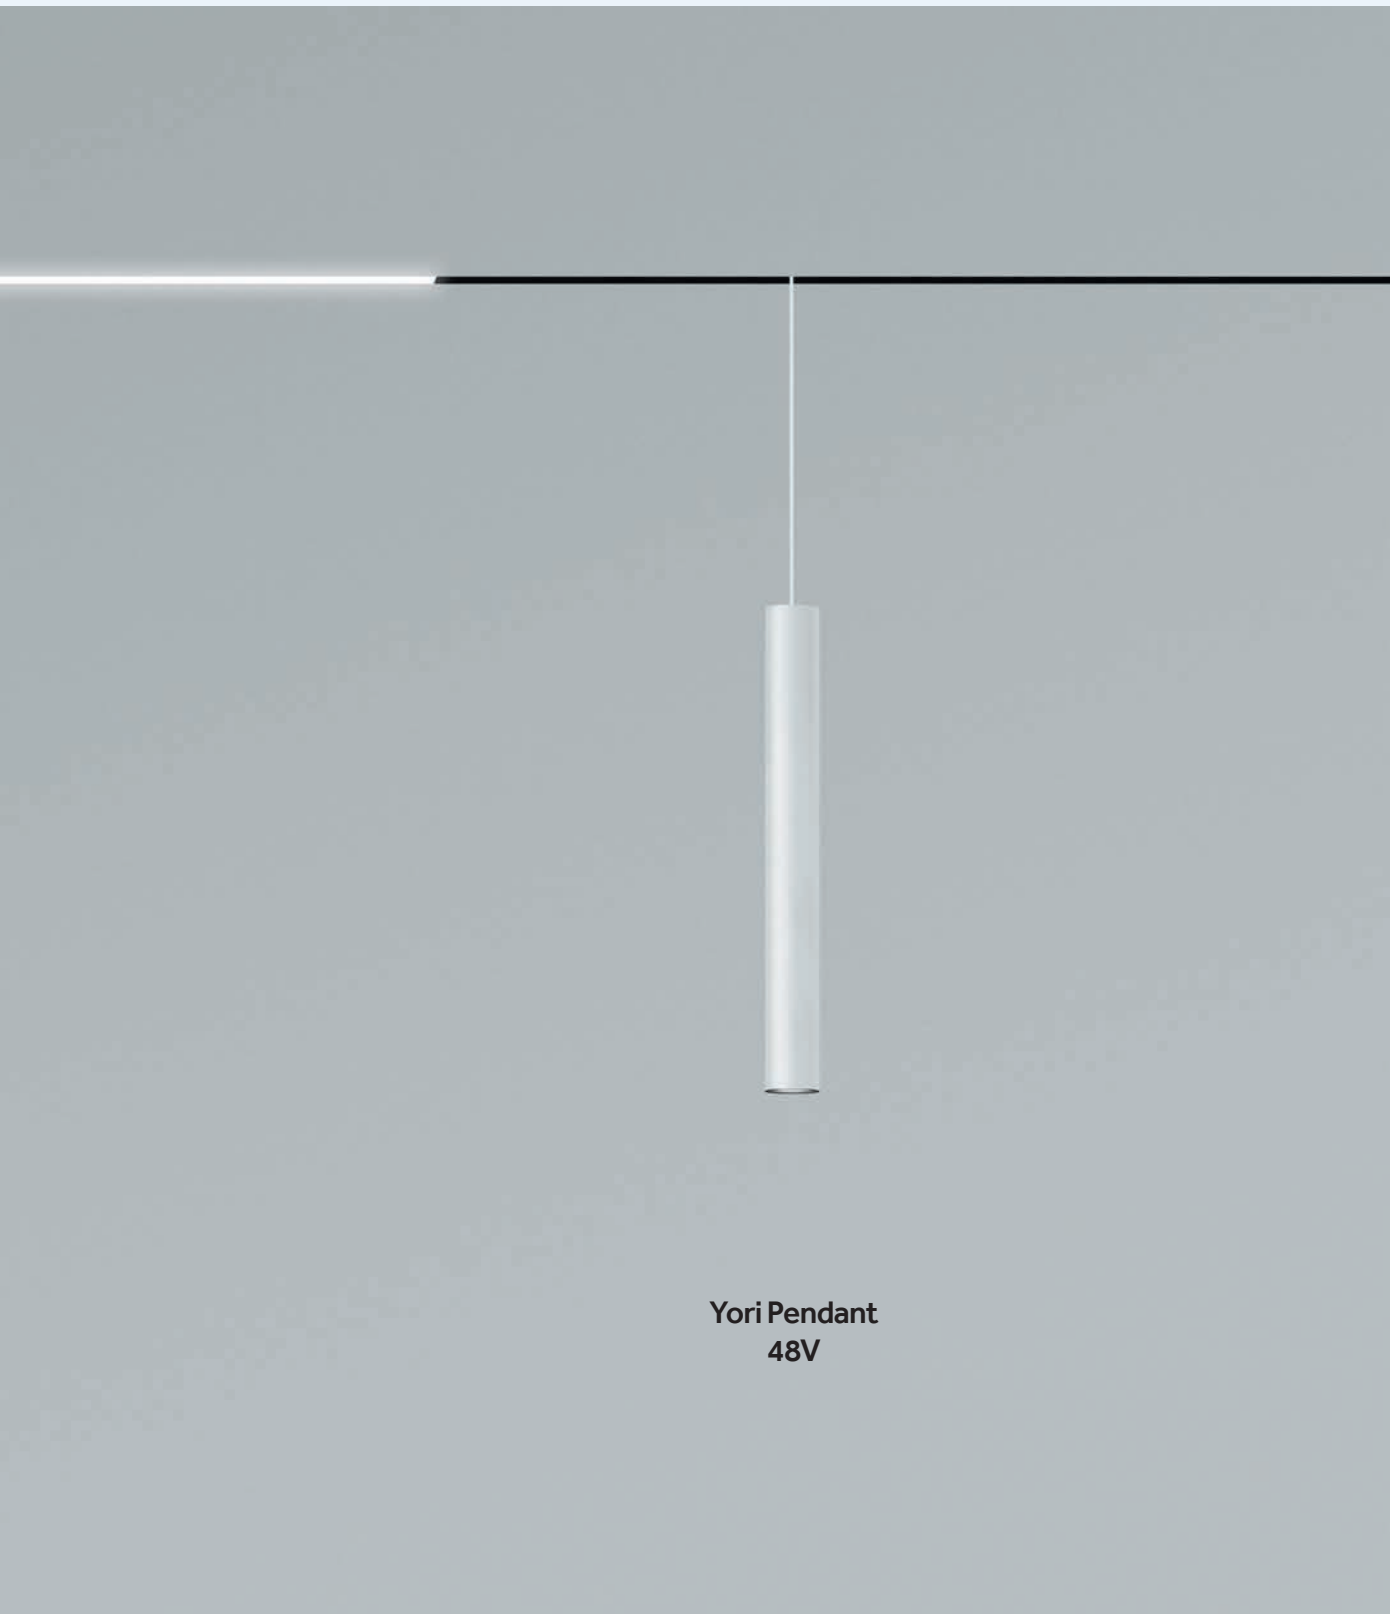


Yori Pendant
48V

Yori Evo 48V



44



Low Voltage

EN Yori Evo family has evolved and widened, now including a 48V low-voltage tracks version available both as adjustable spotlight and as pendant in four different sizes. In presenting a product or a piece of art, light plays an essential role: that's why Yori Evo 48V adds new dimensions, performances and unique flexibility to the gamma. Its outstanding CRI>98 option, enhances colours authenticity and materiality, adding value to any sales item or art object and drawing viewer's attention to it.

IT La famiglia Yori Evo si è evoluta e ampliata, e ora include una versione per binari a bassa tensione da 48V, disponibile sia come spot orientabile che come pendente, in quattro diverse dimensioni. Nel presentare un prodotto o un'opera d'arte, la luce gioca un ruolo essenziale: per questo Yori Evo 48V aggiunge ora alla gamma nuove dimensioni, performance e una flessibilità unica. La versione con lo straordinario CRI>98 accentua l'autenticità e la materialità dei colori, attirando l'attenzione dell'osservatore e dando un valore aggiunto a qualsiasi prodotto o oggetto d'arte.




EN No tools needed for mounting, thanks to the magnetic fixing.

IT Montaggio senza attrezzi, grazie al fissaggio magnetico.



EN Thanks to the magnetic fixing it's possible to move the spots anytime, even when they are on.

IT Grazie al fissaggio magnetico è possibile spostare gli spot in qualunque momento, anche mentre sono accesi.



Accessories
p.78



Finishes
p.82




Control systems
p.84












EN Magnetic fixing
IT Fissaggio magnetico



EN Dimmer on board available: make lights adjustments at any time.
IT Disponibile con Dimmer on board: regola la luce, quando e come vuoi.

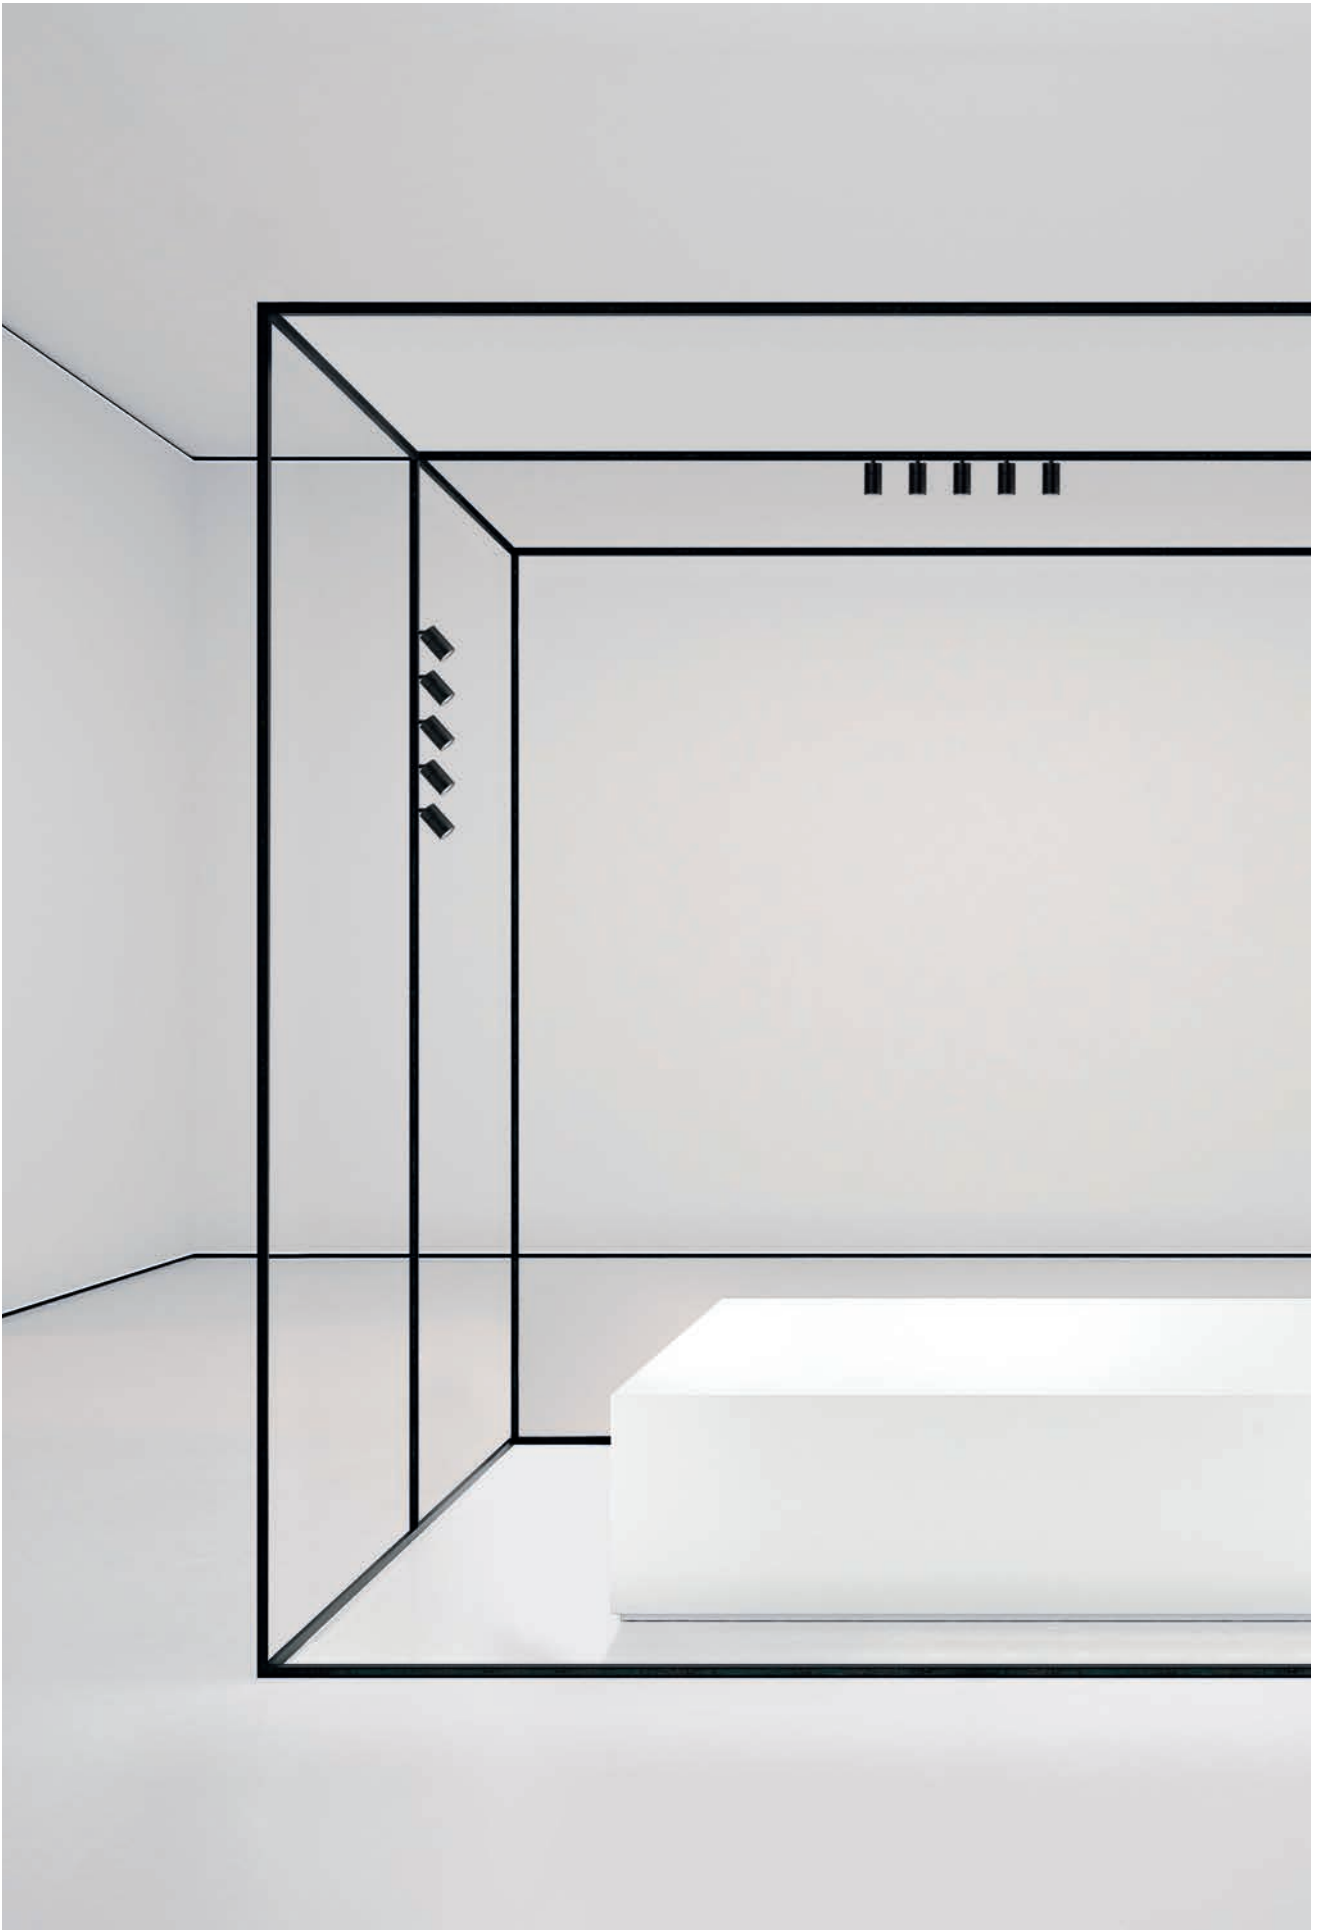

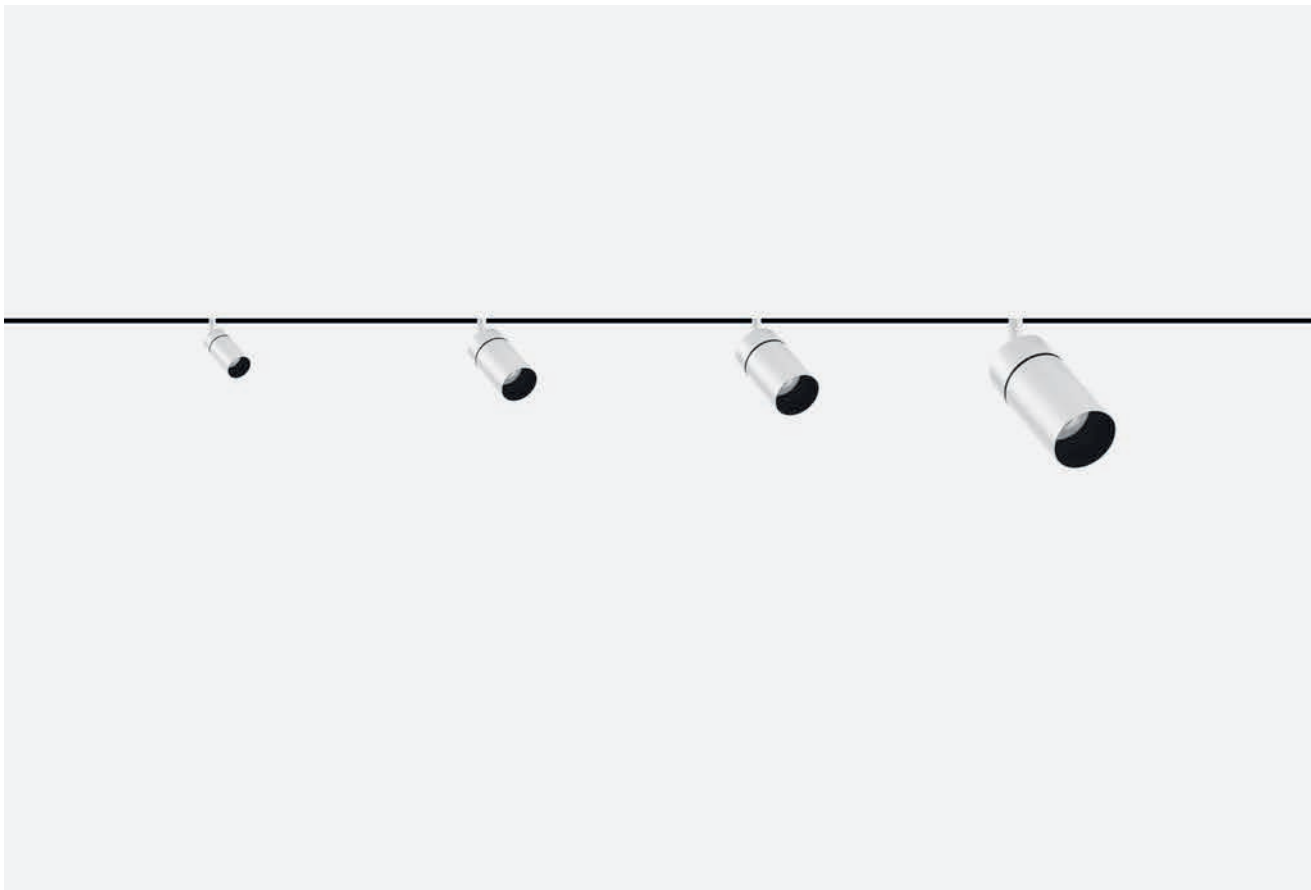


Ø 22 mm		Ø 35 mm		Ø 43 mm		Ø 60 mm	
 		 		 		 	
POWER LED 2 W 140 lm - 200 lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >80, CRI >90		POWER LED 2,4 W, 3,5 W 210 lm - 413 lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >80, CRI >90		POWER LED 4 W, 9 W 410 lm - 940 lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >80, CRI >90		COB LED 9 W, 12 W, 17 W 725 lm - 2400 lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <2 <3 CRI >80, CRI >90	


*166 mm DALI adapter



48

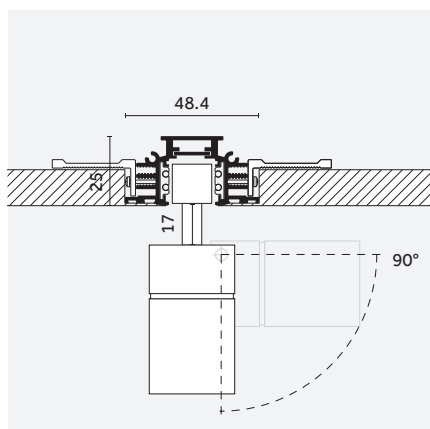


^{EN} Standard arm for standard profiles
^{IT} Braccio standard per profili standard

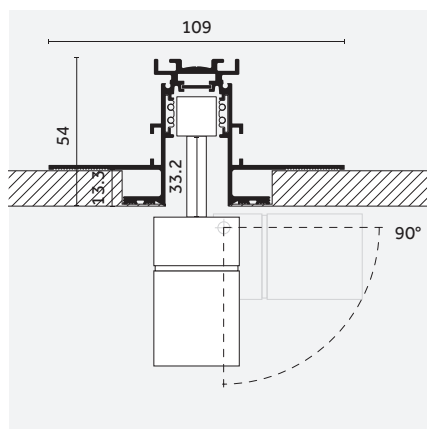


^{EN} Long arm for high profiles
^{IT} Braccio lungo per profili alti



Yori Pendant 48V

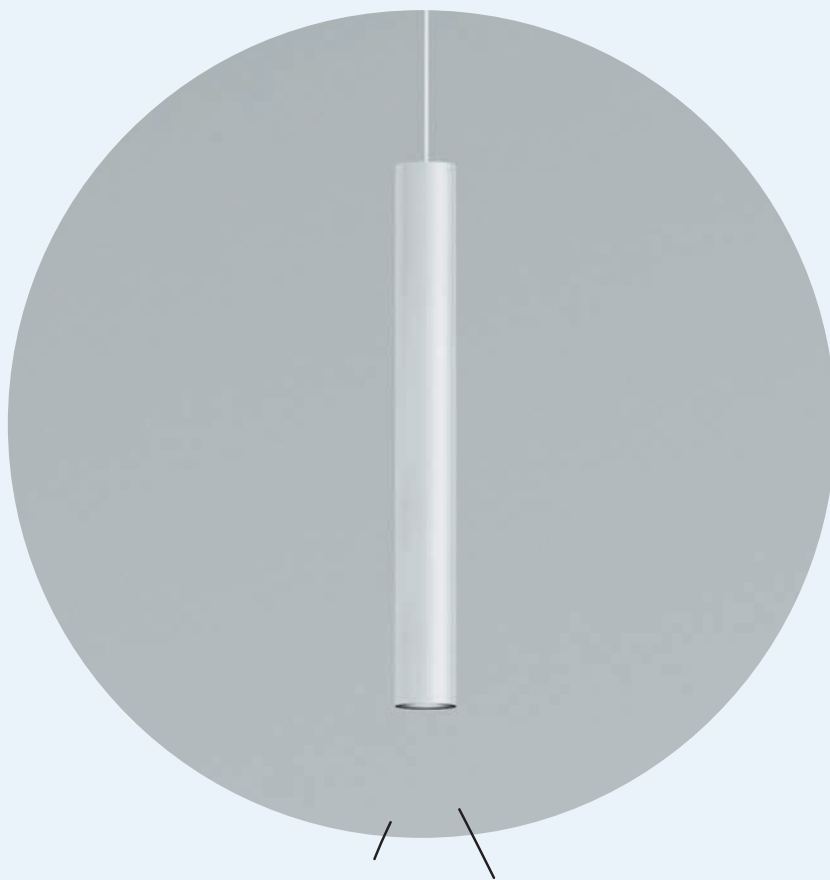

50



^{EN} Yori Evo Pendant 48V extends again the several application of Yori range. Minimal and elegant, thanks to the extensive selection of finishes and to the particularly wide range of sizes, it offers endless combinations.

^{IT} Yori Evo Pendant 48V estende ancora di più le possibilità di applicazione della gamma Yori. Minimal e sofisticato, offre infinite combinazioni grazie alla sua vasta gamma di finiture e alle numerose dimensioni disponibili.



51



Accessories
p.78



Finishes
p.82



Control systems
p.84



^{EN} Yori Pendant 48V has a wide range of technical and decorative accessories, from selective filters to solid and hollow cylinders, for extreme customizations.


^{IT} Yori Pendant 48V dispone di un'ampia gamma di accessori tecnici e decorativi, dai filtri selettivi ai cilindri pieni e vuoti, per un'estrema personalizzazione.




Ø 22 mm			Ø 35 mm			Ø 60 mm	
POWER LED 2 W 140 lm-200 lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >80, CRI >90			POWER LED 2,4 W, 3,5 W 210 lm - 415 lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >80, CRI >90			COB LED 9 W 725 lm-1360 lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <2 <3 CRI >80, CRI >90	

*166 mm DALI adapter

Yori Linear 48V

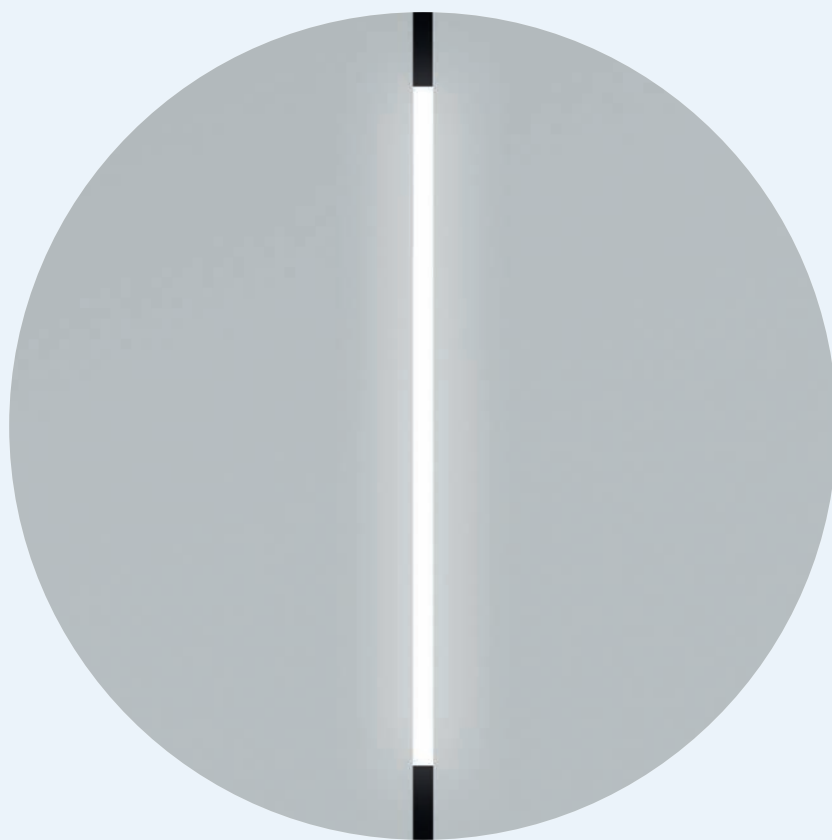

54



^{EN} Yori Linear 48V is available in a number of different lengths and can be used to complement accent lighting to create lines of light and unusual architectural schemes. It comes with three different diffusers: Opal, for soft and diffuse lighting; Prismatic, for more control; UGR, to reduce glare, especially in work places.

^{IT} Yori Linear 48V è disponibile in diverse lunghezze e può essere utilizzato come complemento per luce d'accento, per creare linee di luce e configurazioni architettoniche insolite. Viene fornito con tre diversi diffusori: Opal, per un'illuminazione morbida e diffusa; Prismatic, per maggior controllo; UGR, per ridurre l'abbagliamento, soprattutto nei luoghi di lavoro.



^{EN} No tools needed for mounting, thanks to the magnetic fixing.

^{IT} Montaggio senza attrezzi grazie al fissaggio magnetico




Control systems
p.84




Low Voltage













Yori Linear 48V
Opal diffuser

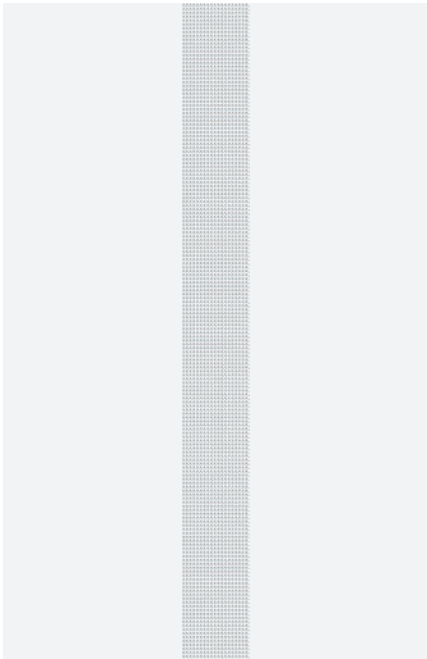

Yori Linear 48V
Prismatic diffuser

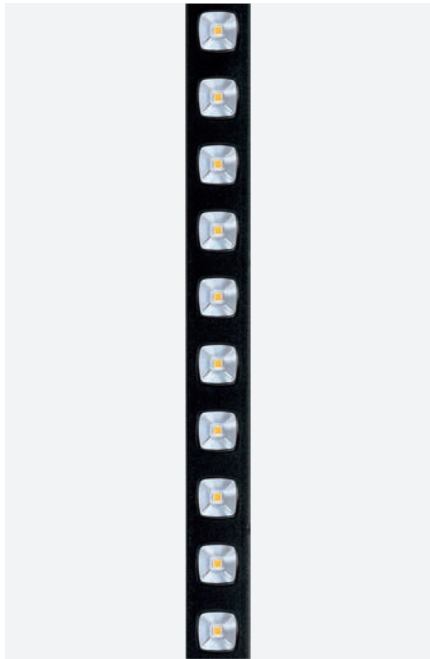


Yori Linear 48V
UGR <19

Yori Linear 48V - Opal diffuser	Yori Linear 48V - Prismatic diffuser	Yori Linear 48V - UGR<19
 286	 286	 286
		 286 High-Performance
 567	 567	 567
 847	 847	 847
 1128	 1128	 1128
 1408	 1408	
MIDPOWERLED 5,4 W, 10,8 W, 16,2 W, 21,6 W, 27 W 731 lm-4050 lm L90 B5=50,000h 2700K, 3000K, 4000K SDCM<3 CRI>90	MIDPOWERLED 5,4 W, 10,8 W, 16,2 W, 21,6 W, 27 W 731 lm-4050 lm L90 B5=50,000h 2700K, 3000K, 4000K SDCM<3 CRI>90	MIDPOWERLED 4,3 W, 8,6 W, 12,9 W, 15,4 W 569 lm-2235 lm L90 B5=50,000h 2700K, 3000K, 4000K SDCM<3 CRI>90 High-Performance 9,9 W, 15 W 1079 lm-1679 lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM<3 CRI>90

^{EN} The European UNI-EN 12464-1 standard establishes the correct lighting for internal work environments. The most important factor to consider is the glare, which is measured with the UGR scale (Unified Glare Rating), the lower the value, the lesser the glare will be. Yori Linear 48V guarantees excellent visual comfort in different work environments, but also in schools and hospitals, thanks to an extremely low UGR value (<19).


^{IT} La norma europea UNI-EN 12464-1 stabilisce la corretta illuminazione per gli ambienti di lavoro interni. Il fattore più importante da considerare è l'abbagliamento, che si misura con la scala UGR (Unified Glare Rating): più il valore è basso e minore sarà l'abbagliamento. Yori Linear 48V garantisce un eccellente benessere visivo in diversi ambienti di lavoro, ma anche per le scuole o gli ospedali, grazie a un valore UGR straordinariamente basso (<19).

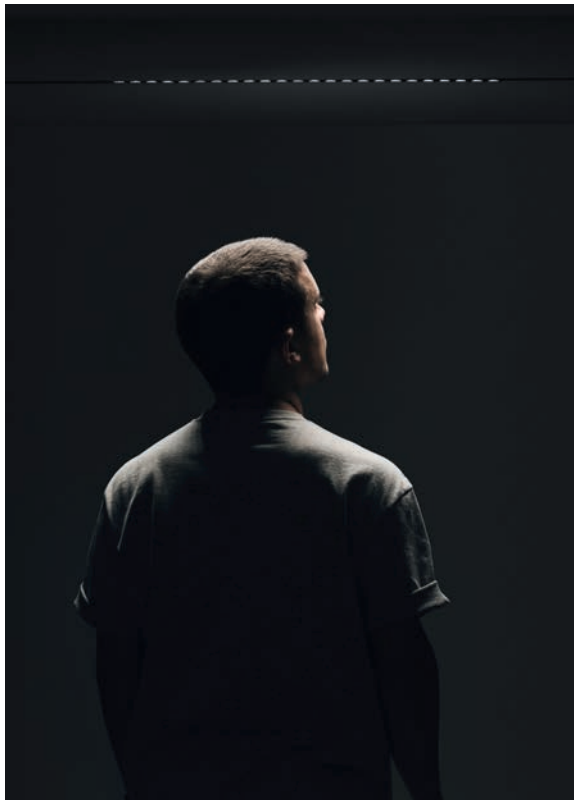



UGR < 19
Luminaire height: 1,95 m
Worktable height: 0,75 m
Efficacy up to 100 lm/W

Low Voltage tracks

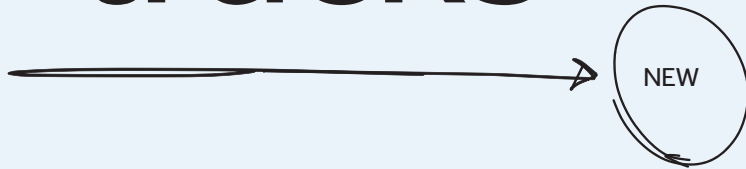



Track 48V
Recessed
Trim

Track 48V
Recessed
Trimless

Track 48V
High Recessed
Trimless

Track 48V
Surface slim

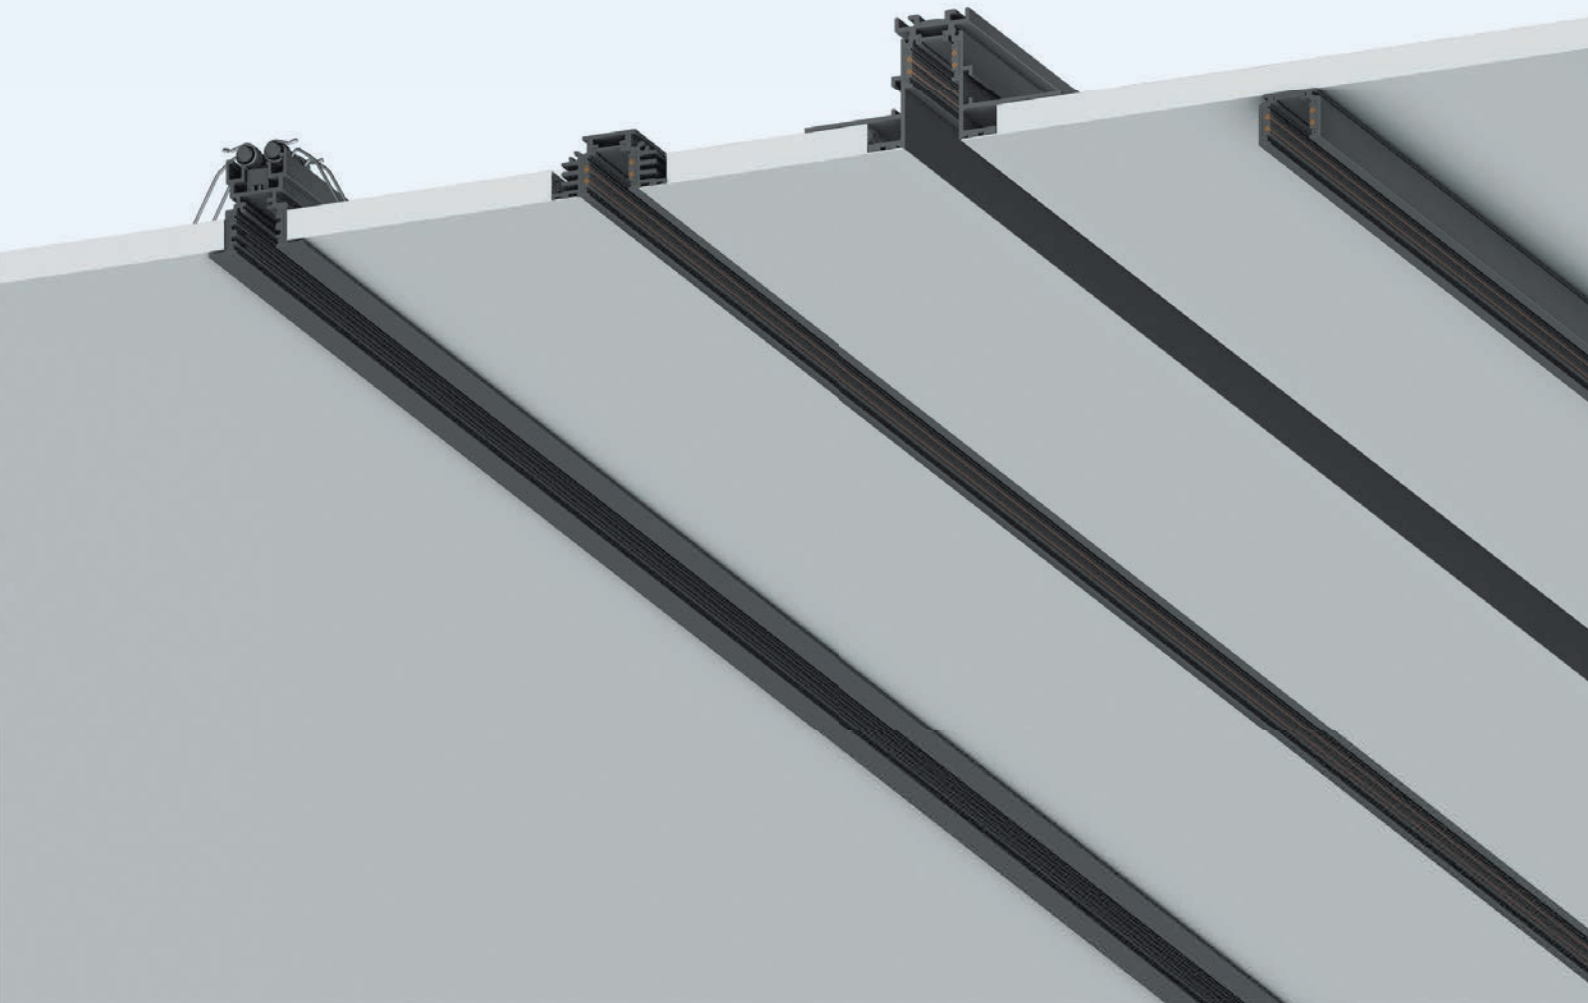




^{EN} Low Voltage tracks
^{IT} Binari Low Voltage

Track 48V
Surface/Pendant

Track 48V
High Surface/Pendant

Track 48V
High Pendant - Indirect

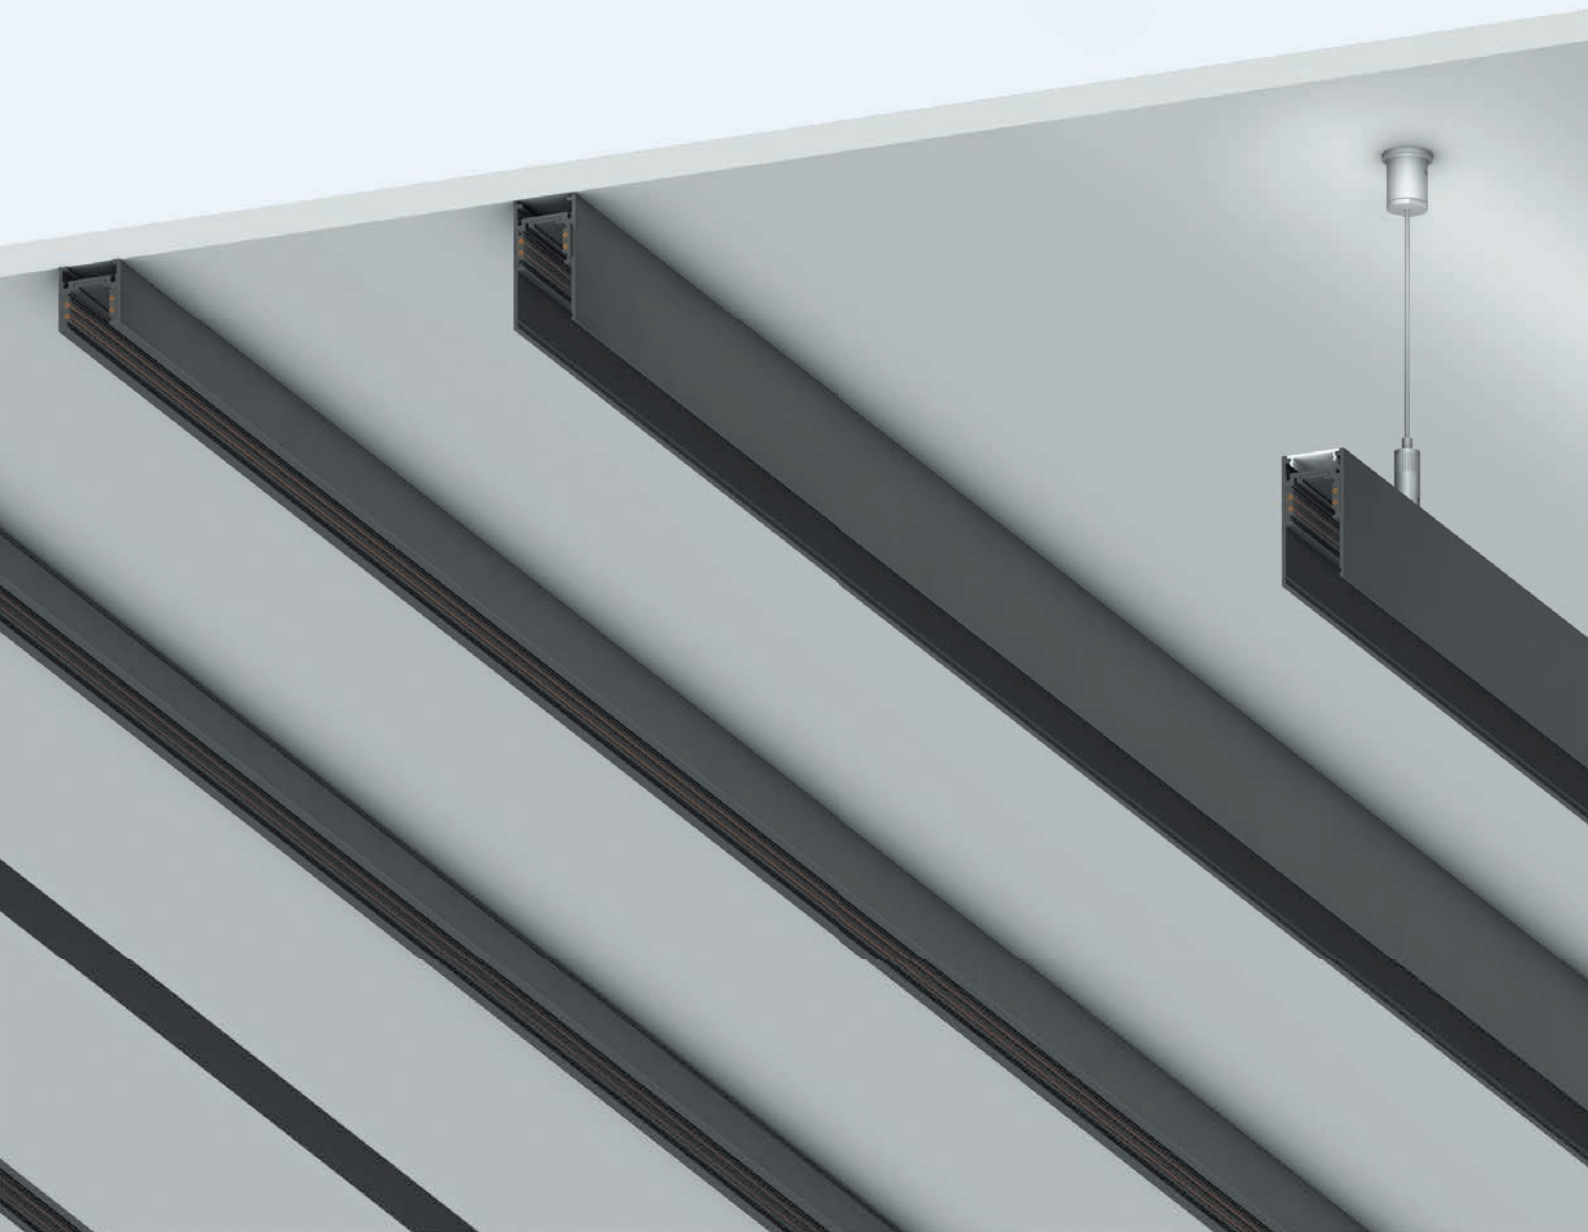


Low Voltage tracks Recessed



Track 48V
Recessed Trim



Track 48V
Recessed Trimless



Track 48V
High Recessed Trimless

Low Voltage tracks Surface/Pendant



Track 48V
Surface Slim



Track 48V
Surface/Pendant




Track 48V High
Surface/Pendant




Track 48V High
Pendant - Indirect


Low Voltage tracks
Recessed



Track 48V
Recessed Trim




Track 48V
Recessed Trimless




Track 48V
High Recessed Trimless


Low Voltage tracks
Surface/Pendant




Track 48V
Surface Slim



Track 48V
Surface/Pendant




Track 48V High
Surface/Pendant




Track 48V High
Pendant - Indirect

EN The Low Voltage tracks give you the freedom of making endless combinations. The same product on different tracks has different aesthetic effects. Like Yori Linear 48V: minimal or drop, depending on your lighting project.


IT I binari Low Voltage ti danno la libertà di creare infinite combinazioni. Lo stesso prodotto su diversi binari porta a differenti effetti estetici. Come Yori Linear 48V: invisibile o drop, a seconda del progetto di illuminazione.

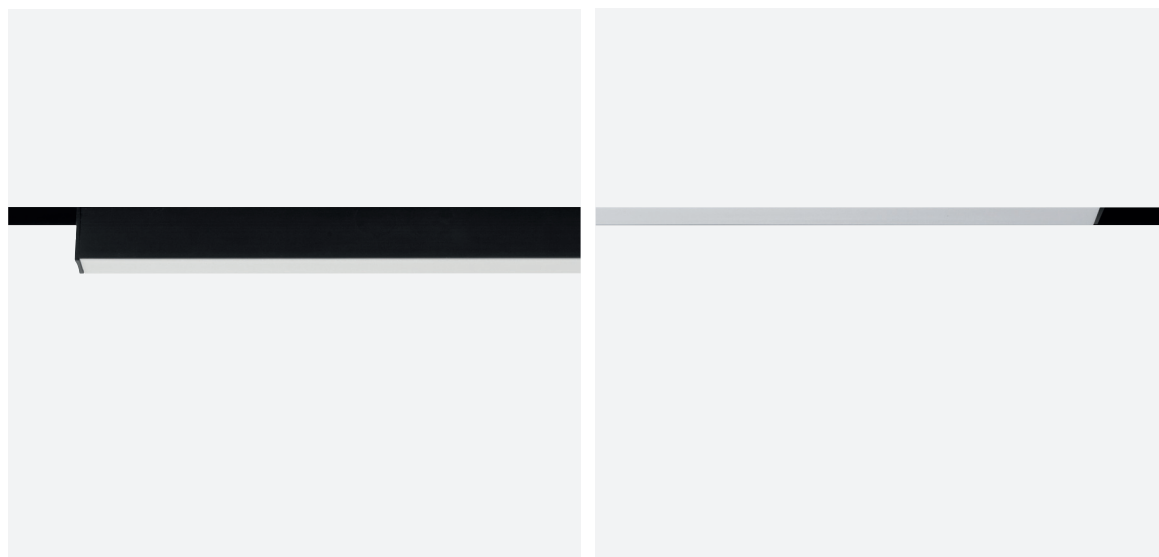


64

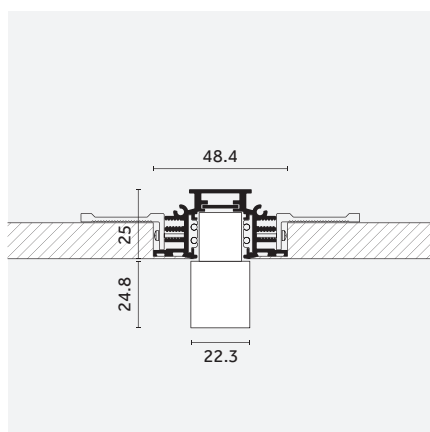

EN Yori Linear 48V on Track 48V Recessed Trimless
IT Yori Linear 48V su Track 48V Recessed Trimless

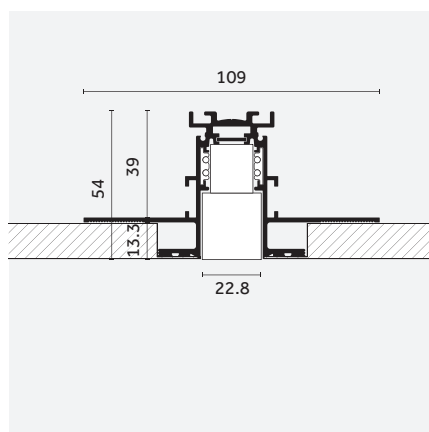

EN Yori Linear 48V on Track 48V High Recessed Trimless
IT Yori Linear 48V su Track 48V High Recessed Trimless

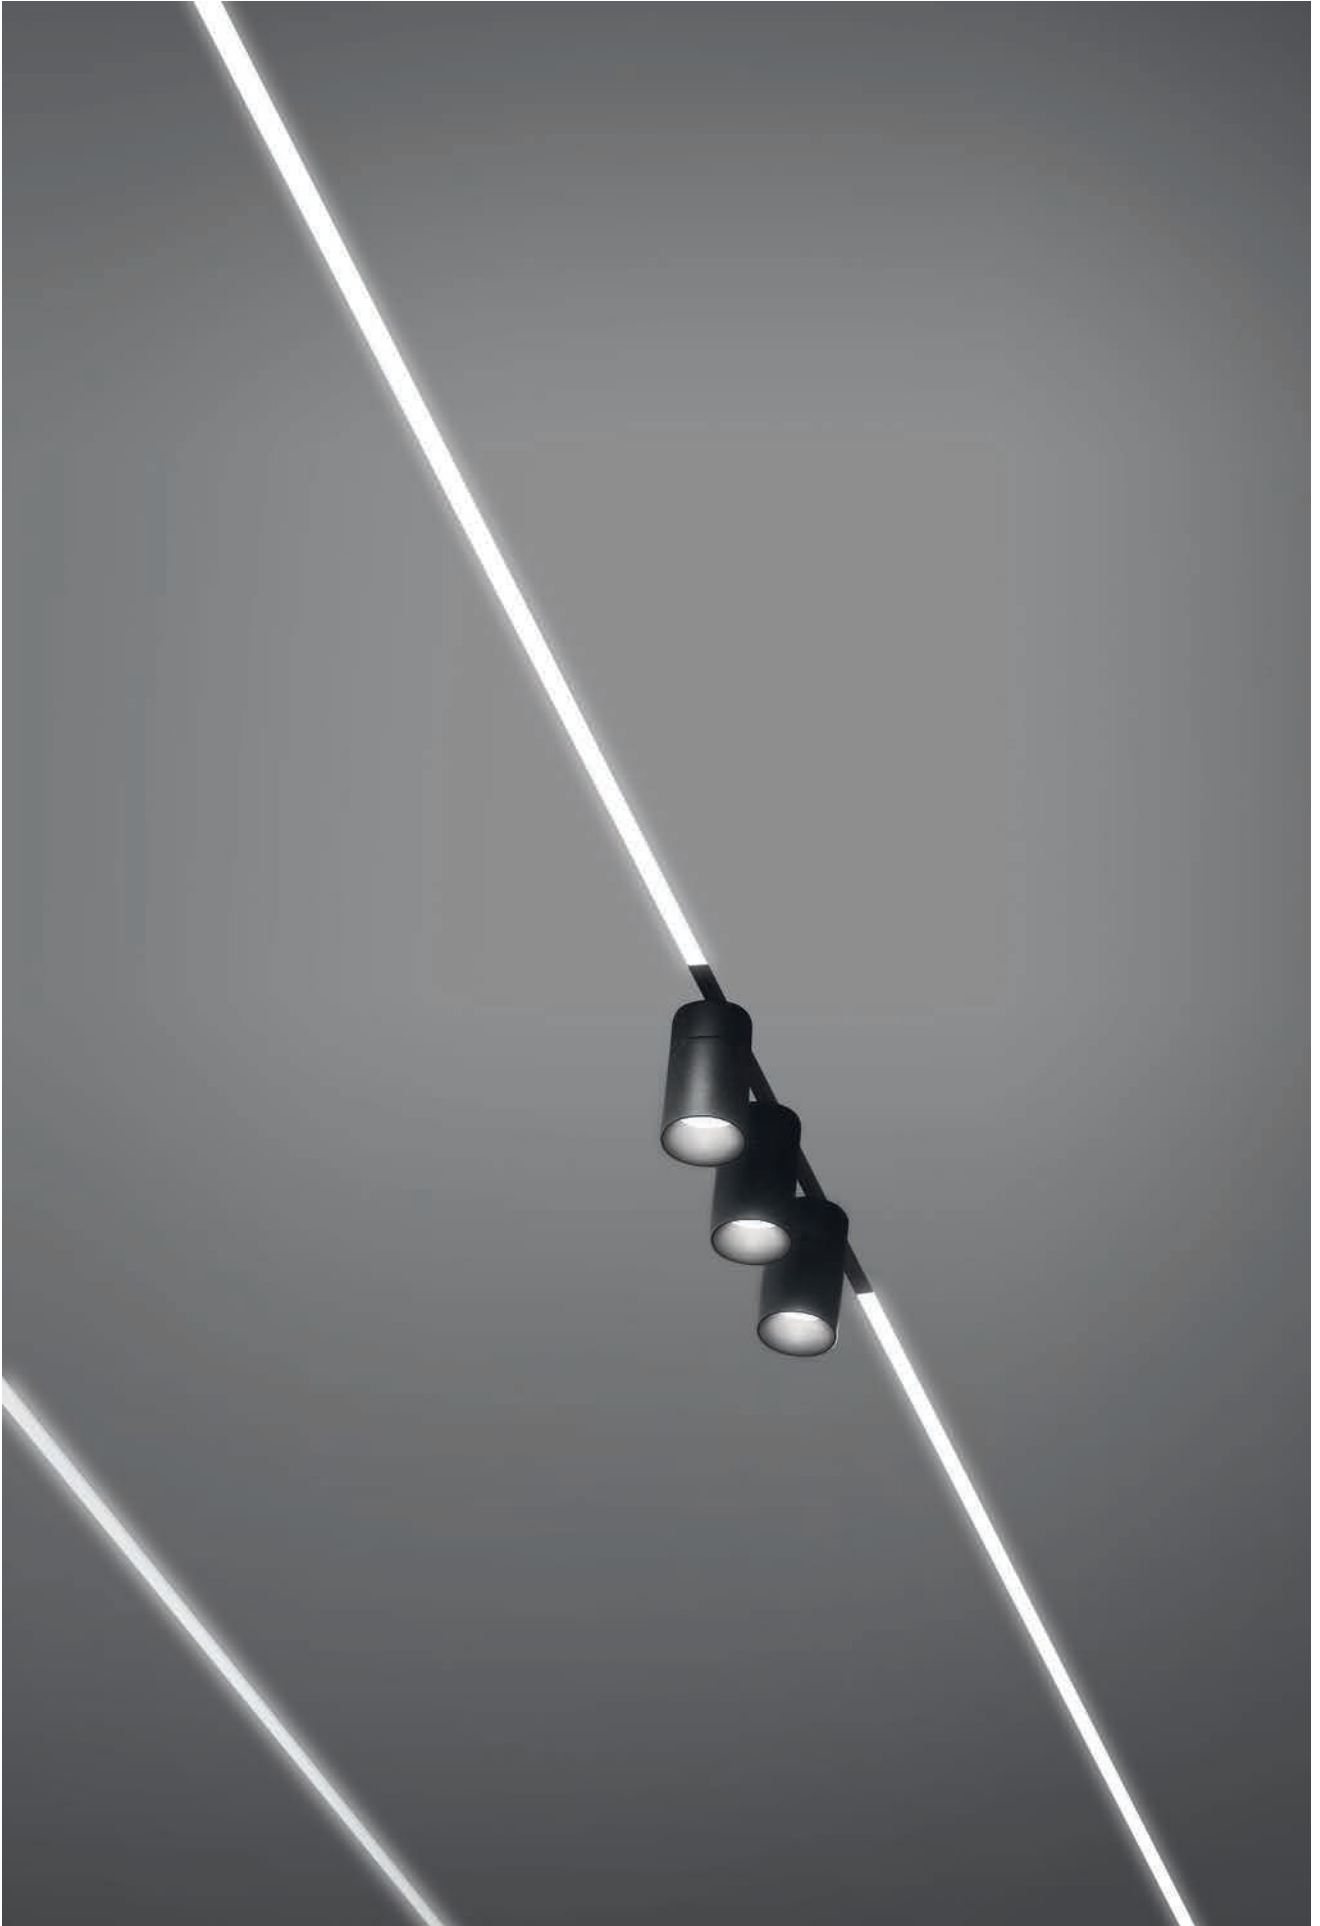







Optics & LED	70
--------------	----

Accessories	78
-------------	----


Finishes	82
----------	----

Controls	84
----------	----

Codes	89
-------	----


New ranges of interchangeable optics:
Precision for high candela values and super
narrow beams, Performance for high
lumen output and high efficacy.

70

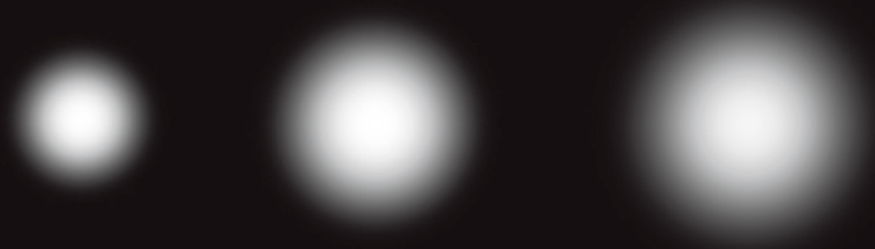

Precision

Super narrow, narrow, medium
High candela value up to 50.000 cd
with controlled and soft distribution

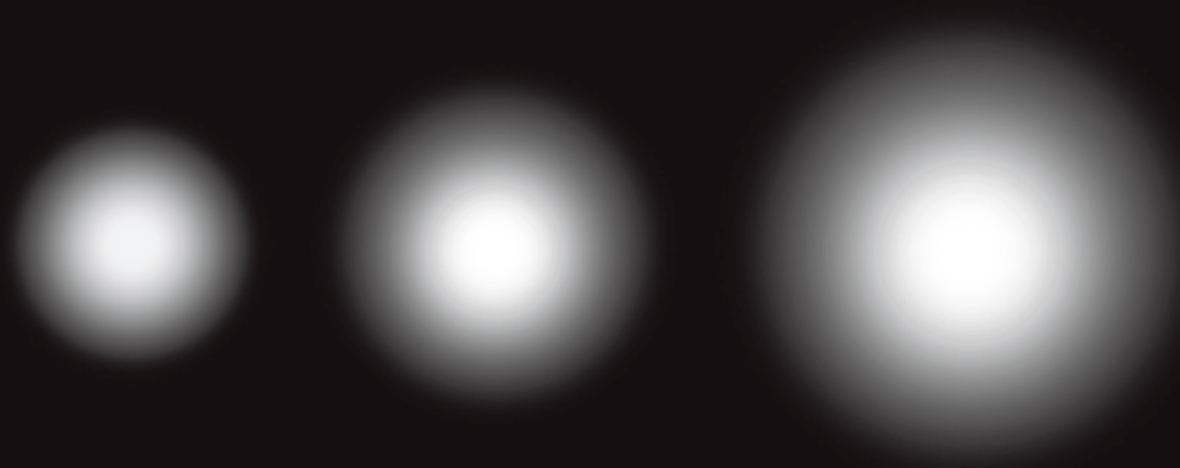

Performance

Narrow, medium, medium-wide, wide
High efficacy up to 118 lm/w with unique
performance never seen before

Precision




^{EN} System of interchangeable lenses made of temperature-resistant plastic (stabilised up to 140°C), self-extinguishing (V0 rating), with LOR up to 89%. Very narrow, narrow and medium beams with luminous intensity of up to 50,000 cd.

^{IT} Sistema di lenti intercambiabili in materiale plastico resistente ad alte temperature, stabilizzate fino a 140°, autoestinguente V0 con efficienza fino all'89%. Fasci molto stretti, stretti e medi con valori di intensità fino a 50.000cd.


Ø 22 mm



Narrow/
Stretto
B 10°



Medium/
Medio
E 28°




Wide/
Largo
H 33°


Ø 35 mm



Very narrow/
Molto stretto
B 10°



Medium/
Medio
E 22°



Large/
Largo
H 31°


Ø 43 mm



Very narrow/
Molto stretto
A 8°



Narrow/
Stretto
B 11°



Medium/
Medio
E 23°



Wide/
Largo
H 40°


Ø 60 mm



Very narrow/
Molto stretto
A 8°



Narrow/
Stretto
B 12°




Medium/
Medio
E 20°




Wide/
Largo
H 32°


Ø 75 mm



Very narrow/
Molto stretto
A 7°




Narrow/
Stretto
B 12°




Medium/
Medio
E 23°


Ø 95 mm



Very narrow/
Molto stretto
A 7°



Narrow/
Stretto
B 12°



Medium/
Medio
E 23°



Wide/
Largo
H 38°



Very wide/
Largo
M 53°


Performance




^{EN} System of interchangeable reflectors made of 99% pure aluminium, with surface treatment; LOR up to 90%, and anti-reflective safety glass with high light transmission (99%). Narrow, medium and wide beams for luminaire efficacy of up to 120 lm/W.

^{IT} Sistema di riflettori intercambiabili in alluminio puro al 99%, con trattamento superficiale, efficienza fino al 90% e vetro di protezione antiriflesso ad alto indice di trasmissione (99%). Fasci stretti, medi e larghi per efficienze apparecchio fino a 120 lm/W.

Ø 43 mm



Narrow/
Stretto
B 8°




Medium/
Medio
E 18°




Wide/
Largo
H 29°

Ø 60 mm



Narrow/
Stretto
B 13°




Medium/
Medio
E 24°




Wide/
Largo
H 39°

Ø 75 mm



Narrow/
Stretto
B 12°



Medium/
Medio
E 23°



Medium wide/
Medio largo
F 37°



Wide/
Largo
H 48°

Ø 95 mm



Narrow/
Stretto
B 10°



Medium/
Medio
E 20°



Medium wide/
Medio largo
H 31°




Wide/
Largo
M 40°

A premium light
comes from a
premium LED

CRI>98



COB LED CRI>98

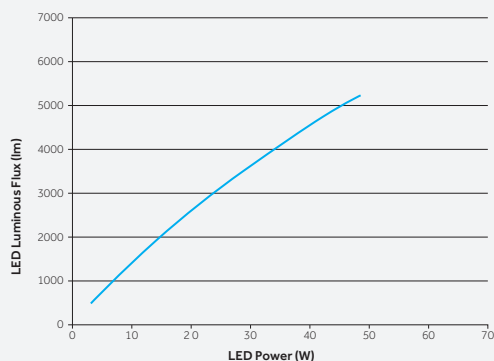

2700 K, 3000 K, 4000 K
SDCM <2, <3
CRI>80, CRI > 90, CRI >98

TM 30
Rf: 90, Rg: 100
(3000 K, CRI>90)

L90 B10=50,000h
Ta: 25°
Tc: 85°
~9,000 hr
Lm Maintenance: 98%
(Source: LM80 test report)

Note:
Yori Ø 22, Ø 35, Ø 43, Ø 60
(POWER LED)

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
100	99	97	99	99	99	99	97	93	97	98	87	99	97	98

^{EN} COB LEDs and POWER LEDs are distinguished by excellent luminous intensity in the smallest sizes now available on the market. This feature means these light sources can be integrated into very compact luminaires with unique performance, very high peak beam intensity (candela) and delivered lumens from 150lm to 4500lm. These light sources are characterised by lumen maintenance at high operating temperatures due to improved efficacy at high temperatures and better optical stability over time.




^{IT} I COB LED e POWER LED sono caratterizzati da un'eccellente intensità luminosa nelle dimensioni più ridotte ora disponibili sul mercato. Questa caratteristica consente l'integrazione di queste sorgenti in prodotti dalle dimensioni molto contenute con performance uniche, picchi di intensità in candele molto elevati e lumen delivered da 150lm fino a 4500lm. Queste sorgenti sono caratterizzate da un mantenimento costante nel tempo del livello di lumen ad alte temperature di utilizzo, grazie ad una migliore efficienza ad alte temperature e ad una migliore stabilità ottica nel corso del tempo.

Warm Dimming

EN The new Warm Dimming LED technology can be used to change the lighting to meet the technical and design needs of the moment, creating a pleasant, halogen dimming effect; this soft or accent lighting is perfect for use in hotels, restaurants, wellness centres and homes.

IT La nuova tecnologia LED Warm Dimming offre la possibilità di creare mutevoli atmosfere luminose a seconda dell'esigenza, ricreando il piacevole effetto della dimmerazione alogena; la luce, diffusa o d'accento, si integra alla perfezione in ambienti quali hotel, ristoranti, wellness e residenziali.

COB LED Warm Dimming

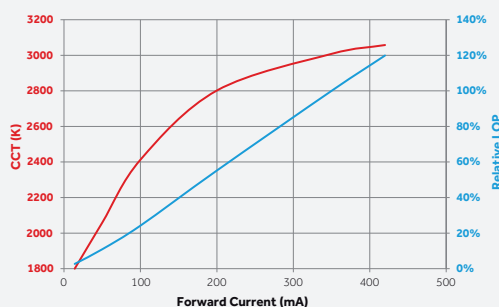

1700K-3000K
SDCM <4
CRI >95
L70
B10=50,000h

	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
Ra															
1700K	94	94	95	97	90	91	88	97	97	94	92	81	78	93	96
3000K	97	95	97	97	97	96	95	99	97	94	97	94	86	95	97

EN Our solution combines two chips in a single COB LED. With this configuration, only a single driver supplies power and gradually reduces incoming amps to bring it in line with the desired output. By reducing power supply to the chips, the luminous flux is reduced and consequently the colour temperature resulting from the combination of the individually designated colour temperatures is automatically offset. This technology delivers a very wide range of adjustment for luminous intensity, with a very gentle, gradual change in colour temperature (from no more than 3000 K to no less than 1700 K). The CRI and colour rendering is excellent for the whole dimming range, with a CRI of up to 97 and an R9 of 94.

IT La nostra soluzione combina due chip in un solo COB LED. Con questa configurazione, l'alimentazione è un unico driver che riduce gradualmente l'ampereaggio in entrata in funzione del rendimento desiderato. Diminuendo l'alimentazione ai chip, il flusso diminuisce e la temperatura di colore, che risulta dalla combinazione delle singole temperature stabilite, viene bilanciata di conseguenza. Questa tecnologia offre un campo di regolazione della luminosità molto ampio con una variazione della temperatura di colore molto morbida e graduale, da un massimo di 3000K a un minimo di 1700 K. Il CRI e il rendimento dei colori è eccellente per l'intero range di dimmerazione, con valori di CRI fino a 97 e R9 di 94.



77



Wide range of accessories

78



EN All filter holders have a slot where two accessories can be inserted together.
IT Tutti i porta filtri dispongono di uno scompartimento che permette l'inserimento di due accessori in contemporanea.



EN Filters, lenses and honeycomb
IT Filtri, lenti e griglie alveolari



Coloured glasses 1 mm/
Vetri colorati 1 mm




Elliptical beam lens/
Lente per fascio ellittico



Colored gel slides/
Vetrini per gel colorato




Wide texture honeycomb louvre/
Griglia alveolare a maglia larga



Selective filters/
Filtri selettivi



Opal lens/
Lente opale



Spread lens/
Lente diffondente



Dense texture honeycomb louvre/
Griglia alveolare a maglia fitta

EN Filters, lenses and honeycomb holders
IT Porta filtri, lenti e griglie alveolari



Cross blade louvre/
Griglia a croce



Barn doors/
Alette rompiflusso

EN Wall washer accessory
IT Accessorio Wall washer



Cone 45° wall washer/
Cono 45° wall washer



EN Wide range of lenses and filters also for the micro sizes 22mm and 35mm of Yori Evo Ghosttrack, Yori Evo 48V and Yori Pendant. The holder allows to use up to 2 accessories at the same time.

IT Ampia gamma di lenti e filtri anche per le dimensioni micro da 22mm e 35mm di Yori Evo Ghosttrack, Yori Evo 48V e Yori Pendant. L'holder consente l'impiego di due accessori contemporaneamente.

EN The optional solid and hollow decorative cylinders come in different sizes and guarantee soft, diffused lighting to enable suggestive, elegant applications.

IT I cilindri decorativi pieni e vuoti sono disponibili in diverse dimensioni e garantiscono un effetto luminoso morbido e diffuso, realizzando suggestivi scenari luminosi.



EN The solid decorative cylinders, thanks to the frosted external surface, guarantee a diffused light and a soft and wide beam, with a minimum glare. Ideal for elegant and out-of-the-ordinary lighting effects.

IT I cilindri decorativi pieni, grazie all'acidatura presente sulla parte esterna, garantiscono una luce diffusa e un fascio morbido, con un abbaglio minimo. Ideale per effetti di luce eleganti e non banali.



EN The hollow cylinders, on the other hand, guarantee a more precise light. With the Warm Dimming technology, the cylinders' colors adjust to the different color temperatures, creating even more unique and striking lighting scenarios.

IT I cilindri vuoti garantiscono una luce più precisa. Con la tecnologia Warm Dimming, i cilindri si colorano grazie alle diverse temperature di colore, realizzando scenari luminosi ancora più unici e suggestivi.



EN Decorative cylinders can also be used with colored filters and selective filters.

IT I cilindri decorativi possono essere utilizzati anche con filtri colorati e filtri selettivi.



A finish for any architectural setting
or interior style.
You just have to choose.

Standard finishes

82



EN **10** White
IT **10** Bianco



EN **12** Embossed matt white
IT **12** Bianco opaco goffrato



EN **21** Black
IT **21** Nero



EN **31** Embossed matt black
IT **31** Nero opaco goffrato



EN **00** Alluminio
IT **00** Aluminum

Special finishes



EN **C0** Royal matt white
IT **C0** Royal bianco opaco



EN **B0** Royal matt black
IT **B0** Royal nero opaco



EN **M0** Brushed aluminium
IT **M0** Alluminio spazzolato



EN **01** Chrome plated
IT **01** Cromo



EN **D0** Brushed brass
IT **D0** Ottone spazzolato



EN **E0** Brushed gold
IT **E0** Oro spazzolato



EN **N0** Brushed copper
IT **N0** Rame spazzolato




EN **L0** Antiqued brushed bronze
IT **L0** Bronzo antico spazzolato

Light in your hands

/ \


84

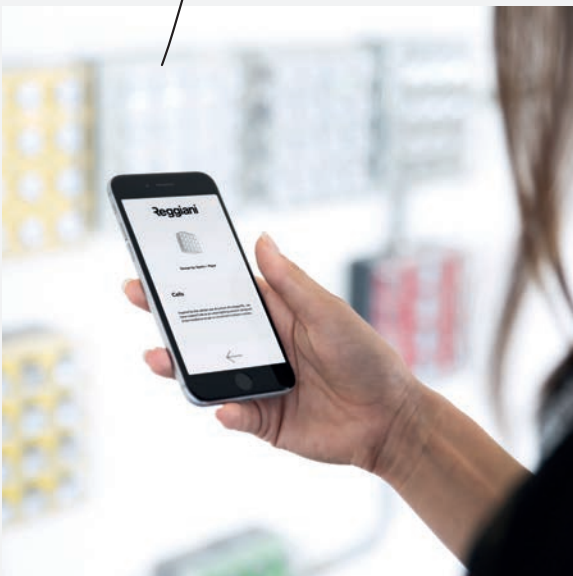

EN We have integrated Bluetooth technologies into our luminaire offer to deliver the best lighting design solutions. This control system allows you to adjust the lighting of single luminaire or of a group of ones, via smartphones, tablets, smartwatches, buttons and switches (also pre-existing ones). The control system can be integrated into the single device (Bluetooth Integrated control) or remotely inserted into the track (Bluetooth Remote System).

IT Per offrire le migliori e più flessibili soluzioni illuminotecniche abbiamo integrato le tecnologie Bluetooth nella nostra offerta. Questo sistema di controllo permette infatti di regolare l'illuminazione del singolo apparecchio o del gruppo di apparecchi semplicemente tramite smartphone, tablet, smartwatch, pulsanti e interruttori (anche pre-esistenti). Il sistema di controllo può essere integrato nel singolo apparecchio (Bluetooth Integrated control) o inserito in remoto nel binario (Bluetooth Remote System).

Bluetooth Integrated control

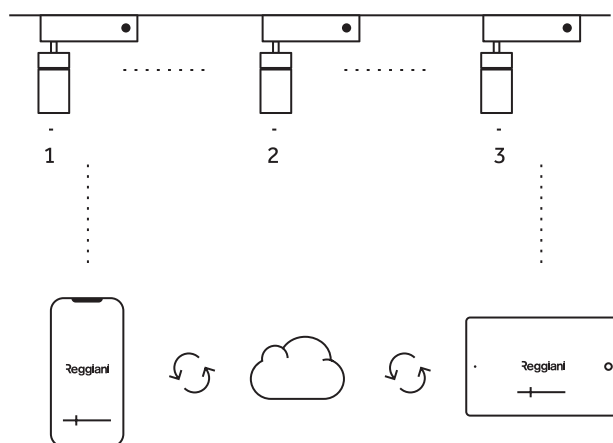


EN The system enables:

- Direct wireless control of light source
- Control device directly integrated into lighting fixture
- Effective adjustment of luminous intensity and colour temperature
- Creation of connected luminaire clusters
- Creation, configuration and archive of custom lighting settings

IT Il sistema permette:

- Controllo wireless diretto della sorgente luminosa
- Dispositivo di controllo integrato direttamente nell'apparecchio
- Regolazione efficace di luminosità e temperatura di colore
- Creazione di gruppi di apparecchi collegati tra loro
- Creazione, configurazione e archivio di scenari luminosi personalizzati

85



EN For more info visit www.reggiani.net


IT Per maggiori info visita www.reggiani.net

EN Control devices developed on DALI protocol that allows you to manage and control wireless luminaires for low voltage (48V) and mains voltage (220-240V) tracks. Devices communicate via Bluetooth Low Energy (BLE) with control apps with no need of wiring, control unit or router. There are two devices available, integrating two software options that work with different control apps.


IT Dispositivi sviluppati sul protocollo DALI, grazie ai quali, è possibile gestire e controllare in modalità wireless apparecchi per binari a basso voltaggio (48V) e mains voltage (220-240V). I dispositivi comunicano via Bluetooth Low Energy (BLE) con le applicazioni di controllo senza necessità di cablaggio, centraline o router. Sono disponibili due dispositivi che integrano due opzioni software alternative interfacciandosi con app di controllo differenti.

Bluetooth Remote System (Casambi)


Broadcast configuration (Up to 100 luminaires/Ghosttrack drivers):

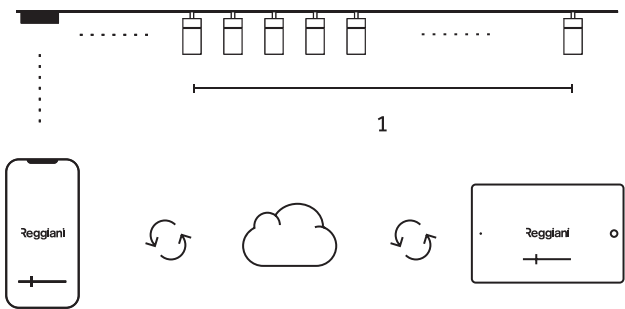

Single 4 configuration:*

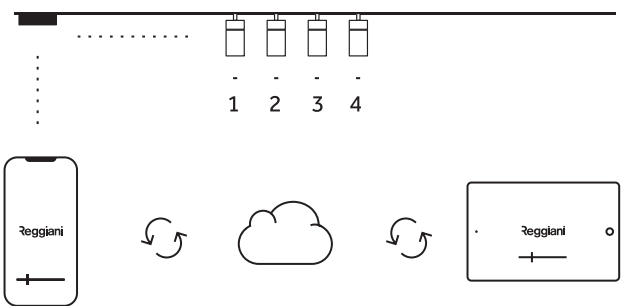

4 groups configuration (Up to 64 luminaires/Ghosttrack drivers)*

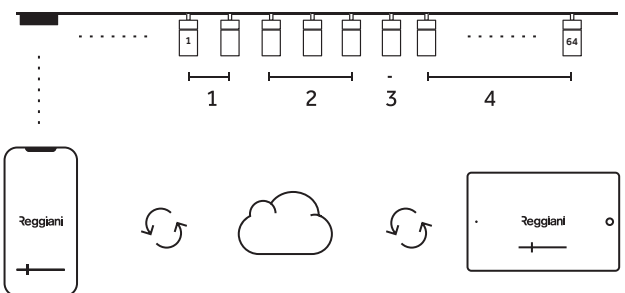

- EN The system enables:
- Lighting equipment programming/control in broadcast mode: single point (max 4 devices) and lamps groups (up to 64 in 4 groups)
 - User friendly interface
 - Interface scenarios and customizations through images
 - Automatic software update
 - Cloud sharing of system and configurations

- IT Il sistema permette:
- Programmazione e controllo degli apparecchi di illuminazione in modalità broadcast: single point (max 4 apparecchi) e gruppi di lampade (fino a 64 in 4 gruppi)
 - Interfaccia user friendly
 - Creazione di scenari e personalizzazioni interfaccia con immagini;
 - Aggiornamento automatico del software;
 - Condivisione dell'impianto e della configurazione tramite Cloud

		
	Wireless control device for Mains Voltage 0.26102.00**	Wireless control device for Low Voltage 0.26104.00**
Nominal input Voltage	100-240 Vac	24- 50 Vdc
Current:	0,025 – 0,06 A	48V – 0,06 A
Output Voltage:	18 -18.5 V DC	18 -18.5 V DC
Output current in short circuit:	250 mA	250 mA
Output channel:	1	1
Management protocol:	DALI	DALI


*For configuration download the Setup App




EN For more info visit www.reggiani.net
IT Per maggiori info visita www.reggiani.net

Bluetooth Remote System


Broadcast configuration (Up to 100 luminaires/Ghostrack drivers):

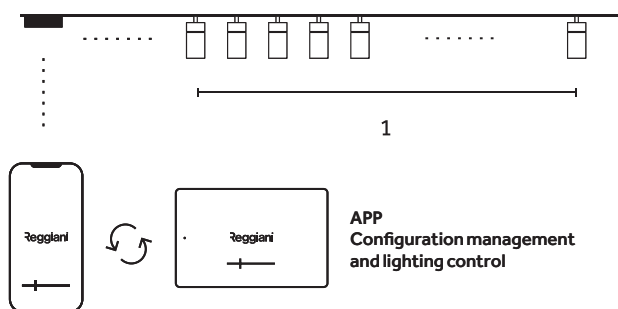

Single configuration (Up to 64 luminaires/Ghostrack drivers)

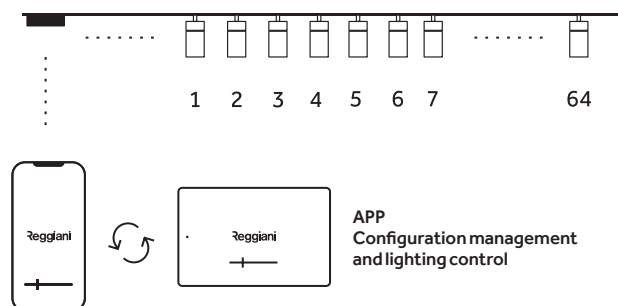

Endless groups configuration (Up to 64 luminaires/Ghostrack drivers)

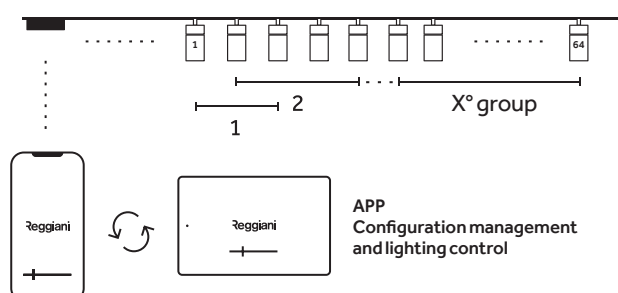

^{EN} The system enables:


- Up to 64 lamps programming in DALI mode;
- More than 64 lamps programming in DALI broadcast mode;
- Group scene modification;
- BUS electrical diagnostics;
- Test and control interface;
- Automatic software update;
- Compatibility with existing DALI systems;
- Broadcast / single point (up to 64 lamps) control mode or in lamp groups.

^{IT} Il sistema permette:

- Programmazione fino a 64 lampade in modalità DALI;
- Programmazione di più 64 lampade in modalità DALI broadcast;
- Modifica delle scene a gruppi;
- Diagnostica elettrica del BUS;
- Interfaccia di test e controllo;
- Compatibilità con impianti DALI già esistenti;
- Controllo in modalità broadcast / single point (fino a 64 lampade) o gruppi di lampade.

87

		
	Wireless control device for Mains Voltage 0.26103.00**	Wireless control device for Low Voltage 0.26105.00**
Nominal input Voltage	100-240 Vac	24- 50 Vdc
Current:	0,025 – 0,06 A	48V – 0,06 A
Output Voltage:	18 -18.5 V DC	18 -18.5 V DC
Output current in short circuit:	250 mA	250 mA
Output channel:	1	1
Management protocol:	DALI	DALI




^{EN} Reggiani APP available from March 2019

^{IT} Reggiani APP disponibile da Marzo 2019

Codes

89


Low Voltage Range

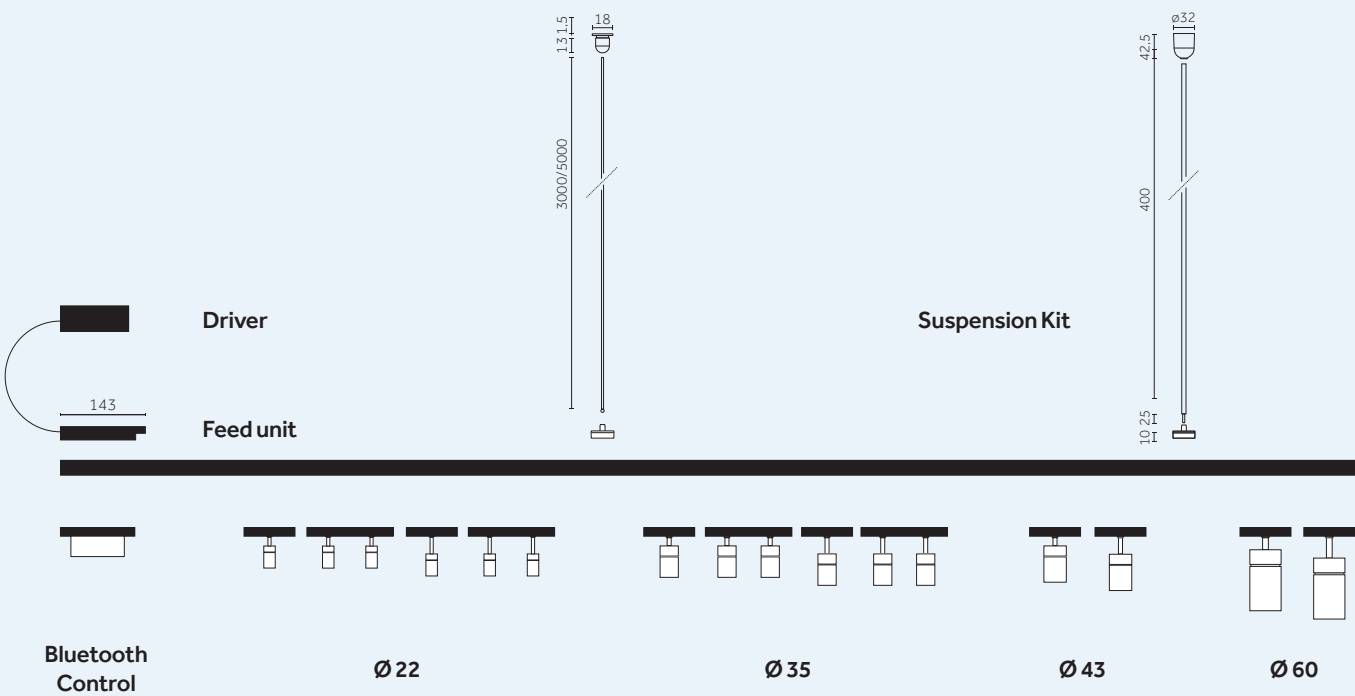


The diagram shows a **Driver** connected to a **Feed** unit, which is then connected to a track with **Spot** units. Dimension (a) is the distance from the Driver to the Feed unit, and dimension (b) is the distance from the Feed unit to the Spot units.

Driver	(a)	5 m	10m	20 m	30 m
50 W	(b)	55 m	50 m	40 m	30 m
70 W	(b)	35 m	30 m	20 m	10 m
150 W	(b)	20 m	15 m	5 m	-
200 W	(b)	15 m	10 m	-	-


(a) Distance Driver / Feed Unit
(b) Distance Feed Unit / Spot




Track 48V
Recessed Trim




Track 48V
Recessed
Trimless




Track 48V
High Recessed
Trimless




Track 48V
Surface slim





Track 48V
Surface/Pendant



Track 48V High
Surface/Pendant




Track 48V High
Pendant - Indirect

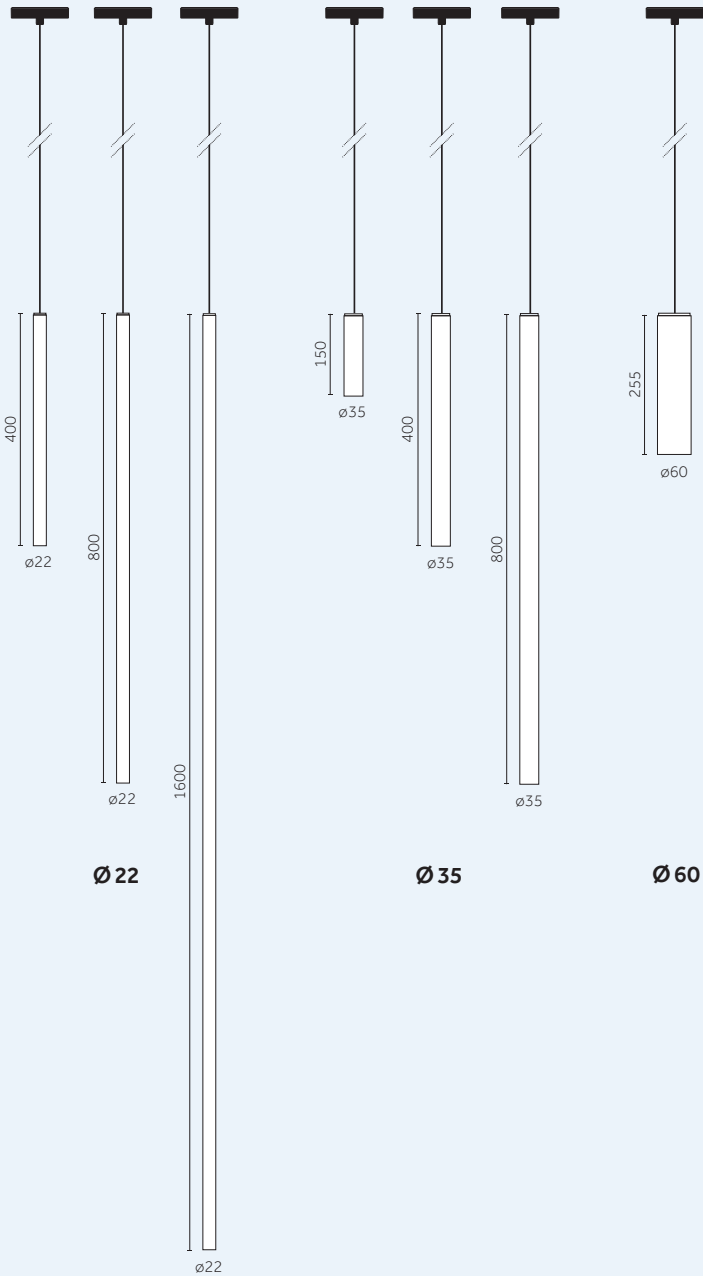

Opal / Prismatic / UGR<19

Low Voltage


Low Voltage products



Yori Evo 48V



154 Yori Pendant 48V



162 Yori Linear 48V 168


Low Voltage tracks




Track 48V
Recessed Trim



176 Track 48V
Recessed Trimless




177 Track 48V High
Recessed Trimless



178 Track 48V
Surface slim


179



Track 48V
Surface/Pendant




180 Track 48V High
Surface/Pendant




182 Track 48V High
Pendant - Indirect

182

Yori Evo 48V

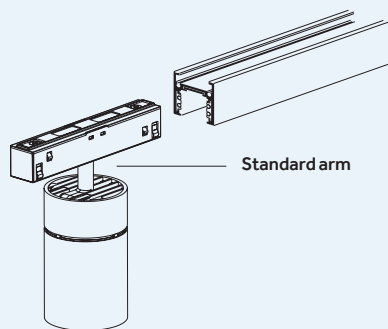


Standard arm

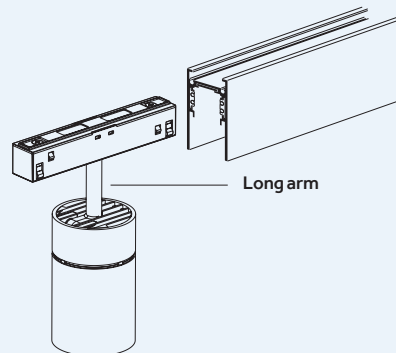

Long arm

Works on:

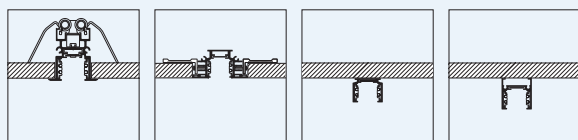


Track 48V
Recessed Trim

Track 48V
Recessed
Trimless

Track 48V
Surface slim

Track 48V
Surface / Pendant

Works on:




Track 48V
High Recessed
Trimless

Track 48V High
Surface/Pendant

Track 48V High
Surface/Pendant
- Indirect

Also works on:

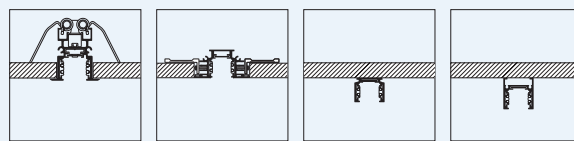

Track 48V
Recessed
Trim

Track 48V
Recessed
Trimless

Track 48V
Surface slim

Track 48V
Surface / Pendant

154






Ø 22 mm		Ø 35 mm		Ø 43 mm		Ø 60 mm	
Precision (1X) Precision (2X)	p.155 p.155	Precision (1X) Precision (2X)	p.156 p.156	Precision (1X) Performance (1X)	p.158 p.158	Precision (1X) Performance (1X)	p.159 p.160
POWERLED 2 W 140lm-200lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >80, CRI >90		POWERLED 2,4 W, 3,5 W 210lm - 413lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >80, CRI >90		POWERLED 4 W, 9 W 410lm - 940lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >80, CRI >90		COBLED 9 W, 12 W, 17 W 725lm-2400lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <2 <3 CRI >80, CRI >90	

*166 mm DALI adapter

Ø 22 mm | Precision (1X)



* Pending

On-Off
StandardOn-Off
Long armDimm 1-10V / DALI / Dimmer on board
StandardDimm 1-10V / DALI / Dimmer on board
Long arm

Code example:

0 . **BN60** **B** . **HW** **01**

Accessories: p.187

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net

2 W POWER LED



Lumen delivered up to 110 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	BN60 Standard	B 10° Narrow	HW	2700	>90	140	<3	01
V Dimm 1-10V	HN60 Long arm	E 28° Medium	HQ	3000	>90	145	<3	12
D DALI		H 33° Wide	WW	3000	>80	190	<3	31
P Dimmer on board			NN	4000	>80	200	<3	B0
LED nominal lumen								
								C0
								D0
								E0
								L0
								M0
								N0


Ø 22 mm | Precision (2X)



* Pending



Standard



Long arm



Code example:

0 . **FN60** **B** . **HW** **01**

Accessories: p.187

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net

2x2 W POWER LED



Lumen delivered up to 2x110 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	FN60 Standard	B 10° Narrow	HW	2700	>90	2x140	<3	01
	LN60 Long arm	E 28° Medium	HQ	3000	>90	2x145	<3	12
		H 33° Wide	WW	3000	>80	2x190	<3	31
			NN	4000	>80	2x200	<3	B0
LED nominal lumen								
								C0
								D0
								E0
								L0
								M0
								N0


Ø 35 mm | Precision (1X)




* Pending

On-Off
Standard

On-Off
Long arm



Dimm 1-10V / DALI / Dimmer on board
Standard



Dimm 1-10V / DALI / Dimmer on board
Long arm



Code example:

0 . CN61 B . HW 01

Accessories: p.188

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net

2,4 W POWER LED

Lumen delivered up to 270 lm / Lumen maintenance: L90B10=50,000h

[illegible]

3,5 W POWER LED



Lumen delivered up to 290lm / Lumen maintenance: L90B10=50,000h

[illegible]


Ø 35 mm | Precision (2X)



* Pending



Standard



Long arm



Code example:

0 . GN61 B . HW 01

Accessories: p.188

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net

2x3,5 W POWER LED

Lumen delivered up to 2x290lm / Lumen maintenance: L90 B10=50,000h






Driver	Version		Optics	LED	K	CRI	lm	SDCM	Finishes	
O On-Off	GN61	Standard	B 10° Narrow	HW	2700	>90	2x300	<3	O1	
	NN61	Longarm	E 22° Medium	HQ	3000	>90	2x314	<3	I2	
			H 31° Wide	WW	3000	>80	2x379	<3	S1	
				NN	4000	>80	2x413	<3	B0	
				LED nominal lumen					C0	
									D0	
								E0		
								L0		
								M0		
								N0		



Ø 60 mm | Precision (1X)



* Pending

On-Off
StandardOn-Off
Long armDimm 1-10V / DALI / Dimmer on board
StandardDimm 1-10V / DALI / Dimmer on board
Long arm

Code example:

0 . DN63 B . HW 01

Accessories: p.191-192

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net

9 W	COBLED			Lumen delivered up to 772 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version		Optics	LED	K	CRI	lm	SDCM	Finishes	
0 On-Off	KN62	Standard	A 8° Very narrow	HW	2700	>90	725	<3	01	
V Dimm 1-10V	YN62	Long arm		HQ	3000	>90	730	<3	12	
D DALI				WW	3000	>80	844	<3	31	
P Dimmer on board				NN	4000	>80	941	<3	B0	
LED nominal lumen									C0	
									D0	
									E0	
									L0	
									M0	
									N0	






12 W		COB LED		Lumen delivered up to 1455 lm / Lumen maintenance: L90 B10=50,000h									
Driver		Version		Optics		LED	K	CRI	lm	SDCM	Finishes		
0 On-Off		DN63	Standard	B 12° Narrow		HC	3000	>98	1250	<2	01		
V Dimm 1-10V		KN63	Long arm	E 20° Medium		HW	2700	>90	1370	<2	12		
D DALI				K - Without optics		HQ	3000	>90	1420	<2	31		
P Dimmer on board						WW	3000	>80	1700	<3	B0		
						NN	4000	>80	1775	<3	C0		
						LED nominal lumen						D0	
												E0	
												L0	
												M0	
												N0	

17 W COB LED			Lumen delivered up to 1970 lm / Lumen maintenance: L90 B10=50,000h							
Driver	Version		Optics	LED	K	CRI	lm	SDCM	Finishes	
0 On-Off	DN64	Standard	B 12° Narrow	HC	3000	>98	1700	<2	01	
V Dimm 1-10V	KN64	Long arm	E 20° Medium	HW	2700	>90	1870	<2	12	
D DALI			K - Without optics	HQ	3000	>90	1920	<2	31	
P Dimmer on board				WW	3000	>80	2320	<3	B0	
				NN	4000	>80	2400	<3	C0	
				LED nominal lumen					D0	
									E0	
									L0	
									M0	
									N0	

Ø 60 mm | Performance (1X)

Risk 1 0.40 IP20 850° CB* EAC

* Pending

On-Off
StandardOn-Off
Long armDimm 1-10V / DALI / Dimmer on board
StandardDimm 1-10V / DALI / Dimmer on board
Long arm

Code example:

0 - DN73 B - HW 01

Accessories: p.193

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net







12 W	POWER LED		Lumen delivered up to 1560 lm / Lumen maintenance: L90 B10=50,000h							
Driver	Version		Optics	LED	K	CRI	lm	SDCM	Finishes	
0 On-Off	DN73	Standard	B 13° Narrow	HC	3000	>98	1250	<2	01	
V Dimm 1-10V	KN73	Long arm	E 24° Medium	HW	2700	>90	1370	<2	12	
D DALI			H 39° Wide	HQ	3000	>90	1420	<2	31	
P Dimmer on board			K - Without optics	WW	3000	>80	1700	<3	B0	
				NN	4000	>80	1775	<3	C0	
				LED nominal lumen						D0
									E0	
									L0	
									M0	
									N0	

17 W			POWER LED		Lumen delivered up to 2110 lm / Lumen maintenance: L90 B10=50,000h								
Driver		Version		Optics		LED	K	CRI	lm	SDCM	Finishes		
0 On-Off		DN74	Standard	B 13° Narrow		HC	3000	>98	1700	<2	01		
V Dimm 1-10V		KN74	Long arm	E 24° Medium		HW	2700	>90	1870	<2	12		
D DALI				H 39° Wide		HQ	3000	>90	1920	<2	31		
P Dimmer on board				K - Without optics		WW	3000	>80	2320	<3	B0		
						NN	4000	>80	2400	<3	C0		
						LED nominal lumen						D0	
												E0	
												L0	
												M0	
												N0	



Yori Pendant 48V


162

Ø 22 mm			Ø 35 mm			Ø 60 mm
						
p.163	p.163	p.163	p.164	p.164	p.165	p.165
POWERLED 2 W 140lm-200lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >80, CRI >90			POWERLED 2,4 W, 3,5 W 210lm - 415lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >80, CRI >90			COBLED 9 W 725 lm-1360lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <2 <3 CRI >80, CRI >90


*166 mm adapter - DALI

Yori Pendant 48V

Ø 22 mm | H 400 mm



On-Off



Dimm 1-10V / DALI / Dimmer on board



* Pending



Code example:

O . PN60 B . HW 12

Accessories: p.187

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Cable length 3mt/

Lunghezza cavo 3mt

2 W POWER LED


Lumen delivered up to 110 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	PN60	B 10° Narrow	HW	2700	>90	140	<3	01
V Dimm 1-10V		E 28° Medium	HQ	3000	>90	145	<3	12
D DALI		H 33° Wide	WW	3000	>80	190	<3	31
P Dimmer on board			NN	4000	>80	200	<3	B0
				LED nominal lumen				
								D0
								E0
								L0
								M0
								N0

Ø 22 mm | H 800 mm



On-Off



Dimm 1-10V / DALI / Dimmer on board



* Pending



Code example:

O . QN60 B . HW 12

Accessories: p.187

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Cable length 3mt/

Lunghezza cavo 3mt

2 W POWER LED


Lumen delivered up to 110 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	QN60	B 10° Narrow	HW	2700	>90	140	<3	01
V Dimm 1-10V		E 28° Medium	HQ	3000	>90	145	<3	12
D DALI		H 33° Wide	WW	3000	>80	190	<3	31
P Dimmer on board			NN	4000	>80	200	<3	B0
				LED nominal lumen				C0
								D0
								E0
								L0
								M0
								N0

Ø 22 mm | H 1600 mm



On-Off



Dimm 1-10V / DALI / Dimmer on board



* Pending



Code example:

O . RN60 B . HW 12

Accessories: p.187

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Cable length 3mt/

Lunghezza cavo 3mt


2 W POWER LED

Lumen delivered up to 110 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	RN60	B 10° Narrow	HW	2700	>90	140	<3	01
V Dimm 1-10V		E 28° Medium	HQ	3000	>90	145	<3	12
D DALI		H 33° Wide	WW	3000	>80	190	<3	31
P Dimmer on board			NN	4000	>80	200	<3	B0
				LED nominal lumen				C0
							D0	
							E0	
							L0	
							M0	
							N0	

Yori Pendant 48V

Ø 35 mm | H 150 mm



On-Off

Dimm 1-10V / DALI / Dimmer on board



Code example:

V . TN60 B . HW 12

Accessories: p.188

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Cable length 3mt/

Lunghezza cavo 3mt

2,4 W POWER LED

Lumen delivered up to 270 lm / Lumen maintenance: L90B10=50,000h


Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
V Dimm 1-10V	TN60	B 10° Narrow	HW	2700	>90	210	<3	01
		E 22° Medium	HQ	3000	>90	220	<3	12
		H 31° Wide	WW	3000	>80	265	<3	31
			NN	4000	>80	290	<3	B0
			LED nominal lumen					C0
								D0
								E0
								L0
								M0
								N0

3,5 W POWER LED

Lumen delivered up to 290 lm / Lumen maintenance: L90B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	TN61	B 10° Narrow	HW	2700	>90	310	<3	O1
D DALI		E 22° Narrow	HQ	3000	>90	315	<3	I2
P Dimmer on board		H 31° Medium	WW	3000	>80	380	<3	31
			NN	4000	>80	415	<3	B0
				LED nominal lumen				C0
								D0
							E0	
							L0	
							M0	
							N0	

164 Ø 35 mm | H 400 mm



On-Off

Dimm 1-10V / DALI / Dimmer on board



Code example:

V . UN60 B . HW 12

Accessories: p.188

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

NOTES:
Cable length 3mt/

Lunghezza cavo 3mt

2,4 W POWER LED

Lumen delivered up to 270lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
V Dimm 1-10V	UN60	B 10° Narrow	HW	2700	>90	210	<3	01
		E 22° Medium	HQ	3000	>90	220	<3	12
		H 31° Wide	WW	3000	>80	265	<3	31
			NN	4000	>80	290	<3	B0
			LED nominal lumen					C0
								D0
								E0
								L0
								M0
								N0


3,5 W POWER LED

Lumen delivered up to 290 lm / Lumen maintenance: L90B10=50,000h


Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	UN61	B 10° Narrow	HW	2700	>90	310	<3	O1
D DALI		E 22° Narrow	HQ	3000	>90	315	<3	I2
P Dimmeronboard		H 31° Medium	WW	3000	>80	380	<3	I3
		NN	4000	>80	415	<3	B0	
			LED nominal lumen					C0
								D0
							E0	
							L0	
							M0	
							N0	

Yori Pendant 48V

Ø 35 mm | H 800 mm



On-Off



DALI / Dimmer on board



* Pending



Code example:

V . VN60 B . HW 12

Accessories: p.188

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Cable length 3mt/

Lunghezza cavo 3mt

2,4 W POWER LED

Lumen delivered up to 270 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
V Dimm 1-10V	VN60	B 10° Narrow	HW	2700	>90	210	<3	01
		E 22° Medium	HQ	3000	>90	220	<3	12
		H 31° Wide	WW	3000	>80	265	<3	31
			NN	4000	>80	290	<3	B0
LED nominal lumen								
								C0
								D0
								E0
								L0
								M0
								N0

3,5 W POWER LED


Lumen delivered up to 290 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	VN61	B 10° Narrow	HW	2700	>90	310	<3	01
D DALI		E 22° Narrow	HQ	3000	>90	315	<3	12
P Dimmer on board		H 31° Medium	WW	3000	>80	380	<3	31
			NN	4000	>80	415	<3	B0
LED nominal lumen								
								C0
								D0
								E0
								L0
								M0
								N0

Ø 60 mm | H 255 mm



On-Off



Dimm 1-10V / DALI / Dimmer on board



* Pending



Code example:

O . XN62 A . HW 01

Accessories: p.191-192

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Cable length 3mt/

Lunghezza cavo 3mt

9 W COB LED

Lumen delivered up to 772 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	XN62	A 8° Very narrow	HW	2700	>90	725	<2	01
V Dimm 1-10V			HQ	3000	>90	730	<2	12
D DALI			WW	3000	>80	844	<3	31
P Dimmer on board			NN	4000	>80	941	<3	B0
LED nominal lumen								
								C0
								D0
								E0
								L0
								M0
								N0

9 W COB LED

Lumen delivered up to 1115 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	ZN62	B 12° Narrow	HW	2700	>90	1050	<2	01
V Dimm 1-10V		E 20° Medium	HQ	3000	>90	1100	<2	12
		H 32° Wide	WW	3000	>80	1300	<3	31
		K - Without optics	NN	4000	>80	1360	<3	B0
LED nominal lumen								
								C0
								D0
								E0
								L0
								M0
								N0

Low Voltage














Yori Pendant 48V




167

Low Voltage

Yori Linear 48V

Opal diffuser	Prismatic diffuser	UGR<19	
 p.169	 p.171	 p.173	 High-Performance p.173
 p.169	 p.171	 p.173	
 p.169	 p.171	 p.174	
 p.170	 p.172	 p.174	
 p.170	 p.172		
MID POWER LED 5,4 W, 10,8 W, 16,2 W, 21,6 W, 27 W 731 lm-4050 lm L90 B5=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >90	POWER LED 5,4 W, 10,8 W, 16,2 W, 21,6 W, 27 W 731 lm-4050 lm L90 B5=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >90	POWER LED 4,3 W, 8,6 W, 12,9 W, 15,4 W 569 lm-2235 lm L90 B5=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >90 High-Performance 9,9 W, 15 W 1079 lm-1679 lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >90	

286 mm | Opal

Risk 1 0.18  IP20   850° 

Code example:

0 . BN420 . HW 21

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Dimm 1-10V version on request /

Versione Dimm 1-10V su richiesta


5,4 W MID POWER LED

Lumen delivered up to 525 lm / Lumen maintenance: L90 B5=50,000h

Driver	Version	Length	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	BN420	286mm	Opal	102°	HW	2700	>90	731	<3	21 
D DALI					HQ	3000	>90	744	<3	
					HN	4000	>90	810	<3	

LED nominal lumen

567 mm | Opal

Risk 1 0.31  IP20   850° 

Code example:

0 . BN430 . HW 21

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Dimm 1-10V version on request /

Versione Dimm 1-10V su richiesta


10,8 W MID POWER LED

Lumen delivered up to 1078 lm / Lumen maintenance: L90 B5=50,000h

Driver	Version	Length	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	BN430	567mm	Opal	102°	HW	2700	>90	1462	<3	21 
D DALI					HQ	3000	>90	1488	<3	
					HN	4000	>90	1620	<3	

LED nominal lumen

847 mm | Opal

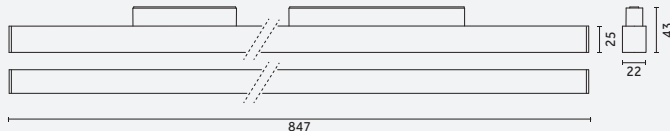Risk 1 0.47  IP20   850° 

Code example:

0 . BN450 . HW 21

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Dimm 1-10V version on request /

Versione Dimm 1-10V su richiesta

16,2 W MID POWER LED

Lumen delivered up to 1615 lm / Lumen maintenance: L90 B5=50,000h


Driver	Version	Length	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	BN450	847mm	Opal	102°	HW	2700	>90	2193	<3	21 
D DALI					HQ	3000	>90	2232	<3	
					HN	4000	>90	2430	<3	

LED nominal lumen

Yori Linear 48V

1128 mm | Opal

Risk 1 0.60 IP20 850°

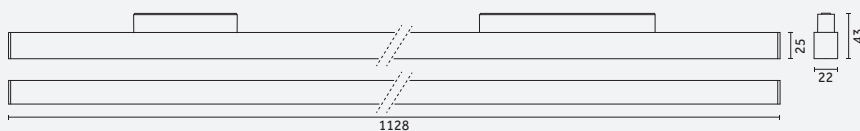

Code example:

0 - BN460 - HW 21

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Dimm 1-10V version on request/

Versione Dimm 1-10V su richiesta

21,6 W MID POWER LED


Lumen delivered up to 2153 lm / Lumen maintenance: L90 B5=50,000h

Driver	Version	Length	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	BN460	1128mm	Opal	102°	HW	2700	>90	2924	<3	21
D DALI					HQ	3000	>90	2976	<3	
					HN	4000	>90	3240	<3	

LED nominal lumen

1408 mm | Opal

Risk 1 0.74 IP20 850°

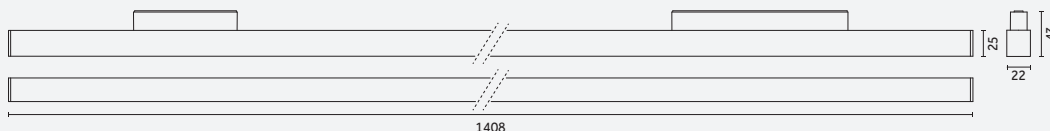

Code example:

0 - BN470 - HW 21

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Dimm 1-10V version on request/

Versione Dimm 1-10V su richiesta

27 W MID POWER LED


Lumen delivered up to 2692 lm / Lumen maintenance: L90 B5=50,000h

Driver	Version	Length	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	BN470	1408mm	Opal	102°	HW	2700	>90	3654	<3	21
D DALI					HQ	3000	>90	3720	<3	
					HN	4000	>90	4050	<3	

LED nominal lumen



286 mm | Prismatic

Risk 1 0.18  IP20   850° 

Code example:

0 . CN420 . HW 21

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:


Dimm 1-10V version on request /

Versione Dimm 1-10V su richiesta

5,4 W MID POWER LED						Lumen delivered up to 368 lm / Lumen maintenance: L90 B5=50,000h					
Driver	Version	Length	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes	
0 On-Off	CN420	286mm	Prismatic	57° / 87°	HW	2700	>90	731	<3	21	
D DALI					HQ	3000	>90	744	<3		
					HN	4000	>90	810	<3		

LED nominal lumen

567 mm | Prismatic

Risk 1 0.32  IP20   850° 

Code example:

0 . CN430 . HW 21

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Dimm 1-10V version on request /


Versione Dimm 1-10V su richiesta

10,8 W MID POWER LED						Lumen delivered up to 755 lm / Lumen maintenance: L90 B5=50,000h					
Driver	Version	Length	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes	
0 On-Off	CN430	567mm	Prismatic	57° / 87°	HW	2700	>90	1462	<3	21	
D DALI					HQ	3000	>90	1488	<3		
					HN	4000	>90	1620	<3		

LED nominal lumen

171

847 mm | Prismatic

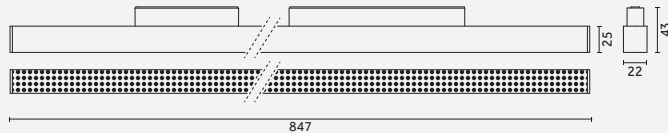Risk 1 0.48  IP20   850° 

Code example:

0 . CN450 . HW 21

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Dimm 1-10V version on request /

Versione Dimm 1-10V su richiesta


16,2 W MID POWER LED						Lumen delivered up to 1133 lm / Lumen maintenance: L90 B5=50,000h					
Driver	Version	Length	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes	
0 On-Off	CN450	847mm	Prismatic	57° / 87°	HW	2700	>90	2193	<3	21	
D DALI					HQ	3000	>90	2232	<3		
					HN	4000	>90	2430	<3		

LED nominal lumen

Yori Linear 48V

1128 mm | Prismatic

Risk 1 0.62 [A] IP20 [Recycle] [Energy] 850° [X]

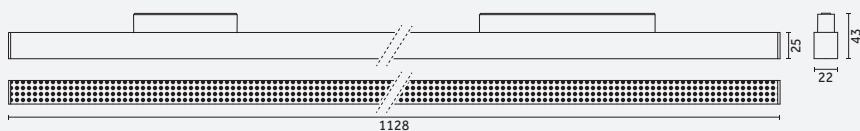

Code example:

0 - CN460 - HW 21

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Dimm 1-10V version on request/

Versione Dimm 1-10V su richiesta

21,6 W MID POWER LED


Lumen delivered up to 1509 lm / Lumen maintenance: L90 B5=50,000h

Driver	Version	Length	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	CN460	1128mm	Prismatic	57° / 87°	HW	2700	>90	2924	<3	21
D DALI					HQ	3000	>90	2976	<3	
					HN	4000	>90	3240	<3	

LED nominal lumen

1408 mm | Prismatic

Risk 1 0.76 [A] IP20 [Recycle] [Energy] 850° [X]

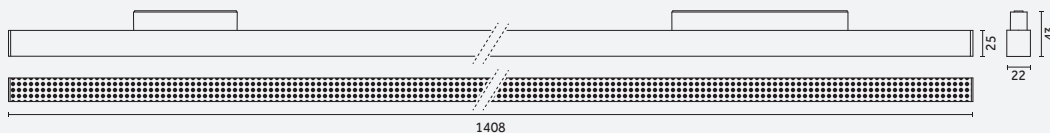

Code example:

0 - CN470 - HW 21

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Dimm 1-10V version on request/

Versione Dimm 1-10V su richiesta

27 W MID POWER LED

Lumen delivered up to 1888 lm / Lumen maintenance: L90 B5=50,000h


Driver	Version	Length	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	CN470	1408mm	Prismatic	57° / 87°	HW	2700	>90	3654	<3	21
D DALI					HQ	3000	>90	3720	<3	
					HN	4000	>90	4050	<3	

LED nominal lumen

286 mm | UGR<19

Risk* 0.22  IP20   850° 

* Pending



Code example:

0 . DN420 . HW 21

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Dimm 1-10V version on request /

Versione Dimm 1-10V su richiesta

4,3 W MID POWER LED

Lumen delivered up to 547 lm / Lumen maintenance: L90 B5=50,000h


Driver	Version	Length	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	DN420	286mm	UGR<19	65°	HW	2700	>90	569	<3	21
D DALI					HQ	3000	>90	579	<3	
					HN	4000	>90	620	<3	

LED nominal lumen

286 mm | UGR<19 | High-Performance

Risk* 0.22  IP20   850° 

* Pending



Code example:

0 . FN430 . HW 21

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Dimm 1-10V version on request /

Versione Dimm 1-10V su richiesta

9,9 W MID POWER LED

Lumen delivered up to 1081 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Length	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	FN430	286mm	UGR<19	65°	HW	2700	>90	1079	<3	21
D DALI					HQ	3000	>90	1122	<3	
					HN	4000	>90	1205	<3	

LED nominal lumen

15 W MID POWER LED

Lumen delivered up to 1506 lm / Lumen maintenance: L90 B10=50,000h


Driver	Version	Length	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	GN440	286mm	UGR<19	65°	HW	2700	>90	1502	<3	21
D DALI					HQ	3000	>90	1564	<3	
					HN	4000	>90	1679	<3	

LED nominal lumen

567 mm | UGR<19

Risk* 0.39  IP20   850° 

* Pending



Code example:

0 . DN430 . HW 21

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Dimm 1-10V version on request /

Versione Dimm 1-10V su richiesta

8,6 W MID POWER LED

Lumen delivered up to 1093 lm / Lumen maintenance: L90 B5=50,000h

Driver	Version	Length	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	DN430	567mm	UGR<19	65°	HW	2700	>90	1139	<3	21
D DALI					HQ	3000	>90	1159	<3	
					HN	4000	>90	1241	<3	


LED nominal lumen

Yori Linear 48V

847 mm | UGR<19

Risk* 0.59 IP20 850°

*Pending

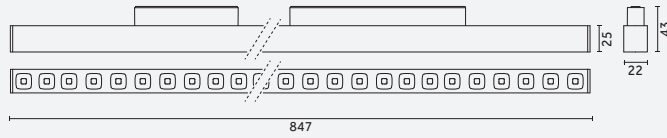

Code example:

0 - DN440 - HW 21

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Dimm 1-10V version on request/

Versione Dimm 1-10V su richiesta

12,9 W MID POWER LED

Lumen delivered up to 1640 lm / Lumen maintenance: L90 B5=50,000h


Driver	Version	Length	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	DN440	847mm	UGR<19	65°	HW	2700	>90	1708	<3	21
D DALI					HQ	3000	>90	1739	<3	
					HN	4000	>90	1862	<3	

LED nominal lumen

1128 mm | UGR<19

Risk* 0.76 IP20 850°

*Pending

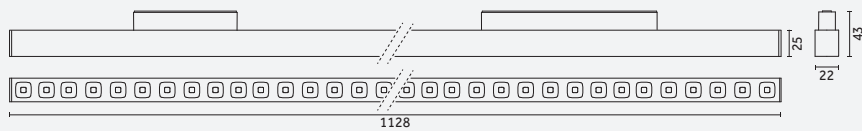

Code example:

0 - DN450 - HW 21

Low Voltage Tracks: p.175-185

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Dimm 1-10V version on request/

Versione Dimm 1-10V su richiesta

15,4 W MID POWER LED


Lumen delivered up to 1968 lm / Lumen maintenance: L90 B5=50,000h

Driver	Version	Length	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	DN450	1128mm	UGR<19	65°	HW	2700	>90	2050	<3	21
D DALI					HQ	3000	>90	2087	<3	
					HN	4000	>90	2235	<3	

LED nominal lumen

Low Voltage Tracks

Track 48V | Recessed Trim

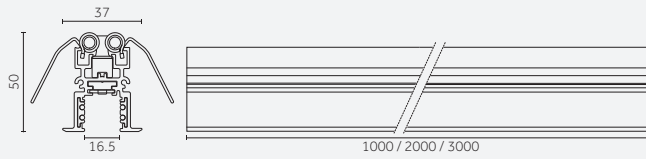


Code example:
0.02401.00 12

Driver: p.185
Control systems: p.185

Version	Length mm	Weight kg	Finishes
0.02401.00	1000	1,00	12
0.02402.00	2000	2,00	31
0.02403.00	3000	3,00	

Track 48V | Recessed Trim | Accessories

Accessories/ Accessori




Description
End cap for tracks/
Tappo di chiusura per binari

Code	Finishes
0.02481.00	12
	31




Description
Reinforcing bracket for jointing connection/
Staffa di rinforzo per installazioni in linea continua

Code	Finishes
0.02487.00	21



Description
90° ceiling corner/
Angolo a 90° a soffitto

Code	Finishes
0.02414.0000	12
	31




Description
Trimless inspection hatch/
Botola d'ispezione Trimless

Code
0.40020.0000



Description
Cable cutter/
Tronchese per taglio conduttori del binario


Code
0.02064.0000



Description
L- connector for wall/ceiling corners, T / X connectors for ceilings/
Giunto a "L" per angoli parete/soffitto, giunti a "T"/"X" per soffitto


On request

Electromechanical connections/ Connessioni elettromeccaniche




Description
Straight feeding connector/
Giunto passante di alimentazione

Code	Finishes
0.02486.00	10
	21




Description
End feed/
Testata di alimentazione

Code	Finishes
0.02485.00	10
	21



Description
Feeding connector for 90° corner/
Giunto di alimentazione per angolo 90°



Code	Finishes
0.02484.00	10
	21



Description
Flexible feeding connector for 90° corner/
Giunto di alimentazione flessibile per angolo 90°

Code	Finishes
0.02404.00	10
	21

Track 48V | Recessed Trimless




Code example:
0.02465.00 21

Driver: p.185
Control systems: p.185

Version	Length mm	Weight kg	Finishes
0.02465.00	1000	1,00	21
0.02466.00	2000	2,00	
0.02467.00	3000	3,00	

Track 48V | Recessed Trimless | Accessories

Accessories/
Accessori



Description
End cap for tracks/
Tappo di chiusura per binario


Code
0.02468.00

Finishes
21



Description
Bracket for trimless installation (4 pieces for 1000mm)/
Staffa per applicazioni Trimless (4 pezzi per 1000mm)


Code
0.02475.0000



Description
Reinforcing bracket for jointing connection/
Staffa di rinforzo per installazioni in linea continua

Code
0.02487.00


Finishes
21



Description
90° ceiling corner/
Angolo a 90° a soffitto


Code
0.02474.00

Finishes
21




Description
Trimless inspection hatch/
Botola d'ispezione Trimless

Code
0.40020.0000



Description
Cable cutter/
Tronchese per taglio conduttori
del binario


Code
0.02064.0000



Description
L- connector for wall/ceiling corners,
T / X connectors for ceilings/
Giunto a "L" per angoli parete/
soffitto, giuntia "T"/"X" per soffitto

On request


Electromechanical connections/
Connessioni elettromeccaniche



Description
Straight feeding connector/
Giunto passante di alimentazione

Code
0.02486.00


Finishes
10
21



Description
End feed/
Testata di alimentazione

Code
0.02485.00


Finishes
10
21



Description
Feeding connector for 90° corner/
Giunto di alimentazione per angolo 90°

Code
0.02484.00

Finishes
10
21





Description
Flexible feeding connector for 90° corner/
Giunto di alimentazione flessibile per angolo 90°

Code
0.02404.00

Finishes
10
21

Track 48V | High | Recessed Trimless

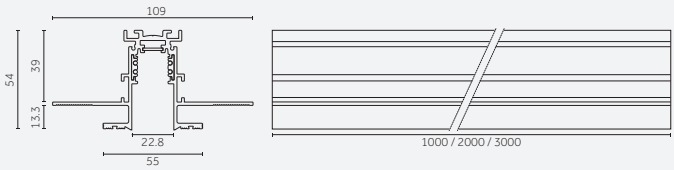


Code example:
0.02445.00 21

Driver: p.185
Control systems: p.185

Version	Length mm	Weight kg	Finishes
0.02445.00	1000	1,00	21
0.02446.00	2000	2,00	
0.02447.00	3000	3,00	


Track 48V | High | Recessed Trimless | Accessories

Accessories/
Accessori




Description
End cap for track/
Tappo di chiusura per binario

Code	Finishes
0.02463.00	12
	31




Description
End cap with cable hole/
Tappo di chiusura con foro per cavo

Code	Finishes
0.02464.00	12
	31




Description
Reinforcing bracket for jointing connection/
Staffa di rinforzo per installazioni in linea continua

Code	Finishes
0.02487.00	21



Description
Trimless inspection hatch/
Botola d'ispezione Trimless

Code
0.40020.0000




Description
90° ceiling corner /
Angolo a 90° a soffitto

Code	Finishes
0.02478.00	21



Description
Cable cutter/
Tronchese per taglio conduttori
del binario


Code
0.02064.0000



Description
L- connector for wall/ceiling corners,
T / X connectors for ceilings/
Giunto a "L" per angoli parete/
soffitto, giunti a "T"/"X" per soffitto


On request

Electromechanical connections/
Conessioni elettromeccaniche




Description
Straight feeding connector/
Giunto passante di alimentazione

Code	Finishes
0.02486.00	10
	21




Description
End feed/
Testata di alimentazione

Code	Finishes
0.02485.00	10
	21



Description
Feeding connector for 90° corner/
Giunto di alimentazione per angolo 90°


Code	Finishes
0.02484.00	10
	21



Description
Flexible feeding connector for 90° corner/
Giunto di alimentazione flessibile per angolo 90°

Code	Finishes
0.02404.00	10
	21

Track 48V | Surface slim




Code example:
0.02450.00 12
Driver: p.185
Control systems: p.185

Version	Length mm	Weight kg	Finishes
0.02450.00	1000	0,70	12
0.02451.00	2000	1,40	31
0.02452.00	3000	2,10	


Track 48V | Surface slim | Accessories

Accessories/
Accessori




Description
End cap/
Tappo di chiusura

Code	Finishes
0.02453.00	12
	31



Description
End cap with cable hole/
Tappo di chiusura con foro per cavo

Code	Finishes
0.02454.00	12
	31




Description
L bracket for 90° angles/
Staffa a L per applicazioni angolari 90°

Code
0.02483.0000



Description
Cable cutter/
Tronchese per taglio conduttori del binario


Code
0.02064.0000



Description
L- connector for wall/ceiling corners, T / X connectors for ceilings/
Giunto a "L" per angoli parete/soffitto, giunti a "T"/"X" per soffitto


On request

Electromechanical connections/
Conessioni elettromeccaniche




Description
Straight feeding connector/
Giunto passante di alimentazione

Code	Finishes
0.02486.00	10
	21




Description
End feed/
Testata di alimentazione

Code	Finishes
0.02485.00	10
	21



Description
Feeding connector for 90° corner/
Giunto di alimentazione per angolo 90°


Code	Finishes
0.02484.00	10
	21



Description
Flexible feeding connector for 90° corner/
Giunto di alimentazione flessibile per angolo 90°

Code	Finishes
0.02404.00	10
	21

Track 48V | Surface/Pendant



Code example:
0.02455.00 12
Driver: p.185
Control systems: p.185

Version	Length mm	Weight kg	Finishes
0.02455.00	1000	0,77	12
0.02456.00	2000	1,54	31
0.02457.00	3000	2,31	

Track 48V | Surface/Pendant | Accessories


Accessories/
Accessori

		Description End cap/ Tappo di chiusura	Code 0.02458.00	Finishes 12 31
		Description End cap with cable hole/ Tappo di chiusura con foro per cavo	Code 0.02459.00	Finishes 12 31
		Description Short bracket for suspension/ Staffa corta per sospensione	Code 0.02479.0000	
		Description Long bracket for suspension/ Staffa lunga per sospensione	Code 0.02482.0000	
		Description 90° corner/ Angolo a 90°	Code 0.02449.00	Finishes 12 31
		Description Bracket for surface-mounting/ Clip per fissaggio a superficie	Code 0.02415.00	Finishes 10 21
		Description Cable cutter/ Tronchese per taglio conduttori del binario	Code 0.02064.0000	
		Description L- connector for wall/ceiling corners, T / X connectors for ceilings/ Giunto a "L" per angoli parete/soffitto, giunti a "T"/"X" per soffitto	On request	

Electromechanical connections/
Conessioni elettromeccaniche

		Description Straight feeding connector/ Giunto passante di alimentazione	Code 0.02486.00	Finishes 10 21
		Description End feed/ Testata di alimentazione	Code 0.02485.00	Finishes 10 21

Low Voltage Tracks




Description
Feeding connector for 90° corner/
Giunto di alimentazione per angolo 90°

Code	Finishes
0.02484.00	10
	21

Description
Flexible feeding connector for 90° corner/
Giunto di alimentazione flessibile per angolo 90°


Code	Finishes
0.02404.00	10
	21

Pendant mounting (surface-mounted track)/
Fissaggio a sospensione (binario da superficie)





Description
Wire suspension set with 3000mm cable + cylinder ceiling rose + short bracket with gripper for rapid cable Ø 1,5m installation/
Set sospensione con cavo 3000mm + rosone cilindrico + staffa corta con tenditore per fissaggio rapido del cavo Ø 1,5m

Code
0.02407.0000





Description
Wire suspension set with 5000mm cable + cylinder ceiling rose + short bracket with gripper for rapid cable Ø 1,5m installation /
Set sospensione con cavo 5000mm + rosone cilindrico + staffa corta con tenditore per fissaggio rapido del cavo Ø 1,5m

Code
0.02408.0000




Description
Wire suspension set with 3000mm cable + ceiling rose + long bracket with gripper for rapid cable Ø 1,5m installation /
Set sospensione con cavo 3000mm + rosone + staffa lunga con tenditore per fissaggio rapido del cavo Ø 1,5m

Code
0.02409.0000





Description
Wire suspension set with 5000mm cable + ceiling rose + long bracket with gripper for rapid cable Ø 1,5m installation /
Set sospensione con cavo 5000mm + rosone + staffa lunga con tenditore per fissaggio rapido del cavo Ø 1,5m

Code
0.02410.0000



Description
Suspension kit with 1m tige.
Ceiling bracket, plastic ceiling rose, threaded M6 rod, M6 bracket/
Set per fissaggio a sospensione con tige 1m.
Staffa per fissaggio a soffitto, rosone in plastica, barra filettata M6, staffa M6

Code	Finishes
0.02488.00	10
	21




Description
Suspension kit with 2m long wire and counter-balance system/
Set sospensione con cavo da 2m e sistema di contro-bilanciamento

Code	Finishes
0.02473.00	10
	21

Low Voltage Tracks

Track 48V | High | Surface/Pendant

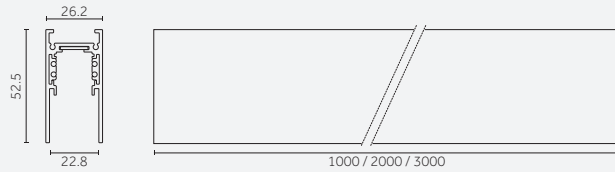

Code example:


0.02460.00 12

Driver: p.185

Control systems: p.185

Version	Length mm	Weight kg	Finishes
0.02460.00	1000	0,95	12
0.02461.00	2000	1,90	31
0.02462.00	3000	2,85	

Track 48V | High | Pendant - Indirect

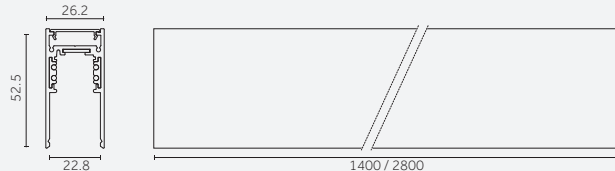

Code example:

X . 02405 . HW 12

Driver: p.185

Control systems: p.185

Notes:

Kit for suspended application to be ordered separately p.184/ Kit per l'applicazione a sospensione da ordinare separatamente vedi p.184

*Version with separate switching indirect light and track, available on request/*Versione per accensione separata luce indiretta/binario, disponibile su richiesta


20,2 W		MID POWER LED			Lumen delivered up to 2430 lm / Lumen maintenance: L90 B5=50,000h						
Driver	Version	Length mm	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes	
X Not included	02405 On/Off*	1400	Opal	105°	HW	2700	>90	2520	<3	12	
	V2405 Dimm 1-10V*				HQ	3000	>90	3050	<3	31	
	D2405 DALI				HN	4000	>90	3300	<3		
					LED nominal lumen						

LED nominal lumen

39,4 W		MID POWER LED			Lumen delivered up to 4860 lm / Lumen maintenance: L90 B5=50,000h						
Driver	Version	Length mm	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes	
X Not included	02406 On/Off*	2800	Opal	105°	HW	2700	>90	5040	<3	12	
	V2406 Dimm 1-10V*				HQ	3000	>90	6100	<3	31	
	D2406 DALI				HN	4000	>90	6600	<3		
					LED nominal lumen						

LED nominal lumen

Track 48V | High | Pendant - Indirect | Tunable white

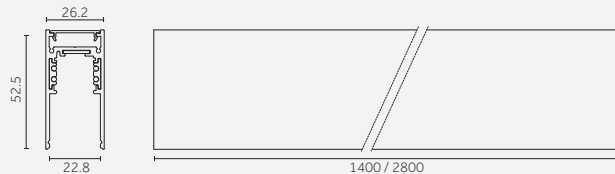

Code example:

X . 02405 . WT 12

Driver: p.185

Driver Tunable white: p.185

Control systems: p.185

Notes:

Kit for suspended application to be ordered separately p.184/ Kit per l'applicazione a sospensione da ordinare separatamente vedi p.184

20 W		MID POWER LED								
Driver	Version	Length mm	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes
X Not included	T2405	1400	Opal	105°	WT	2200-6500	>80	2800	<3	12
					QT	2200-6500	>90	2310	<3	31
LED nominal lumen										





LED nominal lumen

40 W MID POWER LED											
Driver		Version	Length mm	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes
X	Not included	T2406	2800	Opal	105°	WT	2200-6500	>90	5600	<3	12
						QT	2200-6500	>90	4670	<3	31
						LED nominal lumen					





LED nominal lumen

Track 48V High | Surface/Pendant | Pendant - Indirect | Accessories


Accessories/
Accessori

		Description End cap for track/ Tappo di chiusura per binario	Code 0.02463.00	Finishes 12 31
		Description End cap with cable hole/ Tappo di chiusura con foro per cavo	Code 0.02464.00	Finishes 12 31
		Description Short bracket for suspension/ Staffa corta per sospensione	Code 0.02479.0000	
		Description Long bracket for suspension/ Staffa lunga per sospensione	Code 0.02482.0000	
		Description 90° corner / Angolo di 90°	Code 0.02448.00	Finishes 12 31
		Description Bracket for surface-mounting/ Clip per fissaggio a superficie	Code 0.02415.00	Finishes 10 21
		Description Cable cutter/ Tronchese per taglio conduttori del binario	Code 0.02064.0000	

Electromechanical connections/
Conessioni elettromeccaniche


		Description Straight feeding connector/ Giunto passante di alimentazione	Code 0.02486.00	Finishes 10 21
		Description End feed/ Testata di alimentazione	Code 0.02485.00	Finishes 10 21
		Description Feeding connector for 90° corner/ Giunto di alimentazione per angolo 90°	Code 0.02484.00	Finishes 10 21
		Description Flexible feeding connector for 90° corner/ Giunto di alimentazione flessibile per angolo 90°	Code 0.02404.00	Finishes 10 21

Pendant mounting (surface-mounted track)/
Fissaggio a sospensione (binario da superficie)




Description
Wire suspension set with 3000mm cable + cylinder ceiling rose + short bracket with gripper for rapid cable Ø 1,5m installation /
Set sospensione con cavo 3000mm + rosone cilindrico + staffa corta con tenditore per fissaggio rapido del cavo Ø 1,5m

Code
0.02407.0000




Description
Wire suspension set with 5000mm cable + cylinder ceiling rose + short bracket with gripper for rapid cable Ø 1,5m installation /
Set sospensione con cavo 5000mm + rosone cilindrico + staffa corta con tenditore per fissaggio rapido del cavo Ø 1,5m

Code
0.02408.0000




Description
Wire suspension set with 3000mm cable + ceiling rose + long bracket with gripper for rapid cable Ø 1,5m installation /
Set sospensione con cavo 3000mm + rosone + staffa lunga con tenditore per fissaggio rapido del cavo Ø 1,5m

Code
0.02409.0000





Description
Wire suspension set with 5000mm cable + ceiling rose + long bracket with gripper for rapid cable Ø 1,5m installation /
Set sospensione con cavo 5000mm + rosone + staffa lunga con tenditore per fissaggio rapido del cavo Ø 1,5m

Code
0.02410.0000




Description
Suspension kit with 1m tige.
Ceiling bracket, plastic ceiling rose, threaded M6 rod, M6 bracket /
Set per fissaggio a sospensione con tige 1m.
Staffa per fissaggio a soffitto, rosone in plastica, barra filettata M6, staffa M6

Code	Finishes
0.02488.00	10 ☐
	21 ☐



Description
Suspension kit with 2m long wire and counter-balance system /
Set sospensione con cavo da 2m e sistema di contro-bilanciamento

Code	Finishes
0.02473.00	10 ☐
	21 ☐



Description
Canopy surface kit for suspended track feeding.
Rose, ceiling bracket, 4-pole terminal block and gasket for cable passage /
Set basetta a superficie per alimentazione binario a sospensione.
Rosone, staffa per fissaggio a soffitto, morsettiere 4 poli e guarnizione per il passaggio del cavo

Code	Finishes
0.02480.00	12 ☐
	31 ☐


Electrical devices

Track 48V | Electrical Devices

Driver

50 W POWERLED								
Type	Code	W	Size (mm)	Tech. info	CV	Connectable fixtures	Max.distance	Cable section
On/Off	0.31655.0000	50		220-240V / 0/50/60Hz	48V	Max: 45 W	See chart here below	2.5 mm²
70 W POWERLED								
Type	Code	W	Size (mm)	Tech. info	CV	Connectable fixtures	Max.distance	Cable section
On/Off	0.31656.0000	70		220-240V / 0/50/60Hz	48V	Max: 63 W	See chart here below	2.5 mm²
150 W POWERLED								
Type	Code	W	Size (mm)	Tech. info	CV	Connectable fixtures	Max.distance	Cable section
On/Off	0.31650.0000	150		220-240V / 0/50/60Hz	48V	Max: 140 W	See chart here below	2.5 mm²
200 W POWERLED								
Type	Code	W	Size (mm)	Tech. info	CV	Connectable fixtures	Max.distance	Cable section
On/Off	0.31657.0000*	200	—	—	48V	—	—	—

*On request/Su richiesta

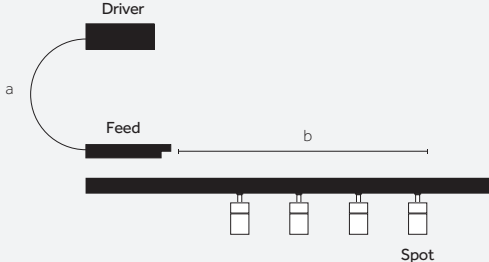	Driver	(a)	5 m	10m	20 m	30 m
	50 W	(b)	55 m	50 m	40 m	30 m
	70 W	(b)	35 m	30 m	20 m	10 m
	150 W	(b)	20 m	15 m	5 m	-
	200 W	(b)	15 m	10 m	-	-
(a) Distance Driver / Feed Unit (b) Distance Feed Unit / Spot						

185

Track 48V | High | Pendant - Indirect | Tunable white | Electrical Devices

Driver

20/40 W MID POWERLED								
Type	Code	W	Size (mm)	Tech. info	CV	Connectable fixtures	Max.distance	Cable section
DALI	D.31640.0000	75		120-277V / 50/60Hz	24V	Max: 67 W	Max: 20 m	2.5 mm²
DMX	G.31640.0000	75		120-277V / 50/60Hz	24V	Max: 67 W	Max: 20 m	2.5 mm²

Control systems

Track 48V | Control systems



Description

Wireless control device for 48V track (see p.86-87)/
Dispositivo di controllo wireless per binario 48V (vedi p.86-87)
Casambi - Control up to 64 drivers divided in 4 groups/
Casambi - Controllo fino a 64 driver divisi in 4 gruppi

Code

0.26104.00

Finishes

10

21



Description

Wireless control device for 48V track (see p.86-87)/
Dispositivo di controllo wireless per binario 48V (vedi p.86-87)
Control up to 64 drivers individually/
Controllo fino a 64 driver individualmente

Code

0.26105.00

Finishes

10

21

Accessories

Ø 22 mm | Accessories

Optics accessories/
Accessori ottiche



Yori Evo Ghostrack | Yori Evo 48V | Yori Pendant Ghostrack | Yori Pendant 48V

	Description Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm Holder included	Code 0.26700.00	Finishes 4A Red 5A Green 6A Blue 7A Pink 8A Yellow 9A Orange		Description Selective filter 3000K - 3500K / Filtro selettivo 3000K - 3500K Holder included	Code 0.26705.00
	Description Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K Holder included	Code 0.26701.00			Description Elliptical beam lens / Lente per fascio ellittico Holder included	Code 0.26707.00
	Description Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K Holder included	Code 0.26702.00			Description Opal lens/ Lente opale Holder included	Code 0.26708.00
	Description Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K Holder included	Code 0.26703.00			Description Spread lens/ Lente diffondente Holder included	Code 0.26709.00
	Description Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K Holder included	Code 0.26704.00				

187

Decorative accessories/
Accessori decorativi

Yori Evo Ghostrack | Yori Evo 48V | Yori Pendant Ghostrack | Yori Pendant 48V

		Description Cylinder, solid version (Ø 22 mm, h 22 mm)/ Cilindro versione piena (Ø 22 mm, h 22 mm)	Code 0.26040.00			Description Cylinder, solid version (Ø 22 mm, h 80 mm)/ Cilindro versione piena (Ø 22 mm, h 80 mm)	Code 0.26041.00

Yori Pendant Ghostrack | Yori Pendant 48V

		Description Coloured cables/ Cavi colorati	Code On request



Ø 35 mm | Accessories

Optics accessories/
Accessori ottiche





Yori Evo Ghostrack | Yori Evo 48V | Yori Pendant Ghostrack | Yori Pendant 48V

	Description Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm Holder included	Code 0.26710.00	Finishes 4A Red 5A Green 6A Blue 7A Pink 8A Yellow 9A Orange		Description Selective filter 3000K - 3500K / Filtro selettivo 3000K - 3500K Holder included	Code 0.26715.00
					Description Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K Holder included	Code 0.26716.00
		Description Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K Holder included	Code 0.26711.00		Description Elliptical beam lens / Lente per fascio ellittico Holder included	Code 0.26717.00
		Description Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K Holder included	Code 0.26712.00		Description Opal lens/ Lente opale Holder included	Code 0.26718.00
		Description Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K Holder included	Code 0.26713.00		Description Spread lens/ Lente diffondente Holder included	Code 0.26719.00
		Description Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K Holder included	Code 0.26714.00			


188

Decorative accessories/
Accessori decorativi

Yori Evo Ghostrack | Yori Evo 48V | Yori Pendant Ghostrack | Yori Pendant 48V

		Description Cylinder, solid version (Ø 35 mm, h 35 mm)/ Cilindro versione piena (Ø 35 mm, h 35 mm)	Code 0.26042.00			Description Cylinder, hollow version (Ø 35 mm, h 35 mm)/ Cilindro versione cava (Ø 35 mm, h 35 mm)	Code 0.26044.00
		Description Cylinder, solid version (Ø 35 mm, h 70 mm)/ Cilindro versione piena (Ø 35 mm, h 70 mm)	Code 0.26043.00			Description Cylinder, hollow version (Ø 35 mm, h 70 mm)/ Cilindro versione cava (Ø 35 mm, h 70 mm)	Code 0.26045.00

Yori Pendant Ghostrack | Yori Pendant 48V

		Description Coloured cables/ Cavi colorati	Code On request
---	---	---	----------------------------------

Ø 43 mm | Precision | Accessories

Optics accessories/
Accessori ottiche

Yori Evo Ghostack | Yori Evo Box | Yori Evo 48V

	Description Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm Holder included	Code 0.26400.00	Finishes 4A Red 5A Green 6A Blue 7A Pink 8A Yellow 9A Orange		Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta Holder included	Code 0.26440.0000	
	Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga Holder included	Code 0.26448.0000			Description Elliptical beam lens / Lente per fascio ellittico Holder included	Code 0.26456.0000	
	Description Opal lens/ Lente opale Holder included	Code 0.26460.0000			Description Spread lens/ Lente diffondente Holder included	Code 0.26468.0000	
	Description Cross blade louvre/ Griglia a croce Holder included	Code 0.26476.0000			Description Barn doors/ Alette rompiflusso Holder included	Code 0.26484.0000	
	Description Cone 45° wall washer/ Cono 45° wall washer Holder included	Code 0.26488.00	Finishes 12 31		Description Short snoot/ Cilindro corto Holder included	Code 0.26556.00	Finishes 12 31
	Description Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm Holder included	Code 0.26400.00	Finishes 4A Red 5A Green 6A Blue 7A Pink 8A Yellow 9A Orange				
	Description Colored gel slides (2 pieces)/ Vetrini per gel colorato (2 pezzi) Holder included	Code 0.26408.0000					
	Description Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K Holder included	Code 0.26557.0000					
	Description Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K Holder included	Code 0.26416.0000					
	Description Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K Holder included	Code 0.26424.0000					
	Description Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K Holder included	Code 0.26432.0000					
	Description Selective filter 3000K - 3500K / Filtro selettivo 3000K - 3500K Holder included	Code 0.26565.0000					
	Description Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K Holder included	Code 0.26573.0000					

Ø 43 mm | Performance | Accessories

Optics accessories/
Accessori ottiche

Yori Evo Ghosttrack | Yori Evo Box | Yori Evo 48V

	Description Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm Holder included	Code <u>0.26401.00</u>	Finishes 4A Red 5A Green 6A Blue 7A Pink 8A Yellow 9A Orange		Description Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K Holder included	Code <u>0.26574.0000</u>		
					Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta Holder included	Code <u>0.26441.0000</u>		
					Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga Holder included	Code <u>0.26449.0000</u>		
					Description Elliptical beam lens / Lente per fascio ellittico Holder included	Code <u>0.26492.0000</u>		
					Description Opal lens/ Lente opale Holder included	Code <u>0.26461.0000</u>		
					Description Spread lens/ Lente diffondente Holder included	Code <u>0.26469.0000</u>		
	Description Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K Holder included	Code <u>0.26433.0000</u>		Description Cross blade louvre/ Griglia a croce	Code <u>0.26480.0000</u>			
	Description Selective filter 3000K - 3500K / Filtro selettivo 3000K - 3500K Holder included	Code <u>0.26566.0000</u>			Description Cone 45° wall washer/ Cono 45° wall washer	Code <u>0.26496.00</u>	Finishes 12 31	

Ø 60 mm | Precision | Accessories

Interchangeable IOS optics/ Ottiche intercambiabili IOS

Yori Evo Ghostrack | Yori Evo Box | Yori Pendant Ghostrack | Yori Evo 48V | Yori Pendant 48V

		Description Precision - Narrow beam/ Precision - Fascio stretto (12°- 9W, 12W, 17W)	Code 0.35125.0000			Description Precision - Medium beam/ Precision - Fascio medio (20°- 9W, 12W, 17W)	Code 0.35126.0000
		Description Precision - Wide beam/ Precision - Fascio largo (32°- 9W, 12W, 17W)	Code 0.35127.0000				

Not for codes/Non per codici: 1X.GH63B.DT / RH82A / GH83B.DT / MM73B.DT / MM72B.DT
KN62 / YN62 / XN62

Not for codes/Non per codici: 1X.GH63B.DT / RH82A / GH83B.DT / MM73B.DT / MM72B.DT
KN62 / YN62 / XN62


Optics accessories/ Accessori ottiche

Yori Evo Ghostrack | Yori Evo Box | Yori Pendant Ghostrack | Yori Evo 48V | Yori Pendant 48V

	Description Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm Holder included	Code 0.26402.00	Finishes 4A Red 5A Green 6A Blue 7A Pink 8A Yellow 9A Orange		Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta Holder included	Code 0.26442.0000	
	Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga Holder included	Code 0.26450.0000			Description Elliptical beam lens / Lente per fascio ellittico Holder included	Code 0.26457.0000	
	Description Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K Holder included	Code 0.26559.0000			Description Opal lens/ Lente opale Holder included	Code 0.26462.0000	
	Description Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K Holder included	Code 0.26418.0000			Description Spread lens/ Lente diffondente Holder included	Code 0.26470.0000	
	Description Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K Holder included	Code 0.26426.0000			Description Cross blade louvre/ Griglia a croce	Code 0.26477.0000	
	Description Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K Holder included	Code 0.26434.0000			Description Barn doors/ Alette rompiflusso	Code 0.26485.0000	
	Description Selective filter 3000K - 3500K / Filtro selettivo 3000K - 3500K Holder included	Code 0.26567.0000			Description Cone 45° wall washer/ Cono 45° wall washer Not for codes/Non per codici: Yori Pendant Ghostrack Yori Pendant 48V	Code 0.26489.00	Finishes 12 31
	Description Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K Holder included	Code 0.26575.0000					

Decorative accessories/
Accessori decorativi

Yori Evo Ghostrack | Yori Evo Box | Yori Pendant Ghostrack | Yori Evo 48V | Yori Pendant 48V


		Description	Code
		Cylinder, hollow version (Ø 60 mm, h 40 mm)/ Cilindro versione cava (Ø 60 mm, h 40 mm)	<u>0.26046.00</u>

Yori Pendant Ghostrack | Yori Pendant 48V


		Description	Code
		Coloured cables/ Cavi colorati	<u>On request</u>

Framing accessory/
Sagomatore

Yori Evo Ghostrack | Yori Evo Box

		Description	Code
		Framing accessory, light shape - square/ Sagomatore, forma di luce - quadrata	<u>0.26651.0021</u>

To be used without optics (Precision / Performance)/
Da utilizzare senza ottica (Precision / Performance)



		Description	Code
		Framing accessory, light shape - round/ Sagomatore, forma di luce - tonda	<u>0.26650.0021</u>

To be used without optics (Precision / Performance)/
Da utilizzare senza ottica (Precision / Performance)

Ø 60 mm | Performance | Accessories

Interchangeable IOS optics/
Ottiche intercambiabili IOS

Yori Evo Ghosttrack | Yori Evo Box | Yori Evo 48V

		Description Performance - Narrow beam/ Performance - Fascio stretto (13°-9W, 12W, 17W)	Code 0.35145.0000			Description Performance - Wide beam/ Performance - Fascio largo (39°-9W, 12W, 17W)	Code 0.35147.0000
		Description Performance - Medium beam/ Performance - Fascio medio (24°-9W, 12W, 17W)	Code 0.35146.0000				



Optics accessories/
Accessori ottiche

Yori Evo Ghosttrack | Yori Evo Box | Yori Evo 48V

	Description Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm Holder included	Code 0.26403.00	Finishes 4A Red 5A Green 6A Blue 7A Pink 8A Yellow 9A Orange		Description Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K Holder included	Code 0.26576.0000	
	Description Colored gel slides (2 pieces)/ Vetrini per gel colorato (2 pezzi)/ Holder included	Code 0.26411.0000			Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta Holder included	Code 0.26443.0000	
	Description Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K Holder included	Code 0.26560.0000			Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga Holder included	Code 0.26451.0000	
	Description Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K Holder included	Code 0.26419.0000			Description Elliptical beam lens / Lente per fascio ellittico Holder included	Code 0.26493.0000	
	Description Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K Holder included	Code 0.26427.0000			Description Opal lens/ Lente opale Holder included	Code 0.26463.0000	
	Description Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K Holder included	Code 0.26435.0000			Description Spread lens/ Lente diffondente Holder included	Code 0.26471.0000	
	Description Selective filter 3000K - 3500K / Filtro selettivo 3000K - 3500K Holder included	Code 0.26568.0000			Description Cross blade louvre/ Griglia a croce Holder included	Code 0.26481.0000	
					Description Cone 45° wall washer/ Cono 45° wall washer	Code 0.26497.00	Finishes 12 31

Framing accessory/
Sagomatore

Yori Evo Ghosttrack | Yori Evo Box

		Description Framing accessory, light shape - square/ Sagomatore, forma di luce - quadrata	Code 0.26651.0021			Description Framing accessory, light shape - round/ Sagomatore, forma di luce - tonda	Code 0.26650.0021
---	---	--	------------------------------------	---	--	--	------------------------------------

To be used without optics (Precision / Performance)/
Da utilizzare senza ottica (Precision / Performance)To be used without optics (Precision / Performance)/
Da utilizzare senza ottica (Precision / Performance)

Ø 75 mm | Precision | Accessories

Interchangeable IOS optics/
Ottiche intercambiabili IOS

Yori Evo Ghostack | Yori Evo Box

		Description Precision - Narrow beam/ Precision - Fascio stretto (12°-12W, 17W, 24W, 28W)	Code <u>0.35130.0000</u>
--	--	--	------------------------------------

Not for codes/Non per codici: 1X.NH64A / 2X.NH64A / 1X.LH66B.DT / NH84A / LH86B.DT

		Description Precision - Medium beam/ Precision - Fascio medio (23°-12W, 17W, 24W, 28W)	Code <u>0.35131.0000</u>
--	--	--	------------------------------------

Not for codes/Non per codici: 1X.NH64A / 2X.NH64A / 1X.LH66B.DT / NH84A / LH86B.DT

Optics accessories/
Accessori ottiche

Yori Evo Ghostack | Yori Evo Box

	Description Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm Holder included	Code <u>0.26404.00</u>	Finishes 4A Red 5A Green 6A Blue 7A Pink 8A Yellow 9A Orange
--	--	----------------------------------	---

	Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta Holder included	Code <u>0.26444.0000</u>
--	--	------------------------------------

	Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga Holder included	Code <u>0.26452.0000</u>
--	---	------------------------------------

	Description Colored gel slides (2 pieces)/ Vetrini per gel colorato (2 pezzi)/ Holder included	Code <u>0.26412.0000</u>
--	--	------------------------------------

	Description Elliptical beam lens / Lente per fascio ellittico Holder included	Code <u>0.26458.0000</u>
--	---	------------------------------------

	Description Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K Holder included	Code <u>0.26561.0000</u>
--	---	------------------------------------

	Description Opal lens/ Lente opale Holder included	Code <u>0.26464.0000</u>
--	--	------------------------------------

	Description Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K Holder included	Code <u>0.26420.0000</u>
--	---	------------------------------------

	Description Spread lens/ Lente diffondente Holder included	Code <u>0.26472.0000</u>
--	--	------------------------------------

	Description Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K Holder included	Code <u>0.26428.0000</u>
--	---	------------------------------------

	Description Cross blade louvre/ Griglia a croce	Code <u>0.26478.0000</u>
--	--	------------------------------------

	Description Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K Holder included	Code <u>0.26436.0000</u>
--	---	------------------------------------

	Description Barn doors/ Alette rompiflusso	Code <u>0.26486.0000</u>
--	---	------------------------------------

	Description Selective filter 3000K - 3500K / Filtro selettivo 3000K - 3500K Holder included	Code <u>0.26569.0000</u>
--	---	------------------------------------


	Description Cone 45° wall washer/ Cono 45° wall washer	Code <u>0.26490.00</u>	Finishes 12 31
--	---	----------------------------------	-----------------------------

	Description Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K Holder included	Code <u>0.26577.0000</u>
--	---	------------------------------------

Ø 75 mm | Performance | Accessories

Interchangeable IOS optics/
Ottiche intercambiabili IOS

Yori Evo Ghostrack | Yori Evo Box

		Description Performance - Narrow beam/ Performance - Fascio stretto (12°-12W, 17W, 24W, 28W)	Code 0.35150.0000			Description Performance - Medium-wide beam/ Performance - Fascio medio largo (37°-12W, 17W, 24W, 28W)	Code 0.35153.0000
		Description Performance - Medium beam/ Performance - Fascio medio (23°-12W, 17W, 24W, 28W)	Code 0.35151.0000			Description Performance - Wide beam/ Performance - Fascio largo (48°-12W, 17W, 24W, 28W)	Code 0.35152.0000

Optics accessories/
Accessori ottiche

Yori Evo Ghostrack | Yori Evo Box

	Description Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm Holder included	Code 0.26405.00	Finishes 4A Red 5A Green 6A Blue 7A Pink 8A Yellow 9A Orange		Description Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K Holder included	Code 0.26578.0000	
	Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta Holder included	Code 0.26445.0000			Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga Holder included	Code 0.26453.0000	
	Description Colored gel slides (2 pieces)/ Vetrini per gel colorato (2 pezzi)/ Holder included	Code 0.26413.0000			Description Elliptical beam lens / Lente per fascio ellittico Holder included	Code 0.26494.0000	
	Description Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K Holder included	Code 0.26562.0000			Description Opal lens/ Lente opale Holder included	Code 0.26465.0000	
	Description Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K Holder included	Code 0.26421.0000			Description Spread lens/ Lente diffondente Holder included	Code 0.26473.0000	
	Description Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K Holder included	Code 0.26429.0000			Description Cross blade louvre/ Griglia a croce Holder included	Code 0.26482.0000	
	Description Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K Holder included	Code 0.26437.0000			Description Cone 45° wall washer/ Cono 45° wall washer	Code 0.26498.00	Finishes 12 31
	Description Selective filter 3000K - 3500K / Filtro selettivo 3000K - 3500K Holder included	Code 0.26570.0000					

Ø 95 mm | Precision | Accessories

Interchangeable IOS optics/
Ottiche intercambiabili IOS

Yori Evo Ghosttrack | Yori Evo Box | Yori Pendant Ghosttrack

		Description Precision - Narrow beam / Precision - Fascio stretto (12°-12W, 17W, 24W, 33W)	Code 0.35135.0000
		Description Precision - Wide beam / Precision - Fascio largo (38°-12W, 17W, 24W, 33W)	Code 0.35037.0000

Not for codes/Non per codici: 1X.PH64A / 2X.PH64A / 1X.MH68B.DT / PH84A / MH88B.DT

		Description Precision - Medium beam / Precision - Fascio medio (23°-12W, 17W, 24W, 33W)	Code 0.35136.0000
		Description Precision - Very wide beam / Precision - Fascio molto largo (53°-12W, 17W, 24W, 33W)	Code 0.35038.0000

Not for codes/Non per codici: 1X.PH64A / 2X.PH64A / 1X.MH68B.DT / PH84A / MH88B.DT

Optics accessories/
Accessori ottiche

Yori Evo Ghosttrack | Yori Evo Box | Yori Pendant Ghosttrack

	Description Colored glass filter 1 mm / Filtro in vetro colorato 1 mm Holder included	Code 0.26406.00	Finishes 4A Red 5A Green 6A Blue 7A Pink 8A Yellow 9A Orange
	Description Colored gel slides (2 pieces) / Vetriini per gel colorato (2 pezzi) Holder included	Code 0.26414.0000	
	Description Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K Holder included	Code 0.26563.0000	
	Description Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K Holder included	Code 0.26422.0000	
	Description Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K Holder included	Code 0.26430.0000	
	Description Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K Holder included	Code 0.26438.0000	
	Description Selective filter 3000K - 3500K / Filtro selettivo 3000K - 3500K Holder included	Code 0.26571.0000	
	Description Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K Holder included	Code 0.26579.0000	

	Description Dense texture honeycomb louvre / Griglia alveolare a maglia fitta Holder included	Code 0.26446.0000	
	Description Wide texture honeycomb louvre / Griglia alveolare a maglia larga Holder included	Code 0.26454.0000	
	Description Elliptical beam lens / Lente per fascio ellittico Holder included	Code 0.26459.0000	
	Description Opal lens / Lente opale Holder included	Code 0.26466.0000	
	Description Spread lens / Lente diffondente Holder included	Code 0.26474.0000	
	Description Cross blade louvre / Griglia a croce	Code 0.26479.0000	
	Description Barn doors / Alette rompiflusso	Code 0.26487.0000	
	Description Cone 45° wall washer / Cono 45° wall washer Not for codes/Non per codici: Yori Pendant Ghosttrack	Code 0.26491.00	Finishes 12 31

Decorative accessories/
Accessori decorativi

Yori Evo Ghosttrack | Yori Evo Box | Yori Pendant Ghosttrack

	Description Cylinder, hollow version (Ø 95 mm, h 60 mm) / Cilindro versione cava (Ø 95 mm, h 60 mm)	Code 0.26047.0000
--	--	------------------------------------



Yori Pendant Ghosttrack | Yori Pendant 48V

	Description Coloured cables / Cavi colorati	Code On request
--	--	----------------------------------

Ø 95 mm | Performance | Accessories

Interchangeable IOS optics/
Ottiche intercambiabili IOS

Yori Evo Ghosttrack | Yori Evo Box

		Description Performance - Narrow beam/ Performance - Fascio stretto (10°-12W, 17W, 24W, 33W)	Code 0.35155.0000			Description Performance - Medium-wide beam/ Performance - Fascio Medio-largo (31°-12W, 17W, 24W, 33W)	Code 0.35157.0000
		Description Performance - Medium beam/ Performance - Fascio medio (20°-12W, 17W, 24W, 33W)	Code 0.35156.0000			Description Performance - Wide beam/ Performance - Fascio largo (40°-12W, 17W, 24W, 33W)	Code 0.35158.0000

Optics accessories/
Accessori ottiche

Yori Evo Ghosttrack | Yori Evo Box

	Description Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm Holder included	Code 0.26407.00	Finishes 4A Red 5A Green 6A Blue 7A Pink 8A Yellow 9A Orange		Description Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K Holder included	Code 0.26580.0000	
	Description Colored gel slides (2 pieces)/ Vetrini per gel colorato (2 pezzi) Holder included	Code 0.26415.0000			Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta Holder included	Code 0.26447.0000	
	Description Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K Holder included	Code 0.26564.0000			Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga Holder included	Code 0.26455.0000	
	Description Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K Holder included	Code 0.26423.0000			Description Elliptical beam lens / Lente per fascio ellittico Holder included	Code 0.26495.0000	
	Description Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K Holder included	Code 0.26431.0000			Description Opal lens/ Lente opale Holder included	Code 0.26467.0000	
	Description Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K Holder included	Code 0.26439.0000			Description Spread lens/ Lente diffondente Holder included	Code 0.26475.0000	
	Description Selective filter 3000K - 3500K / Filtro selettivo 3000K - 3500K Holder included	Code 0.26572.0000			Description Cross blade louvre/ Griglia a croce Holder included	Code 0.26483.0000	
					Description Cone 45° wall washer/ Cono 45° wall washer	Code 0.26499.00	Finishes 12 31

Spacers | Accessories


Mounting accessories/ Accessori montaggio

Yori Evo Ghostrack | Yori Pendant Ghostrack

	Description Standard spacer - 110mm/ Distanziale standard - 110mm	Code <u>0.26500.0000</u>		Description Customizable spacer - 600mm/ Distanziale personalizzabile - 600mm	Code <u>0.26504.0000</u>
				p. 22-23	
	Description Standard spacer - 220mm/ Distanziale standard - 220mm	Code <u>0.26501.0000</u>		Description Customizable spacer - 800mm/ Distanziale personalizzabile - 800mm	Code <u>0.26505.0000</u>
				p. 22-23	
	Description Customizable spacer - 300mm/ Distanziale personalizzabile - 300mm	Code <u>0.26502.0000</u>		Description Customizable spacer - 1000mm/ Distanziale personalizzabile - 1000mm	Code <u>0.26506.0000</u>
		p. 22-23			p. 22-23
	Description Customizable spacer - 400mm/ Distanziale personalizzabile - 400mm	Code <u>0.26503.0000</u>		Description Customizable spacer - 1200mm/ Distanziale personalizzabile - 1200mm	Code <u>0.26507.0000</u>
		p. 22-23			p. 22-23

Other accessories/ Altri accessori

Yori Evo Ghostrack

			Description Ghost lock - Accessory for vertical installation - max 3,5kg weight/ Ghost lock - Accessorio per installazione verticale - Peso max 3,5kg	Code <u>0.26508.0000</u>
---	---	--	--	------------------------------------