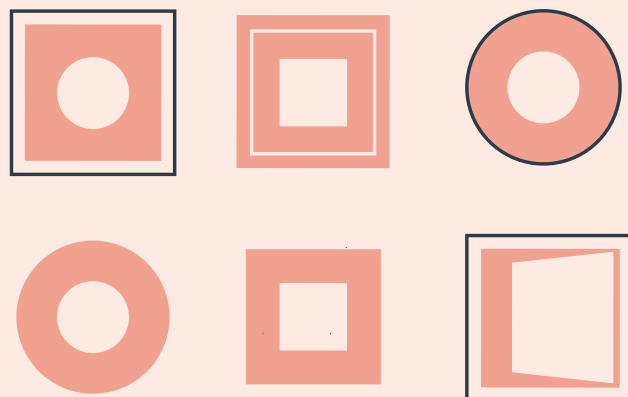


Mood

- **Mood Adjustable**
- **Mood Fixed**
- **Mood Wall Washer**

Combining style and substance, our invisible architectural recessed downlights are ideal for illuminating high-end interiors.



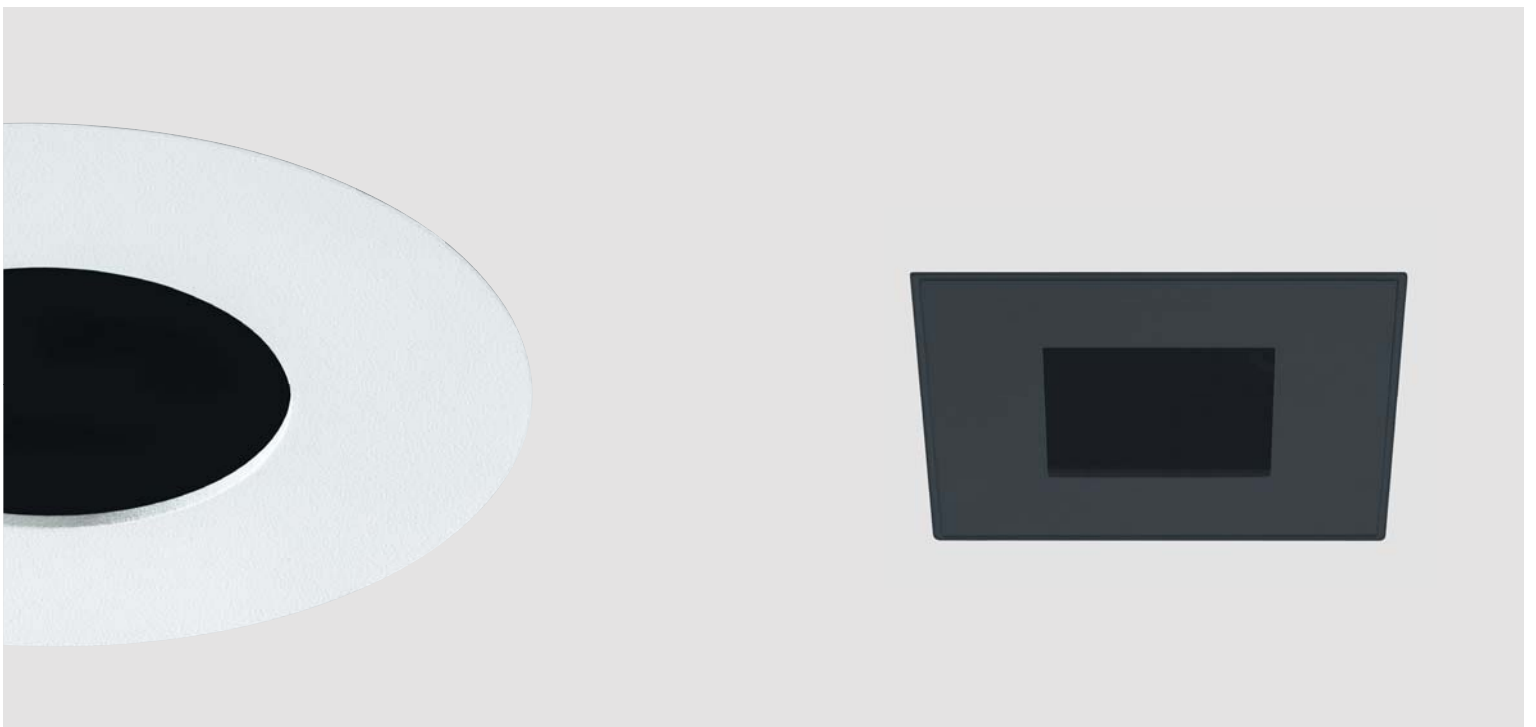


Mood Adjustable

Our adjustable product creates brilliant accent lighting for different environments. The lighting output and aesthetics are of a high standard, featuring multiple optics and a full range of accessories. They are available in various sizes: S, M, L, XL.

Availability: L and XL versions from June 2016 (For more information consult factory)

IP: 20 (IP44 with accessory)



Finishes:



Embossed
matt white

12



Embossed
matt black

31

On request:

- Chrome
- Gold
- Silver
- Copper
- Royal matt white
- Royal matt black
- Primer



Plate shapes:



Round
Flush



Round
Cone



Round
Curve
(accessory)



Square
Flush



Square
Pyramid



Square
Curve
(accessory)

Shapes:



Round
Visible trim



Round
Trimless



Square
Visible trim



Square
Trimless

Optics:



Very
narrow



Narrow




Medium




Wide

Adjustability:



Horizontal
axis



Vertical
axis

35°: S, XL versions
40°: M, L versions

Accessories:



Honeycomb



Holder for coloured
and selective filters

Plate accessories:



IP44
Glass



IP44
Elliptical
glass



IP44
Diffusive
lens



IP44
Opal
lens



IP44
Wall washer*
lens

*Available for:
M, L, XL versions

Technical features:

	Visible trim	Trimless	
S			<p>3.5W 315-375lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p>
M			<p>8.5W 725-875lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p>
L			<p>12W, 17W 1320-2265lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p> <p>Warm Dimming: 13W, 100-1000lm, 2000K-3000K, CRI > 95 Dali, Dimm 1-10V, Phase-cut, Bluetooth</p> <p>Phosphor LED Module: 16W, 1000lm 2700K, 3000K, 4000K / SDCM < 2 CRI > 95 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p>
XL			<p>25W, 34W 2615-4150lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p> <p>Warm Dimming: 34W, 200-2850lm, 2000K-3000K, CRI > 95 Dali, Dimm 1-10V, Phase-cut, Bluetooth</p> <p>Phosphor LED Module: 22W, 2000lm 34W, 3000lm 2700K, 3000K, 4000K / SDCM < 2 CRI > 95 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p>

- Watt and lumen data refer to nominal values of the LED source, for photometric data visit reggiani.net.

- Remote driver not included to be ordered separately. For driver compatibility, distance and minimum-maximum numbers of fixtures to be connected consult factory or visit reggiani.net.

*For version with cone, pyramid and curve plates.

Technical features:

	Visible trim	Trimless	
S			<p>3.5W 315-375lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p>
M			<p>8.5W 725-875lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p>
L			<p>12W, 17W 1320-2265lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p> <p>Warm Dimming: 13W, 100-1000lm, 2000K-3000K, CRI > 95 Dali, Dimm 1-10V, Phase-cut, Bluetooth</p> <p>Phosphor LED Module: 16W, 1000lm 2700K, 3000K, 4000K / SDCM < 2 CRI > 95 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p>
XL			<p>25W, 34W 2615-4150lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p> <p>Warm Dimming: 34W, 200-2850lm, 2000K-3000K, CRI > 95 Dali, Dimm 1-10V, Phase-cut, Bluetooth</p> <p>Phosphor LED Module: 22W, 2000lm 34W, 3000lm 2700K, 3000K, 4000K / SDCM < 2 CRI > 95 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p>

- Watt and lumen data refer to nominal values of the LED source, for photometric data visit reggiani.net.
 - Remote driver not included to be ordered separately. For driver compatibility, distance and minimum-maximum numbers of fixtures to be connected consult factory or visit reggiani.net.
 *For version with cone, pyramid and curve plates.

Sizes:

S

M

L


XL



ø50



ø80



ø110



ø150




50x50



80x80




110x110




150x150

Adjustability:




Horizontal axis
(358°)



Vertical axis
35°: S, XL versions
40°: M, L versions



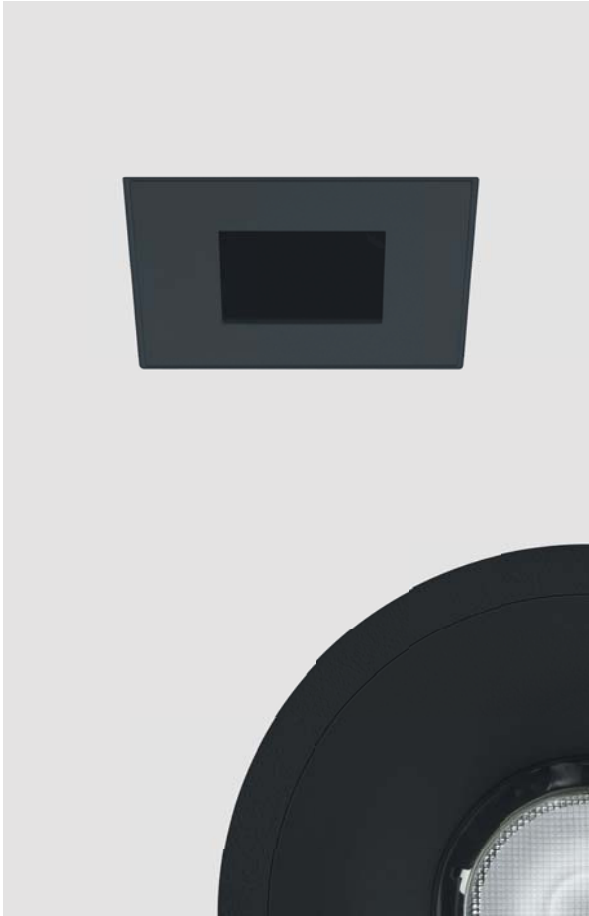Different shapes, plates and finishes



New design optics for very narrow, medium and wide beam angles



Easy lock and adjustability system, no tools required

Adjustability graduated scale

Mood Fixed

Our wide range of fixed Mood comes in five sizes, from 30mm to 150mm. The opal diffuser makes the light soft and the reflectors can change the beam angles, providing flexibility. It is ideal for residential and hospitality applications and IP44 certification provides durability and protection.

Availability: L and XL versions from June 2016 (For more information consult factory)

IP: 44



Finishes:



Embossed
matt white
12



Embossed
matt black
31



Embossed
matt black/Gold
T7



Embossed
matt white/Copper
T9

On request:

- Chrome
- Gold
- Silver
- Copper
- Royal matt white
- Royal matt black
- Primer



Shapes:



Round
Visible trim



Round
Trimless



Square
Visible trim



Square
Trimless

Optics:



Very
Narrow



Narrow



Medium



Wide

Accessories:



Full
dome








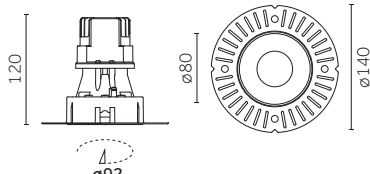
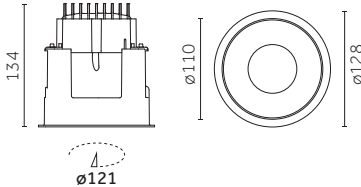
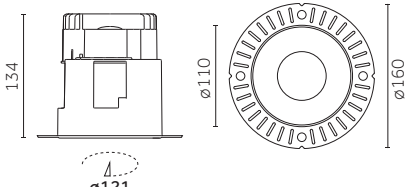
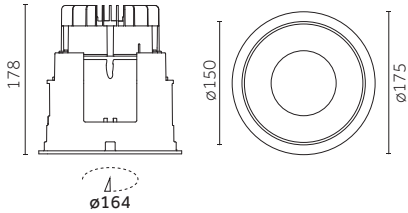
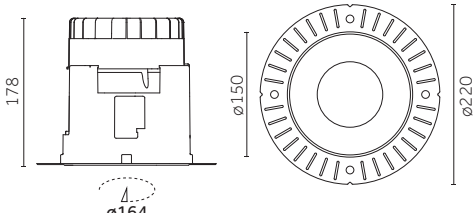
Hollow
dome



Hollow
cylinder











On request for XS,
S and M versions.

Technical features:

	Visible trim	Trimless	
XS			<p>2.5W 155-191lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p>
S			<p>3.5W 315-375lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p>
M			<p>8.5W 725-875lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p>
L			<p>12W, 17W 1320-2265lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p> <p>Warm Dimming: 13W, 100-1000lm, 2000K-3000K, CRI > 95 Dali, Dimm 1-10V, Phase-cut, Bluetooth</p> <p>Phosphor LED Module: 16W, 1000lm 2700K, 3000K, 4000K / SDCM < 2 CRI > 95 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p>
XL			<p>25W, 34W 2615-4150lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p> <p>Warm Dimming: 34W, 200-2850lm, 2000K-3000K, CRI > 95 Dali, Dimm 1-10V, Phase-cut, Bluetooth</p> <p>Phosphor LED Module: 22W, 2000lm 34W, 3000lm 2700K, 3000K, 4000K / SDCM < 2 CRI > 95 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p>

- Watt and lumen data refer to nominal values of the LED source, for photometric data visit reggiani.net.
- Remote driver not included to be ordered separately. For driver compatibility, distance and minimum-maximum numbers of fixtures to be connected consult factory or visit reggiani.net.

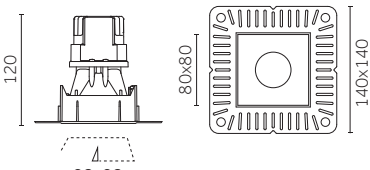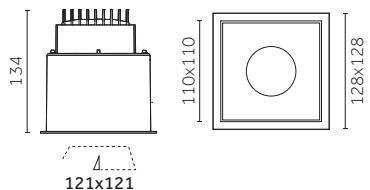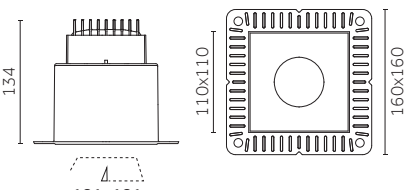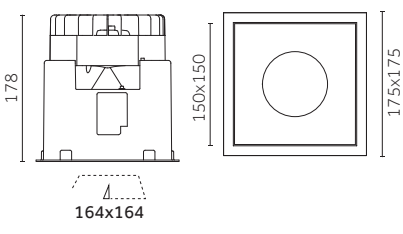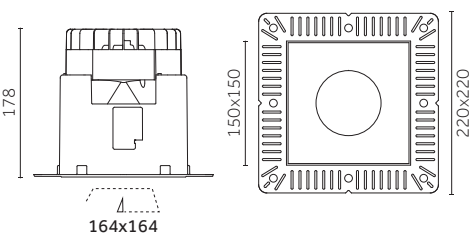Technical features:

	Visible trim	Trimless	
XS	 <p>55 30x30 40x40 37x37</p>	 <p>55 30x30 75x75 37x37</p>	<p>2.5W 155-191lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p>
S	 <p>81 50x50 62x62 58x58</p>	 <p>81 50x50 99x99 58x58</p>	<p>3.5W 315-375lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p>
M	 <p>120 80x80 96x96 92x92</p>	 <p>120 80x80 140x140 92x92</p>	<p>8.5W 725-875lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p>
L	 <p>134 110x110 128x128 121x121</p>	 <p>134 110x110 160x160 121x121</p>	<p>12W, 17W 1320-2265lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p> <p>Warm Dimming: 13W, 100-1000lm, 2000K-3000K, CRI > 95 Dali, Dimm 1-10V, Phase-cut, Bluetooth</p> <p>Phosphor LED Module: 16W, 1000lm 2700K, 3000K, 4000K / SDCM < 2 CRI > 95 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p>
XL	 <p>178 150x150 175x175 164x164</p>	 <p>178 150x150 220x220 164x164</p>	<p>25W, 34W 2615-4150lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p> <p>Warm Dimming: 34W, 200-2850lm, 2000K-3000K, CRI > 95 Dali, Dimm 1-10V, Phase-cut, Bluetooth</p> <p>Phosphor LED Module: 22W, 2000lm 34W, 3000lm 2700K, 3000K, 4000K / SDCM < 2 CRI > 95 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p>

- Watt and lumen data refer to nominal values of the LED source, for photometric data visit reggiani.net.

- Remote driver not included to be ordered separately. For driver compatibility, distance and minimum-maximum numbers of fixtures to be connected consult factory or visit reggiani.net.

Sizes:

XS

S

M

L

XL



ø30

ø50

ø80

ø110

ø150



30x30

50x50

80x80

110x110

150x150

Accessories:



Full dome



Hollow dome



Hollow cylinder

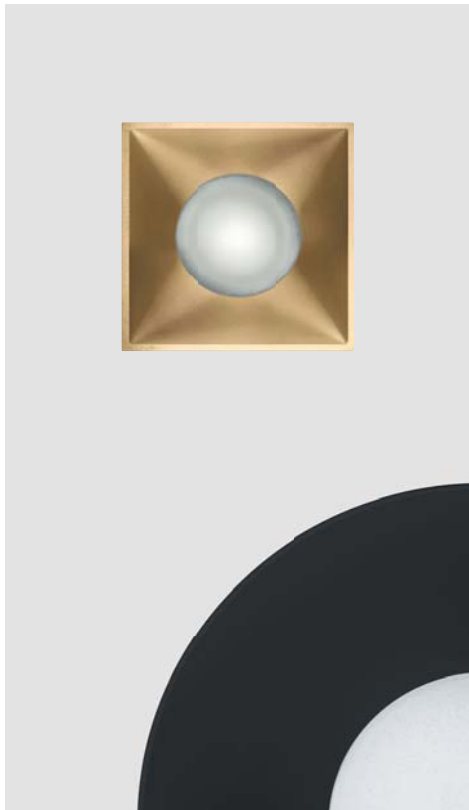
High performance compact heat sink



Recessed LED source for excellent visual comfort



High quality of finishes and minimal design



Silicon gasket for IP44 protection

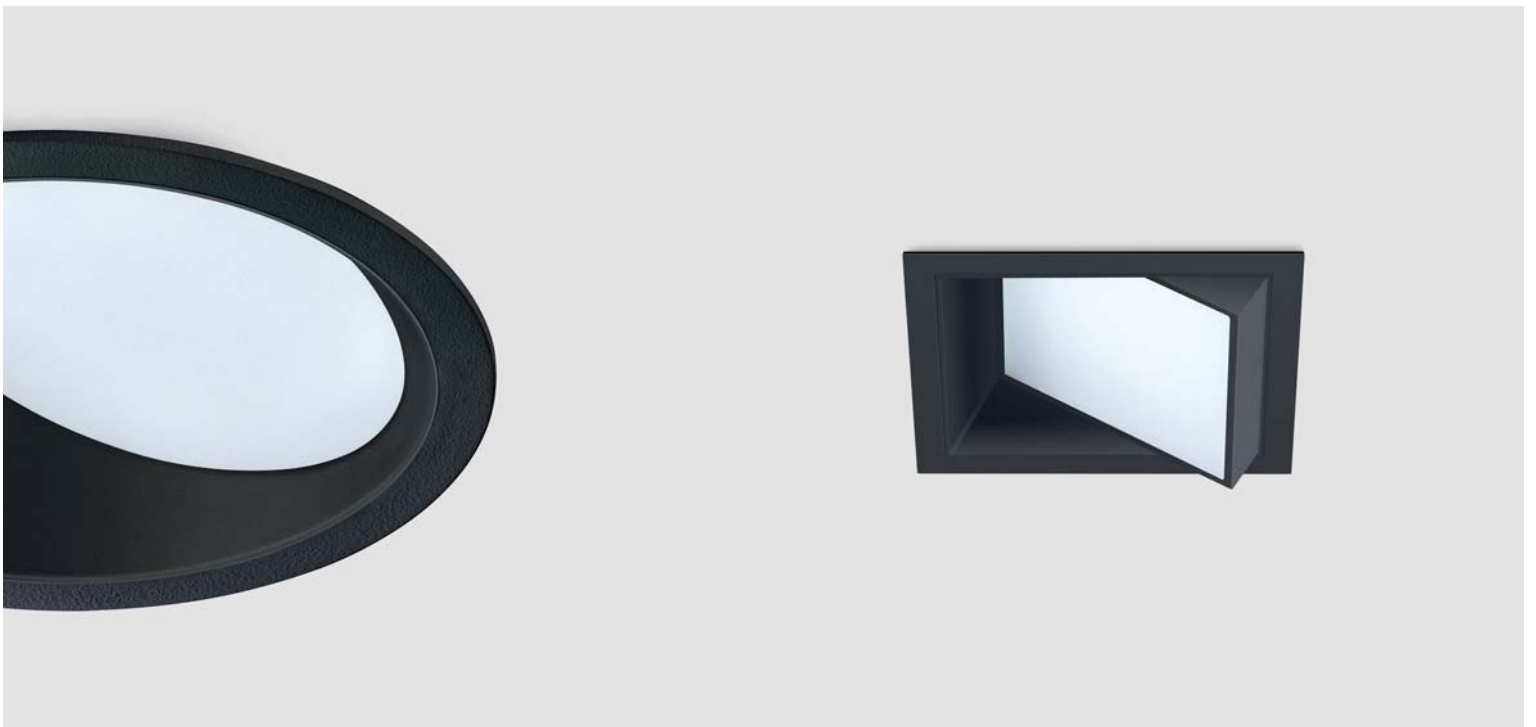
Diffusive dome for soft light effect

Mood Wall Washer

Our ultimate solution for wall wash illumination with both circular and square shapes available. We offer four sizes of minimal recessed downlights, scaling from 50mm to 150mm, and two different types of flush and drop plates.

Availability: L and XL versions from June 2016 (For more information consult factory)

IP: 44



Finishes:



Embossed
matt white

12



Embossed
matt black

31

On request:

- Chrome
- Gold
- Silver
- Copper
- Royal matt white
- Royal matt black
- Primer



Plate shape:



Round
Flush



Round
Drop



Square
Flush



Square
Drop



Round flush
Elliptical lens
(accessory)



Round drop
Elliptical lens
(accessory)



Square flush
Elliptical lens
(accessory)



Square drop
Elliptical lens
(accessory)

Shapes:



Round
Visible trim



Round
Trimless



Square
Visible trim



Square
Trimless

Optics:




Wall
washer*


*Different distributions available in accordance to primary and secondary optics selection.

Adjustability:


Steps




1



2



3



4

3 steps: S,M,L versions
4 steps: XL version (40°)

Technical features:

	Visible trim	Trimless	
S			<p>3.5W 315-375lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p>
M			<p>8.5W 725-875lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p>
L			<p>12W, 17W 1320-2265lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p> <p>Warm Dimming: 13W, 100-1000lm, 2000K-3000K, CRI > 95 Dali, Dimm 1-10V, Phase-cut, Bluetooth</p> <p>Phosphor LED Module: 16W, 1000lm 2700K, 3000K, 4000K / SDCM < 2 CRI > 95 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p>
XL			<p>25W, 34W 2615-4150lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p> <p>Warm Dimming: 34W, 200-2850lm, 2000K-3000K, CRI > 95 Dali, Dimm 1-10V, Phase-cut, Bluetooth</p> <p>Phosphor LED Module: 22W, 2000lm 34W, 3000lm 2700K, 3000K, 4000K / SDCM < 2 CRI > 95 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p>

- Watt and lumen data refer to nominal values of the LED source, for photometric data visit reggiani.net.
- Remote driver not included to be ordered separately. For driver compatibility, distance and minimum-maximum numbers of fixtures to be connected consult factory or visit reggiani.net.

Technical features:

	Visible trim	Trimless	
S	<p>Visible trim</p>	<p>Trimless</p>	<p>3.5W 315-375lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p>
M	<p>Visible trim</p>	<p>Trimless</p>	<p>8.5W 725-875lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p>
L	<p>Visible trim</p>	<p>Trimless</p>	<p>12W, 17W 1320-2265lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p> <p>Warm Dimming: 13W, 100-1000lm, 2000K-3000K, CRI > 95 Dali, Dimm 1-10V, Phase-cut, Bluetooth</p> <p>Phosphor LED Module: 16W, 1000lm 2700K, 3000K, 4000K / SDCM < 2 CRI > 95 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p>
XL	<p>Visible trim</p>	<p>Trimless</p>	<p>25W, 34W 2615-4150lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p> <p>Warm Dimming: 34W, 200-2850lm, 2000K-3000K, CRI > 95 Dali, Dimm 1-10V, Phase-cut, Bluetooth</p> <p>Phosphor LED Module: 22W, 2000lm 34W, 3000lm 2700K, 3000K, 4000K / SDCM < 2 CRI > 95 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth</p>

- Watt and lumen data refer to nominal values of the LED source, for photometric data visit reggiani.net.

- Remote driver not included to be ordered separately. For driver compatibility, distance and minimum-maximum numbers of fixtures to be connected consult factory or visit reggiani.net.

Sizes:

S

M

L

XL



ø50



ø80



ø110



ø150



50x50



80x80




110x110



150x150

Adjustability:



3 steps: S,M,L versions
4 steps: XL version (40°)



1



2



3



4

High performance diffuser



Minimal design

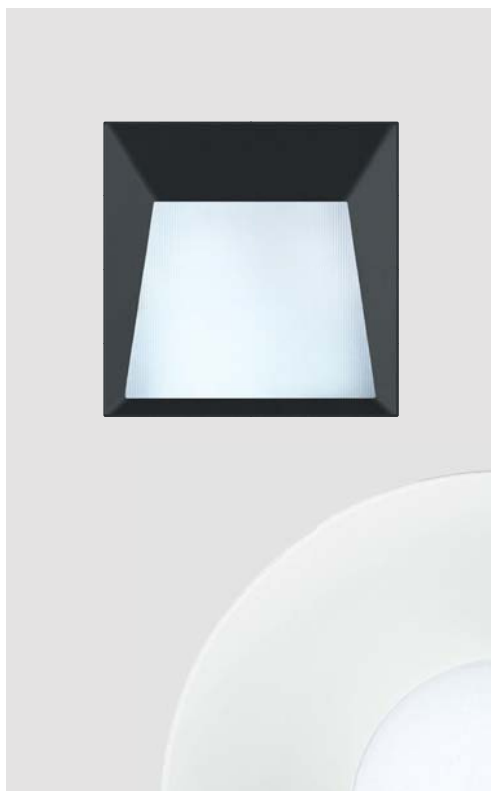


Plate version: drop



Plate version: flush