


Flexible,  
powerful,  
precise


Unit



**Reggiani**





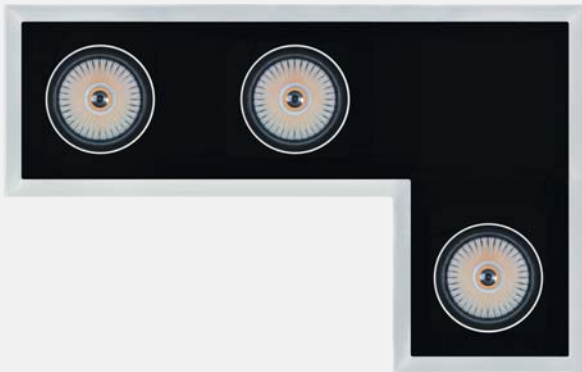



# Unit

EN Unit offers flexibility for different lighting schemes in retail spaces. Trim or trimless, single, double, triple or continuous. Our recessed spotlight can be recessed, flush or drop, with 35° of adjustability, with unique mechanical features making it minimal and discreet in the ceiling. The new optics reach unbelievable performance in terms of light output and tight beam angles for precise aiming. The wide range of accessories add even more choice and flexibility.

IT

Unit offre una grande versatilità nella realizzazione di configurazioni illuminotecniche nell'ambito del retail. Disponibile nella versione con flangia o trimless, da uno, due o tre spot o con disposizione in linea continua. Lo speciale sistema meccanico di orientamento consente un'inclinazione di 35° dello spot in posizione recessed, flush o drop, per integrarsi perfettamente e in maniera discreta nel soffitto. Le nuove ottiche sono altamente performanti in termini di rendimento e consentono un'illuminazione puntuale estremamente precisa grazie a diverse aperture del fascio. La possibilità di scegliere tra un'ampia gamma di accessori rende il prodotto ancora più versatile.

Availability: June 2017  
Disponibilità: Giugno 2017

**X1**

**X2**



Finishes:



Embossed  
matt white

Embossed  
matt black

Special  
finish

12

31

on request

**X3**



**Continuous line**



Unit








### Visible trim

### Trimless




### Continuous

## X1






1x 9W, 12W, 17W  
Lumen: 1x 1305-2320  
Lumen delivered up to 1x 1880lm  
Efficacy up to 100 lm/w  
K: 2700, 3000, 4000; CRI: > 80, > 90, > 95  
Warm dimming version available: 2000K-3000K; CRI>95  
Phosphor LED Module available: 2700K, 3000K, 4000K; CRI > 95; SDCM < 2  
Control: On/Off, Phase-cut, Dimm 1-10V, Dali, Bluetooth

## X2



2x 9W, 12W, 17W  
Lumen: 2x 1305-2320  
Lumen delivered up to 2x 1880lm  
Efficacy up to 100 lm/w  
K: 2700, 3000, 4000; CRI: > 80, > 90, > 95  
Warm dimming version available: 2000K-3000K; CRI>95  
Phosphor LED Module available: 2700K, 3000K, 4000K; CRI > 95; SDCM < 2  
Control: On/Off, Phase-cut, Dimm 1-10V, Dali, Bluetooth

## X3

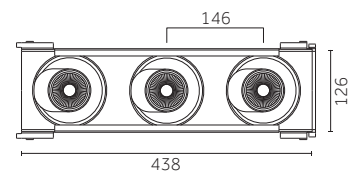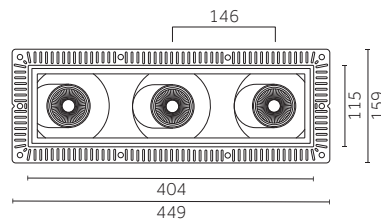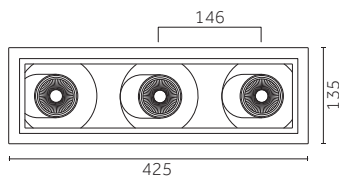


3x 9W, 12W, 17W  
Lumen: 3x 1305-2320  
Lumen delivered up to 3x 1880lm  
Efficacy up to 100 lm/w  
K: 2700, 3000, 4000; CRI: > 80, > 90, > 95  
Warm dimming version available: 2000K-3000K; CRI>95  
Phosphor LED Module available: 2700K, 3000K, 4000K; CRI > 95; SDCM < 2  
Control: On/Off, Phase-cut, Dimm 1-10V, Dali, Bluetooth

- See page 12 for Continuous installation parts and accessories. / Per i componenti e accessori di installazione Continuous, vedi pagina 12.  
- For more information and photometric data visit [reggiani.net](http://reggiani.net). / Per maggiori informazioni e i dati fotometrici visitare [reggiani.net](http://reggiani.net).

# New ranges of interchangeable optics: Precision for high candela values and super narrow beams, Performance for high lumen output and efficacy.

## Precision

Unit




TIR LENS

Beam: super narrow (7°), narrow, medium  
High intensity peak up to 23.000 cd  
No field angle



# Performance




REFLECTOR


Beam: narrow, medium, wide  
Lumen delivered up to 1880 lm  
Efficacy up to 100 lm/W



# Adjustability

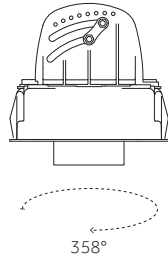

Horizontal axis




Vertical axis




Unit


# Projector position



Recessed



Flush



Drop




EN

The mechanical adjustment system allows maximum tilt (35°) of the spot in recessed, flush and drop position for versatile and discreet use, and excellent performances.

IT

Il sistema meccanico di orientamento consente la massima inclinazione (35°) dello spot in posizione recessed, flush e drop, per un impiego versatile, performante ma estremamente discreto.

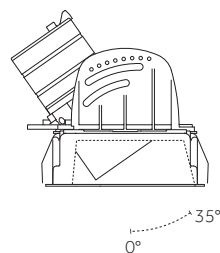

# Accessories:



Unit



Honeycomb  
(dense and wide texture)



Holder for coloured  
and selective filters



Cross louver



Diffusing lens



Elliptical lens



Wall washer visor

EN

The wide range of installation accessories and parts means Unit Continuous is available with both visible trim and trimless. It can also be integrated with air-conditioning and video surveillance systems.

IT


Grazie alla ampia gamma di accessori e componenti per l'installazione, Unit Continuous può essere impiegato in versione trim e trimless e permette l'integrazione con sistemi di condizionamento e video sorveglianza.




 Empty module (1x, 2x, 3x)

 Corner element, 90°

 Extension module

 Inspection, air-conditioning  
speakers module

 End cap

 Trim / Trimless profile

**Finishes:**  
Finiture:



Embossed  
matt white  
12



Embossed  
matt black  
31



Special  
finish  
on request

**Product range:**  
Gamma  
di prodotto:




1x  
(115x115mm)



2x  
(260x115mm)



3x  
(404x115mm)



Continuous  
line

Trimless



1x  
(135x135mm)



2x  
(280x135mm)



3x  
(425x135mm)



Continuous  
line

Visible trim

**Optics:**  
Ottiche:



**Precision**  
(Up to 23,000 cd)  
Super Narrow,  
Narrow, Medium



**Performance**  
(Up to 100 lm/W)  
Narrow, Medium,  
Wide

**Adjustability:**  
Orientabilità:



35°



356°

**Spotlight position:**  
Posizione spotlight:



Recessed



Flush



Drop

**Accessories:**  
Accessori:



Honeycomb (dense  
and wide texture)



Holder for coloured  
and selective filters



Wall washer visor



Elliptical lens



Diffusing lens



Cross louver

**Technical features:**  
Caratteristiche  
tecniche:

**W:** 9 - 12 - 17; **K:** 2700, 3000, 4000; **Lumen:** 1305 - 2320; **CRI:** >80, >90 >95; **SDCM** <3.  
**Warm Dimming version available** (2000K-3000K; CRI>95).  
**Phosphor LED Module available** (2700K, 3000K, 4000K; CRI >95; SDCM <2).  
**Control:** On/Off, Phase-cut, Dimm 1-10V, Dali, Bluetooth.

# Worldwide contacts

## HEADQUARTERS

### ITALY

#### Reggiani Spa Illuminazione

Viale Monza 16 P.O. Box 99

20845 Sovico (MB), Italy

T. (+39) 039 20711

F. (+39) 039 2071999

contact@reggiani.net

## UNITED KINGDOM

### Reggiani Ltd

12 Chester Road

Borehamwood

Herts, WD6 1LT - UK

T. (+44) 0208 236 3000

F. (+44) 0208 236 3099

reggiani@reggiani.co.uk

## USA

### Reggiani Lighting USA, inc.

372 Starke Road

Carlstadt NJ 07072, USA

T. (+1) 201 372 1717

F. (+1) 201 372 1616

info@reggianiusa.com

www.reggianiusa.com

## CHINA

### Reggiani Ningbo ITG Lighting co. Ltd

Shenjia Village - Qiuai Town - Yinzhou

315010 Ningbo, China

T. (+86) 574 88418655 - 88412627

F. (+86) 574 88364186

info@itglight.com

## FRANCE

### Showroom

Showroom Bureau Projets

35 Bd. Richard Lenoir, Bastille

75011 Paris, France

T. (+33) 01 43382704

F. (+33) 01 43382720

france@reggiani.net

## RUSSIA

### Showroom

Kalanchevskaya Street, 16,

Building 1, Room 4A, 129090 Moscow

T. (+7) 495 2690113 - 846 3320266

F. (+7) 495 2690112

russia@reggiani.net

## Worldwide distributors

For the worldwide distributors list visit

[www.reggiani.net](http://www.reggiani.net)



# Reggiani