




Mood Wall Washer



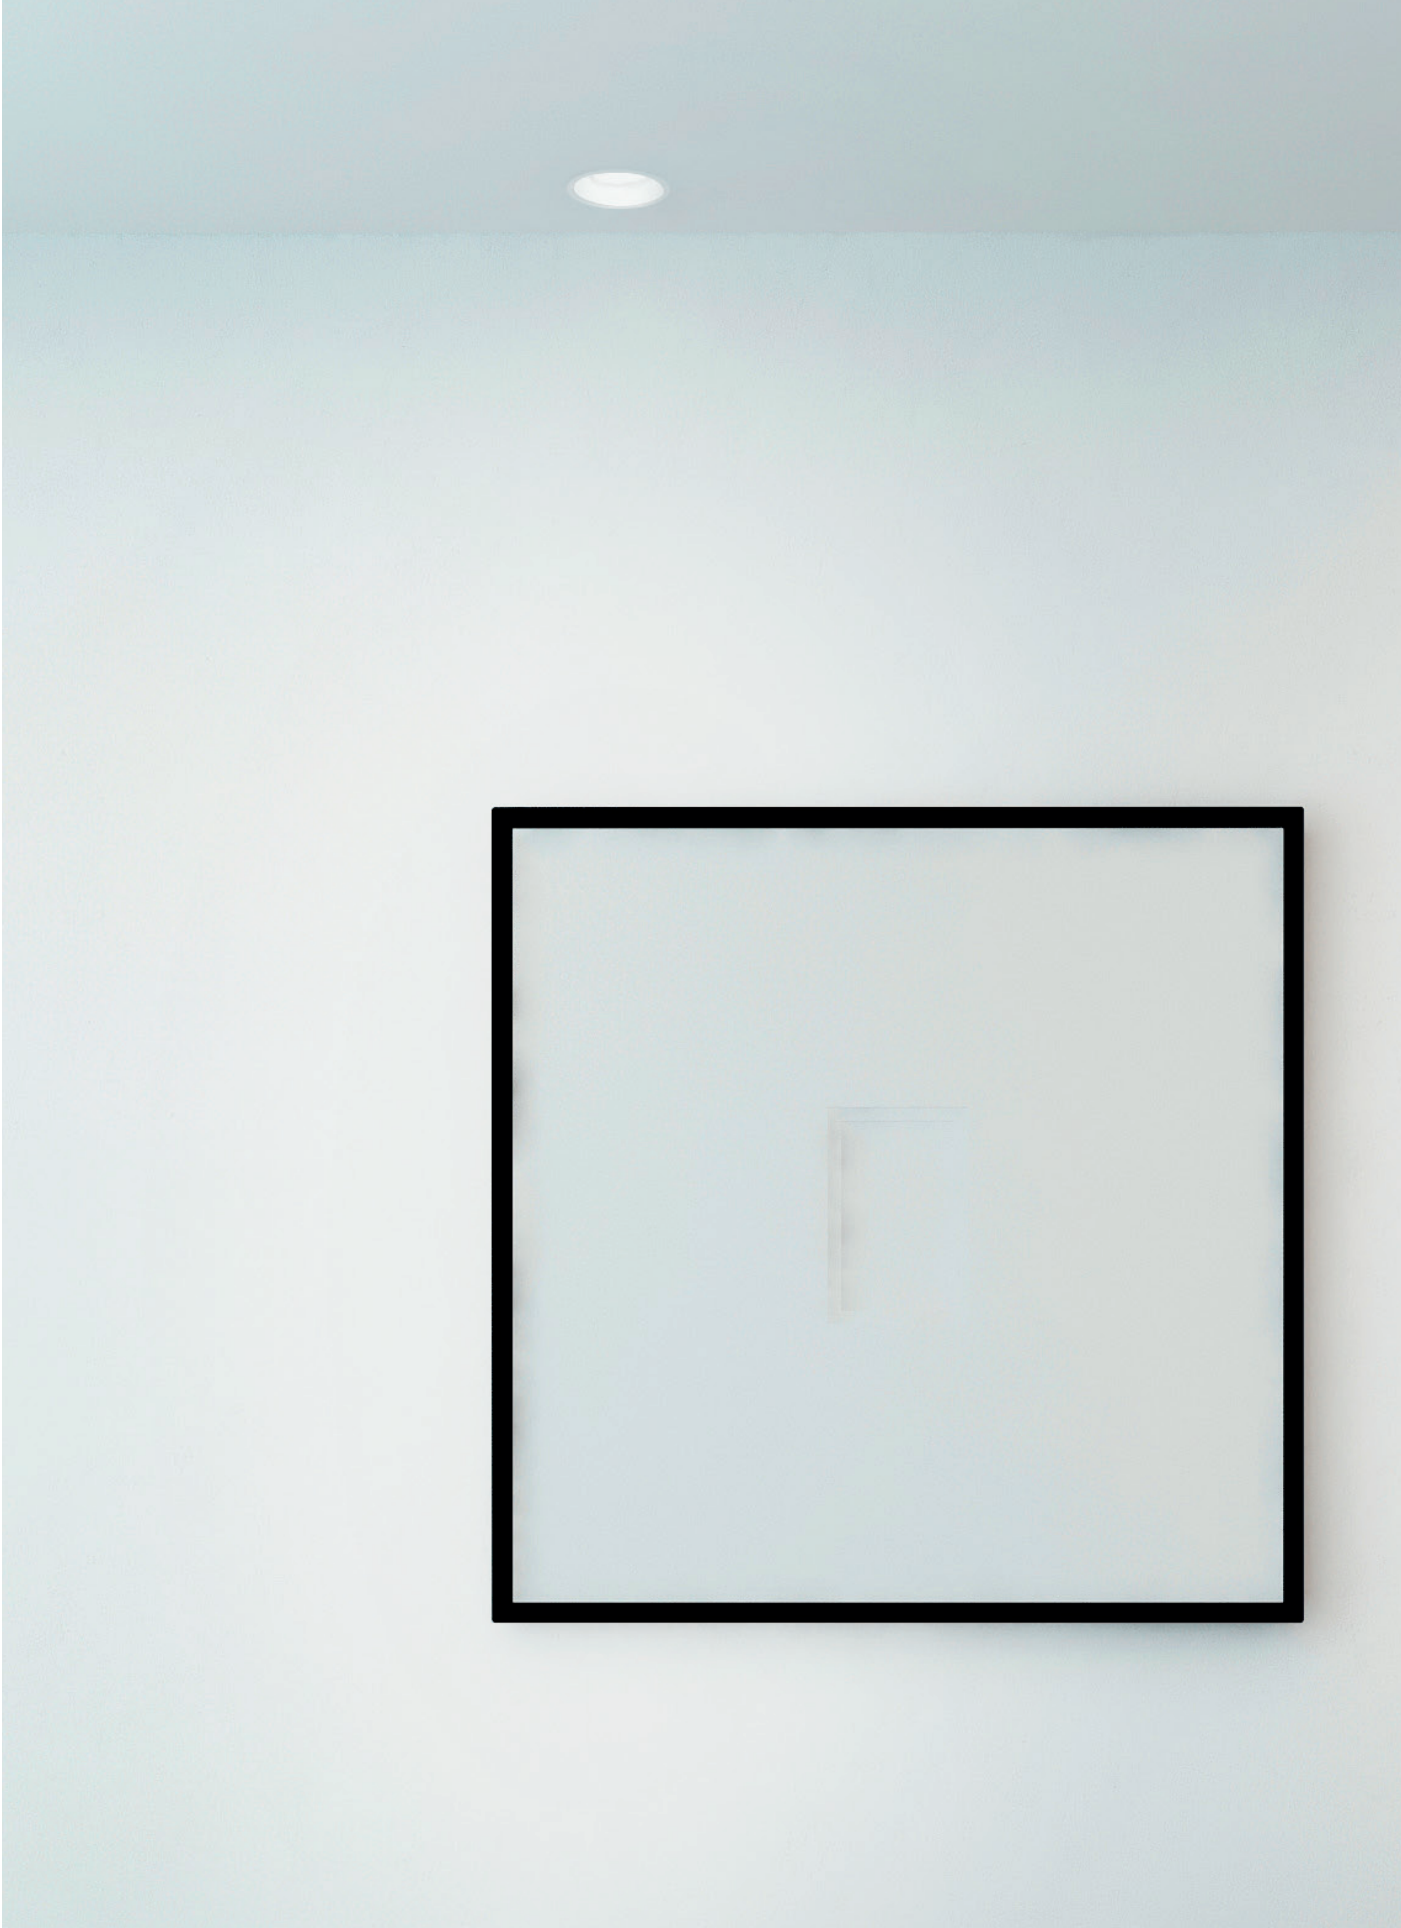

Mood Wall Washer


EN The ultimate solution in wall wash lighting available in round and square shapes. Available in four sizes (from 50 mm to 150 mm), these recessed luminaires are suitable for mounting with both flush and drop plates.










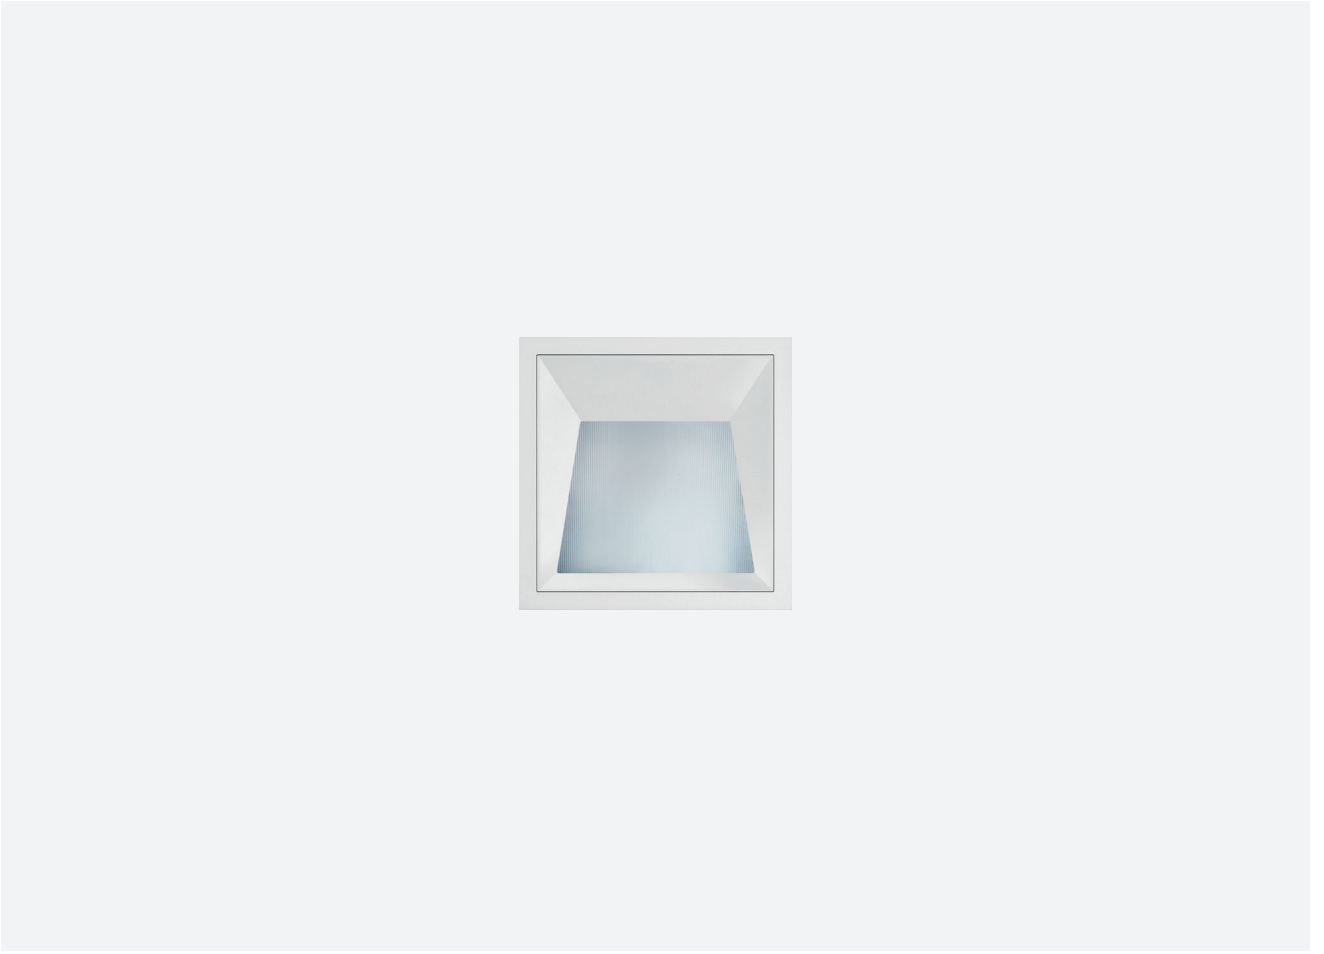

IT La soluzione ottimale per l'illuminazione wall washer declinata in forma tonda e quadrata. Disponibili in quattro diverse dimensioni, da 50 mm a 150 mm, questi apparecchi da incasso si prestano per il montaggio con piattello a filo o esposto.





















Overview

Application:	Recessed
Light source:	COB LED, POWER LED, Warm Dimming COB LED Phosphor LED Module
Watt:	3,5 W - 34 W
Kelvin:	2700 K, 3000 K, 4000 K
Lumen:	310 lm - 4695 lm
CRI:	>80, >90, >95
SDCM:	<2, <3, <4
IP:	44
Control options:	On/Off, Phase-cut, Dimm 1-10V, DALI
Technologies:	Warm Dimming, Bluetooth

Available for North America: visit www.reggianiusa.com/
Disponibile per Nord America: visita www.reggianiusa.com



<p>Versions/ Versioni</p>	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>Mood Wall Washer Round Flush/A Filo</p> </div> <div style="text-align: center;">  <p>Mood Wall Washer Round Drop/Esposto</p> </div> <div style="text-align: center;">  <p>Mood Wall Washer Square Flush/A Filo</p> </div> <div style="text-align: center;">  <p>Mood Wall Washer Square Drop/Esposto</p> </div> </div>
<p>Finishes/ Finiture</p>	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>12 Embossed matt white/ Bianco opaco goffrato</p> </div> <div style="text-align: center;">  <p>31 Embossed matt black/ Nero opaco goffrato</p> </div> </div> <p>Special finishes/Finiture speciali</p> <ul style="list-style-type: none"> C0 Royal matt white/Bianco opaco Royal W1 White super glossy/Bianco super lucido 01 Chrome plated/Cromo W5 Galvanized shiny nickel/Nickel lucido galvanizzato U1 Glossy gold/Oro lucido 05 Gold plated/Cromo oro W4 Galvanized shiny copper/Rame lucido galvanizzato U4 Shiny copper/Rame lucido W0 Super glossy black/Nero super lucido B0 Royal matt black/Nero opaco Royal
<p>Beams/ Fasci</p>	<div style="text-align: center;">  <p>Wall Washer</p> </div>
<p>Adjustability/ Orientabilità</p>	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>1 step: 10°</p> </div> <div style="text-align: center;">  <p>2 step: 20°</p> </div> <div style="text-align: center;">  <p>3 step: 30°</p> </div> <div style="text-align: center;">  <p>4 step: 40° For version XL/ Per versioni XL</p> </div> </div>

Sizes and tech. specifications/ Misura e info tecniche				
	S	M	L	XL
Mood Wall Washer Round Flush/A filo	 Visible trim Ø62mm Trimless Ø50mm p.162	 Visible trim Ø96mm Trimless Ø80mm p.164	 Visible trim Ø128mm Trimless Ø110mm p.166	 Visible trim Ø175mm Trimless Ø150mm p.169
Mood Wall Washer Round Drop/Esposto	 Visible trim Ø62mm Trimless Ø50mm p.162	 Visible trim Ø96mm Trimless Ø80mm p.164	 Visible trim Ø128mm Trimless Ø110mm p.167	 Visible trim Ø175mm Trimless Ø150mm p.170
Mood Wall Washer Square Flush/A filo	 Visible trim 62x62mm Trimless 50x50mm p.172	 Visible trim 96x96mm Trimless 80x80mm p.174	 Visible trim 128x128mm Trimless 110x110mm p.176	 Visible trim 175x175mm Trimless 150x150mm p.179
Mood Wall Washer Square Drop/Esposto	 Visible trim 62x62mm Trimless 50x50mm p.172	 Visible trim 96x96mm Trimless 80x80mm p.174	 Visible trim 128x128mm Trimless 110x110mm p.177	 Visible trim 175x175mm Trimless 150x150mm p.180
Max recess depth/ Ingombro interno massimo	 70 Ø58 58x58	 119 Ø92 92x92	 132 Ø121 121x121	 166 Ø164 164x164
Beam width/ Apertura cono di luce	Wall Washer	Wall Washer	Wall Washer	Wall Washer
Light source/ Sorgente luminosa	POWER LED 3,5 W 310 lm - 415 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >80, CRI >90	POWER LED 8,5 W 725 lm - 940 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >80, CRI >90 Warm Dimming COB LED 6,5 W 10 lm - 550 lm L70 B50=50,000h 1800 K-2800 K SDCM <4 CRI >95	COB LED 12 W, 17 W 1370 lm - 2400 lm L80 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <2, <3 CRI >80, CRI >90 Warm Dimming COB LED 12 W 100 lm - 1000 lm L70 B50=50,000h 1700 K-3000 K SDCM <4 CRI >95 Phosphor LED Module 16 W 950 lm - 980 lm L70 B0=50,000h 2700 K, 3000 K, 4000 K SDCM <2 CRI >95	COB LED 25 W, 34 W 2790 lm - 4695 lm L80 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <2, <3 CRI >80, CRI >90 Warm Dimming COB LED 33 W 100 lm - 3100 lm L70 B50=50,000h 1700 K-3000 K SDCM <4 CRI >95 Phosphor LED Module 22 W, 34 W 2220 lm - 3320 lm L70 B0=50,000h 2700 K, 3000 K, 4000 K SDCM <2 CRI >95

Accessories/
Accessori

Plate with round elliptical lens/
Piatello con lente ellittica



Flush Round Plate/
Piatello tondo a filo

12
31



Drop Round Plate/
Piatello tondo drop

12
31



Flush Square Plate/
Piatello quadrato a filo


12
31



Drop Square Plate/
Piatello quadrato drop

12
31


Mounting accessories/
Accessori montaggio




Formwork/
Cassaforma

Optics

Mood Wall Washer (S)

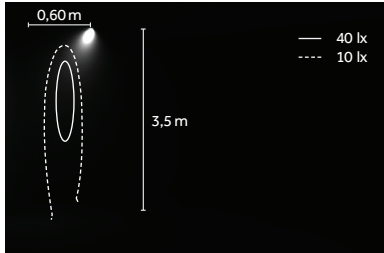


Drop / LED: 3.5 W/3000 K (HQ)

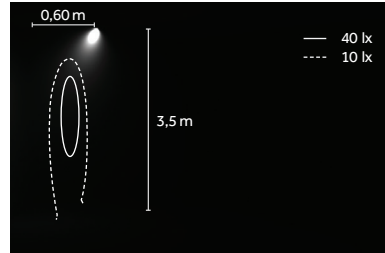


Flush / LED: 3.5 W/3000 K (HQ)

Mood Wall Washer (M)

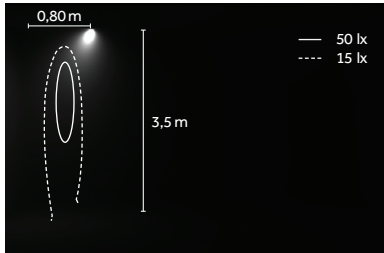


Drop / LED: 8.5 W/3000 K (HQ)

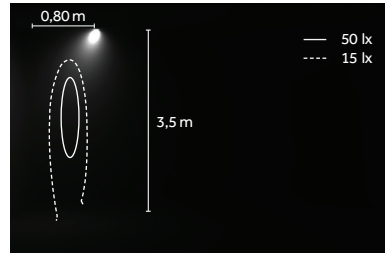


Flush / LED: 8.5 W/3000 K (HQ)

Mood Wall Washer (L)


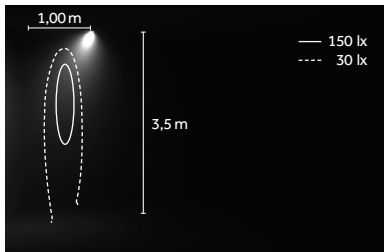


Drop / LED: 17 W/3000 K (HQ)

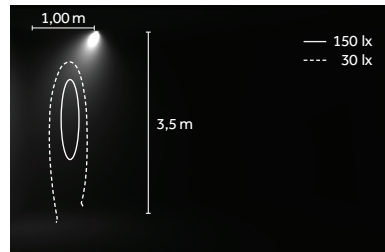


Flush / LED: 17 W/3000 K (HQ)

Mood Wall Washer (XL)

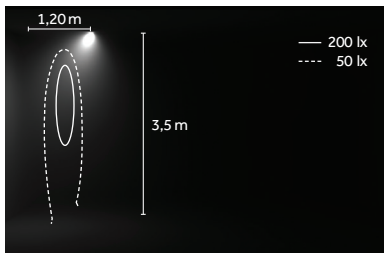


Drop / LED: 34 W/3000 K (HQ)

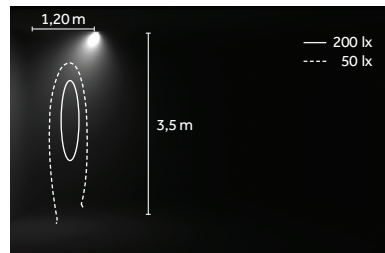

Flush / LED: 34 W/3000 K (HQ)

LED

COB





2700 K, 3000 K, 4000 K
SDCM <2, <3
CRI >80, CRI > 90

TM 30
Rf: 90, Rg: 100

L80 B10=50,000h
Ta: 25°
Tc: 85°
~9.000hr
Lm Maintenance: 98%
(Source: LM80 test report)


Note:
Mood S, M (POWER LED)

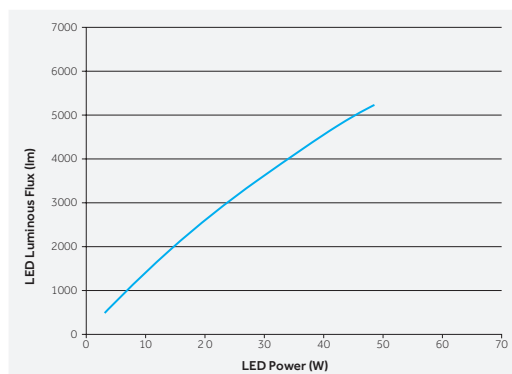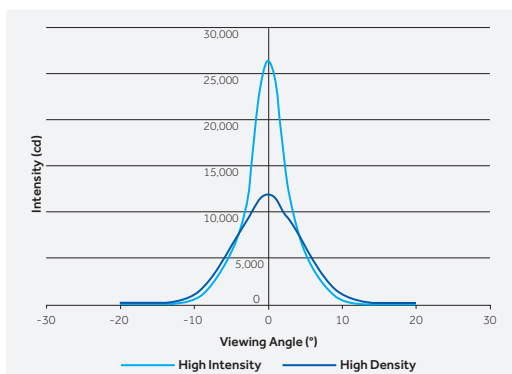

EN COB LEDs and POWER LED are distinguished by excellent luminous intensity in the smaller sizes now available on the market. This feature means these light sources can be integrated into very compact luminaires with unique performance, very high peak beam intensity (candela) and delivered lumens of 150lm to 4000 lm. These light sources are characterised by lumen maintenance at high operating temperatures due to improved efficacy at high temperatures and better optical stability over time.


IT I COB LED e POWER LED sono caratterizzati da un'eccellente intensità luminosa nelle dimensioni più ridotte ora disponibili sul mercato, e questa caratteristica consente l'integrazione di queste sorgenti in prodotti dalle dimensioni molto contenute con performance uniche, picchi di intensità in candele molto elevati e lumen delivered da 150 lm fino a 4000 lm. Queste sorgenti sono caratterizzate da un mantenimento costante nel tempo del livello di lumen ad alte temperature di utilizzo grazie ad una migliore efficienza ad alte temperature e ad una migliore stabilità ottica nel corso del tempo.

Warm Dimming



1700 K-3000 K
SDCM <4
CRI >95

L70 B50=50,000h

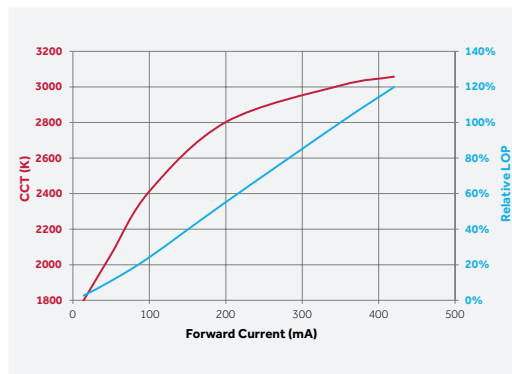


EN Our solution combines two chips in a single COB LED. With this configuration, only a single driver supplies power and gradually reduces incoming amps to bring it in line with the desired output. By reducing power supply to the chips, the luminous flux is reduced and consequently the colour temperature resulting from the combination of the individually designated colour temperatures is automatically offset. This technology delivers a very wide range of adjustment for luminous intensity, with a very gentle, gradual change in colour temperature (from no more than 3000 K to no less than 1700 K). The CRI and colour rendering is excellent for the whole dimming range, with a CRI of up to 97 and an R9 of 94.

IT La nostra soluzione combina due chip in un solo COB LED. Con questa configurazione, l'alimentazione è un unico driver che riduce gradualmente l'ampereaggio in entrata in funzione del rendimento desiderato. Diminuendo l'alimentazione ai chip, diminuisce il flusso e la temperatura di colore, che risulta dalla combinazione delle singole temperature di colore stabilite, viene bilanciata automaticamente di conseguenza. Questa tecnologia offre un campo di regolazione della luminosità molto ampio con una variazione della temperatura di colore molto morbida e graduale, da un massimo di 3000K a un minimo di 1700 K. Il CRI e il rendimento dei colori è eccellente per l'intero range di dimmerazione, con valori di CRI fino a 97 e R9 di 94.

Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
1700K	94	95	97	90	91	88	97	97	94	92	81	78	93	96	98
3000K	97	95	97	97	96	95	99	97	94	97	94	86	95	97	95


Phosphor LED




2700 K, 3000 K, 4000 K
SDCM <2
CRI >95

TM30
Rf: 96, Rg: 103

L70 B0=50,000h
Ta: 25°
Tc: 85°
10.000 hr
Lumen Maintenance: 98%
(Source: LM80 test report)

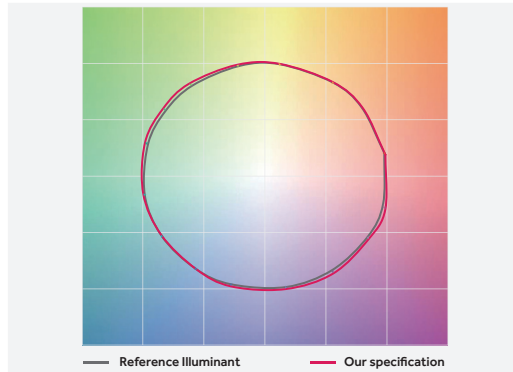

^{EN} The Phosphor LED Modules are designed to provide the most accurate, natural color rendition possible, over the entire visual spectrum. They come in 2700K, 3000K and 4000K CCT delivering typical CRI (Ra) of 97, with typical R9 of 95, and extremely high R values across all 15 CIE CRI samples. This light source option features SDCM < 2 and outstanding values of color maintenance over time. The Phosphor LED modules are designed to perfectly emulate natural light sources, with precise color rendering by CIE or IES standards, for the most exacting illumination of art, architecture, or other surfaces.

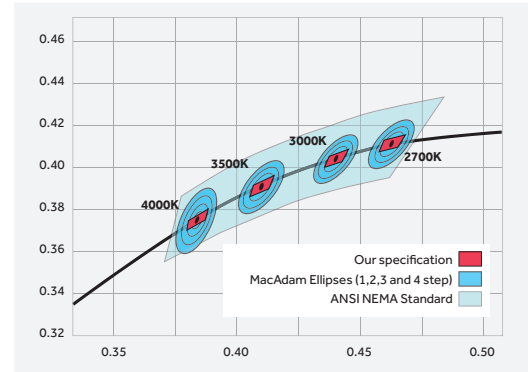


^{IT} I moduli LED con tecnologia al fosforo sono stati progettati per offrire la resa cromatica più precisa e naturale possibile dell'intero spettro visibile. Sono disponibili con temperatura di colore di 2700K, 3000K e 4000K, con un tipico CRI (Ra) pari a 97 (R9 = 95), e valori di R estremamente elevati per tutti i 15 colori campione del diagramma cromatico CIE.

Questo tipo di sorgente luminosa è caratterizzata da un valore SDCM < 2 e può vantare un'eccellente capacità di mantenimento della qualità del colore nel tempo.

I moduli LED con tecnologia al fosforo sono stati progettati al fine di imitare esattamente le sorgenti di luce naturali, con una resa cromatica precisa in conformità alle norme CIE o IES, per l'illuminazione d'accento di opere d'arte, elementi architettonici o altre superfici.

EN For the best performance, at least three Mood Wall Washer luminaires need to be installed according to the recommended configuration and to the specified ratio for distance between luminaires and distance between the luminaires and the wall.


IT Per ottenere le massime prestazioni da Mood Wall Washer occorre installare un minimo di 3 prodotti, seguendo la configurazione consigliata e considerando i dati (ratio) indicati per la distanza tra gli apparecchi e la distanza tra gli apparecchi e la parete.

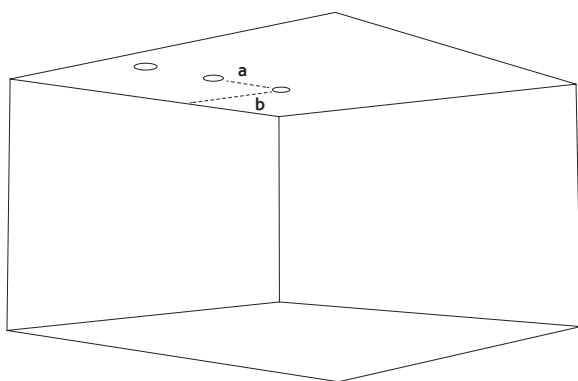

EN Product: Mood Wall Washer Flush
Adjustment step: Standard (2nd)
a: fixture spacing
b: distance from wall

IT Prodotto: Mood Wall Washer a filo
Step di orientabilità: Standard (2^a)
a: distanza tra gli apparecchi
b: distanza dal muro

Size/ Misure	Power/ Potenze	Distances/ Distanze	
		a	b
S	3,5 W	800 mm	600 mm
M	8,5 W	1000 mm	800 mm
L	12 W / 17 W	1000 mm	1000 mm
XL	25 W / 34 W	1500 mm	1200 mm

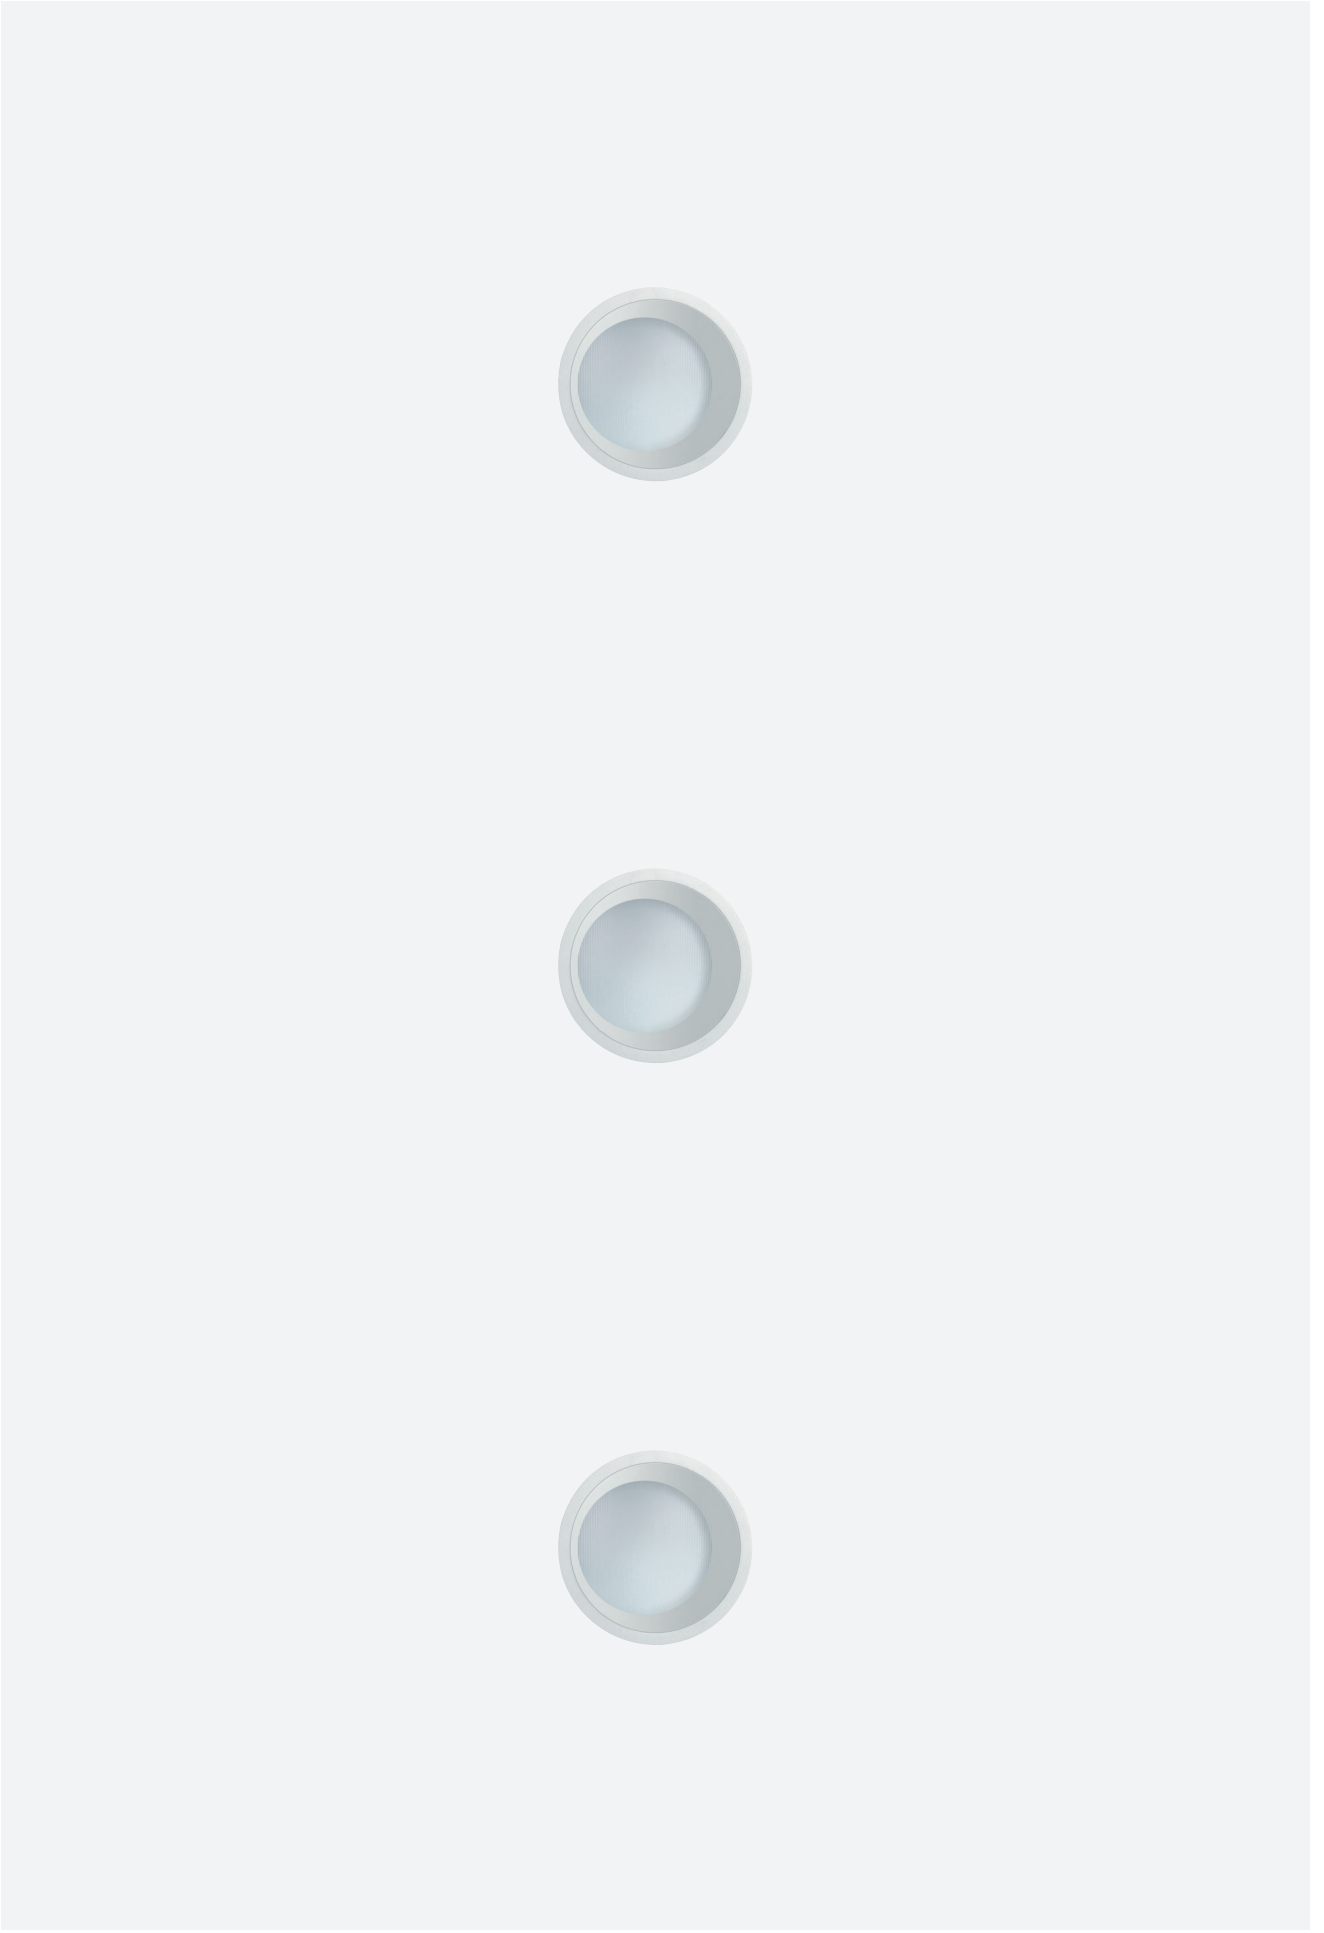


EN Mood Wall Washer comes with 3-step (4 for the XL size) positioning (from 10° to 40° in the vertical axis) and two different plates: flush and drop. The positioning steps and the two plate types enable flexible adjustment of the effect on the vertical surface and the degree of asymmetric light distribution.

IT Mood Wall Washer presenta 3 step (4 per la misura XL) di posizionamento (da 10° fino a 40° rispetto all'asse verticale) e due diversi tipi di piattelli: a filo o esposto. Gli step di posizionamento e le due tipologie di piattello consentono di modificare con flessibilità l'effetto sulla superficie verticale e il grado di asimmetria della distribuzione.



EN Plate version: flush
IT Versione piattello: flush

EN Plate version: drop
IT Versione piattello: drop

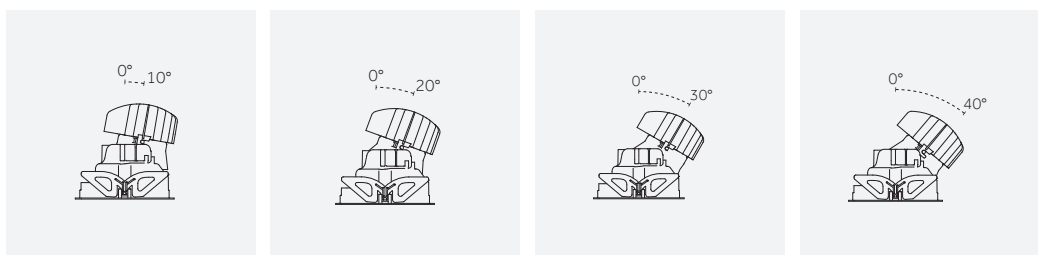

EN Step: 1
IT Step: 1

EN Step: 2
IT Step: 2


EN Step: 3
IT Step: 3

EN Step: 4 (XL only)
IT Step: 4 (Solo XL)



S | Flush/A filo


Risk 1 0.09 IP44 Recycle 850° CE CB EAC



Visible trim/
Con flangia



Trimless/
Senza flangia



Code example:
X . **RG11** **H** . **HW** **12**

Accessories: p.163
Drivers: p.183
Finishes: p.152
Photometric data:
www.reggiani.net

Notes:
* On request/sur richiesta

3,5W POWERLED


Lumen delivered up to 146 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	RG11 Visible trim UG11 Trimless	H Wall Washer	HW 2700 HQ 3000 WW 3000 NN 4000	>90	310 315 380 415	<3	12 C0* 31 W1* 01* W5* U1* 05* W4* U4* W0* B0*

LED nominal lumen

S | Drop/Esposto


Risk 1 0.09 IP44 Recycle 850° CE CB EAC



Visible trim/
Con flangia



Trimless/
Senza flangia



Code example:
X . **TG11** **H** . **HW** **12**

Accessories: p.163
Drivers: p.183
Finishes: p.152
Photometric data:
www.reggiani.net

Notes:
* On request/sur richiesta

3,5W POWERLED

Lumen delivered up to 128 lm / Lumen maintenance: L90 B10=50,000h


Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	TG11 Visible trim VG11 Trimless	H Wall Washer	HW 2700 HQ 3000 WW 3000 NN 4000	>90	310 315 380 415	<3	12 C0* 31 W1* 01* W5* U1* 05* W4* U4* W0* B0*

LED nominal lumen

S | Accessories

Plates/ Piattelli

S | Flush/A filo





Description
Flush plate with round elliptical lens/
Piattello a filo con lente ellittica tonda

Code
0.26063.00


Finishes
12 
31 

S | Drop/Esposto




Description
Drop plate with round elliptical lens/
Piattello drop con lente ellittica tonda

Code
0.26067.00

Finishes
12 
31 

Mounting accessories/ Accessori montaggio




Description
Formwork/
Cassaforma


Code
0.40190.0000

M | Flush/A filo


Risk 1 0,28 IP44 850° CE CB EAC



Visible trim/
Con flangia



Trimless/
Senza flangia



Code example:
X . RG12 H . HW 12

Accessories: p.165
Drivers: p.184
Finishes: p.152
Photometric data:
www.reggiani.net

Notes:
* On request/surrichiesta

8,5 W POWERLED Lumen delivered up to 320lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	RG12 Visible trim	H Wall Washer	HW 2700	>90	725	<3	12 <input type="checkbox"/> C0*
	UG12 Trimless		HQ 3000	>90	730	<3	31 <input type="checkbox"/> W1*
			WW 3000	>80	844	<3	01*
			NN 4000	>80	940	<3	W5*
			LED nominal lumen				U1*
							05*
							W4*
							U4*
							W0*
							B0*

6,5 W Warm Dimming COB LED Lumen delivered up to 200lm / Lumen maintenance: L70 B50=50,000h


Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	RG12 Visible trim	H Wall Washer	DT 1800-2800	>95	10-550	<4	12 <input type="checkbox"/> C0*
	UG12 Trimless		LED nominal lumen				31 <input type="checkbox"/> W1*
							01*
							W5*
							U1*
							05*
							W4*
							U4*
							W0*
							B0*

M | Drop/Esposto


Risk 1 0,28 IP44 850° CE CB EAC



Visible trim/
Con flangia



Trimless/
Senza flangia



Code example:
X . TG12 H . HW 12

Accessories: p.165
Drivers: p.184
Finishes: p.152
Photometric data:
www.reggiani.net

Notes:
* On request/surrichiesta

8,5 W POWERLED Lumen delivered up to 301lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	TG12 Visible trim	H Wall Washer	HW 2700	>90	725	<3	12 <input type="checkbox"/> C0*
	VG12 Trimless		HQ 3000	>90	730	<3	31 <input type="checkbox"/> W1*
			WW 3000	>80	844	<3	01*
			NN 4000	>80	940	<3	W5*
			LED nominal lumen				U1*
							05*
							W4*
							U4*
							W0*
							B0*


6,5 W Warm Dimming COB LED Lumen delivered up to 200lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	TG12 Visible trim	H Wall Washer	DT 1800-2800	>95	10-550	<4	12 <input type="checkbox"/> C0*
	VG12 Trimless		LED nominal lumen				31 <input type="checkbox"/> W1*
							01*
							W5*
							U1*
							05*
							W4*
							U4*
							W0*
							B0*

M | Accessories



Plates/ Piattelli

M | Flush/A filo




Description
Flush plate with round elliptical lens/
Piattello a filo con lente ellittica tonda

Code
0.26089.00



Finishes
12 
31 

M | Drop/Esposto




Description
Drop plate with round elliptical lens/
Piattello drop con lente ellittica tonda

Code
0.26090.00

Finishes
12 
31 

Mounting accessories/ Accessori montaggio




Description
Formwork/
Cassaforma

Code
0.40194.0000


L | Flush/A filo



Visible trim/
Con flangia



Trimless/
Senza flangia



Code example:
X . RG13 H . HW 12

Accessories: p. 168
Drivers: p.185
Finishes: p.152
Photometric data:
www.reggiani.net

Notes:
* On request/sur richiesta

12 W COB LED		Lumen delivered up to 836 lm / Lumen maintenance: L80 B10=50,000h						Finishes	
Driver	Version	Optics	LED K	CRI	lm	SDCM	12	31	
<u>X</u> Not included	<u>RG13</u> Visible trim	<u>H</u> Wall Washer	<u>HW</u> 2700	>90	1370	<2	<input type="checkbox"/>	<input type="checkbox"/>	
	<u>UG13</u> Trimless		<u>HQ</u> 3000	>90	1420	<2	<input type="checkbox"/>	<input type="checkbox"/>	
			<u>WW</u> 3000	>80	1700	<3	<input type="checkbox"/>	<input type="checkbox"/>	
			<u>NN</u> 4000	>80	1775	<3	<input type="checkbox"/>	<input type="checkbox"/>	
			LED nominal lumen						
			C0*						
			W1*						
			O1*						
			W5*						
			U1*						
			O5*						
			W4*						
			U4*						
			W0*						
			B0*						

17 W COB LED		Lumen delivered up to 1197 lm / Lumen maintenance: L80 B10=50,000h						Finishes	
Driver	Version	Optics	LED K	CRI	lm	SDCM	12	31	
<u>X</u> Not included	<u>RG14</u> Visible trim	<u>H</u> Wall Washer	<u>HW</u> 2700	>90	1870	<2	<input type="checkbox"/>	<input type="checkbox"/>	
	<u>UG14</u> Trimless		<u>HQ</u> 3000	>90	1920	<2	<input type="checkbox"/>	<input type="checkbox"/>	
			<u>WW</u> 3000	>80	2320	<3	<input type="checkbox"/>	<input type="checkbox"/>	
			<u>NN</u> 4000	>80	2400	<3	<input type="checkbox"/>	<input type="checkbox"/>	
			LED nominal lumen						
			C0*						
			W1*						
			O1*						
			W5*						
			U1*						
			O5*						
			W4*						
			U4*						
			W0*						
			B0*						


12 W Warm Dimming COB LED		Lumen delivered up to 560 lm / Lumen maintenance: L70 B50=50,000h						Finishes	
Driver	Version	Optics	LED K	CRI	lm	SDCM	12	31	
<u>X</u> Not included	<u>RG14</u> Visible trim	<u>H</u> Wall Washer	<u>DT</u> 1700-3000	>95	100-1000	<4	<input type="checkbox"/>	<input type="checkbox"/>	
	<u>UG14</u> Trimless		LED nominal lumen						
			C0*						
			W1*						
			O1*						
			W5*						
			U1*						
			O5*						
			W4*						
			U4*						
			W0*						
			B0*						

16 W Phosphor LED Module		Lumen delivered up to 363 lm / Lumen maintenance: L70 B0=50,000h						Finishes	
Driver	Version	Optics	LED K	CRI	lm	SDCM	12	31	
<u>X</u> Not included	<u>RG14</u> Visible trim	<u>H</u> Wall Washer	<u>XW</u> 2700	>95	950	<2	<input type="checkbox"/>	<input type="checkbox"/>	
	<u>UG14</u> Trimless		<u>XQ</u> 3000	>95	970	<2	<input type="checkbox"/>	<input type="checkbox"/>	
			<u>XN</u> 4000	>95	980	<2	<input type="checkbox"/>	<input type="checkbox"/>	
			LED nominal lumen						
			C0*						
			W1*						
			O1*						
			W5*						
			U1*						
			O5*						
			W4*						
			U4*						
			W0*						
			B0*						


L | Drop/Esposto



Visible trim/
Con flangia



Trimless/
Senza flangia



Code example:

X . **TG13** H . **HW** **12**

Accessories: p.168

Drivers: p.185

Finishes: p.152

Photometric data:

www.reggiani.net

Notes:

* On request/su richiesta

12 W COBLED Lumen delivered up to 918 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	TG13 Visible trim	H Wall Washer	HW 2700	>90	1370	<2	12
	VG13 Trimless		HQ 3000	>90	1420	<2	31
			WW 3000	>80	1705	<3	
			NN 4000	>80	1775	<3	

LED nominal lumen

17 W COBLED Lumen delivered up to 1240 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	TG14 Visible trim	H Wall Washer	HW 2700	>90	1870	<2	12
	VG14 Trimless		HQ 3000	>90	1920	<2	31
			WW 3000	>80	2320	<3	
			NN 4000	>80	2400	<3	

LED nominal lumen

12 W Warm Dimming COBLED Lumen delivered up to 560 lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	TG14 Visible trim	H Wall Washer	DT 1700-3000	>95	100-1000	<4	12
	VG14 Trimless						31

LED nominal lumen

16 W Phosphor LED Module Lumen delivered up to 400 lm / Lumen maintenance: L70 B0=50,000h


Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	TG14 Visible trim	H Wall Washer	XW 2700	>95	950	<2	12
	VG14 Trimless		XQ 3000	>95	970	<2	31
			XN 4000	>95	980	<2	

LED nominal lumen

L | Accessories

Plates/
Piattelli

L | Flush/A filo




Description
Flush plate with round elliptical lens/
Piattello a filo con lente ellittica tonda

Code
0.26093.00

Finishes
12
31



L | Drop/Esposto



Description
Drop plate with round elliptical lens/
Piattello drop con lente ellittica tonda

Code
0.26094.00

Finishes
12
31

Mounting accessories/
Accessori montaggio


Description
Formwork/
Cassaforma

Code
0.40195.0000


XL | Flush/A filo



Visible trim/
Con flangia



Trimless/
Senza flangia

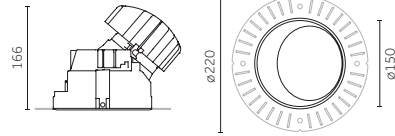

Code example:

X . RG16 . H . HW . 12

Accessories: p.171

Drivers: p.186-187

Finishes: p.152

Photometric data:

www.reggiani.net

Notes:

* On request/su richiesta

25 W COBLED Lumen delivered up to 1890lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	<u>RG16</u> Visible trim	<u>H</u> Wall Washer	<u>HW</u> 2700	>90	2790	<2	12
	<u>UG16</u> Trimless		<u>HQ</u> 3000	>90	2860	<2	31
			<u>WW</u> 3000	>80	3485	<3	
			<u>NN</u> 4000	>80	3600	<3	

LED nominal lumen

34 W COBLED Lumen delivered up to 2420lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	<u>RG17</u> Visible trim	<u>H</u> Wall Washer	<u>HW</u> 2700	>90	3635	<2	12
	<u>UG17</u> Trimless		<u>HQ</u> 3000	>90	3735	<2	31
			<u>WW</u> 3000	>80	4510	<3	
			<u>NN</u> 4000	>80	4695	<3	

LED nominal lumen

33 W Warm Dimming COBLED Lumen delivered up to 1600lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	<u>RG17</u> Visible trim	<u>H</u> Wall Washer	<u>DT</u> 1700-3000	>95	100-3100	<4	12
	<u>UG17</u> Trimless						31

LED nominal lumen

22 W Phosphor LED Module Lumen maintenance: L70 B0=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	<u>RG15</u> Visible trim	<u>H</u> Wall Washer	<u>XW</u> 2700	>95	2220	<2	12
	<u>UG15</u> Trimless		<u>XQ</u> 3000	>95	2270	<2	31
			<u>XN</u> 4000	>95	2310	<2	

LED nominal lumen

34 W Phosphor LED Module Lumen maintenance: L70 B0=50,000h


Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	<u>RG17</u> Visible trim	<u>H</u> Wall Washer	<u>XW</u> 2700	>95	3185	<2	12
	<u>UG17</u> Trimless		<u>XQ</u> 3000	>95	3265	<2	31
			<u>XN</u> 4000	>95	3320	<2	

LED nominal lumen


XL | Drop/Esposto



Visible trim/
Con flangia



Trimless/
Senza flangia

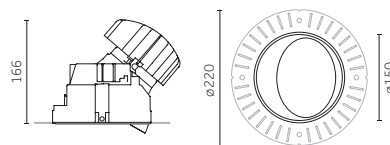

Code example:

X . **TG16** H . **HW** **12**

Accessories: p. 171
Drivers: p.186-187
Finishes: p.152
Photometric data:
www.reggiani.net

Notes:

* On request/sur richiesta

25 W		COB LED		Lumen delivered up to 1830 lm / Lumen maintenance: L80 B10=50,000h				
Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes	
X Not included	TG16 Visible trim	H Wall Washer	HW 2700	>90	2790	<2	12 C0*	
	VG16 Trimless		HQ 3000	>90	2860	<2	31 W1*	
			WW 3000	>80	3485	<3	01*	
			NN 4000	>80	3600	<3	W5*	
			LED nominal lumen				U1*	
							05*	
							W4*	
							U4*	
							W0*	
							B0*	

34 W		COB LED		Lumen delivered up to 2370 lm / Lumen maintenance: L80 B10=50,000h				
Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes	
X Not included	TG17 Visible trim	H Wall Washer	HW 2700	>90	3635	<2	12 C0*	
	VG17 Trimless		HQ 3000	>90	3735	<2	31 W1*	
			WW 3000	>80	4510	<3	01*	
			NN 4000	>80	4695	<3	W5*	
			LED nominal lumen				U1*	
							05*	
							W4*	
							U4*	
							W0*	
							B0*	

33 W		Warm Dimming COB LED		Lumen delivered up to 1600 lm / Lumen maintenance: L70 B50=50,000h				
Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes	
X Not included	TG17 Visible trim	H Wall Washer	DT 1700-3000	>95	100-3100	<4	12 C0*	
	VG17 Trimless		LED nominal lumen				31 W1*	
							01*	
							W5*	
							U1*	
							05*	
							W4*	
							U4*	
							W0*	
							B0*	


22 W		Phosphor LED Module		Lumen maintenance: L70 B0=50,000h				
Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes	
X Not included	TG15 Visible trim	H Wall Washer	XW 2700	>95	2220	<2	12 C0*	
	VG15 Trimless		XQ 3000	>95	2270	<2	31 W1*	
			XN 4000	>95	2310	<2	01*	
			LED nominal lumen				W5*	
							U1*	
							05*	
							W4*	
							U4*	
							W0*	
							B0*	

34 W		Phosphor LED Module		Lumen maintenance: L70 B0=50,000h				
Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes	
X Not included	TG17 Visible trim	H Wall Washer	XW 2700	>95	3185	<2	12 C0*	
	VG17 Trimless		XQ 3000	>95	3265	<2	31 W1*	
			XN 4000	>95	3320	<2	01*	
			LED nominal lumen				W5*	
							U1*	
							05*	
							W4*	
							U4*	
							W0*	
							B0*	

XL | Accessories

Plates/ Piattelli

XL | Flush/A filo




Description
Flush plate with round elliptical lens/
Piattello a filo con lente ellittica tonda

Code
0.26097.00

Finishes
12 
31 

XL | Drop/Esposto




Description
Drop plate with round elliptical lens/
Piattello drop con lente ellittica tonda

Code
0.26098.00

Finishes
12 
31 

Mounting accessories/ Accessori montaggio



Description
Formwork/
Cassaforma

Code
0.40196.0000

S | Flush/A filo


Risk 1 0.10 IP44 Recycle 850° CE CB EAC



Visible trim/
Con flangia



Trimless/
Senza flangia



Code example:
X . ZG11 H . HW 12

Accessories: p.173
Drivers: p.183
Finishes: p.152
Photometric data:
www.reggiani.net

Notes:
* On request/sur richiesta

3,5W POWERLED

Driver	Version	Optics
X Not included	ZG11 Visible trim	H Wall Washer
	XG11 Trimless	

Lumen delivered up to 161 lm / Lumen maintenance: L90 B10=50,000h

LED K	CRI	lm	SDCM	Finishes
HW 2700	>90	310	<3	12
HQ 3000	>90	315	<3	31
WW 3000	>80	380	<3	
NN 4000	>80	415	<3	

Finishes
C0*
W1*
O1*
W5*
U1*
O5*
W4*
U4*
W0*
B0*

S | Drop/Esposto


Risk 1 0.10 IP44 Recycle 850° CE CB EAC



Visible trim/
Con flangia



Trimless/
Senza flangia



Code example:
X . WG11 H . HW 12

Accessories: p.173
Drivers: p.183
Finishes: p.152
Photometric data:
www.reggiani.net

Notes:
* On request/sur richiesta

3,5W POWERLED

Driver	Version	Optics
X Not included	WG11 Visible trim	H Wall Washer
	YG11 Trimless	

Lumen delivered up to 130 lm / Lumen maintenance: L90 B10=50,000h



LED K	CRI	lm	SDCM	Finishes
HW 2700	>90	310	<3	12
HQ 3000	>90	315	<3	31
WW 3000	>80	380	<3	
NN 4000	>80	415	<3	

Finishes
C0*
W1*
O1*
W5*
U1*
O5*
W4*
U4*
W0*
B0*

S | Accessories

Plates/ Piattelli

S | Flush/A filo




Description
Flush plate with round elliptical lens/
Piattello a filo con lente ellittica quadra

Code
0.26068.00

Finishes
12 
31 

S | Drop/Esposto




Description
Drop plate with round elliptical lens/
Piattello drop con lente ellittica quadra

Code
0.26069.00


Finishes
12 
31 

Mounting accessories/ Accessori montaggio




Description
Formwork/
Cassaforma


Code
0.40190.0000

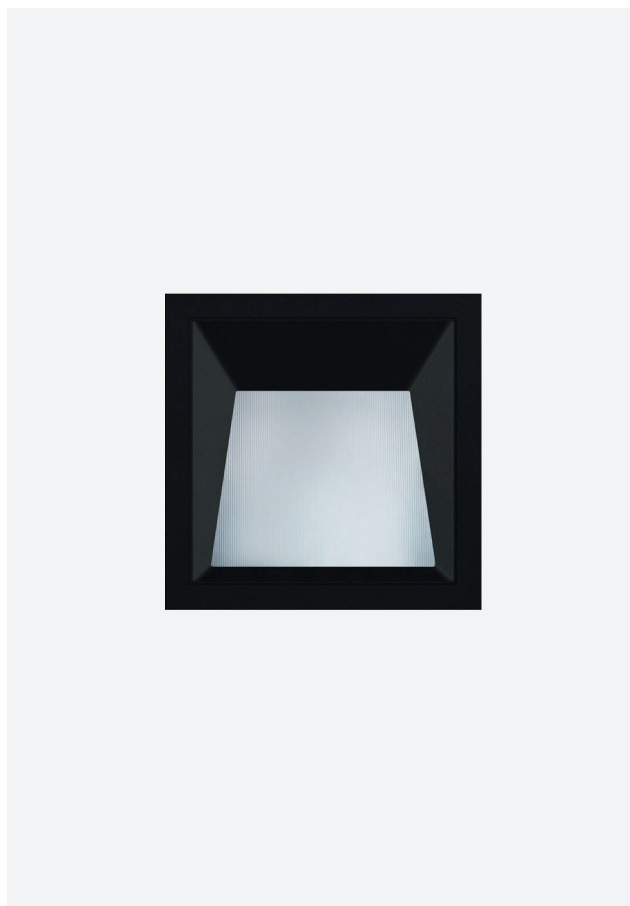


M | Flush/A filo



Visible trim/
Con flangia



Trimless/
Senza flangia



Code example:
X . ZG12 H . HW 12

Accessories: p.175
Drivers: p.184
Finishes: p.152
Photometric data:
www.reggiani.net

Notes:
* On request/sur richiesta

8,5 W POWERLED Lumen delivered up to 323 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	ZG12 Visible trim	H Wall Washer	HW 2700	>90	725	<3	12 C0*
	XG12 Trimless		HQ 3000	>90	730	<3	31 W1*
			WW 3000	>80	844	<3	01*
			NN 4000	>80	940	<3	W5*
							U1*
							05*
							W4*
							U4*
							W0*
							B0*


6,5 W Warm Dimming COB LED Lumen delivered up to 200 lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	ZG12 Visible trim	H Wall Washer	DT 1800-3000	>95	10-550	<4	12 C0*
	XG12 Trimless						31 W1*
							01*
							W5*
							U1*
							05*
							W4*
							U4*
							W0*
							B0*


M | Drop/Esposto



Visible trim/
Con flangia



Trimless/
Senza flangia



Code example:
X . WG12 H . HW 12

Accessories: p.175
Drivers: p.184
Finishes: p.152
Photometric data:
www.reggiani.net

Notes:
* On request/sur richiesta

8,5 W POWERLED Lumen delivered up to 282 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	WG12 Visible trim	H Wall Washer	HW 2700	>90	725	<3	12 C0*
	YG12 Trimless		HQ 3000	>90	730	<3	31 W1*
			WW 3000	>80	844	<3	01*
			NN 4000	>80	940	<3	W5*
							U1*
							05*
							W4*
							U4*
							W0*
							B0*

6,5 W Warm Dimming COB LED Lumen delivered up to 200 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	WG12 Visible trim	H Wall Washer	DT 1800-2800	>95	10-550	<4	12 C0*
	YG12 Trimless						31 W1*
							01*
							W5*
							U1*
							05*
							W4*
							U4*
							W0*
							B0*

M | Accessories



Plates/ Piattelli

M | Flush/A filo



Description
Flush plate with round elliptical lens/
Piattello a filo con lente ellittica quadra

Code
0.26091.00



Finishes
12 
31 

M | Drop/Esposto





Description
Drop plate with round elliptical lens/
Piattello drop con lente ellittica quadra

Code
0.26092.00

Finishes
12 
31 

Mounting accessories/ Accessori montaggio




Description
Formwork/
Cassaforma

Code
0.40194.0000


L | Flush/A filo



Visible trim/
Con flangia



Trimless/
Senza flangia

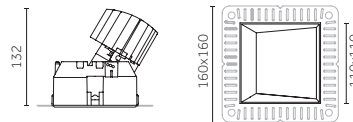

Code example:
X . **ZG13** **H** . **HW** **12**

Accessories: p.178
Drivers: p.185
Finishes: p.152
Photometric data:
www.reggiani.net

Notes:
* On request/sur richiesta

12 W COB LED Lumen delivered up to 918 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
<u>X</u> Not included	<u>ZG13</u> Visible trim	<u>H</u> Wall Washer	<u>HW</u> 2700	>90	1370	<2	12 C0+
	<u>XG13</u> Trimless		<u>HQ</u> 3000	>90	1420	<2	31 W1+
			<u>WW</u> 3000	>80	1705	<3	O1+
			<u>NN</u> 4000	>80	1775	<3	W5+
							U1+
							O5+
							W4+
							U4+
							W0+
							B0+

17 W COB LED Lumen delivered up to 1198 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
<u>X</u> Not included	<u>ZG14</u> Visible trim	<u>H</u> Wall Washer	<u>HW</u> 2700	>90	1870	<2	12 C0+
	<u>XG14</u> Trimless		<u>HQ</u> 3000	>90	1920	<2	31 W1+
			<u>WW</u> 3000	>80	2320	<3	O1+
			<u>NN</u> 4000	>80	2400	<3	W5+
							U1+
							O5+
							W4+
							U4+
							W0+
							B0+

12 W Warm Dimming COB LED Lumen delivered up to 560 lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
<u>X</u> Not included	<u>ZG14</u> Visible trim	<u>H</u> Wall Washer	<u>DT</u> 1800-3000	>95	100-1000	<4	12 C0+
	<u>XG14</u> Trimless						31 W1+
							O1+
							W5+
							U1+
							O5+
							W4+
							U4+
							W0+
							B0+


16 W Phosphor LED Module Lumen delivered up to 377 lm / Lumen maintenance: L70 B0=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
<u>X</u> Not included	<u>ZG14</u> Visible trim	<u>H</u> Wall Washer	<u>XW</u> 2700	>95	950	<2	12 C0+
	<u>XG14</u> Trimless		<u>XQ</u> 3000	>95	970	<2	31 W1+
			<u>XN</u> 4000	>95	980	<2	O1+
							W5+
							U1+
							O5+
							W4+
							U4+
							W0+
							B0+


L | Drop/Esposto



Visible trim/
Con flangia



Trimless/
Senza flangia



Code example:

X . **WG13** H . **HW** **12**

Accessories: p.178

Drivers: p.185

Finishes: p.152

Photometric data:

www.reggiani.net

Notes:

* On request/su richiesta

12 W COBLED Lumen delivered up to 971 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	WG13 Visible trim	H Wall Washer	HW 2700	>90	1370	<2	12
	YG13 Trimless		HQ 3000	>90	1420	<2	31
			WW 3000	>80	1705	<3	
			NN 4000	>80	1775	<3	

17 W COBLED Lumen delivered up to 1261 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	WG14 Visible trim	H Wall Washer	HW 2700	>90	1870	<2	12
	YG14 Trimless		HQ 3000	>90	1920	<2	31
			WW 3000	>80	2320	<3	
			NN 4000	>80	2400	<3	

12 W Warm Dimming COBLED Lumen delivered up to 560 lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	WG14 Visible trim	H Wall Washer	DT 1700-3000	>95	100-1000	<4	12
	YG14 Trimless						31


16 W Phosphor LED Module Lumen delivered up to 385 lm / Lumen maintenance: L70 B0=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	WG14 Visible trim	H Wall Washer	XW 2700	>95	950	<2	12
	YG14 Trimless		XQ 3000	>95	970	<2	31
			XN 4000	>95	980	<2	

L | Accessories

Plates/ Piattelli

L | Flush/A filo



Description

Flush plate with round elliptical lens/
Piattello a filo con lente ellittica quadra


Code

0.26095.00

Finishes

12	
31	

L | Drop/Esposto



Description

Drop plate with round elliptical lens/
Piattello drop con lente ellittica quadra



Code

0.26096.00

Finishes

12	
31	

Mounting accessories/ Accessori montaggio



Description

Formwork/
Cassaforma


Code

0.40195.0000


XL | Flush/A filo



Visible trim/
Con flangia



Trimless/
Senza flangia



Code example:

X . **ZG16** H . **HW** **12**

Accessories: p.181

Drivers: p.186-187

Finishes: p.152

Photometric data:

www.reggiani.net

Notes:

* On request/sur richiesta

25 W COBLED Lumen delivered up to 1820 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	ZG16 Visible trim	H Wall Washer	HW 2700	>90	2790	<2	12
	XG16 Trimless		HQ 3000	>90	2860	<2	31
			WW 3000	>80	3485	<3	
			NN 4000	>80	3600	<3	

34 W COBLED Lumen delivered up to 2375 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	ZG17 Visible trim	H Wall Washer	HW 2700	>90	3635	<2	12
	XG17 Trimless		HQ 3000	>90	3735	<2	31
			WW 3000	>80	4510	<3	
			NN 4000	>80	4695	<3	

33 W Warm Dimming COBLED Lumen delivered up to 1600 lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	ZG17 Visible trim	H Wall Washer	DT 1700-3000	>95	100-3100	<4	12
	XG17 Trimless						31

22 W Phosphor LED Module Lumen maintenance: L70 B0=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	ZG15 Visible trim	H Wall Washer	XW 2700	>95	2220	<2	12
	XG15 Trimless		XQ 3000	>95	2270	<2	31
			XN 4000	>95	2310	<2	


34 W Phosphor LED Module Lumen maintenance: L70 B0=50,000h

Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes
X Not included	ZG17 Visible trim	H Wall Washer	XW 2700	>95	3185	<2	12
	XG17 Trimless		XQ 3000	>95	3265	<2	31
			XN 4000	>95	3320	<2	


XL | Drop/Esposto



Visible trim/
Con flangia



Trimless/
Senza flangia

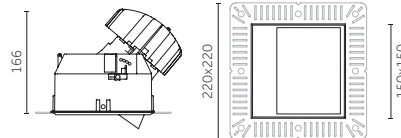

Code example:
X . WG16 H . HW 12

Accessories: p.181
Drivers: p.186-187
Finishes: p.152
Photometric data:
www.reggiani.net

Notes:
* On request/su richiesta

25 W		COB LED		Lumen delivered up to 1780 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes			
X Not included	<u>WG16</u> Visible trim	H Wall Washer	HW 2700	>90	2790	<2	12		C0*	
	<u>YG16</u> Trimless		HQ 3000	>90	2860	<2	31		W1*	
			WW 3000	>80	3485	<3			O1*	
			NN 4000	>80	3600	<3			W5*	
									U1*	
									O5*	
									W4*	
									U4*	
									W0*	
									B0*	

34 W		COB LED		Lumen delivered up to 2310 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes			
X Not included	<u>WG17</u> Visible trim	H Wall Washer	HW 2700	>90	3635	<2	12		C0*	
	<u>YG17</u> Trimless		HQ 3000	>90	3735	<2	31		W1*	
			WW 3000	>80	4510	<3			O1*	
			NN 4000	>80	4695	<3			W5*	
									U1*	
									O5*	
									W4*	
									U4*	
									W0*	
									B0*	

33 W		Warm Dimming COB LED		Lumen delivered up to 1600 lm / Lumen maintenance: L70 B50=50,000h						
Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes			
X Not included	<u>WG17</u> Visible trim	H Wall Washer	DT 1700-3000	>95	100-3100	<4	12		C0*	
	<u>YG17</u> Trimless						31		W1*	
									O1*	
									W5*	
									U1*	
									O5*	
									W4*	
									U4*	
									W0*	
									B0*	



22 W		Phosphor LED Module		Lumen maintenance: L70 B0=50,000h						
Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes			
X Not included	<u>WG15</u> Visible trim	H Wall Washer	XW 2700	>95	2220	<2	12		C0*	
	<u>YG15</u> Trimless		XQ 3000	>95	2270	<2	31		W1*	
			XN 4000	>95	2310	<2			O1*	
									W5*	
									U1*	
									O5*	
									W4*	
									U4*	
									W0*	
									B0*	

34 W		Phosphor LED Module		Lumen maintenance: L70 B0=50,000h						
Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes			
X Not included	<u>WG17</u> Visible trim	H Wall Washer	XW 2700	>95	3185	<2	12		C0*	
	<u>YG17</u> Trimless		XQ 3000	>95	3265	<2	31		W1*	
			XN 4000	>95	3320	<2			O1*	
									W5*	
									U1*	
									O5*	
									W4*	
									U4*	
									W0*	
									B0*	

XL | Accessories

Plates/ Piattelli

XL | Flush/A filo




Description
Flush plate with round elliptical lens/
Piattello a filo con lente ellittica quadra

Code
0.26099.00

Finishes
12 
31 

XL | Drop/Esposto




Description
Drop plate with round elliptical lens/
Piattello drop con lente ellittica quadra

Code
0.26100.00

Finishes
12 
31 

Mounting accessories/ Accessori montaggio



Description
Formwork/
Cassaforma









Code
0.40196.0000

Electrical Devices







S | Electrical Devices

Driver/ Alimentazioni

3,5 W POWERLED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30422.0000	20		57 mm	220-240Vac 176-264Vdc / 0.50/60Hz	1050	Min: 1 - Max: 5	20 m	1.5 mm ²
On/Off	0.30423.0000	40		52 mm	100-240 / 50/60Hz	1050	Min: 1 - Max: 10	20 m	1.5 mm ²
Phase-cut	T.30422.0000	13		57 mm	220-240Vac / 50/60Hz	1050	Min: 3 - Max: 3	20 m	1.5 mm ²
Phase-cut	T.30423.0000	36		57 mm	220-240Vac / 50/60Hz	1050	Min: 6 - Max: 10	20 m	1.5 mm ²
Dimm 1-10V	V.30422.0000	20		82 mm	180-240Vac 150-275Vdc / 0.50/60Hz	1050	Min: 1 - Max: 6	20 m	1.5 mm ²
Dimm 1-10V	V.30423.0000	40		45 mm	99-264Vac 170-280Vdc / 0.50/60Hz	1050	Min: 1 - Max: 10	20 m	1.5 mm ²
DALI	D.30422.0000	21		82 mm	220-230Vac / 0.50/60Hz	1050	Min: 3 - Max: 6	20 m	1.5 mm ²
DALI	D.30423.0000	50		56 mm	120-277Vac 120-250Vdc / 0.50/60Hz	1050	Min: 1 - Max: 15	20 m	1.5 mm ²

Other devices/ Altri dispositivi

Type	Code	Size (mm)	Cut-out	Tech. specifications	Connectable fixtures	Max.distance	Cable section
 Wireless bluetooth control device/ Dispositivo di controllo wireless bluetooth	0.26101.0000		45 mm	220-240V, 50-60Hz 0,6A for DALI drivers	Max: 1	-	1.5 mm ²
 1h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 1h*	0.35070.0000		58 mm	220-240V / 50/60 Hz	Min: 4	20 m	1.5 mm ²
 3h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 3h*	0.35070.3H00		58 mm	220-240V / 50/60 Hz	Min: 4	20 m	1.5 mm ²

*Emergency pack for LED luminaires including Ni/Cd battery with 1h/3h back-up


*Gruppo di emergenza per apparecchi LED con batterie Ni/Cd autonomia 1h/3h.

For Mood range products in S sizes, the emergency pack will not pass through the product's cut-out so this accessory needs to be positioned remotely, no more than 5 m away from the product/
Per i prodotti della gamma Mood nelle dimensioni S, il gruppo di emergenza non può passare dal foro di incasso del prodotto; l'accessorio deve quindi essere posizionato in posizione remota ad una distanza di max 5m dal prodotto.

For Mood range products in S size, the emergency pack must be connected in series to at least four products/
Per i prodotti della gamma Mood nelle dimensioni S il gruppo di emergenza deve essere collegato ad almeno quattro prodotti in serie.

Installation and connection accessories/ Accessori di installazione e collegamento









Type	Code	Tech. specifications
 Description for series connection/ Accessorio per collegamento in serie	0.26070.0000	Max 60V/dc





M | Electrical Devices

Driver/ Alimentazioni







8,5 W POWER LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30420.0000	20		56 mm	198-264Vac 170-280Vdc / 0,50/60Hz	700	Max: 1	20 m	1.5 mm ²
On/Off	0.30041.0000	40		57 mm	100-240Vac / 50/60Hz	700	Min: 1 - Max: 4	20 m	1.5 mm ²
Phase-cut	T.30420.0000	12		45 mm	230-240Vac / 50/60Hz	700	Max: 1	20 m	1.5 mm ²
Phase-cut	T.30421.0000	32		57 mm	198-264Vac 176-264Vdc / 0,50/60Hz	700	Min: 1 - Max: 3	20 m	1.5 mm ²
Dimm 1-10V	V.30420.0000	20		56 mm	99-264Vac 170-280Vdc / 0,50/60Hz	700	Max: 1	20 m	1.5 mm ²
Dimm 1-10V	V.30421.0000	40		79 mm	99-264Vac 170-280Vdc / 0,50/60Hz	700	Min: 1 - Max: 4	20 m	1.5 mm ²
DALI	D.30420.0000	20		56 mm	99-264Vac 176-264Vdc / 0,50/60Hz	700	Max: 1	20 m	1.5 mm ²
DALI	D.30421.0000	50		82 mm	120-277Vac 120-250Vdc / 0,50/60Hz	700	Min: 1 - Max: 4	20 m	1.5 mm ²

6,5 W Warm Dimming COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
Dimm 1-10V	V.30349.0000	14		45 mm	198-264Vac / 0,50/60Hz	700	Max: 1	20 m	1.5 mm ²
DALI	D.30349.0000	14		45 mm	198-264Vac / 0,50/60Hz	700	Max: 1	20 m	1.5 mm ²

Other devices/ Altri dispositivi

Type	Code	Size (mm)	Cut-out	Tech. specifications	Connectable fixtures	Max.distance	Cable section
 Wireless bluetooth control device/ Dispositivo di controllo wireless bluetooth	0.26101.0000		45 mm	220-240V, 50-60Hz 0,6A for DALI drivers	Max: 1	-	1.5 mm ²
 1h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 1h*	0.35070.0000		58 mm	220-240V / 50/60 Hz	Min: 4	20 m	1.5 mm ²
 3h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 3h*	0.35070.3H00		58 mm	220-240V / 50/60 Hz	Min: 4	20 m	1.5 mm ²

*Emergency pack for LED luminaires including Ni/Cd battery with 1h/3h back-up

*Gruppo di emergenza per apparecchi LED con batterie Ni/Cd autonomia 1h/3h.


For Mood range products in M sizes, the emergency pack will not pass through the product's cut-out so this accessory needs to be positioned remotely, no more than 5 m away from the product/
Per i prodotti della gamma Mood nelle dimensioni M, il gruppo di emergenza non può passare dal foro di incasso del prodotto trimless; l'accessorio deve quindi essere posizionato in posizione remota ad una distanza di max 5m dal prodotto.

For Mood range products in M size, the emergency pack must be connected in series to at least four products/
Per i prodotti della gamma Mood nelle dimensioni M il gruppo di emergenza deve essere collegato ad almeno quattro prodotti in serie.

Per i prodotti della gamma Mood nelle dimensioni M il gruppo di emergenza deve essere collegato ad almeno quattro prodotti in serie.

Installation and connection accessories/ Accessori di installazione e collegamento





Type	Code	Tech. specifications
 Accessory for series connection/ Accessorio per collegamento in serie	0.26070.0000	Max 60V/dc







L | Electrical Devices

Driver/ Alimentazioni




12 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30412.0000	20		56 mm	198-264Vac 170-280Vdc / 0,50/60Hz	350	Max: 1	20m	1.5 mm ²
Phase-cut	T.30412.0000	20		52 mm	220-240Vac / 50/60Hz	350	Max: 1	20m	1.5 mm ²
Dimm 1-10V	V.30040.0000	33		45 mm	220-240Vac / 50/60Hz	350	Max: 1	20m	1.5 mm ²
DALI	D.30040.0000	33		45 mm	220-240Vac / 50/60Hz	350	Max: 1	20m	1.5 mm ²





17 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30400.0000	20		56 mm	198-264Vac 170-280Vdc / 0,50/60Hz	500	Max: 1	20m	1.5 mm ²
Phase-cut	T.30400.0000	22		52 mm	220-240Vac / 50/60Hz	500	Max: 1	20m	1.5 mm ²
Dimm 1-10V	V.30400.0000	20		45 mm	99-264Vac 170-280Vdc / 0,50/60Hz	500	Max: 1	20m	1.5 mm ²
DALI	D.30400.0000	20		56 mm	99-264Vac 176-264Vdc / 0,50/60Hz	500	Max: 1	20m	1.5 mm ²







12 W Warm Dimming COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
Dimm 1-10V	V.30040.0000	33		45 mm	220-240Vac / 50/60Hz	350	Max: 1	20m	1.5 mm ²
Phase-cut	T.30424.0000	18		45 mm	220-240Vac / 50/60Hz	350	Max: 1	20m	1.5 mm ²
DALI	D.30040.0000	33		45 mm	220-240Vac / 50/60Hz	350	Max: 1	20m	1.5 mm ²

16 W Phosphor LED Module

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30420.0000	20		56 mm	198-264Vac 170-280Vdc / 0,50/60Hz	700	Max: 1	20m	1.5 mm ²
Phase-cut	T.30421.0000	32		57 mm	198-264Vac 176-264Vdc / 0,50/60Hz	700	Max: 1	20m	1.5 mm ²
Dimm 1-10V	V.30420.0000	20		56 mm	99-264Vac 170-280Vdc / 0,50/60Hz	700	Max: 1	20m	1.5 mm ²
DALI	D.30420.0000	20		56 mm	99-264Vac 170-280Vdc / 0,50/60Hz	700	Max: 1	20m	1.5 mm ²


Other devices/ Altri dispositivi

Type	Code	Size (mm)	Cut-out	Tech. specifications	Connectable fixtures	Max.distance	Cable section
 Wireless bluetooth control device/ Dispositivo di controllo wireless bluetooth	0.26101.0000		45 mm	220-240V, 50-60Hz 0,6A for DALI drivers	Max: 1	-	1.5 mm ²
 1h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 1h*	0.35081.0000		106 mm	220-240V / 50/60 Hz	Max: 1	20m	1.5 mm ²
 3h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 3h*	0.35081.UK00		106 mm	220-240V / 50/60 Hz	Max: 1	20m	1.5 mm ²

*For LED fixtures (8,5-17W), Ni/Cd battery/Per apparecchi LED (8,5-17W), batterie Ni/Cd

Installation and connection accessories/ Accessori di installazione e collegamento





Type	Code	Tech. specifications
 Accessory for series connection/ Accessorio per collegamento in serie	0.26070.0000	Max 60V/dc






XL | Electrical Devices

Driver/
Alimentazioni



25 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30041.0000	40		57 mm	100-240Vac / 50/60Hz	700	Max: 1	20 m	1.5 mm ²
Phase-cut	T.30041.0000	36		57 mm	220-240Vac / 50/60Hz	700	Max: 1	20 m	1.5 mm ²
Dimm 1-10V	V.30041.0000	33		45 mm	220-240Vac / 50/60Hz	700	Max: 1	20 m	1.5 mm ²
DALI	D.30041.0000	32		70 mm	99-264Vac 176-264Vdc / 0,50/60Hz	700	Max: 1	20 m	1.5 mm ²





34 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30408.0000	38		52 mm	198-264Vac 176-264Vdc / 50/60Hz	950	Max: 1	20 m	1.5 mm ²
Dimm 1-10V	V.30408.0000	40		82 mm	99-264Vac 170-280Vdc / 0,50/60Hz	950	Max: 1	20 m	1.5 mm ²
DALI	D.30408.0000	40		82 mm	99-264Vac 170-280Vdc / 0,50/60Hz	950	Max: 1	20 m	1.5 mm ²





33 W Warm Dimming COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
Dimm 1-10V	V.30425.0000	45		60 mm	220-240Vac / 50/60Hz	900	Max: 1	20 m	1.5 mm ²
DALI	D.30425.0000	45		60 mm	220-240Vac / 50/60Hz	900	Max: 1	20 m	1.5 mm ²

22 W Phosphor LED Module




Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30041.0000	40		57 mm	100-240Vac / 50/60Hz	700	Max: 1	20 m	1.5 mm ²
Phase-cut	T.30041.0000	36		57 mm	220-240Vac / 50/60Hz	700	Max: 1	20 m	1.5 mm ²
Dimm 1-10V	V.30041.0000	33		45 mm	220-240Vac / 50/60Hz	700	Max: 1	20 m	1.5 mm ²
DALI	D.30041.0000	32		70 mm	99-264Vac 176-264Vdc / 0,50/60Hz	700	Max: 1	20 m	1.5 mm ²

34 W Phosphor LED Module

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30423.0000	40		57 mm	100-240Vac / 50/60Hz	1050	Max: 1	20 m	1.5 mm ²
Phase-cut	T.30409.0000	40		68 mm	220-240Vac / 50/60Hz	1050	Max: 1	20 m	1.5 mm ²
Dimm 1-10V	V.30409.0000	40		82 mm	99-264Vac 170-280Vdc / 0,50/60Hz	1050	Max: 1	20 m	1.5 mm ²
DALI	D.30409.0000	40		82 mm	99-264Vac 170-280Vdc / 0,50/60Hz	1050	Max: 1	20 m	1.5 mm ²

XL | Electrical Devices

Other devices/ Altri dispositivi

Type	Code	Size (mm)	Cut-out	Tech. specifications	Connectable fixtures	Max. distance	Cable section
•)) Wireless bluetooth control device/ Dispositivo di controllo wireless bluetooth	0.26101.0000		45 mm	220-240V, 50-60Hz 0,6A for DALI drivers	Max: 1	-	1.5 mm ²
⊕ 1h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 1h*	0.35081.0000		105 mm	220-240V / 50/60 Hz	Max: 1	20 m	1.5 mm ²
⊕ 3h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 3h*	0.35081.UK00		105 mm	220-240V / 50/60 Hz	Max: 1	20 m	1.5 mm ²

For LED fixtures (17-34W), Ni/Cd battery/Per apparecchi LED (17-34W), batterie Ni/Cd

Installation and connection accessories/ Accessori di installazione e collegamento

Type	Code	Tech. specifications
⊕ Accessory for series connection/ Accessorio per collegamento in serie	0.26070.0000	Max 60V/dc

