

The
illumination
collective

Our bright new ideas

News catalogue 2016
English

Reggiani

Ciao!

**We are a forward
thinking community of
lighting experts bringing
cutting edge technical
performance, and
pioneering ideas to our
clients.**

**We are the
illumination collective.**

02 **Mood**

22 **Yori Linear**

28 **Yori Surface/Pendant**

36 **Yori Wall**

42 **Zoom+Lightshaper**


48 **Trybeca Surface/Pendant**

54 **Cells**

Mood

- **Mood Adjustable**
- **Mood Fixed**
- **Mood Wall Washer**

Combining style and substance, our invisible architectural recessed downlights are ideal for illuminating high-end interiors.

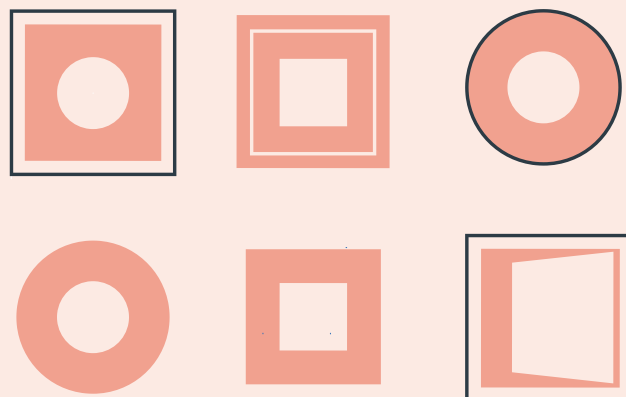




Mood Adjustable

Our adjustable product creates brilliant accent lighting for different environments. The lighting output and aesthetics are of a high standard, featuring multiple optics and a full range of accessories. They are available in various sizes: S, M, L, XL.

Availability: L and XL versions from June 2016 (For more information consult factory)

IP: 20 (IP44 with accessory)

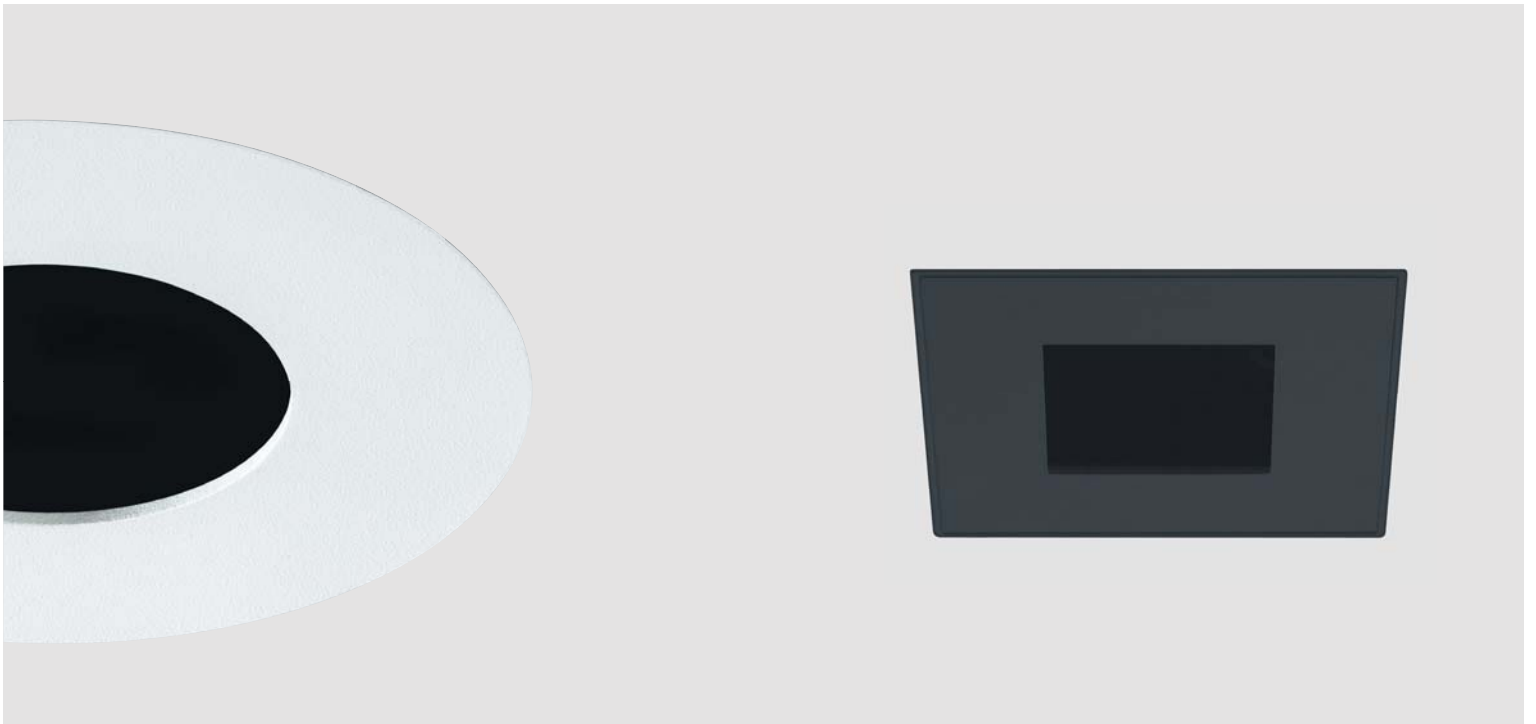

Finishes:Embossed
matt white

12

Embossed
matt black

31

On request:

Chrome
Gold
Silver
Copper
Royal matt white
Royal matt black
Primer

**Plate shapes:**Round
FlushRound
ConeRound
Curve
(accessory)Square
FlushSquare
PyramidSquare
Curve
(accessory)**Shapes:**Round
Visible trimRound
TrimlessSquare
Visible trimSquare
Trimless**Optics:**Very
narrow


Narrow



Medium



Wide

Adjustability:Horizontal
axisVertical
axis

35°: S, XL versions
40°: M, L versions

Accessories:


Honeycomb

Holder for coloured
and selective filters**Plate accessories:**IP44
GlassIP44
Elliptical
glassIP44
Diffusive
lensIP44
Opal
lensIP44
Wall washer*
lens


*Available for:
M, L, XL versions

Technical features:

S





Trimless





3.5W
315-375lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off, Dali, Dimm 1-10V, Phase-cut,
Bluetooth

M

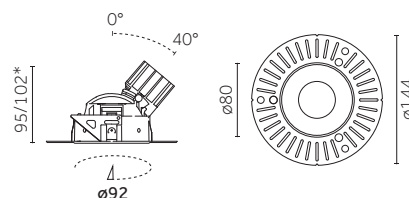

8.5W
725-875lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off, Dali, Dimm 1-10V, Phase-cut,
Bluetooth

L

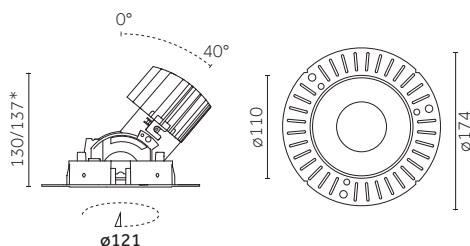
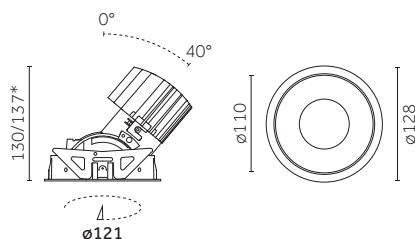


12W, 17W
1320-2265lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off, Dali, Dimm 1-10V,
Phase-cut, Bluetooth

Warm Dimming:
13W, 100-1000lm, 2000K-3000K,
CRI > 95
Dali, Dimm 1-10V, Phase-cut,
Bluetooth

Phosphor LED Module:
16W, 1000lm
2700K, 3000K, 4000K / SDCM < 2
CRI > 95
On/Off, Dali, Dimm 1-10V, Phase-cut,
Bluetooth

XL

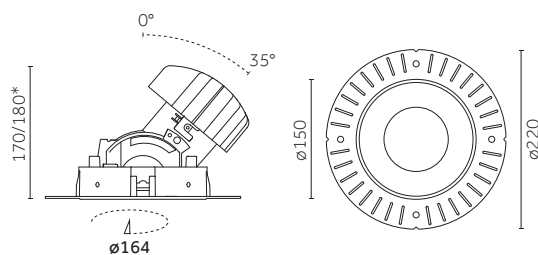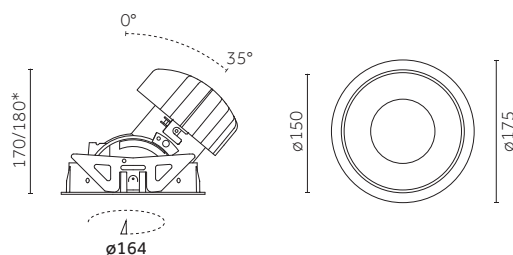

25W, 34W
2615-4150lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off, Dali, Dimm 1-10V,
Phase-cut, Bluetooth

Warm Dimming:
34W, 200-2850lm,
2000K-3000K, CRI > 95
Dali, Dimm 1-10V, Phase-cut,
Bluetooth

Phosphor LED Module:
22W, 2000lm
34W, 3000lm
2700K, 3000K, 4000K / SDCM < 2
CRI > 95
On/Off, Dali, Dimm 1-10V, Phase-cut,
Bluetooth



- Watt and lumen data refer to nominal values of the LED source, for photometric data visit reggiani.net.

- Remote driver not included to be ordered separately. For driver compatibility, distance and minimum-maximum numbers of fixtures to be connected consult factory or visit reggiani.net.

*For version with cone, pyramid and curve plates.



Technical features:

S





3.5W
315-375lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off, Dali, Dimm 1-10V, Phase-cut,
Bluetooth

M

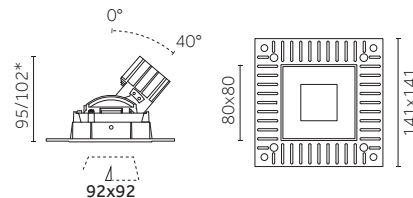

8.5W
725-875lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off, Dali, Dimm 1-10V, Phase-cut,
Bluetooth

L

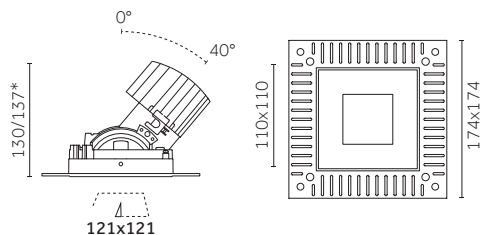
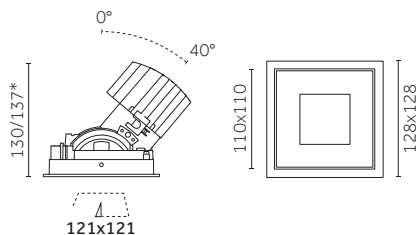


12W, 17W
1320-2265lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off, Dali, Dimm 1-10V, Phase-cut,
Bluetooth

Warm Dimming:
13W, 100-1000lm, 2000K-3000K,
CRI > 95
Dali, Dimm 1-10V, Phase-cut,
Bluetooth

Phosphor LED Module:
16W, 1000lm
2700K, 3000K, 4000K / SDCM < 2
CRI > 95
On/Off, Dali, Dimm 1-10V, Phase-cut,
Bluetooth

XL

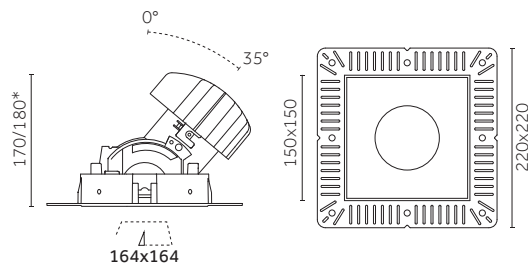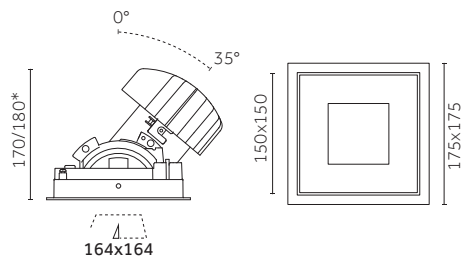

25W, 34W
2615-4150lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off, Dali, Dimm 1-10V,
Phase-cut, Bluetooth

Warm Dimming:
34W, 200-2850lm,
2000K-3000K, CRI > 95
Dali, Dimm 1-10V, Phase-cut,
Bluetooth



Phosphor LED Module:
22W, 2000lm
34W, 3000lm
2700K, 3000K, 4000K / SDCM < 2
CRI > 95
On/Off, Dali, Dimm 1-10V, Phase-cut,
Bluetooth

- Watt and lumen data refer to nominal values of the LED source, for photometric data visit reggiani.net.


- Remote driver not included to be ordered separately. For driver compatibility, distance and minimum-maximum numbers of fixtures to be connected consult factory or visit reggiani.net.

*For version with cone, pyramid and curve plates.


Sizes:

S	M	L	XL
			
ø50	ø80	ø110	ø150
			
50x50	80x80	110x110	150x150

Adjustability:




Horizontal axis
(358°)



Vertical axis
35°: S, XL versions
40°: M, L versions

Different shapes, plates and finishes

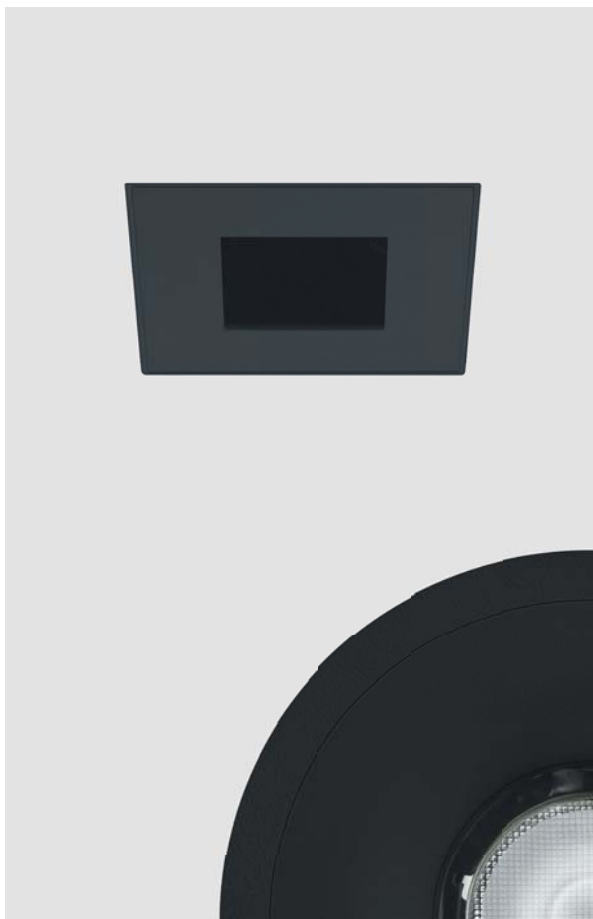

New design optics for very narrow, medium and wide beam angles



Easy lock and adjustability system, no tools required

Adjustability graduated scale

Mood Fixed

Our wide range of fixed Mood comes in five sizes, from 30mm to 150mm. The opal diffuser makes the light soft and the reflectors can change the beam angles, providing flexibility. It is ideal for residential and hospitality applications and IP44 certification provides durability and protection.

Availability: L and XL versions from June 2016 (For more information consult factory)

IP: 44



Finishes:Embossed
matt white

12

Embossed
matt black

31

Embossed
matt black/Gold

T7

Embossed
matt white/Copper

T9

On request:

Chrome
 Gold
 Silver
 Copper
 Royal matt white
 Royal matt black
 Primer

**Shapes:**Round
Visible trimRound
TrimlessSquare
Visible trimSquare
Trimless**Optics:**Very
Narrow

Narrow



Medium




Wide

Accessories:Full
domeHollow
domeHollow
cylinder

On request for XS,
S and M versions.



Technical features:

XS





2.5W
155-191lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI>80, CRI>90
On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth

S





3.5W
315-375lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI>80, CRI>90
On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth

M

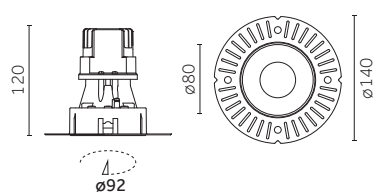

8.5W
725-875lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI>80, CRI>90
On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth

L

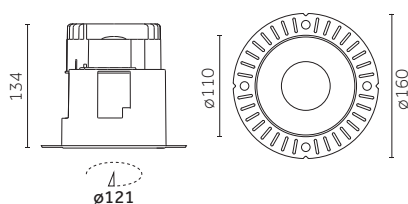
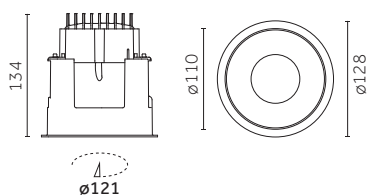


12W, 17W
1320-2265lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI>80, CRI>90
On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth

Warm Dimming:
13W, 100-1000lm, 2000K-3000K, CRI>95
Dali, Dimm 1-10V, Phase-cut, Bluetooth

Phosphor LED Module:
16W, 1000lm
2700K, 3000K, 4000K / SDCM < 2
CRI>95
On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth

XL

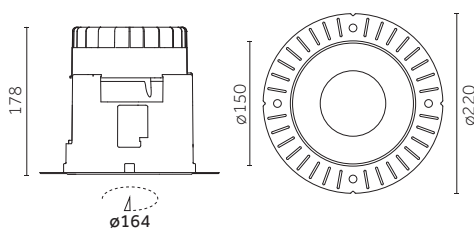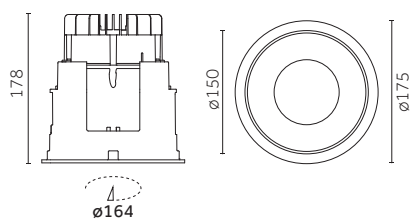


25W, 34W
2615-4150lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI>80, CRI>90
On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth

Warm Dimming:
34W, 200-2850lm, 2000K-3000K, CRI>95
Dali, Dimm 1-10V, Phase-cut, Bluetooth


Phosphor LED Module:
22W, 2000lm
34W, 3000lm
2700K, 3000K, 4000K / SDCM < 2
CRI>95
On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth

Technical features:

XS





Trimless





2.5W
155-191lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off, Dali, Dimm 1-10V, Phase-cut,
Bluetooth

S





3.5W
315-375lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off, Dali, Dimm 1-10V, Phase-cut,
Bluetooth

M

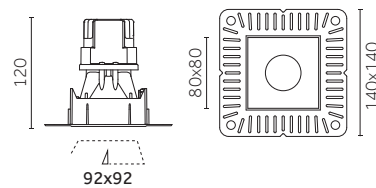

8.5W
725-875lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off, Dali, Dimm 1-10V, Phase-cut,
Bluetooth

L

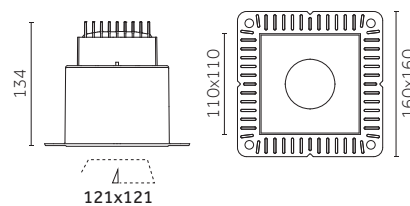
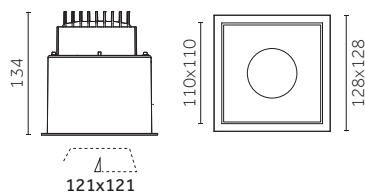


12W, 17W
1320-2265lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off, Dali, Dimm 1-10V, Phase-cut,
Bluetooth

Warm Dimming:
13W, 100-1000lm, 2000K-3000K, CRI > 95
Dali, Dimm 1-10V, Phase-cut, Bluetooth

Phosphor LED Module:
16W, 1000lm
2700K, 3000K, 4000K / SDCM < 2
CRI > 95
On/Off, Dali, Dimm 1-10V, Phase-cut,
Bluetooth

XL

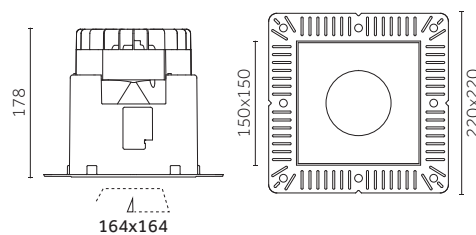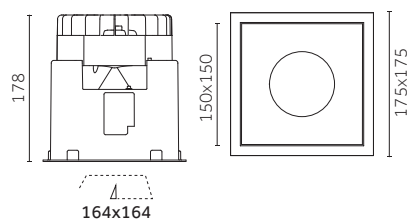

25W, 34W
2615-4150lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off, Dali, Dimm 1-10V,
Phase-cut, Bluetooth

Warm Dimming:
34W, 200-2850lm, 2000K-3000K, CRI > 95
Dali, Dimm 1-10V, Phase-cut, Bluetooth

Phosphor LED Module:
22W, 2000lm
34W, 3000lm
2700K, 3000K, 4000K / SDCM < 2
CRI > 95
On/Off, Dali, Dimm 1-10V, Phase-cut,
Bluetooth

Sizes:

XS	S	M	L	XL
				
ø30	ø50	ø80	ø110	ø150
				
30x30	50x50	80x80	110x110	150x150

Accessories:





Full dome



Hollow dome





Hollow cylinder


High performance compact heat sink



Recessed LED source for excellent visual comfort



High quality of finishes and minimal design

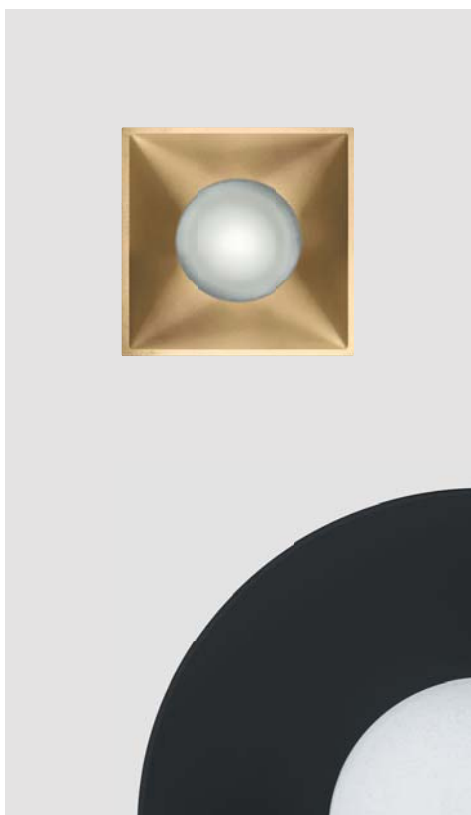

Silicon gasket for IP44 protection

Diffusive dome for soft light effect



Mood Wall Washer

Our ultimate solution for wall wash illumination with both circular and square shapes available. We offer four sizes of minimal recessed downlights, scaling from 50mm to 150mm, and two different types of flush and drop plates.

Availability: L and XL versions from June 2016 (For more information consult factory)

IP: 44



Finishes:Embossed
matt white

12

Embossed
matt black

31

On request:


Chrome
Gold
Silver
Copper
Royal matt white
Royal matt black
Primer

**Plate shape:**Round
FlushRound
DropSquare
FlushSquare
DropRound flush
Elliptical lens
(accessory)Round drop
Elliptical lens
(accessory)Square flush
Elliptical lens
(accessory)Square drop
Elliptical lens
(accessory)**Shapes:**Round
Visible trimRound
TrimlessSquare
Visible trimSquare
Trimless**Optics:**Wall
washer*


*Different distributions available in accordance to primary and secondary optics selection.

Adjustability:


Steps




1



2



3



4


3 steps: S,M,L versions
4 steps: XL version (40°)

Technical features:


	Visible trim	Trimless	
S			3.5W 315-375lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth
M			8.5W 725-875lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth
L			12W, 17W 1320-2265lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth Warm Dimming: 13W, 100-1000lm, 2000K-3000K, CRI > 95 Dali, Dimm 1-10V, Phase-cut, Bluetooth Phosphor LED Module: 16W, 1000lm 2700K, 3000K, 4000K / SDCM < 2 CRI > 95 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth
XL			25W, 34W 2615-4150lm / L70 50,000h 2700K, 3000K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth Warm Dimming: 34W, 200-2850lm, 2000K-3000K, CRI > 95 Dali, Dimm 1-10V, Phase-cut, Bluetooth Phosphor LED Module: 22W, 2000lm 34W, 3000lm 2700K, 3000K, 4000K / SDCM < 2 CRI > 95 On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth

Technical features:

S





Trimless





3.5W
315-375lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth

M

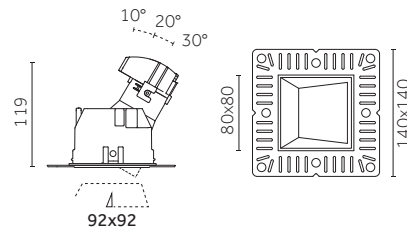

8.5W
725-875lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth

L

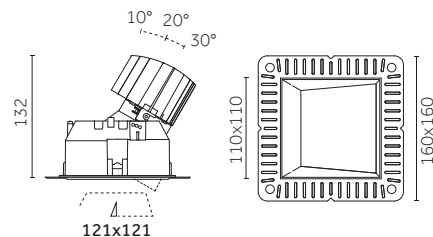
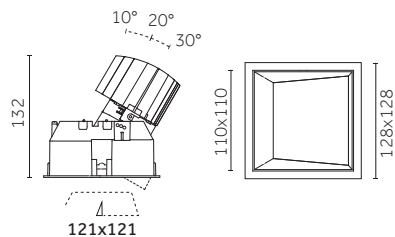


12W, 17W
1320-2265lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth

Warm Dimming:
13W, 100-1000lm, 2000K-3000K, CRI > 95
Dali, Dimm 1-10V, Phase-cut, Bluetooth

Phosphor LED Module:
16W, 1000lm
2700K, 3000K, 4000K / SDCM < 2
CRI > 95
On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth

XL

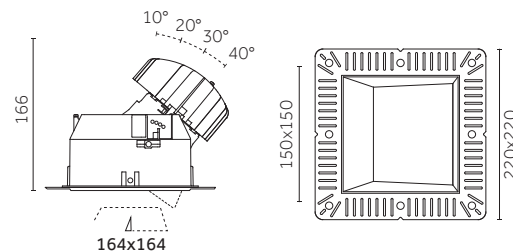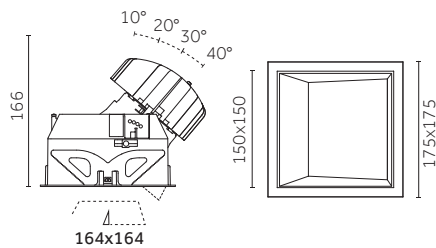

25W, 34W
2615-4150lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth


Warm Dimming:
34W, 200-2850lm, 2000K-3000K, CRI > 95
Dali, Dimm 1-10V, Phase-cut, Bluetooth

Phosphor LED Module:
22W, 2000lm
34W, 3000lm
2700K, 3000K, 4000K / SDCM < 2
CRI > 95
On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth

Sizes:

S	M	L	XL
			
ø50	ø80	ø110	ø150
			
50x50	80x80	110x110	150x150

Adjustability:



10° 20° 30°

3 steps: S,M,L versions
4 steps: XL version (40°)



1

2

3

4

High performance diffuser



Minimal design


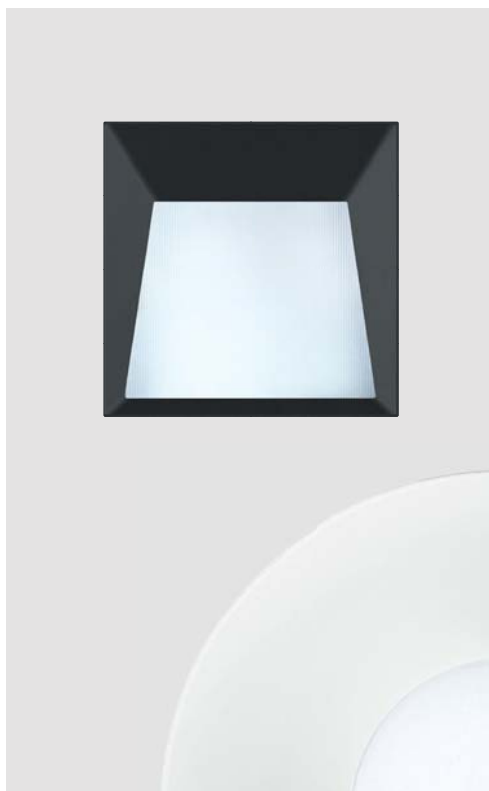


Plate version: drop



Plate version: flush

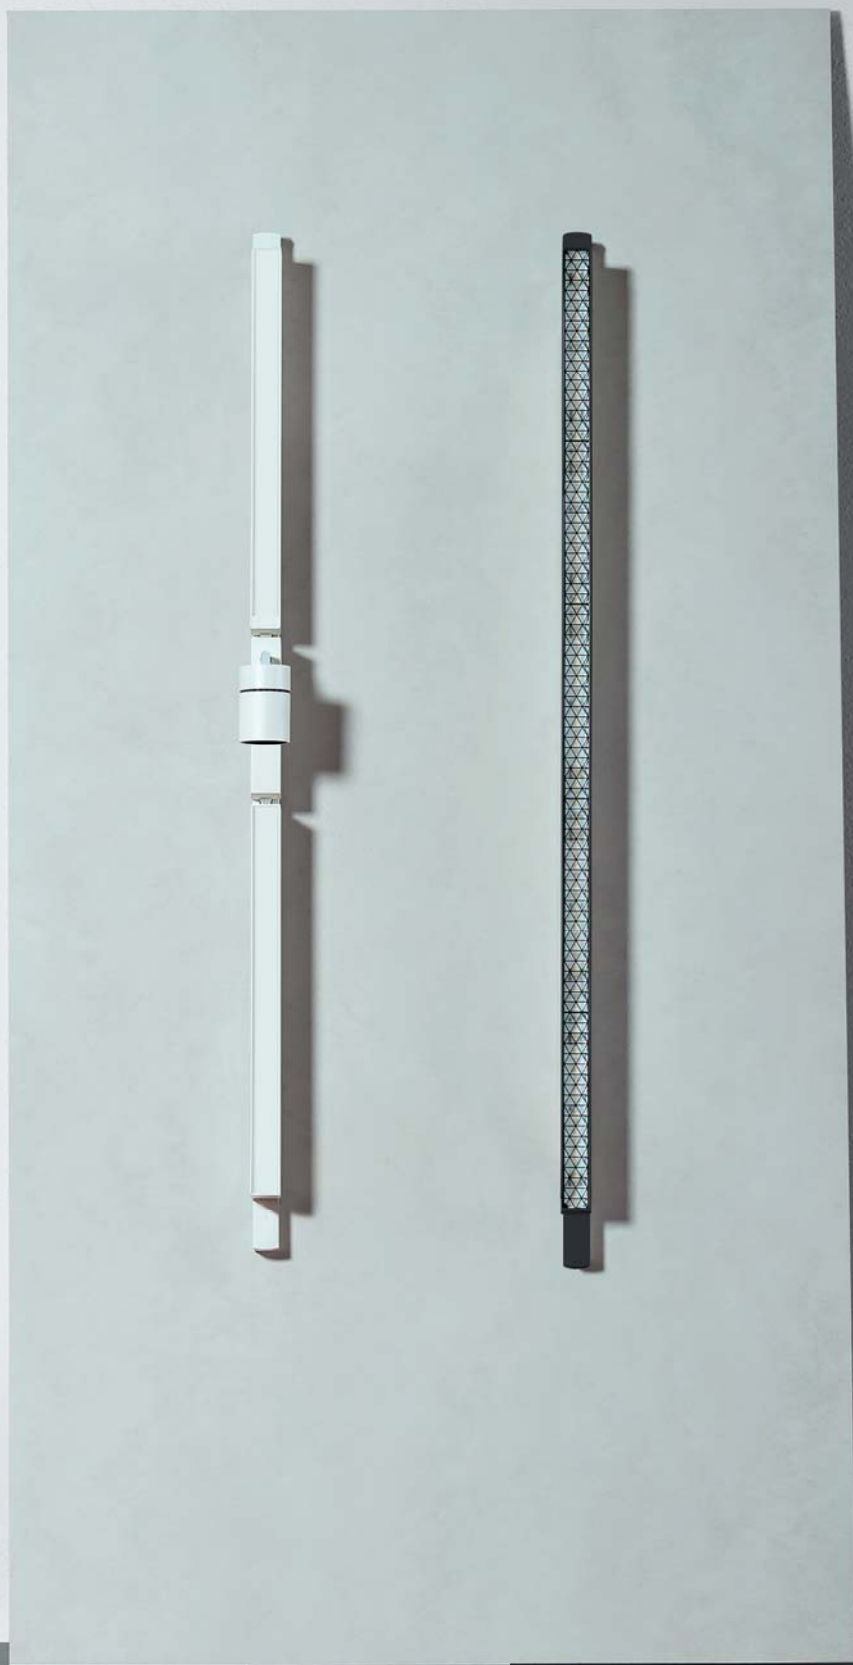


Yori Linear

Yori Linear lets you create comfortable diffusive illumination that complements accent lighting. We've made this linear solution suitable for track-mounting application to integrate with the profile of the Yori projector. With five different diffusers and a variety of lengths for a single, connected or continuous line of light, the possibilities are endless.

IP: 20



Finishes:Embossed
matt white

12

Embossed
matt black

31

Product range:

460 mm



920 mm



1380 mm

System:

Single



Continuous line

**Versions:**


Opal




Prismatic

Louver
(UGR <19)Opal
U-Shape


Ribbed

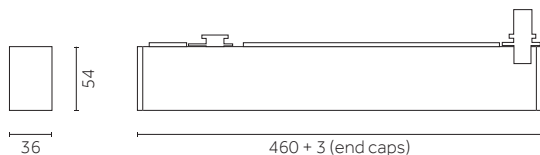Technical features:**460 mm**


13W
1430-1980lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI>80, CRI>90
On/Off, Dimm*

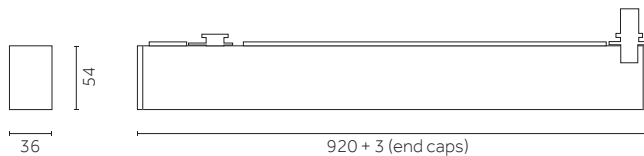920 mm

26W
2760-3815lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI>80, CRI>90
On/Off, Dimm*

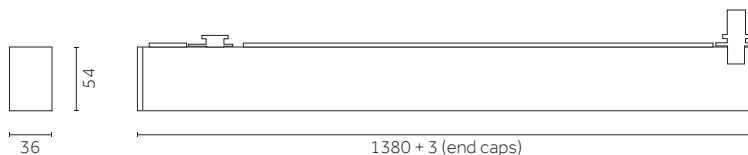1380 mm

38W
4315-5785lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI>80, CRI>90
On/Off, Dimm*

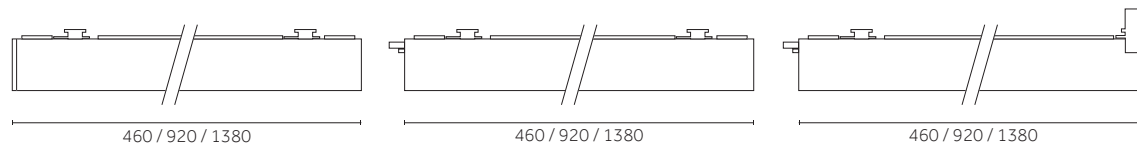
Continuous line:

Five different diffusers



Integration with Yori projector

Yori Surface/ Pendant

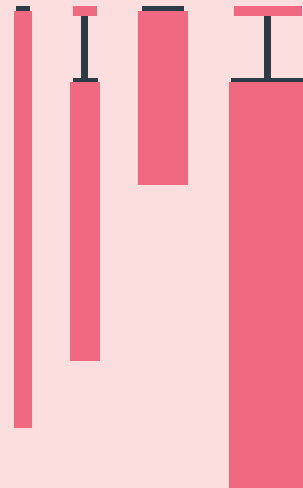

Versatile and streamlined, we bring you a new interior lighting range with an array of wattages, finishes, sizes and accessories, for infinite design possibilities.

Yori System:






Yori Surface/Pendant

This versatile new interior illumination range is inspired by the streamlined design of the Yori Projector System. We have brought together simplicity and excellent technical performance in a wide variety of wattages, finishes, sizes and accessories, enabling you to create a unique lighting solution.

IP: 20

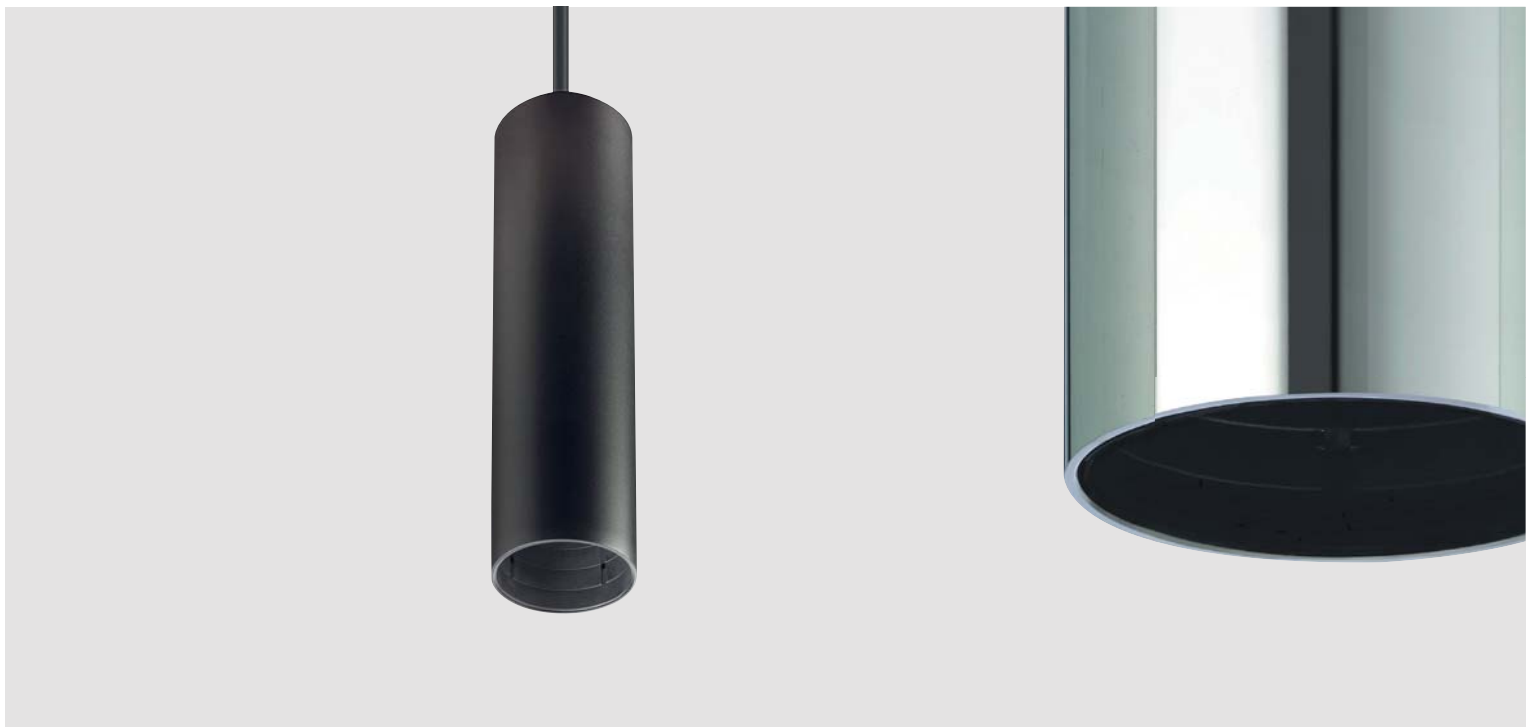

Finishes:Embossed
matt white

12

Embossed
matt black

31

Royal
matt white

C0

Royal
matt black

B0

Brushed
copper

N0

Brushed
brass

D0

Brushed
gold

E0

Antiqued
brushed
bronze

L0

Chrome
plated

O1

Brushed
aluminium

M0

Versions:

Surface



Pendant

Optics:Very
Narrow

Narrow



Medium



Wide

**Yori Pendant
mounting options:**Surface
baseMounting
accessories

Semi-recessed



Trimless

Track
adapter**Accessories:**

Honeycomb*

Cross
louver*Elliptical
lens*Diffusive
lens*Yori Pendant
mounting
accessoriesOpal
cylinderColoured
cables
(on request)*Available for version with
diameter of 60 and 95mm.

Technical features:

Surface

Ø 22 mm



Ø33

cut-out required



2W
156-195lm / L70 50,000h
2700K, 3000K, 4000K
SDCM < 3
CRI > 80, CRI > 90
On/Off (remote driver)*



2W
156-195lm / L70 50,000h
2700K, 3000K, 4000K
SDCM < 3
CRI > 80, CRI > 90
On/Off (remote driver)*



2W
156-195lm / L70 50,000h
2700K, 3000K, 4000K
SDCM < 3
CRI > 80, CRI > 90
On/Off (remote driver)*

Ø 35 mm



2W
141-203lm / L70 50,000h
2700K, 3000K, 4000K
SDCM < 3
CRI > 80, CRI > 90
On/Off*

Ø 60 mm



3W
180-197lm / L70 50,000h
2700K, 3000K, 4000K
SDCM < 3
CRI > 80, CRI > 90
On/Off*



7W
633-907lm / L70 50,000h
2700K, 3000K, 4000K
SDCM < 3
CRI > 80, CRI > 90
On/Off*



10W
873-1166lm / L70 50,000h
2700K, 3000K, 4000K
SDCM < 3
CRI > 80, CRI > 90
On/Off, Dali, Dimm 1-10V,
Phase-cut, Bluetooth**

Warm Dimming version:
7W, 100-500lm,
2000K-3000K, CRI > 95
Dali, Dimm 1-10V,
Phase-cut, Bluetooth**

Ø 95 mm



13W
1148-1661lm
2700K, 3000K, 4000K
SDCM < 3
CRI > 80, CRI > 90
On/Off, Dali, Dimm 1-10V,
Phase-cut, Bluetooth**



18W
1631-2355lm / L70 50,000h
2700K, 3000K, 4000K
SDCM < 3
CRI > 80, CRI > 90
On/Off, Dali, Dimm 1-10V,
Phase-cut, Bluetooth**






25W
2337-3205lm / L70 50,000h
2700K, 3000K, 4000K
SDCM < 3
CRI > 80, CRI > 90
On/Off, Dali, Dimm 1-10V,
Phase-cut, Bluetooth**

Warm Dimming version:
25W,
200-2150lm,
2000K-3000K, CRI > 95
Dali, Dimm 1-10V,
Phase-cut, Bluetooth**



Technical features:

Pendant





Ø 22 mm

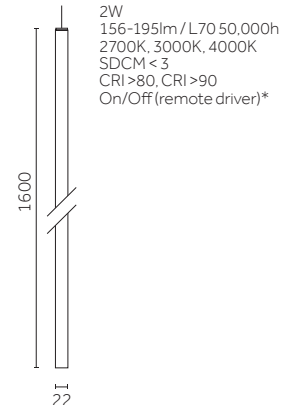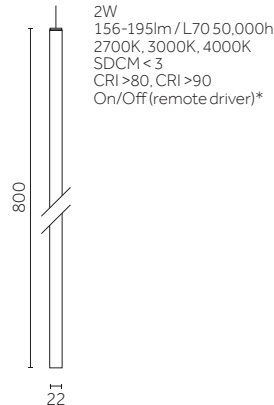





Ø 35 mm



Ø 60 mm

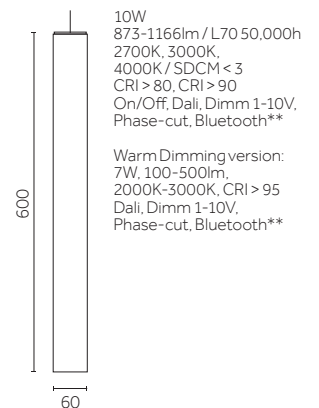

Ø 95 mm

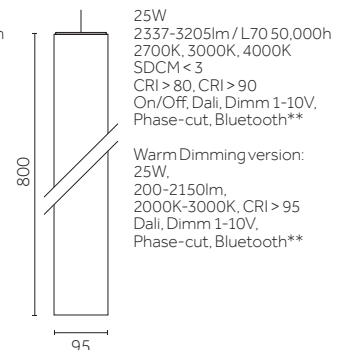

Opal cylinders range:




●
Full
version





○
Hollow
version


Ø 22 mm




Ø 35 mm



Ø 60 mm



Ø 95 mm






Yori Pendant mounting versions: surface, trimless

Different finishes



Four different diameters

Yori Wall

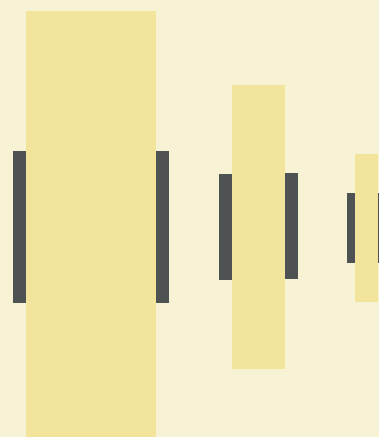

A comprehensive, flexible range of wall mounted solutions to transform residential and hospitality interiors.

Yori System:





Yori Wall

Transform residential and hospitality interiors with this comprehensive range of wall mounted architectural solutions. Yori Wall gives you a huge degree of flexibility: beyond the three basic sizes there are different high-end finishes, interchangeable optics and direct, indirect and direct-indirect light versions. The choice is all yours.

Availability: July 2016 (For more information consult factory)

IP: 20



Finishes:

Other finishes
on request

Embossed
matt white

12

Embossed
matt black

31

Royal
matt white

C0

Royal
matt black

B0

Brushed
bronze

T1

Brushed
gold

E0

Chrome
plated

O1

Brushed
aluminium

M0

Versions:

Direct light



Direct/Indirect light

Optics:

Narrow



Medium



Wide

Accessories:

Honeycomb*



Cross
Louver*



Elliptical
lens*



Diffusive
lens*




Opal
cylinder

*Available for version with
diameter of 60 and 95mm.


Technical features:

Ø 35 mm

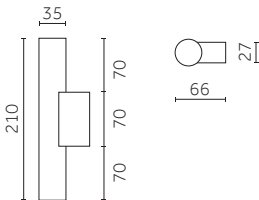


W*
lm*
2700K, 3000K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off**

Ø 60 mm

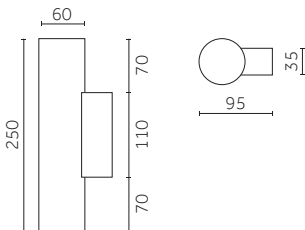

W*
lm*
2700K, 3000K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off**


Ø 95 mm

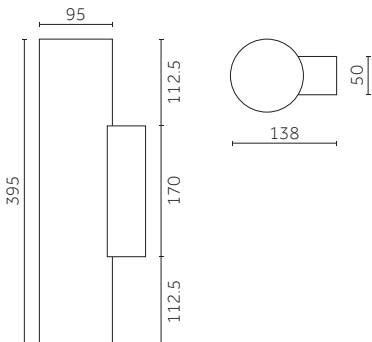

W*
lm*
2700K, 3000K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off**

* Watt e lumen data available from May 2016. **Dali, Dimm 1-10V, Phase-cut and Bluetooth control options available on request.

Minimal design

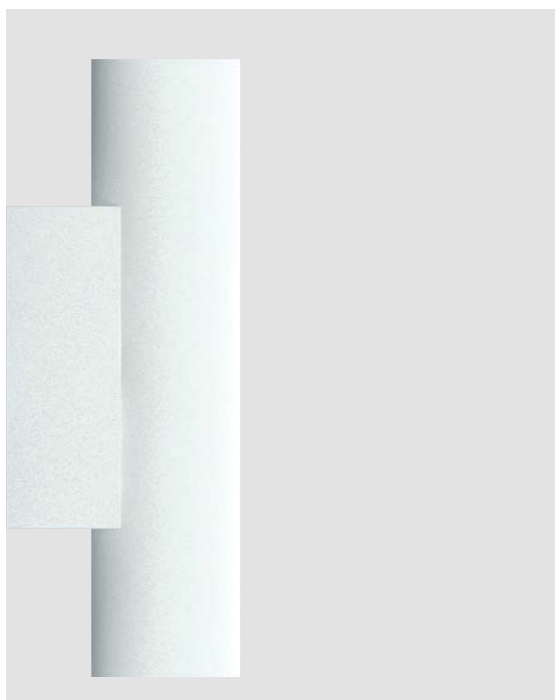

Direct and indirect emission



Three different diameters

Zoom+Lightshaper

A bold advance in lighting that delivers an easily adjustable light beam, shape dimensions and sharpness in either square and round light frames.





Zoom+Lightshaper

A bold advance in lighting, Zoom+Lightshaper combines high performance and flexibility. Thanks to the five lenses positioned in the aluminium body, the light beam (Zoom), the dimension of the shapes (Diaphragm) and their sharpness (Focus) are all easily adjustable. We have designed Zoom+Lightshaper to integrate perfectly with the Yori projector, and offer both square and round light frames.



Finishes:Embossed
matt black


31

Embossed
matt white

12

Functions:

Zoom



Focus



Diaphragm

**Light shapes:****Designed for:**Yori
Surface

- 13W
- 22W
- 30W
- Warm Dimming 30W


Yori
Track

- 13W
- 22W
- 30W
- Warm Dimming 30W
- Dimmer on board 30W



Accessories:Coloured
FiltersElliptical
lensGobo
(on request)

Technical features:


Zoom+Lightshaper



Zoom+Lightshaper with Yori Track

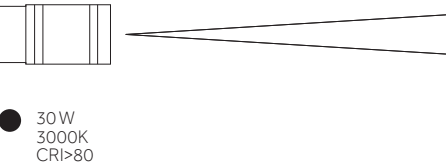

	●		●		●		●		●		●	
Dist. (m)	Ø (m)	E _m (lux)	Ø (m)	E _m (lux)	Ø (m)	E _m (lux)	Ø (m)	E _m (lux)	Ø (m)	E _m (lux)	Ø (m)	E _m (lux)
1	0.08	15377	0.13	14751	0.19	12391	0.23	5758	0.28	3847	0.34	1567
2	0.17	3844	0.27	3688	0.38	3098	0.46	1439	0.56	962	0.68	392
3	0.25	1709	0.40	1639	0.57	1377	0.69	640	0.84	427	1.01	174
4	0.33	961	0.54	922	0.75	774	0.92	360	1.12	240	1.35	98
5	0.42	615	0.67	590	0.94	496	1.15	230	1.40	154	1.69	63

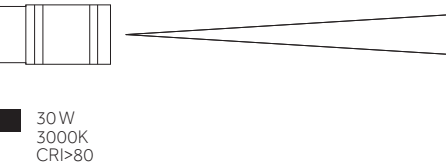

	■		■		■	
Dist. (m)	m	E _m (lux)	m	E _m (lux)	m	E _m (lux)
1	0.08	4819	0.20	4059	0.32	1670
2	0.16	1205	0.40	1015	0.63	418
3	0.24	535	0.61	451	0.95	186
4	0.32	301	0.81	254	1.26	104
5	0.40	193	1.01	162	1.58	67

- Photometric data refers to growing diaphragm (round frames) and framing blades (square frames) apertures with a contextual use of Zoom function to maximize the illuminance E_m (lux).


Version with dimmer on board



Precision and performance

Trybeca Surface/ Pendant

Transform interiors through diffuse lighting using our surface and suspended lighting solutions, based on the clean design of two simple shapes.

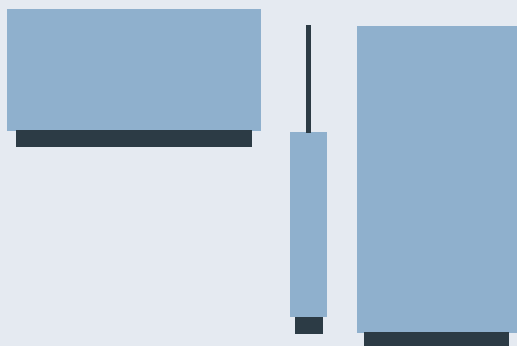

Trybeca System:






Trybeca Surface/Pendant

Transform interiors with diffuse lighting – Trybeca is a range of surface and suspended lighting solutions, based on the clean design of two simple shapes, round and square. Trybeca Surface fuses high performance with the flexibility of three different diffuser positions in a single solution, bringing the smooth effect of high quality diffuser to interior. And with four different sizes you can tailor this solution to complement the scale and ceiling height of the interior you're designing.

IP: 20

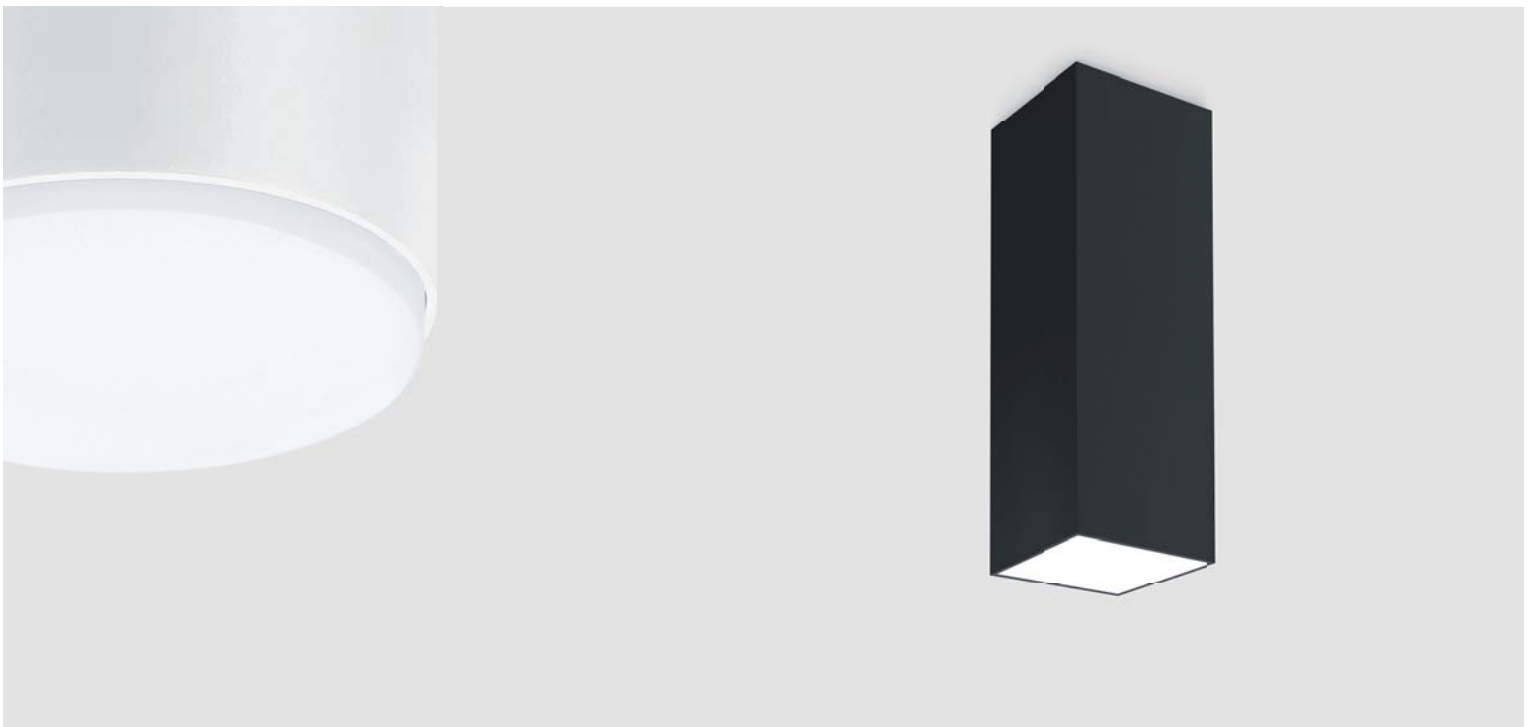

Finishes:Embossed
matt white

12

Embossed
matt black

31

Embossed
matt white

12

Embossed
matt black

31

Shapes:

Square



Round

Diffuser positions:

Recessed




Flush



Drop



Each product includes three different
spacers for flush, recessed or drop diffuser
position.

Accessories:Black
TigeWhite
Tige

Available for round and square versions:
38, 75, 150 mm.
Length: up to 1500 mm.
Custom lenght on request.

Fabric
Red
Cable

Available for round versions: 38, 75, 150 mm.
Length: up to 1500 mm.
Custom lenght on request.
Black or white cable on request.

Technical features:

38 mm

- ∅ 44
- 44x44



3W
266-375lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off*

75 mm

- ∅ 81
- 81x81



8W
637-975lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off*




8W
637-975lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth**

Warm Dimming version:
7W, 100-500lm, 2000K-3000K, CRI > 95
Dali, Dimm 1-10V, Phase-cut, Bluetooth**

150 mm

- ∅ 158
- 158x158




24W
1637-2565lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth**

Warm Dimming version:
25W, 200-2150lm, 2000K-3000K, CRI > 95
Dali, Dimm 1-10V, Phase-cut, Bluetooth**

300 mm

- ∅ 340
- 333x333



35W
3419-4161lm / L70 50,000h
2700K, 3000K, 4000K / SDCM < 3
CRI > 80, CRI > 90
On/Off, Dali, Dimm 1-10V, Phase-cut, Bluetooth**

Diffuser positions:



	38	75	150	300
Recessed	-15	-15	-15	-24
Flush	0	0	0	0
Drop	15	24	24	24

- Watt and lumen data refer to nominal values of the LED source, for photometric data visit reggiani.net. *Dali, Dimm 1-10V, Phase-cut, Bluetooth available on request. **For Bluetooth compatibility consult factory or visit reggiani.net.

Wide range of sizes




Pendant version with red fabric cable



Super Drop diffuser on request,
available for recessed version

Cells

Design by: Speirs + Major

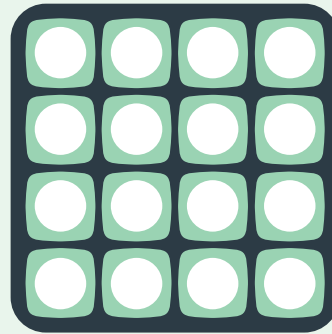

Bringing quality light to urban contexts with a brand new modular solution inspired by nature.






Cells

Inspired by the cellular eye structure of a dragonfly, we have created Cells as an urban lighting solution designed to be installed as single or connected multiple modules. Our advanced control optics give you a wide choice of functionality, from general illumination to bespoke configurations, making CELLS ideal for both architectural and technical applications, indoors and out. The modules may be surface and recessed mounted on ceilings and walls, and you can choose from a wide range of colours and finishes for different locations. We envisage our Cells bringing light to an array of urban contexts, including exterior pathways, private and public facilities, parking lots and buildings.

IK: 10, IP: 66

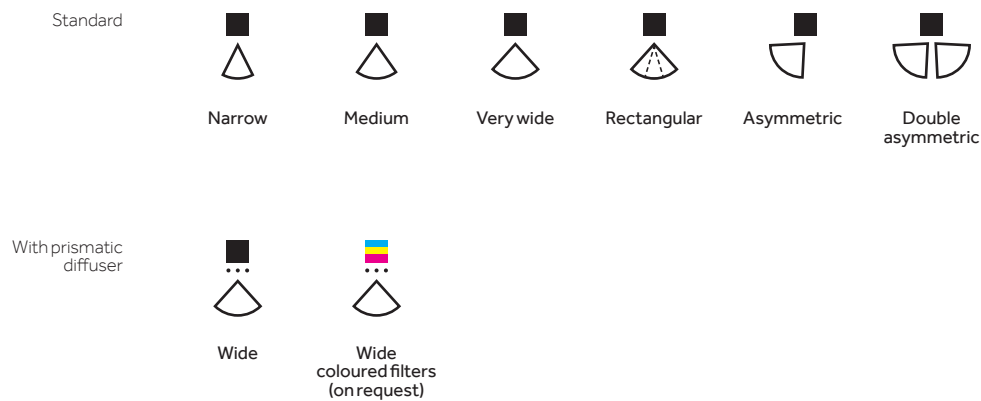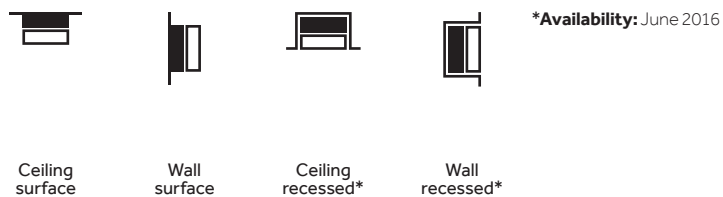


Configuration:**Optics:****Fixing option:**

Connected modules

Connector (accessory) to be ordered separately.

Technical features:


201x201mm

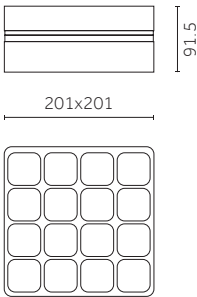

18W
2150~2300lm / L70 50,000h
3000K, 4000K / SDCM < 3
CRI > 80,
On/Off, Dali, Dimm 1-10V, Phase-cut,
Bluetooth*


3h emergency version available

Optical configuration:

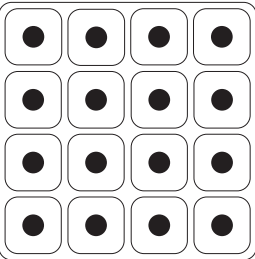


16 clip-on collimating reflectors that can be configured in different ways. Standard light distribution versions are available: narrow, medium, wide, asymmetric, rectangular, double asymmetric and very wide with opal diffuser.


CEILING




Optics:
Asymmetric,
Rectangular or Very wide.
or
Diffuser:
Opal



Optics:
Narrow or Medium or Wide
or Rectangular.




Optics:
Asymmetric




Optics:
Double asymmetric


WALL




Optics:
Asymmetric,
Rectangular or Very wide.
or
Diffuser:
Opal



Optics:
Asymmetric



Optics:
Asymmetric




Optics:
Double asymmetric

- Watt and lumen data refer to nominal values of the LED source, for photometric data visit reggiani.net.
*For Bluetooth compatibility consult factory or visit reggiani.net.

LED sources placed in recessed position to maximize visual comfort



Engineered optics to minimise light pollution and spillage of light

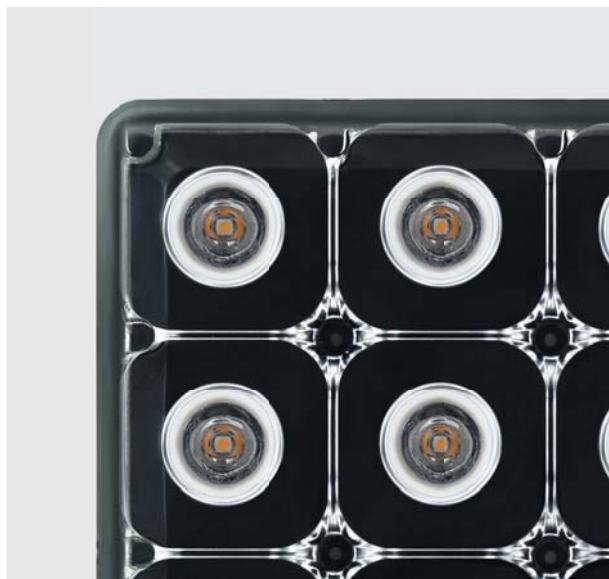

Pop Finishes

IK10 shock resistant and high transmittance diffuser

High performance metalized collimating reflectors

Coloured plastic plates

Aluminium plate that houses the LED array

Hard robust die-cast aluminium body for electronic components





Worldwide contacts

Italy

Reggiani Spa Illuminazione

Viale Monza 16 P.O. Box 99
20845 Sovico (MB), Italy
T. (+39) 039 20711
F. (+39) 039 2071999
contact@reggiani.net

United Kingdom

Reggiani Ltd

12 Chester Road
Borehamwood
Herts, WD6 1LT - UK
T. (+44) 0208 236 3000
F. (+44) 0208 236 3099
reggiani@reggiani.co.uk

USA

Reggiani Lighting USA, inc.

372 Starke Road
Carlstadt NJ 07072, USA
T. (+1) 201 372 1717
F. (+1) 201 372 1616
info@reggianiusa.net
www.reggianiusa.com

China

Reggiani Ningbo ITG Lighting co. Ltd

Shenjia Village - Qiurai Town - Yinzhou
315010 Ningbo, China
T. (+86) 574 88418655 - 88412627
F. (+86) 574 88364186
info@itglight.com

France

Showroom

Showroom Bureau Projets
35 Bd. Richard Lenoir, Bastille
75011 Paris, France
T. (+33) 01 43382704
F. (+33) 01 43382720
france@reggiani.net

Russia

Showroom

Kalanchevskaya Street, 16,
Building 1, Room 4A, 129090 Moscow
T. (+7) 495 2690113 - 846 3320266
F. (+7) 495 2690112
russia@reggiani.net

Worldwide distributors

For the worldwide distributors list visit
www.reggiani.net

Art direction
Dalziel & Pow
Reggiani Creative Team

Graphic Design
Dalziel & Pow
Reggiani Creative Team

Art Photography
Marco Reggi Photographer

Product photo
Controluce

Layout
Partner Group
Reggiani Creative Team

Printed by
Cattaneo Grafiche srl

Edition
April 2016

Copyright © Reggiani 2016
All Rights reserved

REGGIANI S.P.A. ILLUMINAZIONE reserves
the right to modify technical, design and
dimensional features without notification.
No part of this document may be reproduced.
The luminaire sizes are given in mm.
874/2012 The REGGIANI catalogue products
are intended for professional users.

