


MAINS VOLTAGE

220-240V




Yori Evo
Ghostrack

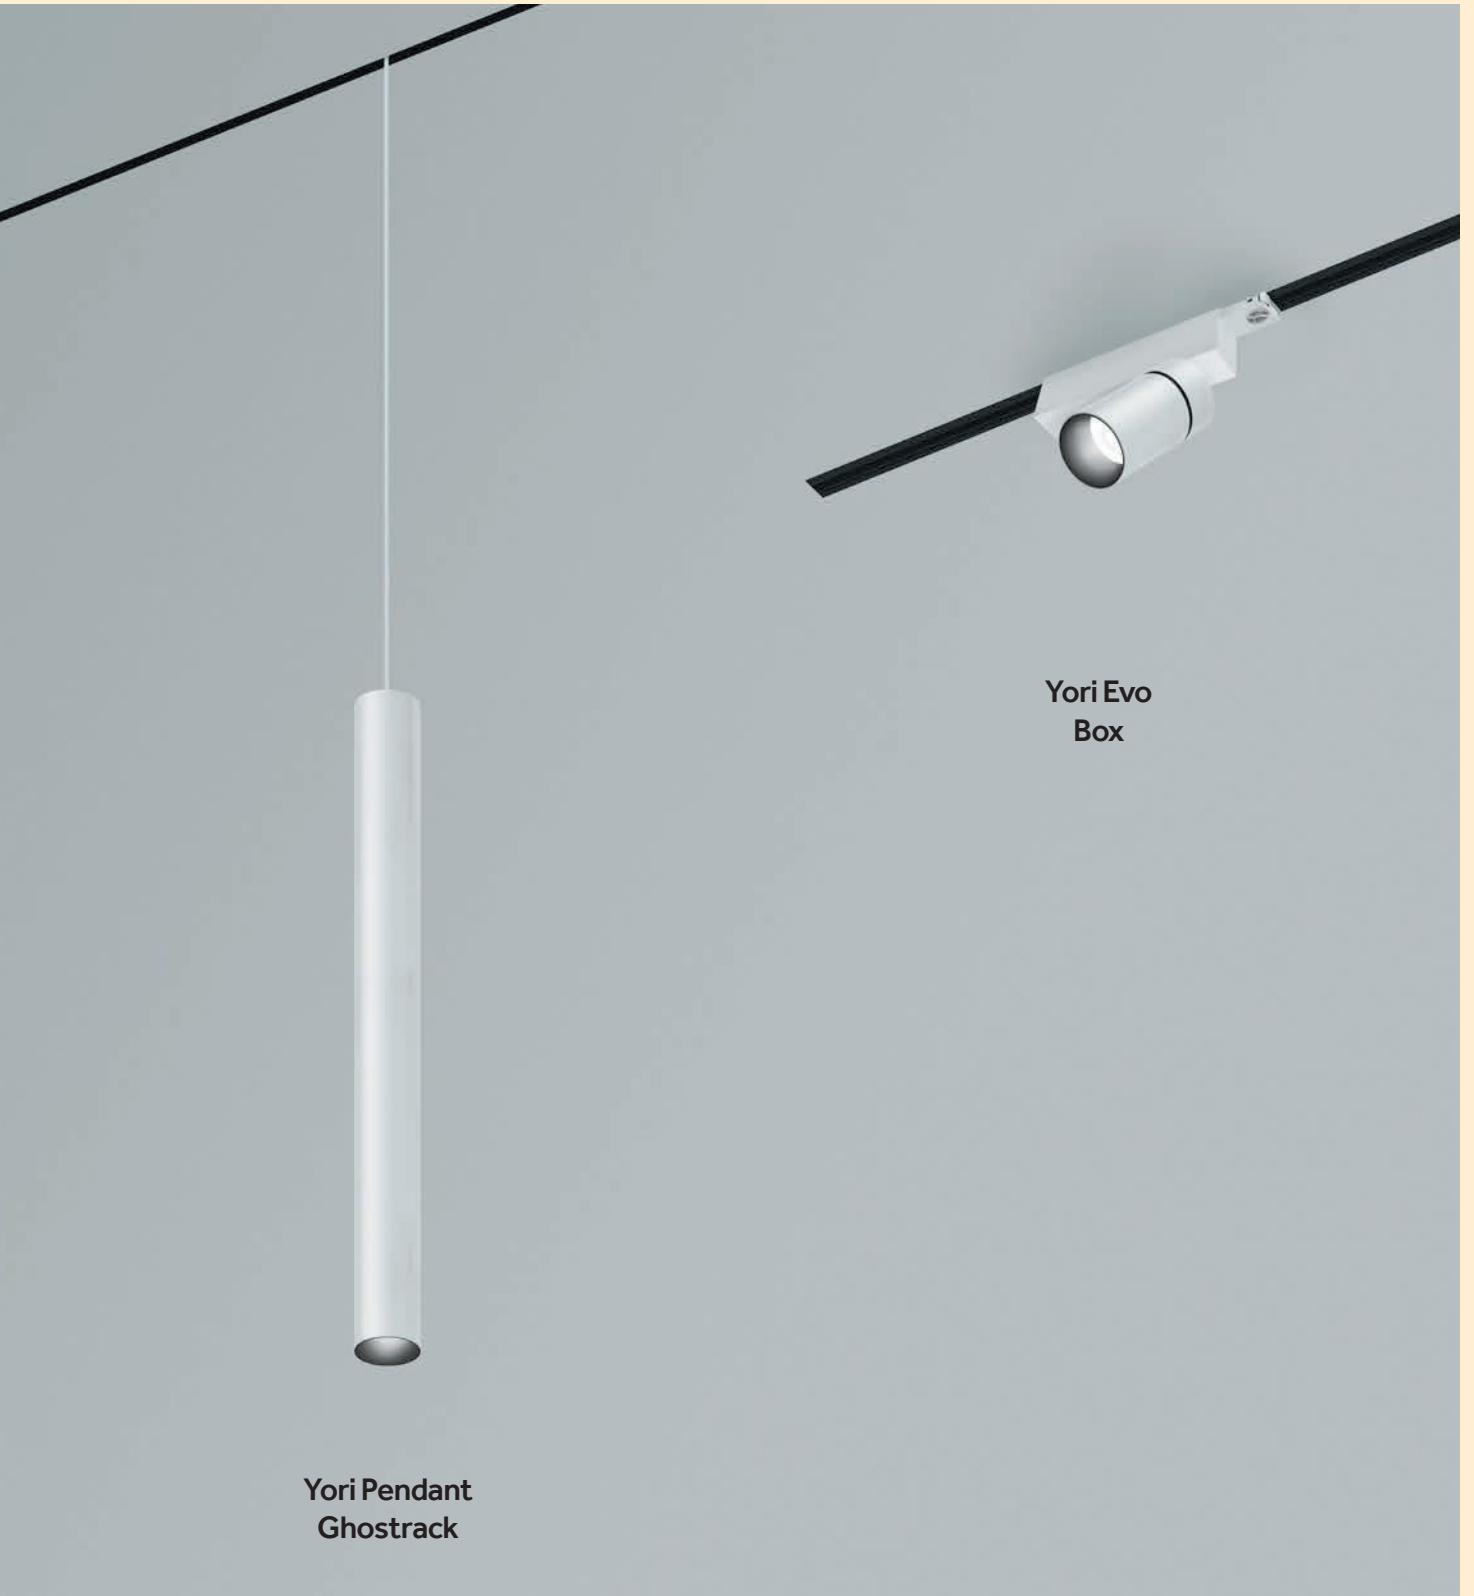

Yori Pendant
Ghostrack

Yori Evo
Box

Yori Evo Ghostrack

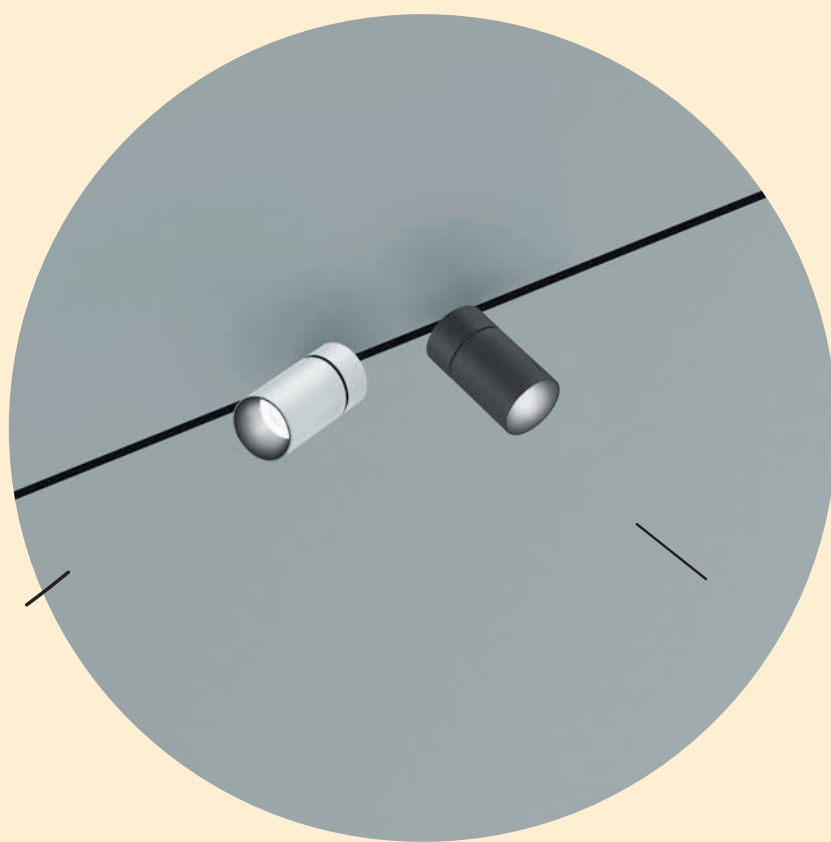

Mains Voltage

EN Yori Evo Ghostrack lets you create unique lighting schemes and configurations. Its brand new patented technology features an invisible adapter and driver for single or cluster installations on a standard 3-circuit track. Designed to be the perfect solution for accent lighting, it offers a wide range of sizes: now, even wider, thanks to the new mini sizes, Ø 22 mm and Ø 35 mm.

IT Yori Evo Ghostrack offre la possibilità di creare configurazioni e layout illuminotecnici unici. La sua innovativa tecnologia brevettata è dotata di adattatore e driver invisibili, per un'installazione singola o in cluster su binari standard a 3 accensioni. Progettato per essere la soluzione ideale per l'illuminazione d'accento, è disponibile in una vasta gamma di formati: ora, ancora più ampia, grazie alle nuove dimensioni da Ø 22 mm e Ø 35 mm.



1. Yori Evo Ghostrack mounting

2. Ghostrack driver mounting

3. Connection and switch on

13




Accessories
p.78



Finishes
p.82



Control systems
p.84

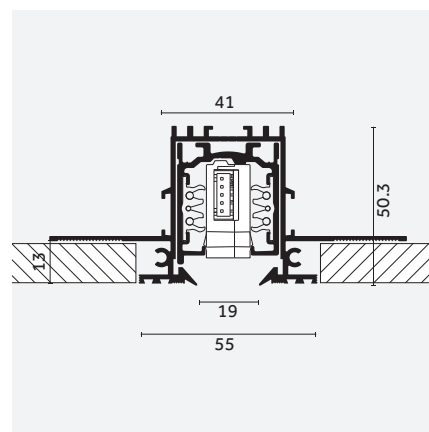


EN Ghostrack driver invisible inside the track

IT Ghostrack driver invisibile all'interno del binario




Mains Voltage

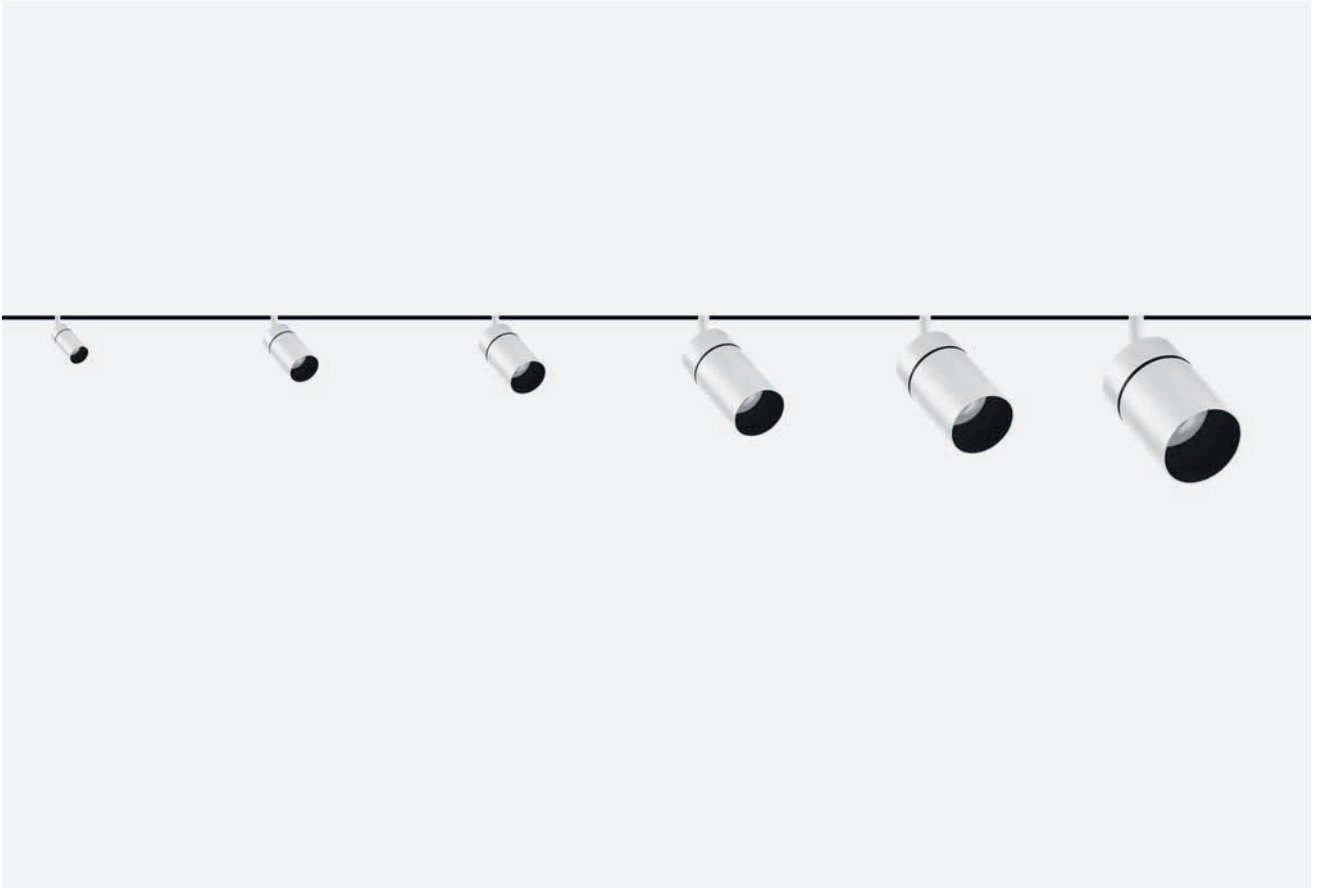

Ø 22 mm	Ø 35 mm	Ø 43 mm	Ø 60 mm	Ø 75 mm	Ø 95 mm
POWER LED 2 W 140 lm - 200 lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >80, CRI >90	POWER LED 2,7 W 270 lm - 372 lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >80, CRI >90	POWER LED 2,5 W, 4 W, 9 W 215 lm - 940 lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >80, CRI >90	COBLED 9 W, 12 W, 17 W 960 lm - 2400 lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <2 <3 CRI >80, CRI >90, CRI >98	COBLED 12 W, 17 W, 24 W, 28 W 1323 lm - 4054 lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <2 <3 CRI >80, CRI >90, CRI >98	COBLED 12 W, 17 W, 24 W, 33 W 1323 lm - 4695 lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <2 <3 CRI >80, CRI >90, CRI >98
		Warm Dimming COB LED 6,5 W 10 lm - 550 lm L70 B50=50,000h 1800K-2800K SDCM <4 CRI >95	Warm Dimming COB LED 12 W 100 lm - 1000 lm L70 B50=50,000h 1700K-3000K SDCM <4 CRI >95	Warm Dimming COB LED 25 W 100 lm - 2500 lm L70 B50=50,000h 1700K-3000K SDCM <4 CRI >95	Warm Dimming COB LED 33 W 100 lm - 3100 lm L70 B50=50,000h 1700K-3000K SDCM <4 CRI >95

*Cluster configuration with 220 mm adapter/*Configurazione cluster con adattatore da 220 mm

Yori Pendant Ghostrack

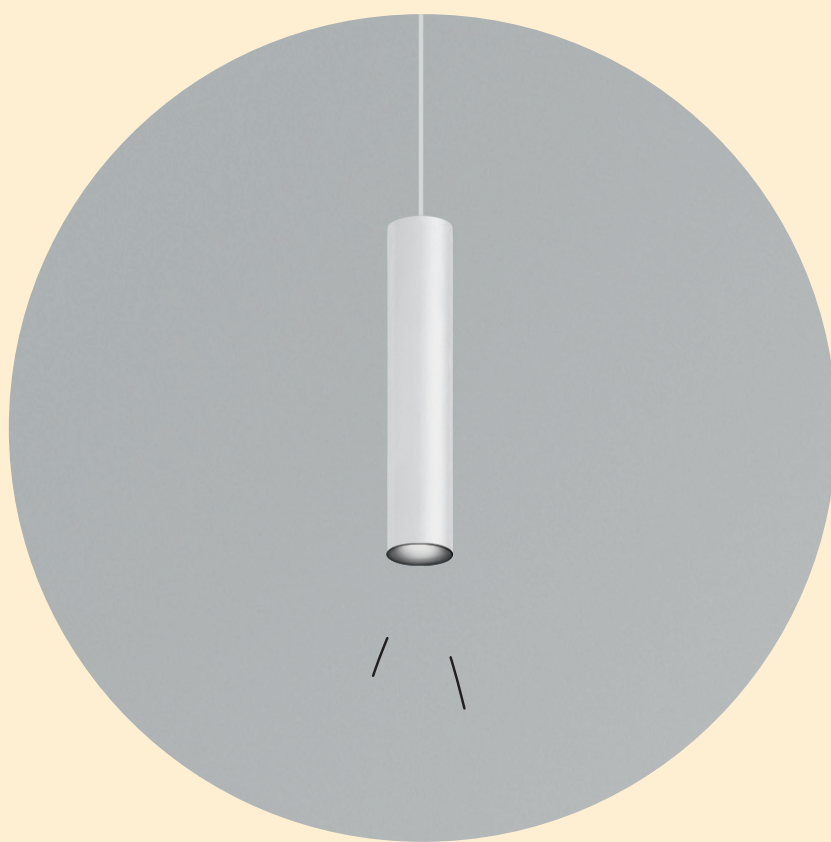

Mains Voltage

EN From the Yori Evo Ghostrack family, a new line of suspension luminaires is born: Yori Ghostrack Pendant allows a discreet installation thanks to the invisible adapter and driver. It comes in four different sizes and a wide range of finishes.

IT Dalla famiglia Yori Evo Ghostrack, nasce una nuova linea di apparecchi a sospensione: Yori Ghostrack Pendant consente un'installazione discreta grazie all'adattatore e al driver invisibili. È disponibile in quattro diverse dimensioni e con una vasta gamma di finiture.



1. Yori Pendant Ghostrack mounting



2. Ghostrack driver mounting



3. Connection and switch on

17




Accessories
p.78



Finishes
p.82




Control systems
p.84

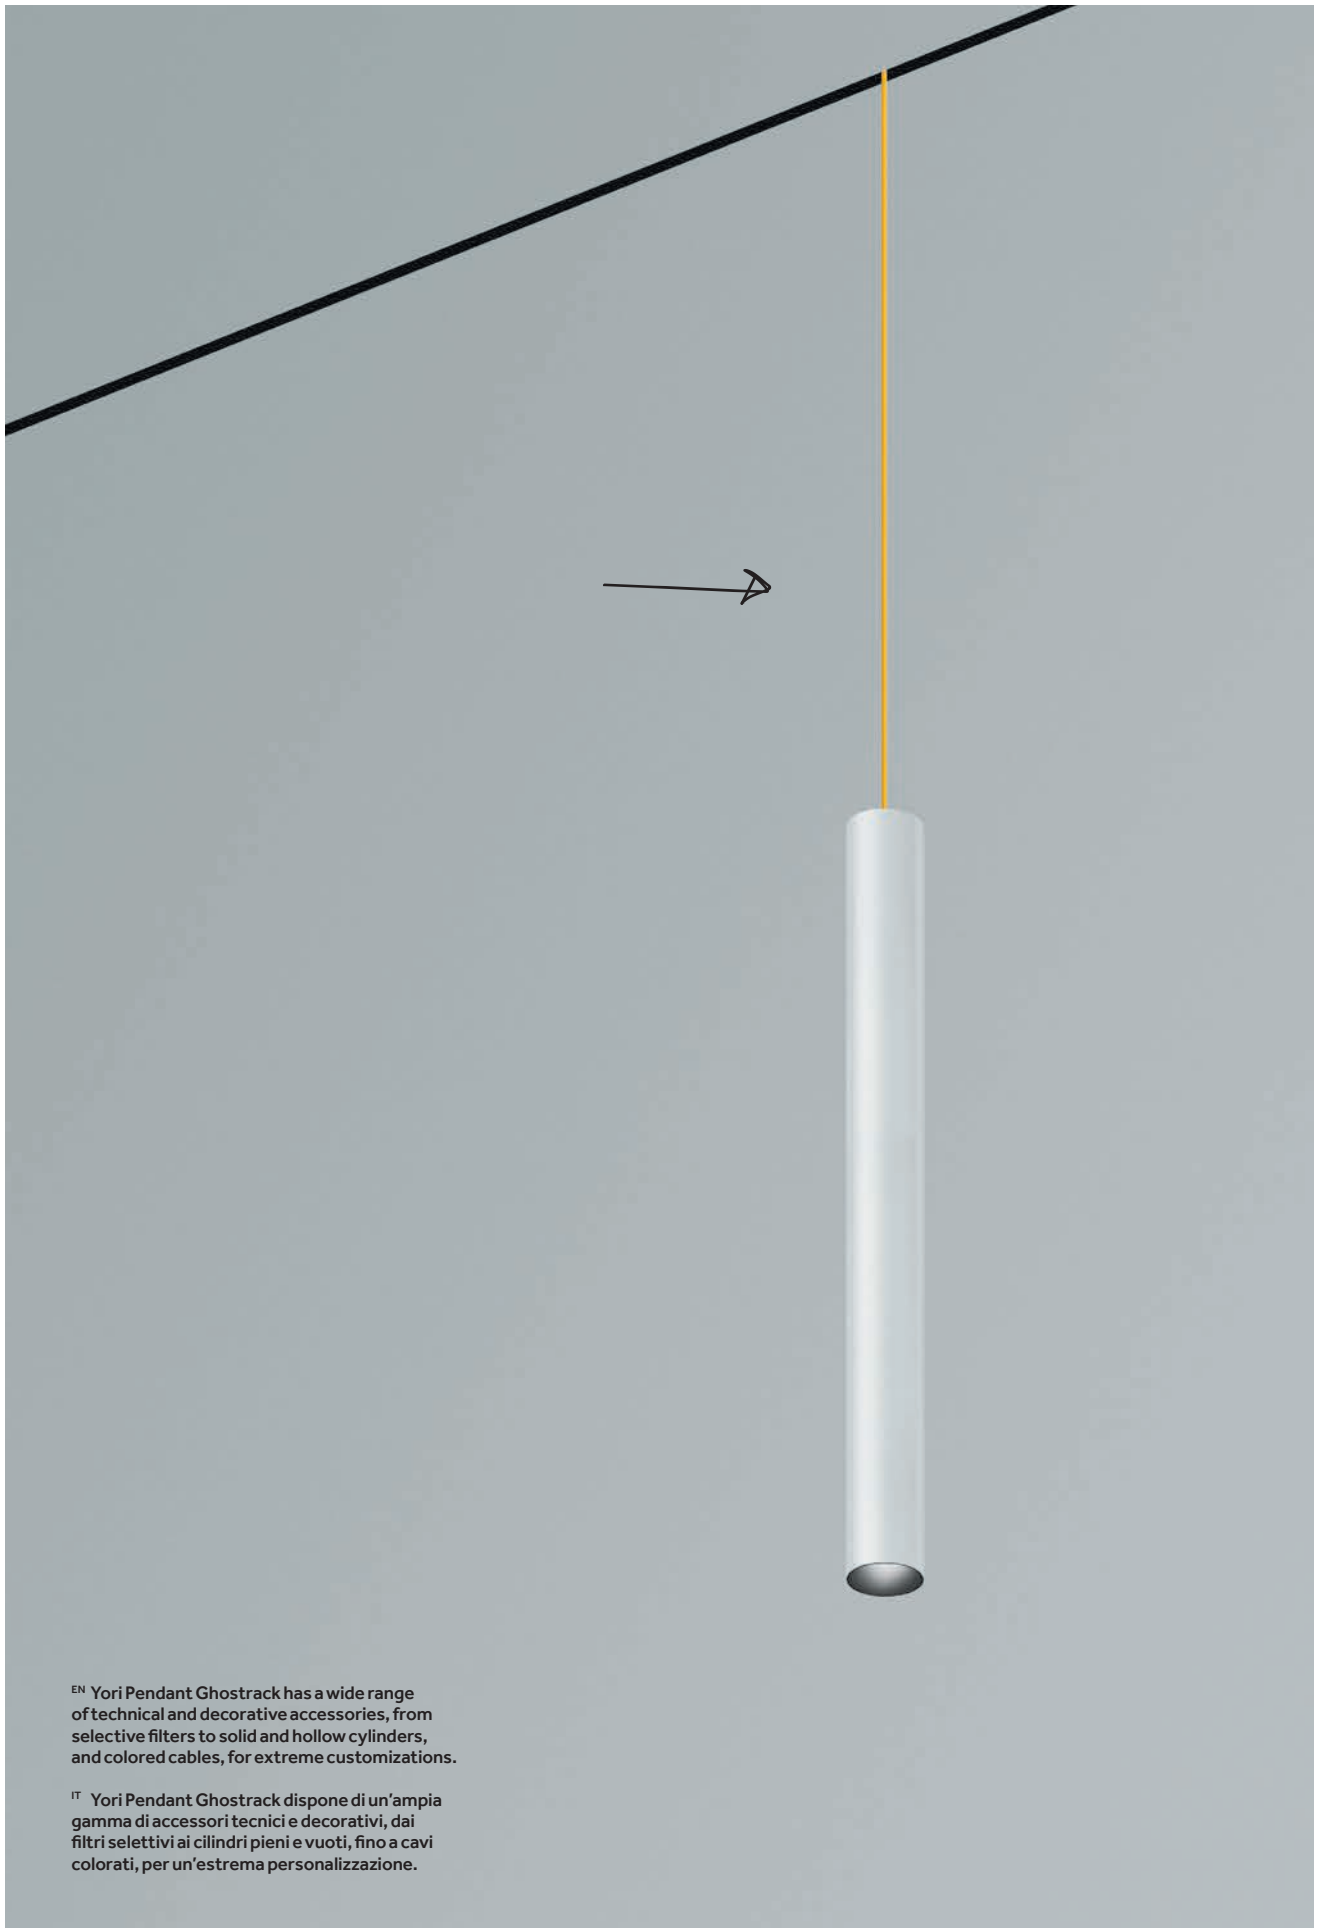

^{EN} Yori Pendant Ghostack has a wide range of technical and decorative accessories, from selective filters to solid and hollow cylinders, and colored cables, for extreme customizations.

^{IT} Yori Pendant Ghostack dispone di un'ampia gamma di accessori tecnici e decorativi, dai filtri selettivi ai cilindri pieni e vuoti, fino a cavi colorati, per un'estrema personalizzazione.


Mains Voltage

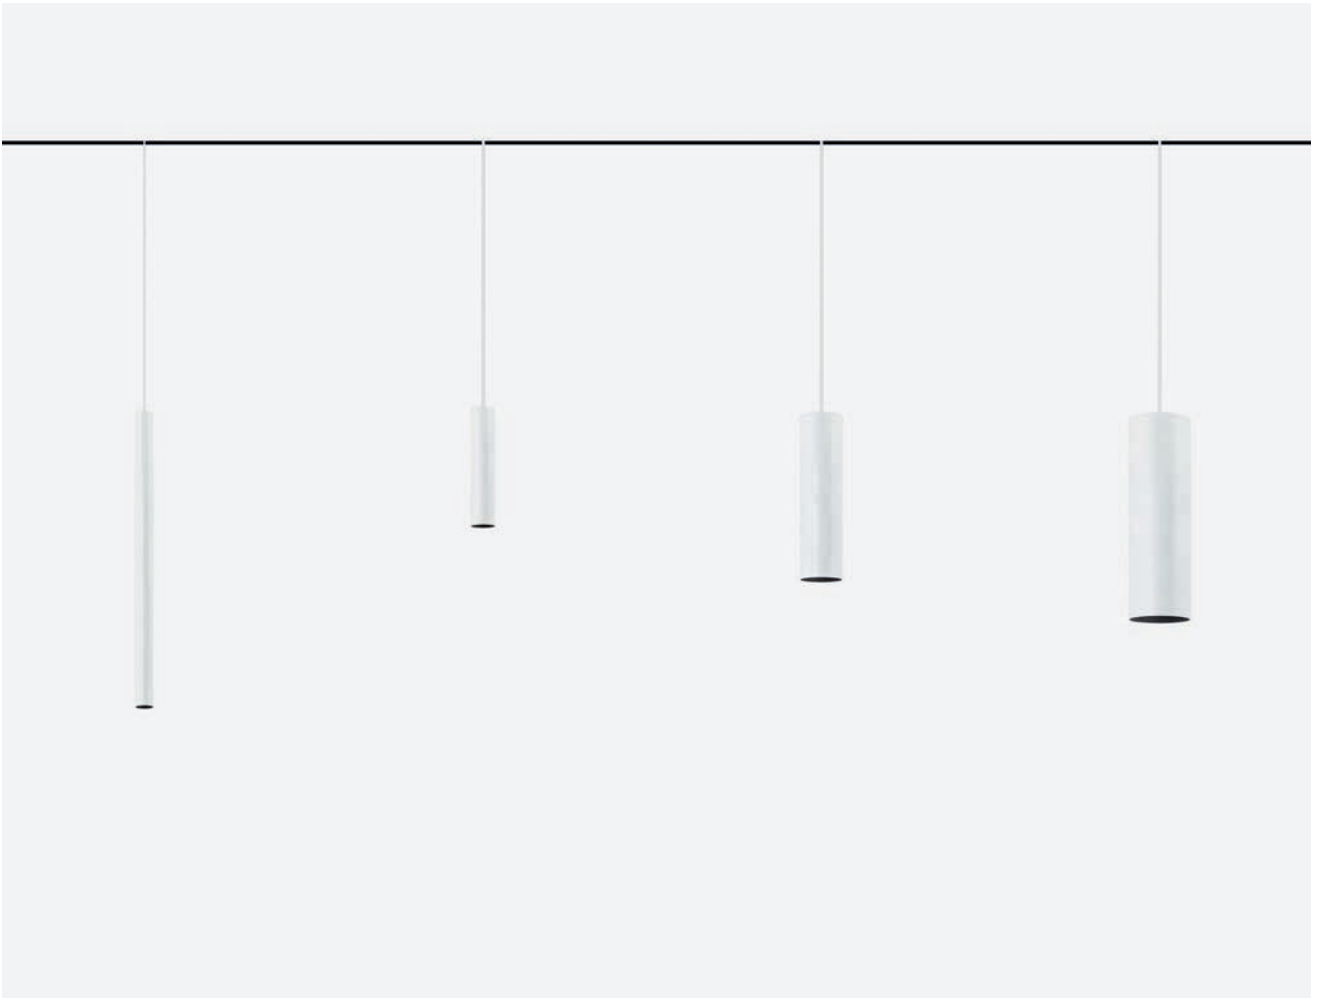

Ø 22 mm	Ø 35 mm	Ø 60 mm	Ø 95 mm
<p>POWER LED 2 W 140 lm - 200 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >80, CRI >90</p>	<p>POWER LED 2,7 W 270 lm - 372 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >80, CRI >90</p>	<p>COB LED 9 W, 12 W 1050 lm - 1775 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >85, CRI >90</p> <p>Warm Dimming COB LED 6 W, 12 W 100 lm - 1000 lm L70 B50=50,000h 1700 K-3000 K SDCM <4 CRI >95</p>	<p>COB LED 12 W, 17 W, 24 W 1491 lm - 3602 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <2, <3 CRI >80, CRI >90</p> <p>Warm Dimming COB LED 25 W 100 lm - 2500 lm L70 B50=50,000h 1700 K-3000 K SDCM <4 CRI >95</p>

Choose or create your Ghostrack cluster

- Yori Evo Ghostrack
- Yori Pendant Ghostrack

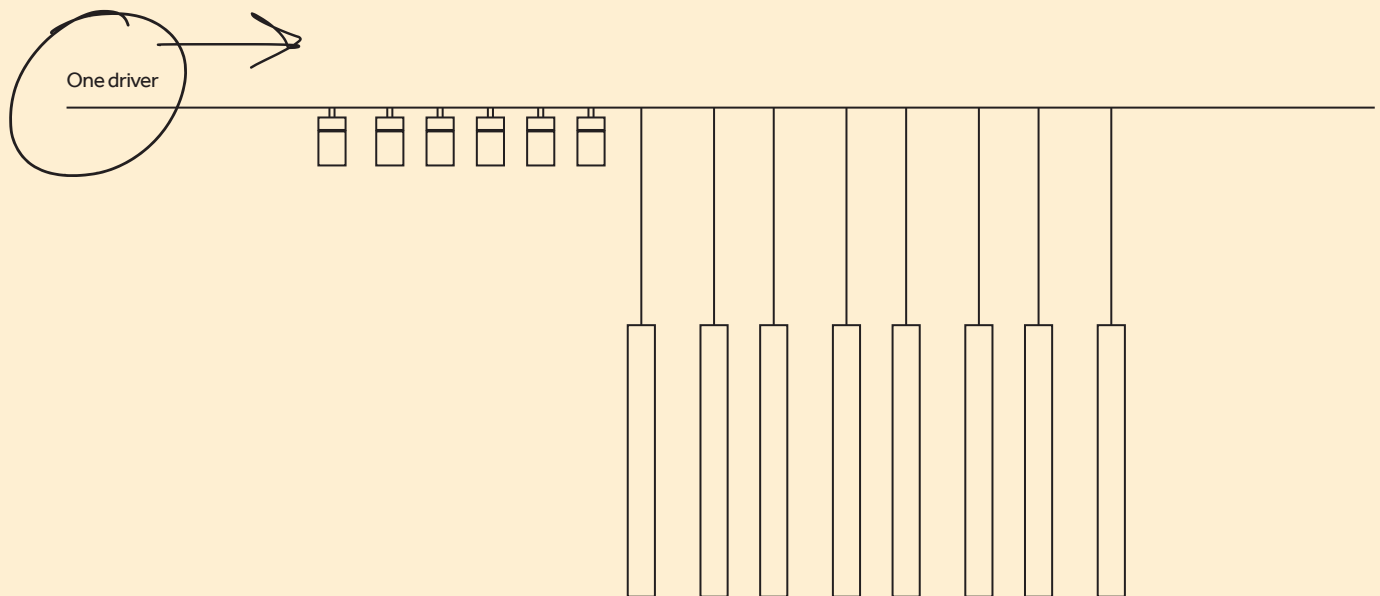


Mains Voltage


Create your custom cluster:

- ^{EN} 1. Choose one size (Ø22, Ø35, Ø43 mm)
 2. Check the Ghostrack driver chart (p.119/127) to know the min/max number of products to connect (from 1 to 15)
 3. Create your custom cluster


- ^{IT} 1. Scegli una misura (Ø22, Ø35, Ø43 mm)
 2. Controlla la tabella Ghostrack driver (p.119/127) per conoscere il numero minimo/massimo di prodotti utilizzabili (da 1 a 15)
 3. Crea il tuo cluster personalizzato



Ø 22 mm Ø 35 mm Ø 43 mm



Ø 22 mm Ø 35 mm



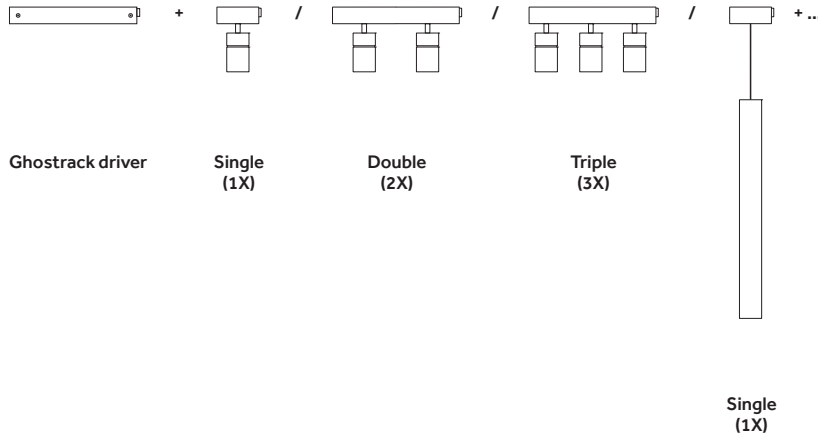


Choose a standard cluster:

- ^{EN} For the Ø60mm, Ø75mm and Ø95mm sizes you can choose between different cluster models of 2X, 3X or 4X (or single spot option)
^{IT} Per le misure Ø60mm, Ø75mm e Ø95mm puoi scegliere tra diversi modelli di cluster da 2X, 3X o 4X (o l'opzione con singolo spot)



Ø 60 mm Ø 75 mm Ø 95 mm

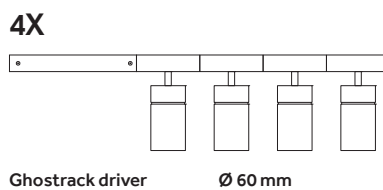


Ghostrack Cluster

and customize it

^{EN} Customize your Ghostrack cluster with an optional spacer. The spacer comes in a number of lengths and can be used for flexible positioning of the projectors, using the track to create the configuration that best meets the lighting design needs.

^{IT} Personalizza il tuo cluster Ghostrack con uno spacer accessorio. Disponibile in diverse lunghezze, lo spacer è un distanziale che permette di posizionare i proiettori con flessibilità realizzando sul binario la configurazione più adatta alle esigenze illuminotecniche del progetto.

22 Spacers

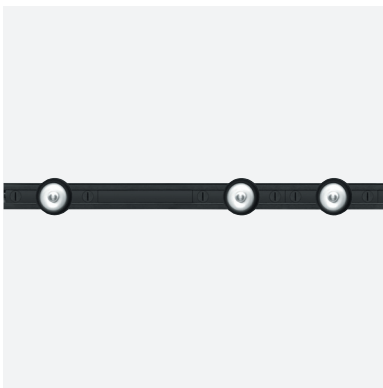

Standard spacers:

- 110 mm
- 220 mm



Customizable spacers:

- 300 mm
- 400 mm
- 600 mm
- 800 mm
- 1000 mm
- 1200 mm


^{EN} The customizable spacers can be cut to size to suit the desired distance between luminaires.

^{IT} Gli spacer personalizzabili possono essere tagliati a misura per differenti esigenze di inter-distanza tra gli apparecchi.


Mains Voltage

Examples:



Ø75 mm | Cluster (2X) + 1 Spacer

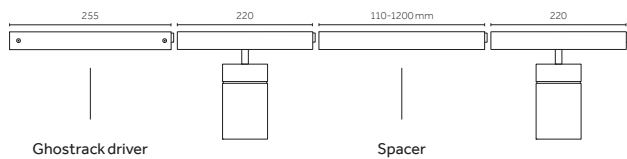


Ø43 mm | Cluster (1 to 14) + 2 Spacers

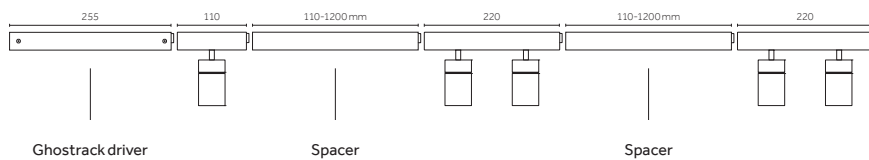

Ø22 mm | Cluster (1 to 14) + 4 Spacers

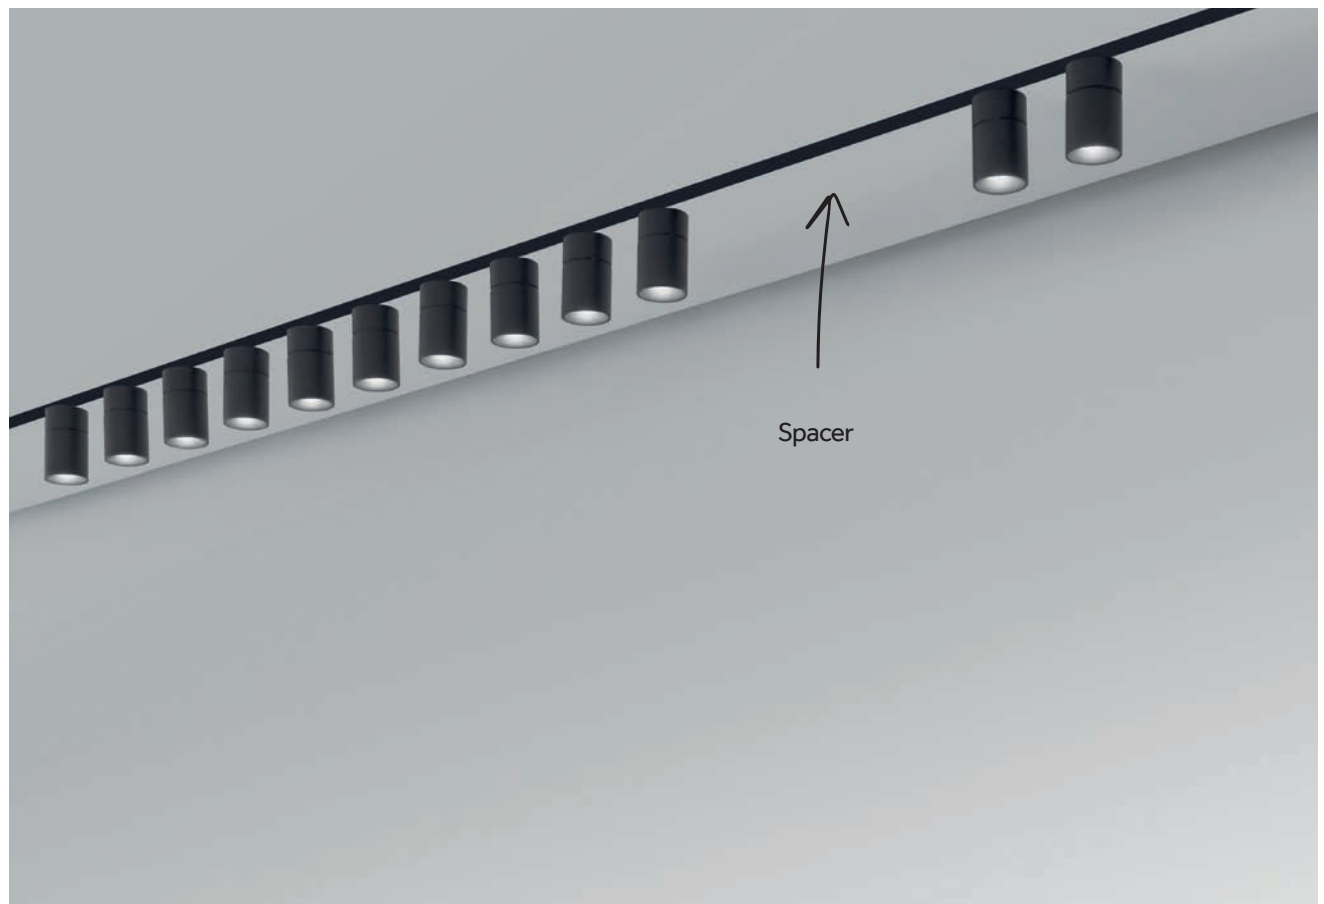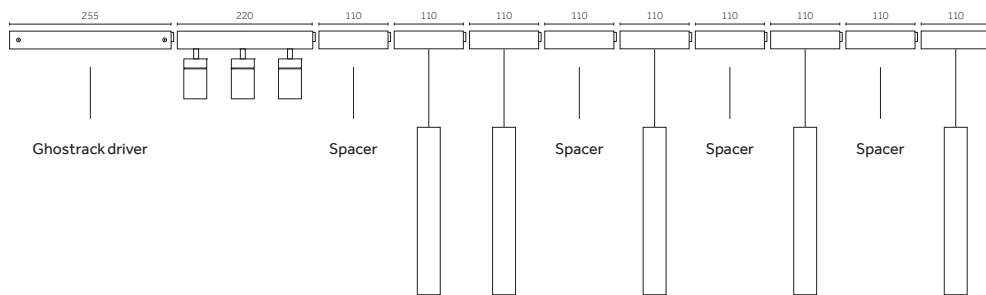

Yori Evo Box

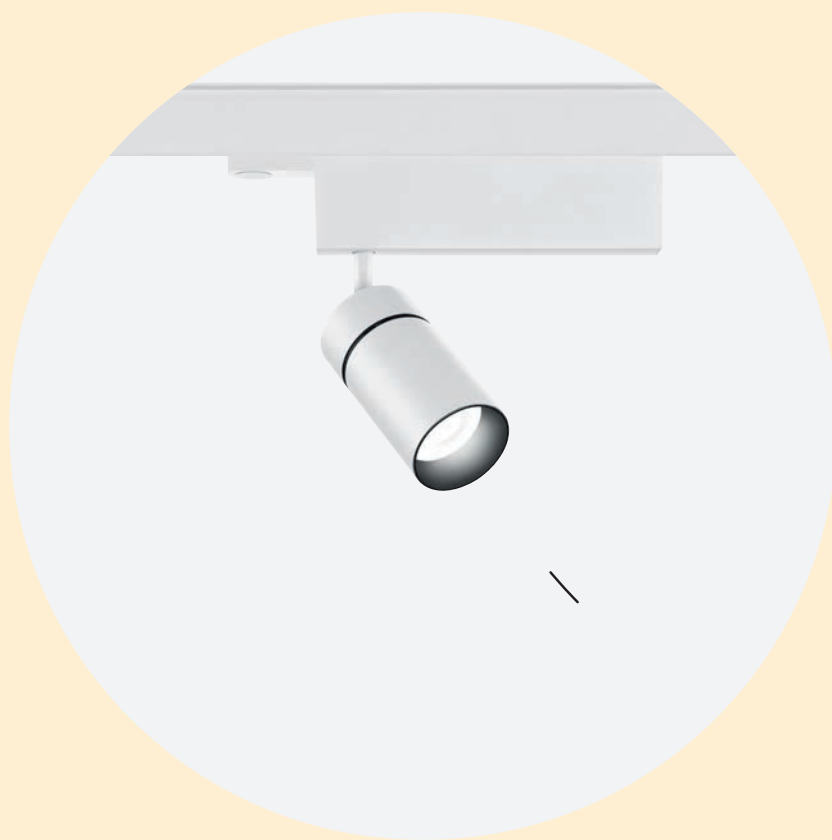

Mains Voltage

^{EN} The Yori Box projector has been developed and advanced to create Yori Evo Box, which extends the specific features of the Yori Box range to a new, powerful luminaire with a simple, elegant design. It comes in four sizes and has an outstanding lumen output up to 4520 lm. It offers a wide range of control systems, including Dimmer on board and Bluetooth. The accessories that complete this family make it even more versatile.

^{IT} Dallo sviluppo e evoluzione del proiettore a binario Yori Box, Yori Evo Box amplia le specifiche peculiarità della gamma Yori Box in un nuovo apparecchio flessibile e dal design semplice e elegante. È disponibile in quattro dimensioni e vanta un eccezionale lumen output fino a 4520 lm. Offre un'ampia gamma di sistemi di controllo, tra cui Dimmer on board e Bluetooth. Gli accessori che completano la famiglia rendono questo prodotto ancora più versatile.



^{EN} Integrated Bluetooth technologies
^{IT} Tecnologie Bluetooth integrate

^{EN} Dimmer on board
^{IT} Dimmer on board




Accessories
p.78



Finishes
p.82







Control systems
p.84

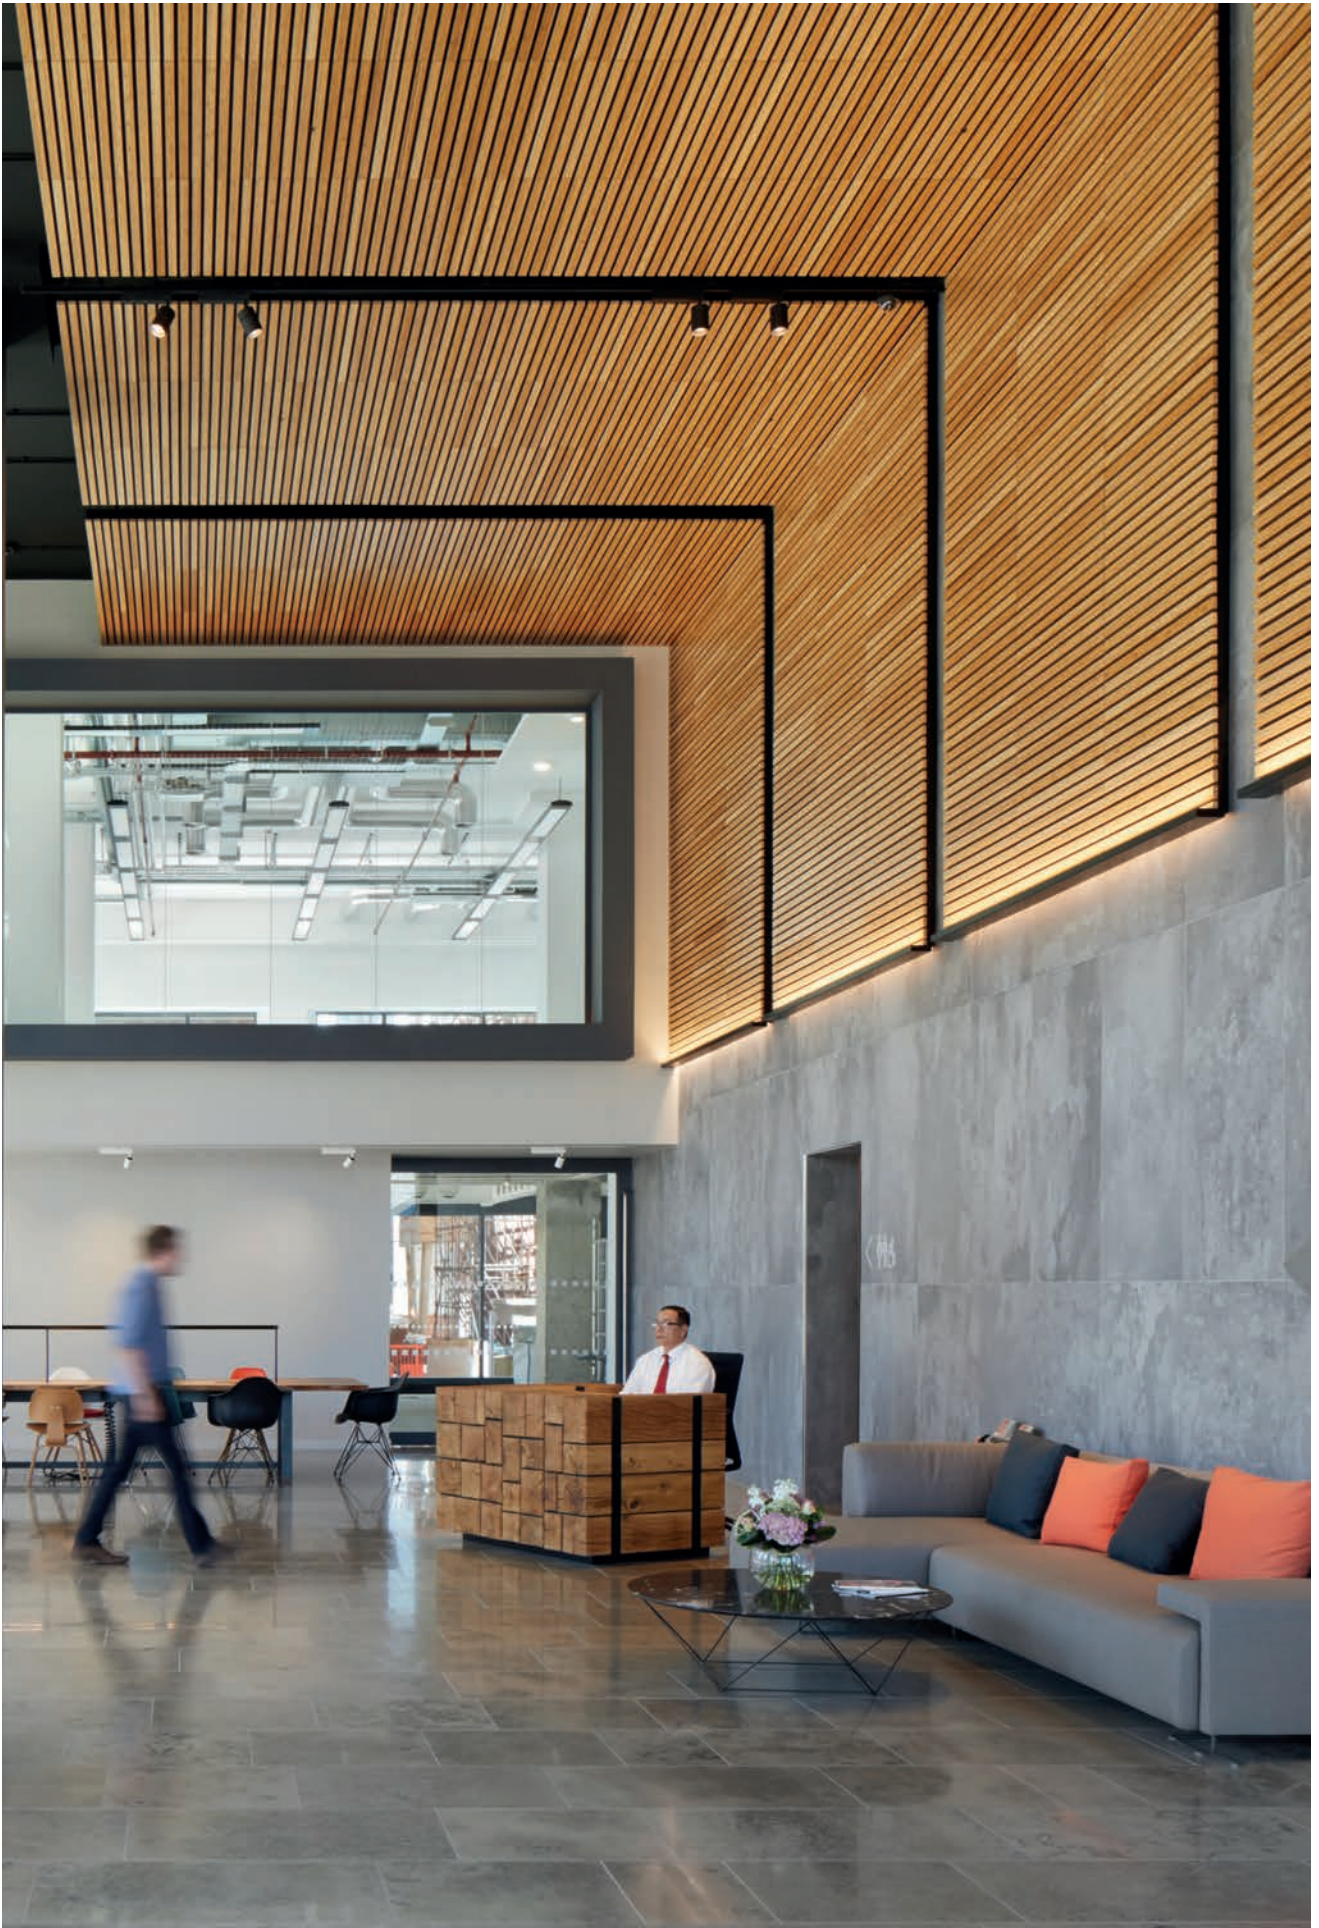

Mains Voltage



Ø 43 mm	Ø 60 mm	Ø 75 mm	Ø 95 mm
			
<p>POWER LED 4 W, 9 W 410 lm - 940 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >80, CRI >90</p>	<p>COB LED 9 W, 12 W, 17 W 725 lm - 2400 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <2 <3 CRI >80, CRI >90, CRI >98</p>	<p>COB LED 12 W, 17 W, 24 W, 28 W 1323 lm - 4054 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <2 <3 CRI >80, CRI >90, CRI >98</p>	<p>COB LED 12 W, 17 W, 24 W, 33 W, 37 W 1323 lm - 5090 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <2 <3 CRI >80, CRI >90, CRI >98</p>
<p>Warm Dimming COB LED 6,5 W 10 lm - 550 lm L70 B50=50,000h 1800 K - 2800 K SDCM <4 CRI >95</p>	<p>Warm Dimming COB LED 12 W 100 lm - 1000 lm L70 B50=50,000h 1700 K - 3000 K SDCM <4 CRI >95</p>	<p>Warm Dimming COB LED 25 W 100 lm - 2500 lm L70 B50=50,000h 1700 K - 3000 K SDCM <4 CRI >95</p>	<p>Warm Dimming COB LED 33 W 100 lm - 3100 lm L70 B50=50,000h 1700 K - 3000 K SDCM <4 CRI >95</p>

*Phase-cut / DALI / Dimmer on board / Bluetooth


Mains Voltage tracks


NEW



Track
Recessed


Track
Surface/Pendant

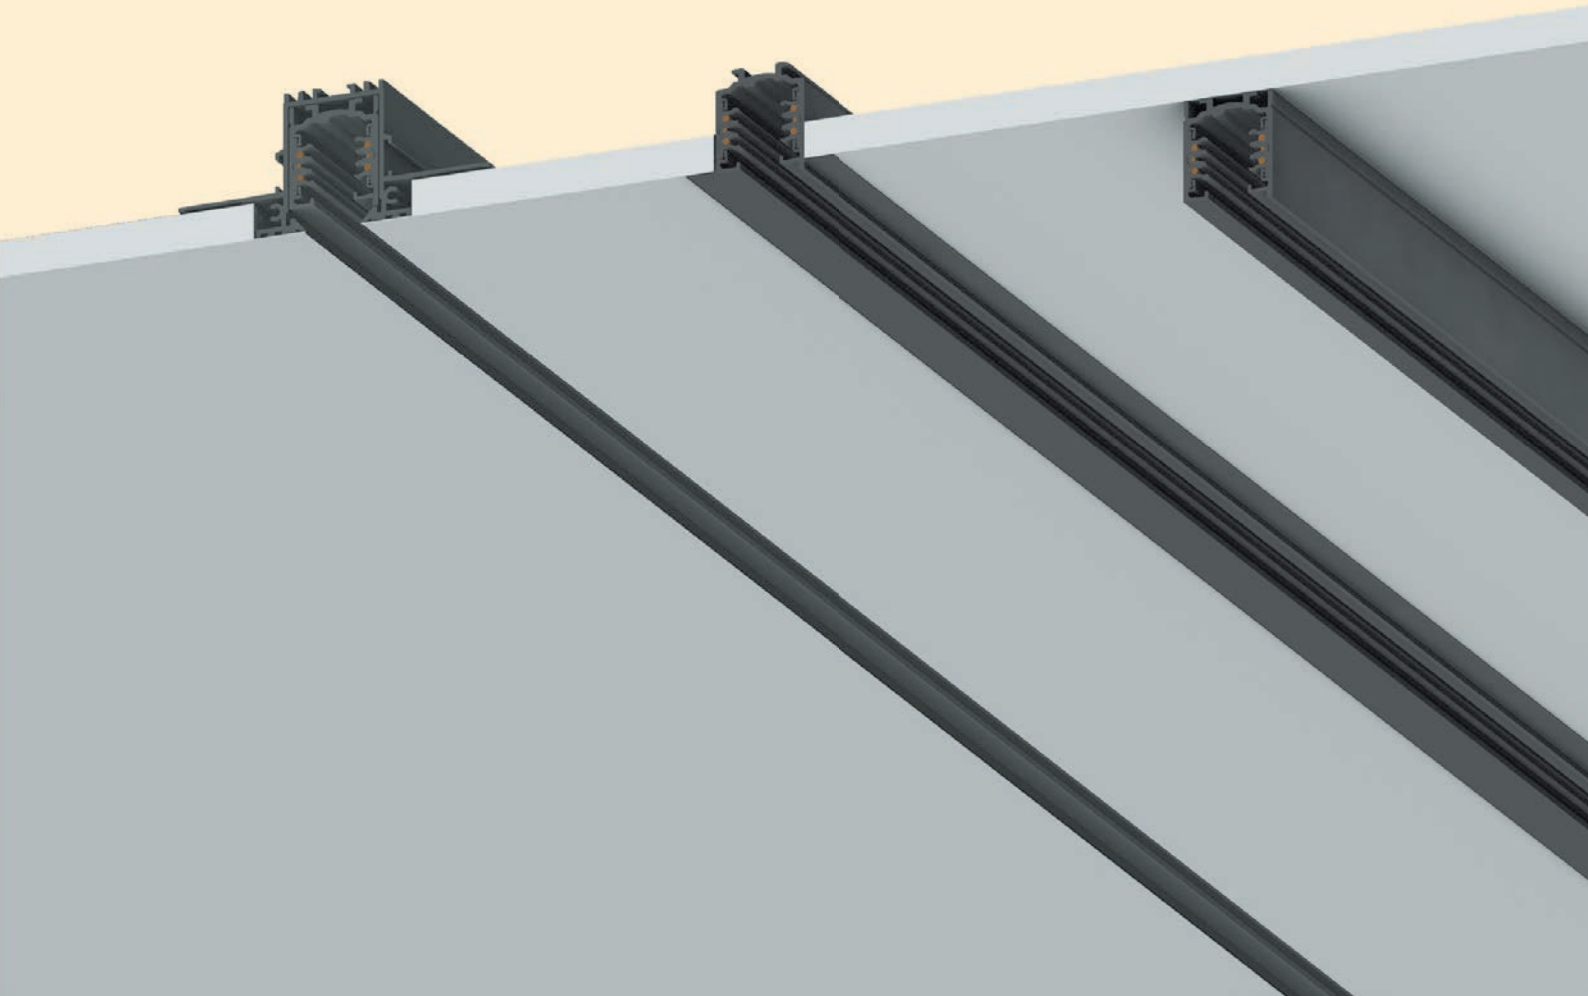




EN 3-circuit standard tracks
 IT Binari Standard a 3 accensioni

NEW



H Track
 Surface/Pendant

H Track
 Pendant - Indirect

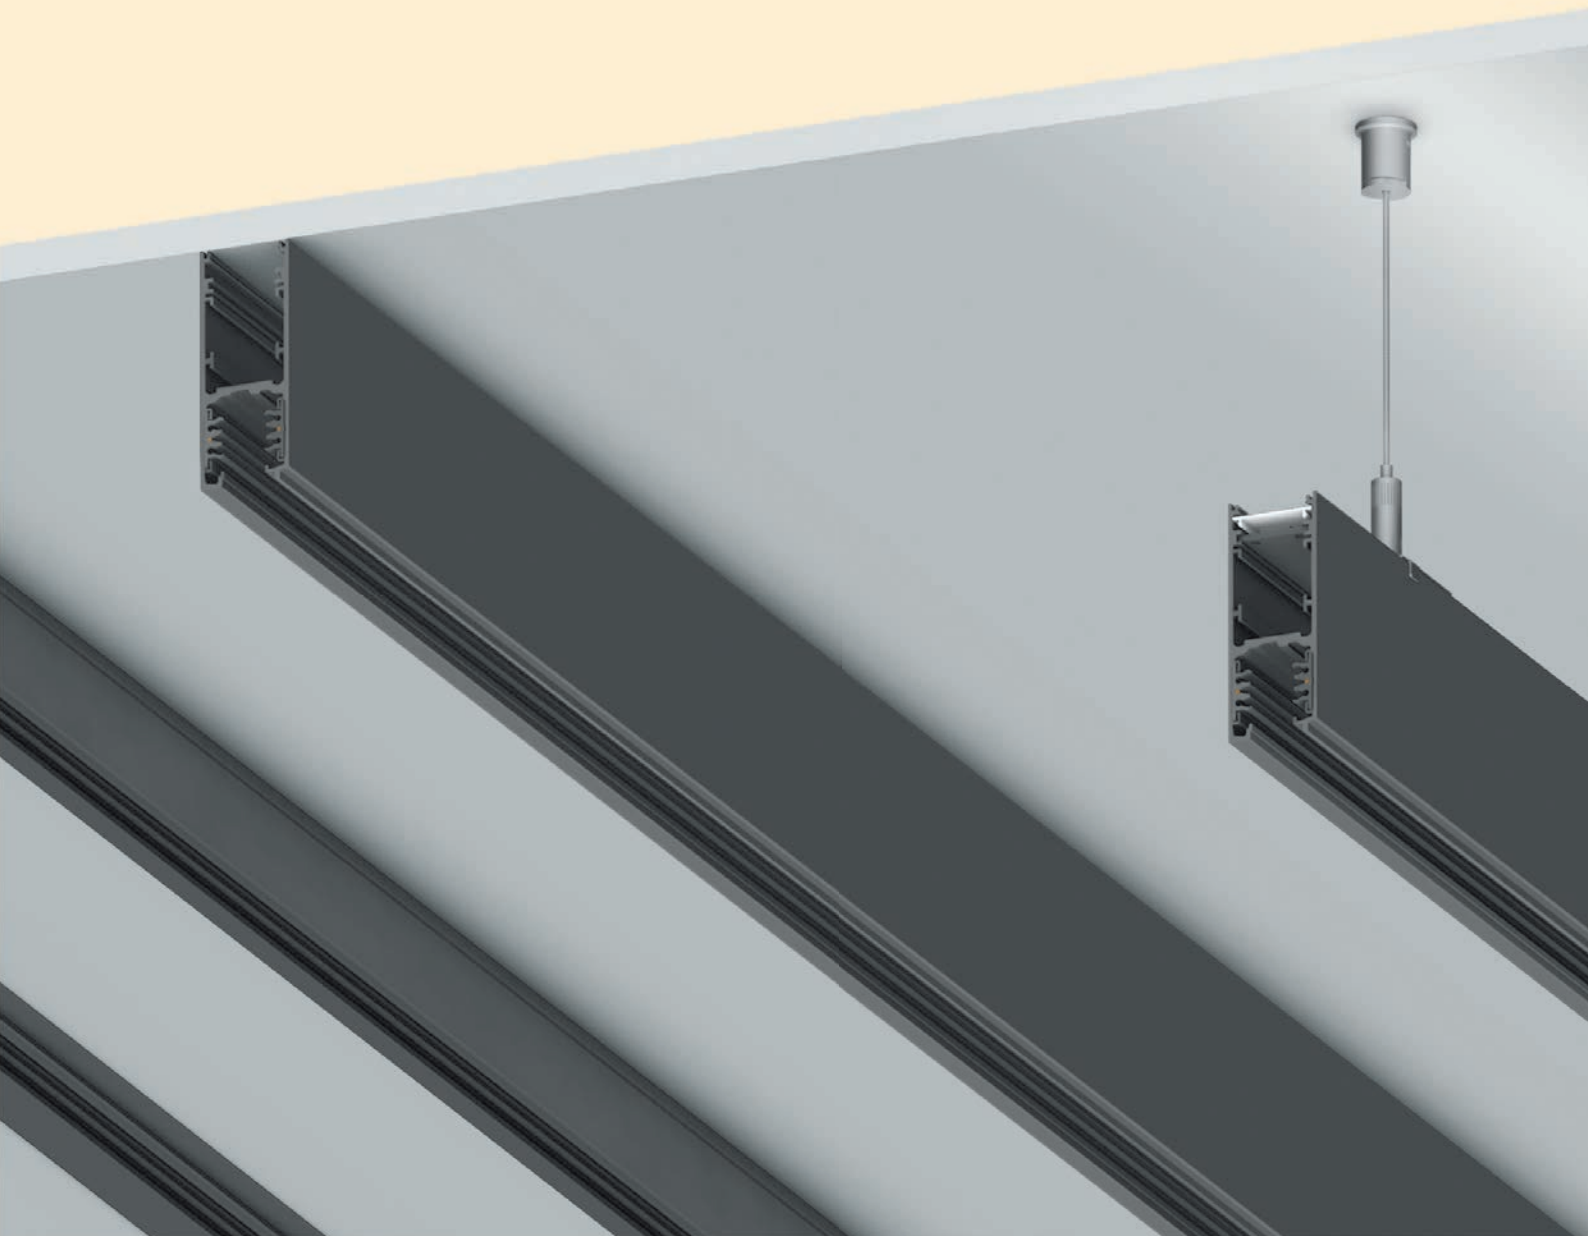


Supertrack



Mains Voltage tracks


EN Complete integration with ceilings and walls: our new Supertrack, with its super narrow width of 19 mm, works in harmony with any kind of architecture and space. Its restrained height allows installation even when there is little space available in the false ceiling. Being almost invisible and super flexible, it's a particularly versatile solution for retail and hospitality.

IT Completa integrazione con soffitti e pareti: il nostro nuovo Supertrack, grazie alla larghezza ridotta, di soli 19 mm, si inserisce con discrezione in qualsiasi tipo di architettura e spazio. La sua altezza contenuta consente l'installazione anche quando c'è poco spazio disponibile nel controsoffitto. L'eccezionale adattabilità e il suo essere quasi invisibile lo rendono una soluzione particolarmente versatile per il mondo del retail e dell'hospitality.

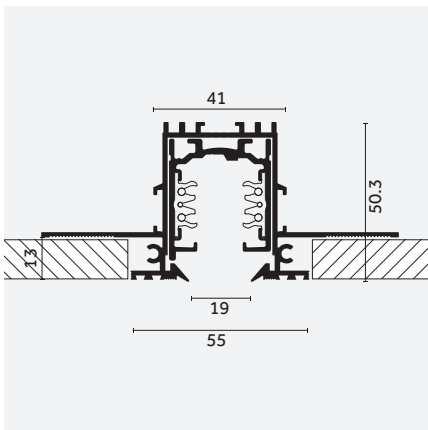

EN Supertrack: recessed trimless track with minimal size

IT Supertrack: binario recessed trimless con minimi ingombri

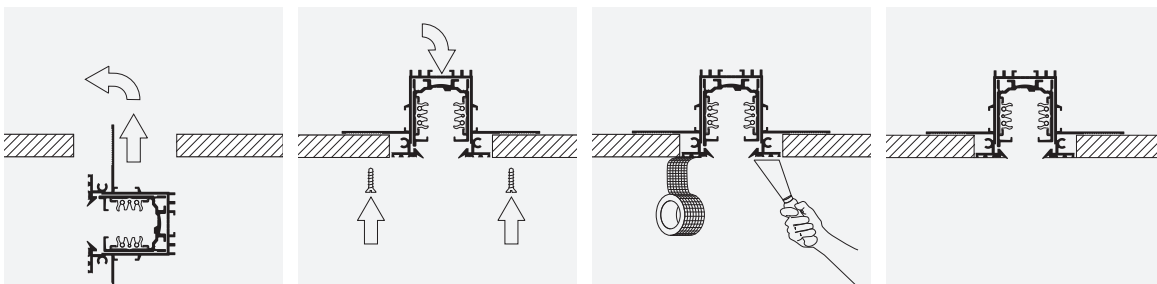

EN Easy and fast installation


IT Installazione semplice e veloce

Supertrack


EN Lines help defining spaces, framing interiors or simply catching the eye. Supertrack support your creativity and any particular architectural needs, allowing you to create endless geometric configurations.

IT Le linee aiutano a definire gli spazi, incorniciarli o semplicemente a catturare l'attenzione. Supertrack supporta la tua creatività e qualunque esigenza architettonica, permettendoti di creare infinite configurazioni geometriche.


32




EN "L" configuration
IT Configurazione a "L"

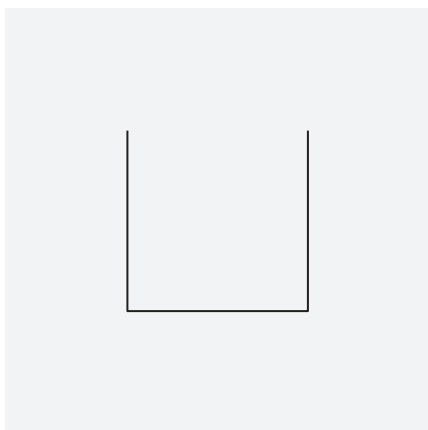


EN "U" configuration
IT Configurazione a "U"

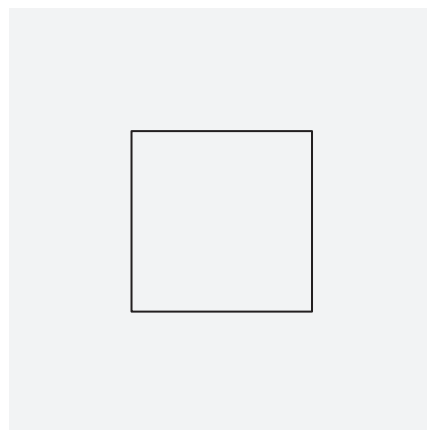


EN Square configuration
IT Configurazione quadrata

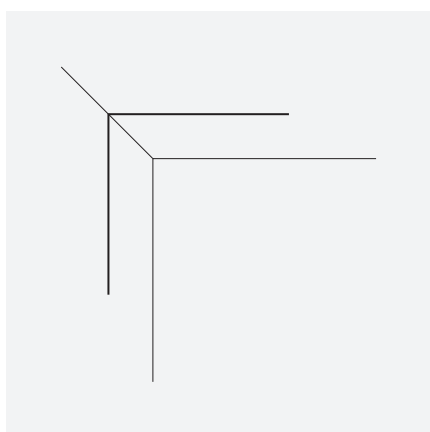


EN Wall-Ceiling configuration
IT Configurazione parete-soffitto

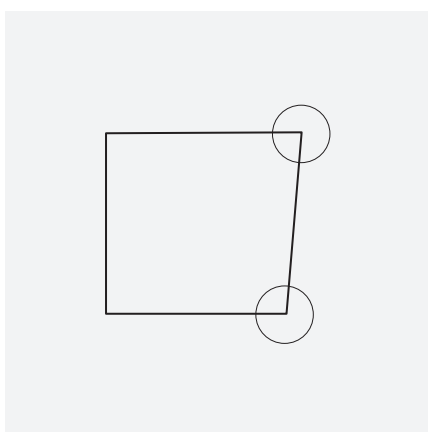

EN Custom configuration on request
IT Configurazione custom su richiesta

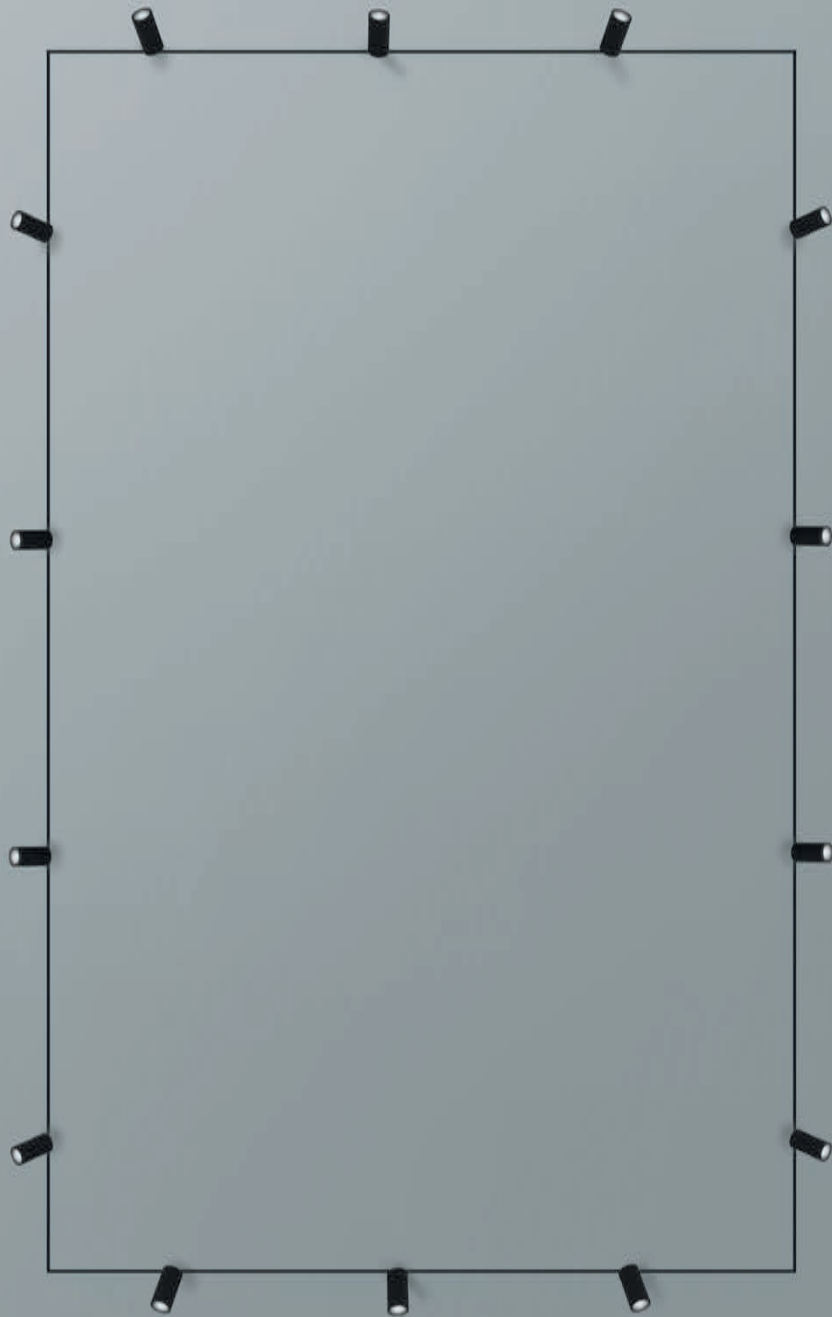


H track

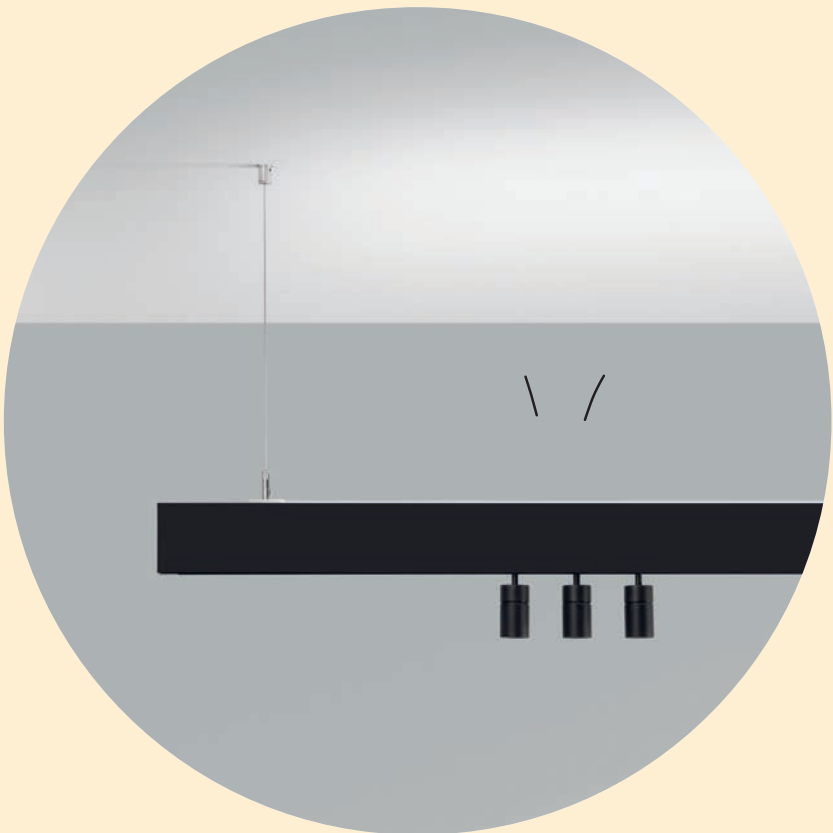


Mains Voltage tracks

^{EN} The brand new H-Track is designed to meet both the functional and aesthetic needs of any architectural project. It offers the flexibility of a 3-phase track together with the visual comfort of indirect lighting. It can be installed at the height you prefer and combined with any Yori Evo Ghostrack luminaire, to realize an infinite range of lighting configurations. The indirect lighting from the upper compartment creates a more spacious feeling while emphasizing the architecture of the spaces.

^{IT} Il nuovissimo H-Track è progettato per soddisfare le esigenze funzionali ed estetiche di qualsiasi progetto architettonico. Offre la flessibilità di un binario trifase combinata al comfort visivo dell'illuminazione indiretta. Può essere installato all'altezza che preferisci e combinato con qualsiasi apparecchio Yori Evo Ghostrack, per realizzare un'infinita gamma di configurazioni illuminotecniche. L'illuminazione indiretta dal vano superiore rende gli spazi visivamente più ampi e allo stesso tempo enfatizza l'architettura degli interni.

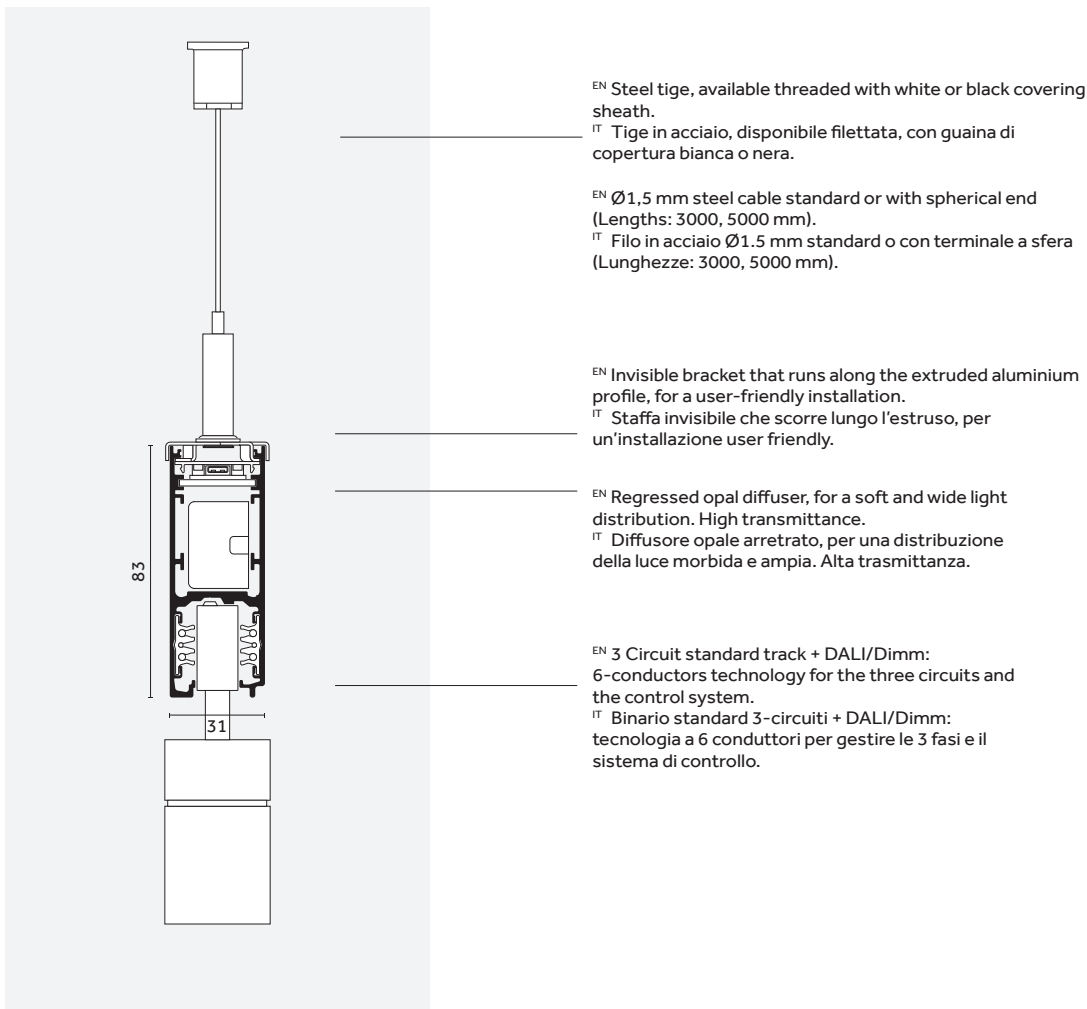

^{EN} Maximum number of modules connectable in continuous line: 60 modules of 1402 mm, 30 modules of 2805 mm, power cable section 1.5 mm²
^{IT} Numero massimo di moduli collegabili in linea continua: 60 moduli da 1402 mm, 30 moduli da 2805 mm, cavo di alimentazione sezione 1,5 mm²

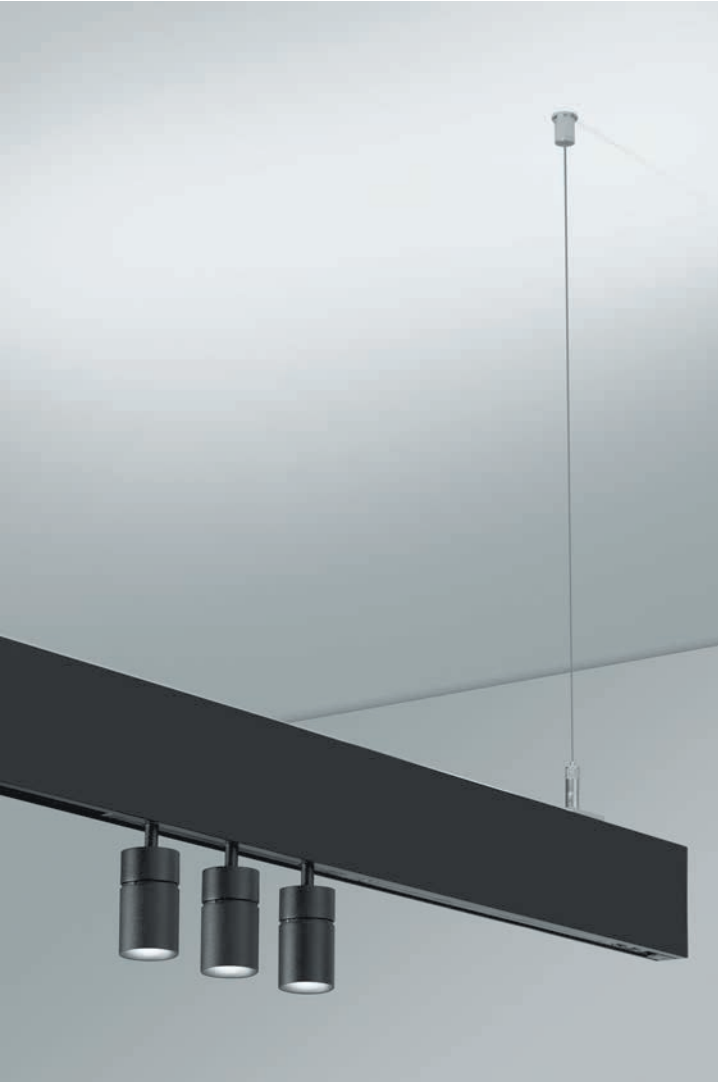

Mains Voltage tracks



37

H Track





Optics & LED	70
-------------------------	-----------

Accessories	78
--------------------	-----------


Finishes	82
-----------------	-----------

Controls	84
-----------------	-----------

Codes	89
--------------	-----------


New ranges of interchangeable optics:
Precision for high candela values and super
narrow beams, Performance for high
lumen output and high efficacy.

70

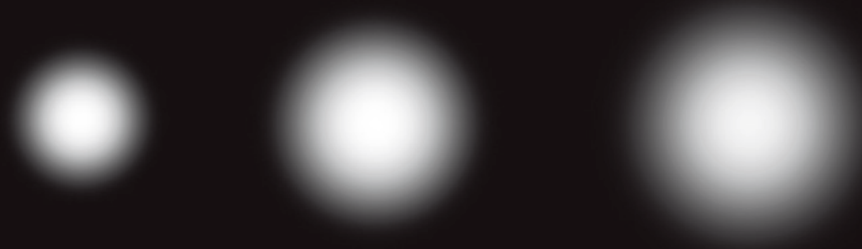

Precision

Super narrow, narrow, medium
High candela value up to 50.000 cd
with controlled and soft distribution

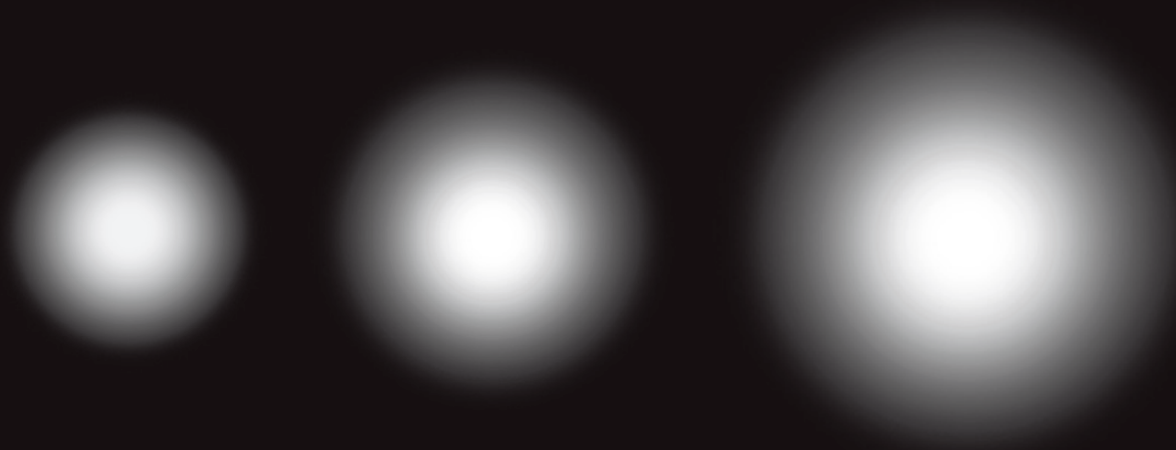

Performance

Narrow, medium, medium-wide, wide
High efficacy up to 118 lm/w with unique
performance never seen before

Precision




^{EN} System of interchangeable lenses made of temperature-resistant plastic (stabilised up to 140°C), self-extinguishing (V0 rating), with LOR up to 89%. Very narrow, narrow and medium beams with luminous intensity of up to 50,000 cd.

72

^{IT} Sistema di lenti intercambiabili in materiale plastico resistente ad alte temperature, stabilizzate fino a 140°, autoestinguente V0 con efficienza fino all'89%. Fasci molto stretti, stretti e medi con valori di intensità fino a 50.000cd.

Ø 22 mm




Narrow/
Stretto
B 10°

Medium/
Medio
E 28°

Wide/
Largo
H 33°

Ø 35 mm




Very narrow/
Molto stretto
B 10°

Medium/
Medio
E 22°

Large/
Largo
H 31°

Ø 43 mm




Very narrow/
Molto stretto
A 8°

Narrow/
Stretto
B 11°

Medium/
Medio
E 23°

Wide/
Largo
H 40°

Ø 60 mm



Very narrow/
Molto stretto
A 8°

Narrow/
Stretto
B 12°

Medium/
Medio
E 20°

Wide/
Largo
H 32°

Ø 75 mm




Very narrow/
Molto stretto
A 7°

Narrow/
Stretto
B 12°

Medium/
Medio
E 23°

Ø 95 mm

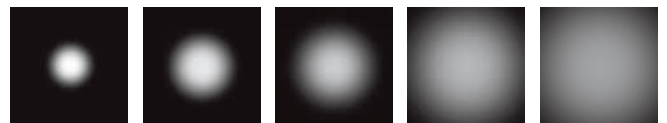

Very narrow/
Molto stretto
A 7°

Narrow/
Stretto
B 12°

Medium/
Medio
E 23°

Wide/
Largo
H 38°

Very wide/
Largo
M 53°


Performance




^{EN} System of interchangeable reflectors made of 99% pure aluminium, with surface treatment; LOR up to 90%, and anti-reflective safety glass with high light transmission (99%). Narrow, medium and wide beams for luminaire efficacy of up to 120 lm/W.

^{IT} Sistema di riflettori intercambiabili in alluminio puro al 99%, con trattamento superficiale, efficienza fino al 90% e vetro di protezione antiriflesso ad alto indice di trasmissione (99%). Fasci stretti, medi e larghi per efficienze apparecchio fino a 120 lm/W.

Ø 43 mm



Narrow/
Stretto
B 8°




Medium/
Medio
E 18°




Wide/
Largo
H 29°

Ø 60 mm



Narrow/
Stretto
B 13°




Medium/
Medio
E 24°




Wide/
Largo
H 39°

Ø 75 mm



Narrow/
Stretto
B 12°



Medium/
Medio
E 23°



Medium wide/
Medio largo
F 37°




Wide/
Largo
H 48°

Ø 95 mm



Narrow/
Stretto
B 10°



Medium/
Medio
E 20°



Medium wide/
Medio largo
H 31°




Wide/
Largo
M 40°

A premium light
comes from a
premium LED

CRI>98



COB LED CRI>98

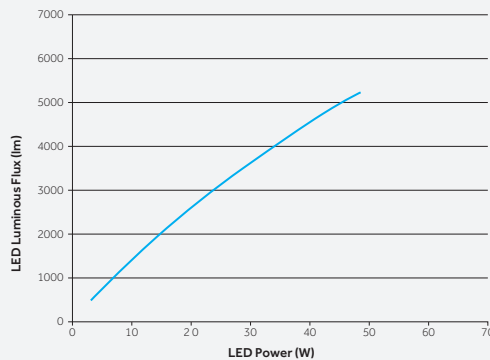

2700 K, 3000 K, 4000 K
SDCM <2, <3
CRI>80, CRI > 90, CRI >98

TM30
Rf: 90, Rg: 100
(3000 K, CRI>90)

L90 B10=50,000h
Ta: 25°
Tc: 85°
~9,000 hr
Lm Maintenance: 98%
(Source: LM80 test report)

Note:
Yori Ø 22, Ø 35, Ø 43, Ø 60
(POWER LED)

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
100	99	97	99	99	99	99	97	93	97	98	87	99	97	98

^{EN} COB LEDs and POWER LEDs are distinguished by excellent luminous intensity in the smallest sizes now available on the market. This feature means these light sources can be integrated into very compact luminaires with unique performance, very high peak beam intensity (candela) and delivered lumens from 150lm to 4500lm. These light sources are characterised by lumen maintenance at high operating temperatures due to improved efficacy at high temperatures and better optical stability over time.




^{IT} I COB LED e POWER LED sono caratterizzati da un'eccellente intensità luminosa nelle dimensioni più ridotte ora disponibili sul mercato. Questa caratteristica consente l'integrazione di queste sorgenti in prodotti dalle dimensioni molto contenute con performance uniche, picchi di intensità in candele molto elevati e lumen delivered da 150lm fino a 4500lm. Queste sorgenti sono caratterizzate da un mantenimento costante nel tempo del livello di lumen ad alte temperature di utilizzo, grazie ad una migliore efficienza ad alte temperature e ad una migliore stabilità ottica nel corso del tempo.

Warm Dimming

^{EN} The new Warm Dimming LED technology can be used to change the lighting to meet the technical and design needs of the moment, creating a pleasant, halogen dimming effect; this soft or accent lighting is perfect for use in hotels, restaurants, wellness centres and homes.

^{IT} La nuova tecnologia LED Warm Dimming offre la possibilità di creare mutevoli atmosfere luminose a seconda dell'esigenza, ricreando il piacevole effetto della dimmerazione alogena; la luce, diffusa o d'accento, si integra alla perfezione in ambienti quali hotel, ristoranti, wellness e residenziali.

COB LED Warm Dimming

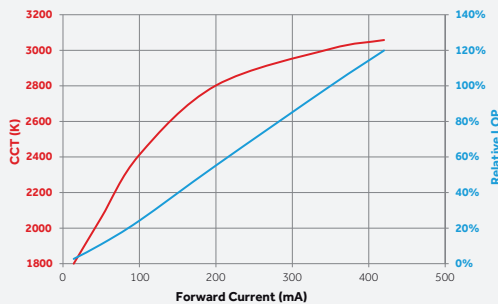

1700K-3000K
SDCM <4
CRI >95
L70
B10=50,000h

	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	
Ra																
1700K	94	94	95	97	90	91	88	97	97	94	92	81	78	93	96	98
3000K	97	95	97	97	97	96	95	99	97	94	97	94	86	95	97	95

^{EN} Our solution combines two chips in a single COB LED. With this configuration, only a single driver supplies power and gradually reduces incoming amps to bring it in line with the desired output. By reducing power supply to the chips, the luminous flux is reduced and consequently the colour temperature resulting from the combination of the individually designated colour temperatures is automatically offset. This technology delivers a very wide range of adjustment for luminous intensity, with a very gentle, gradual change in colour temperature (from no more than 3000K to no less than 1700K). The CRI and colour rendering is excellent for the whole dimming range, with a CRI of up to 97 and an R9 of 94.

^{IT} La nostra soluzione combina due chip in un solo COB LED. Con questa configurazione, l'alimentazione è un unico driver che riduce gradualmente l'ampereaggio in entrata in funzione del rendimento desiderato. Diminuendo l'alimentazione ai chip, il flusso luminoso diminuisce e la temperatura di colore, che risulta dalla combinazione delle singole temperature stabilite, viene bilanciata di conseguenza. Questa tecnologia offre un campo di regolazione della luminosità molto ampio con una variazione della temperatura di colore molto morbida e graduale, da un massimo di 3000K a un minimo di 1700K. Il CRI e il rendimento dei colori è eccellente per l'intero range di dimmerazione, con valori di CRI fino a 97 e R9 di 94.



Wide range of accessories

78



EN All filter holders have a slot where two accessories can be inserted together.
IT Tutti i porta filtri dispongono di uno scompartimento che permette l'inserimento di due accessori in contemporanea.



EN Filters, lenses and honeycomb
IT Filtri, lenti e griglie alveolari



Coloured glasses 1 mm/
Vetri colorati 1 mm




Elliptical beam lens/
Lente per fascio ellittico



Colored gel slides/
Vetrini per gel colorato



Wide texture honeycomb louvre/
Griglia alveolare a maglia larga



Selective filters/
Filtri selettivi



Opal lens/
Lente opale



Spread lens/
Lente diffondente



Dense texture honeycomb louvre/
Griglia alveolare a maglia fitta

EN Filters, lenses and honeycomb holders
IT Porta filtri, lenti e griglie alveolari



Cross blade louvre/
Griglia a croce



Barn doors/
Alette rompiflusso

EN Wall washer accessory
IT Accessorio Wall washer



Cone 45° wall washer/
Cono 45° wall washer



EN Wide range of lenses and filters also for the micro sizes 22mm and 35mm of Yori Evo Ghostrack, Yori Evo 48V and Yori Pendant. The holder allows to use up to 2 accessories at the same time.

IT Ampia gamma di lenti e filtri anche per le dimensioni micro da 22mm e 35mm di Yori Evo Ghostrack, Yori Evo 48V e Yori Pendant. L'holder consente l'impiego di due accessori contemporaneamente.

EN The optional solid and hollow decorative cylinders come in different sizes and guarantee soft, diffused lighting to enable suggestive, elegant applications.

IT I cilindri decorativi pieni e vuoti sono disponibili in diverse dimensioni e garantiscono un effetto luminoso morbido e diffuso, realizzando suggestivi scenari luminosi.



EN The solid decorative cylinders, thanks to the frosted external surface, guarantee a diffused light and a soft and wide beam, with a minimum glare. Ideal for elegant and out-of-the-ordinary lighting effects.

IT I cilindri decorativi pieni, grazie all'acidatura presente sulla parte esterna, garantiscono una luce diffusa e un fascio morbido, con un abbaglio minimo. Ideale per effetti di luce eleganti e non banali.



EN The hollow cylinders, on the other hand, guarantee a more precise light. With the Warm Dimming technology, the cylinders' colors adjust to the different color temperatures, creating even more unique and striking lighting scenarios.

IT I cilindri vuoti garantiscono una luce più precisa. Con la tecnologia Warm Dimming, i cilindri si colorano grazie alle diverse temperature di colore, realizzando scenari luminosi ancora più unici e suggestivi.

80



EN Decorative cylinders can also be used with colored filters and selective filters.

IT I cilindri decorativi possono essere utilizzati anche con filtri colorati e filtri selettivi.



A finish for any architectural setting
or interior style.
You just have to choose.

Standard finishes

82



EN 10 White
IT 10 Bianco




EN 12 Embossed matt white
IT 12 Bianco opaco goffrato



EN 21 Black
IT 21 Nero



EN 31 Embossed matt black
IT 31 Nero opaco goffrato

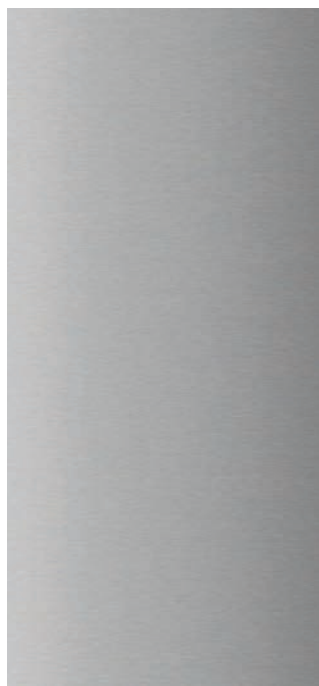

EN 00 Alluminio
IT 00 Alluminio

Special finishes



EN **C0** Royal matt white
IT **C0** Royal bianco opaco



EN **B0** Royal matt black
IT **B0** Royal nero opaco



EN **M0** Brushed aluminium
IT **M0** Alluminio spazzolato



EN **01** Chrome plated
IT **01** Cromo




EN **D0** Brushed brass
IT **D0** Ottone spazzolato



EN **E0** Brushed gold
IT **E0** Oro spazzolato



EN **N0** Brushed copper
IT **N0** Rame spazzolato

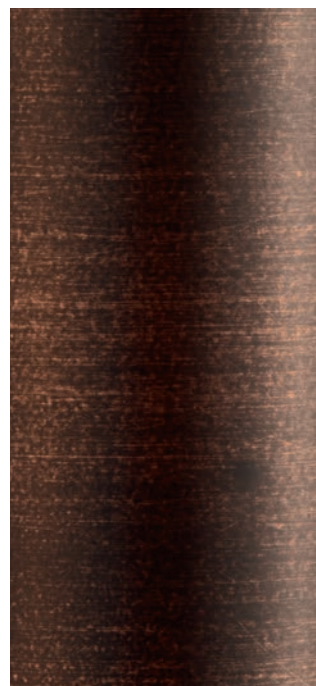


EN **L0** Antiqued brushed bronze
IT **L0** Bronzo antico spazzolato

Light in your hands




84

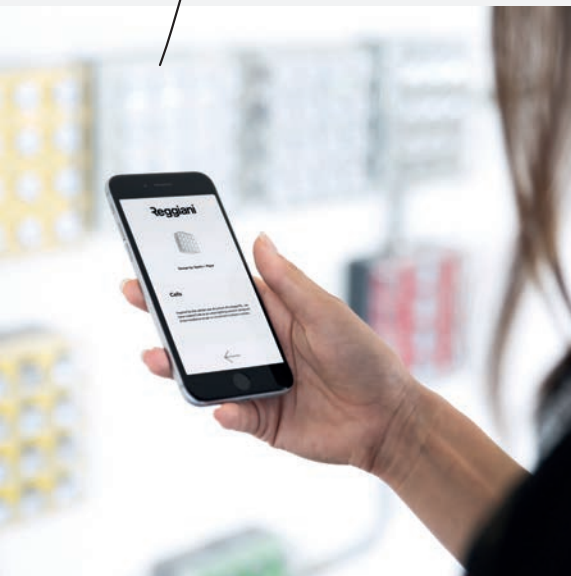

EN We have integrated Bluetooth technologies into our luminaire offer to deliver the best lighting design solutions. This control system allows you to adjust the lighting of single luminaire or of a group of ones, via smartphones, tablets, smartwatches, buttons and switches (also pre-existing ones). The control system can be integrated into the single device (Bluetooth Integrated control) or remotely inserted into the track (Bluetooth Remote System).

IT Per offrire le migliori e più flessibili soluzioni illuminotecniche abbiamo integrato le tecnologie Bluetooth nella nostra offerta. Questo sistema di controllo permette infatti di regolare l'illuminazione del singolo apparecchio o del gruppo di apparecchi semplicemente tramite smartphone, tablet, smartwatch, pulsanti e interruttori (anche pre-esistenti). Il sistema di controllo può essere integrato nel singolo apparecchio (Bluetooth Integrated control) o inserito in remoto nel binario (Bluetooth Remote System).

Bluetooth Integrated control

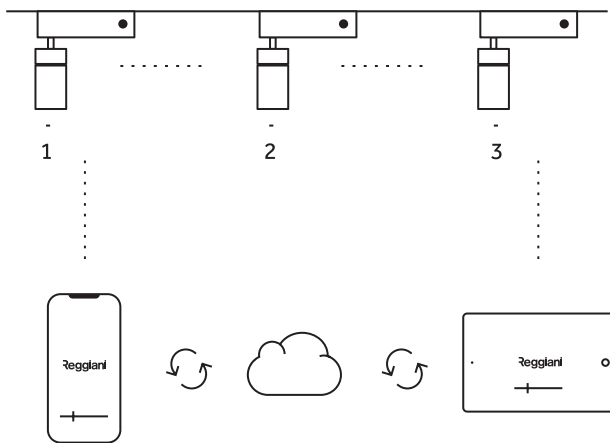


EN The system enables:

- Direct wireless control of light source
- Control device directly integrated into lighting fixture
- Effective adjustment of luminous intensity and colour temperature
- Creation of connected luminaire clusters

IT Il sistema permette:

- Controllo wireless diretto della sorgente luminosa
- Dispositivo di controllo integrato direttamente nell'apparecchio
- Regolazione efficace di luminosità e temperatura di colore
- Creazione di gruppi di apparecchi collegati tra loro
- Creazione, configurazione e archivio di scenari luminosi personalizzati

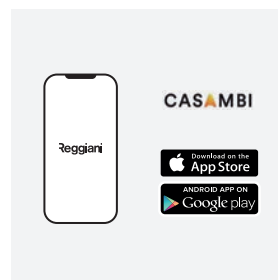

EN For more info visit www.reggiani.net


IT Per maggiori info visita www.reggiani.net

EN Control devices developed on DALI protocol that allows you to manage and control wireless luminaires for low voltage (48V) and mains voltage (220-240V) tracks. Devices communicate via Bluetooth Low Energy (BLE) with control apps with no need of wiring, control unit or router. There are two devices available, integrating two software options that work with different control apps.


IT Dispositivi sviluppati sul protocollo DALI, grazie ai quali, è possibile gestire e controllare in modalità wireless apparecchi per binari a basso voltaggio (48V) e mains voltage (220-240V). I dispositivi comunicano via Bluetooth Low Energy (BLE) con le applicazioni di controllo senza necessità di cablaggio, centraline o router. Sono disponibili due dispositivi che integrano due opzioni software alternative interfacciandosi con app di controllo differenti.

Bluetooth Remote System (Casambi)


Broadcast configuration (Up to 100 luminaires/Ghostrack drivers):

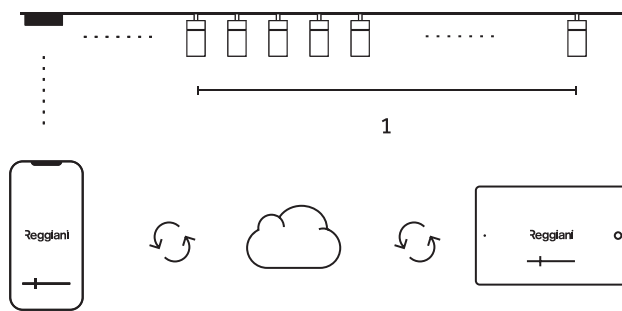

Single 4 configuration:*

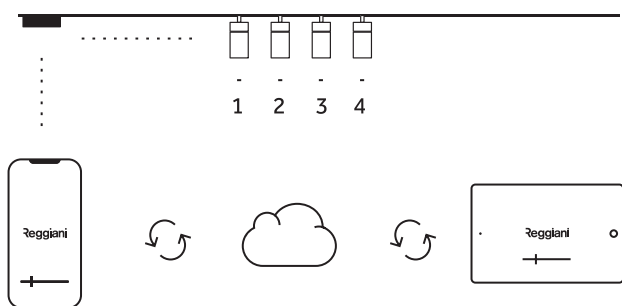

4 groups configuration (Up to 64 luminaires/Ghostrack drivers)*

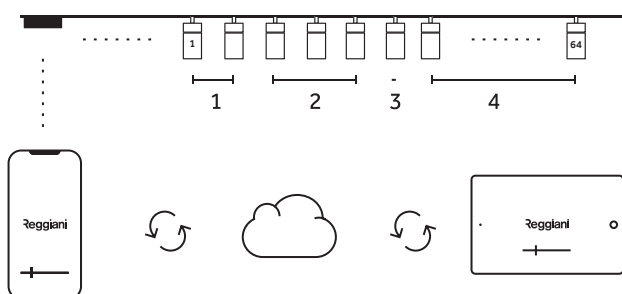



EN The system enables:

- Lighting equipment programming/control in broadcast mode: single point (max 4 devices) and lamps groups (up to 64 in 4 groups)
- User friendly interface
- Interface scenarios and customizations through images
- Automatic software update
- Cloud sharing of system and configurations

IT Il sistema permette:

- Programmazione e controllo degli apparecchi di illuminazione in modalità broadcast: single point (max 4 apparecchi) e gruppi di lampade (fino a 64 in 4 gruppi)
- Interfaccia user friendly
- Creazione di scenari e personalizzazioni interfaccia con immagini;
- Aggiornamento automatico del software;
- Condivisione dell'impianto e della configurazione tramite Cloud

		
	Wireless control device for Mains Voltage 0.26102.00**	Wireless control device for Low Voltage 0.26104.00**
Nominal input Voltage	100-240 Vac	24- 50 Vdc
Current:	0,025 – 0,06 A	48V – 0,06 A
Output Voltage:	18 – 18.5 V DC	18 – 18.5 V DC
Output current in short circuit:	250 mA	250 mA
Output channel:	1	1
Management protocol:	DALI	DALI

*For configuration download the Setup App




EN For more info visit www.reggiani.net


IT Per maggiori info visita www.reggiani.net

Bluetooth Remote System


Broadcast configuration (Up to 100 luminaires/Ghostrack drivers):

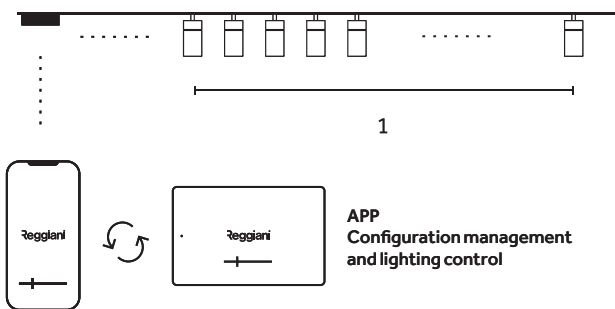

Single configuration (Up to 64 luminaires/Ghostrack drivers)

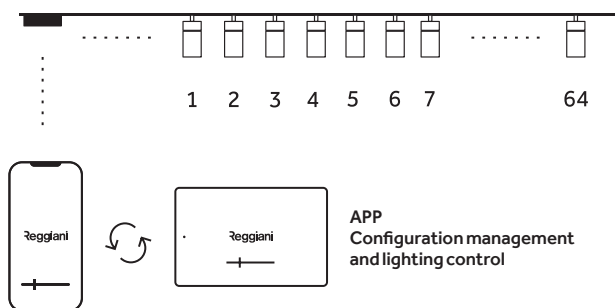

Endless groups configuration (Up to 64 luminaires/Ghostrack drivers)

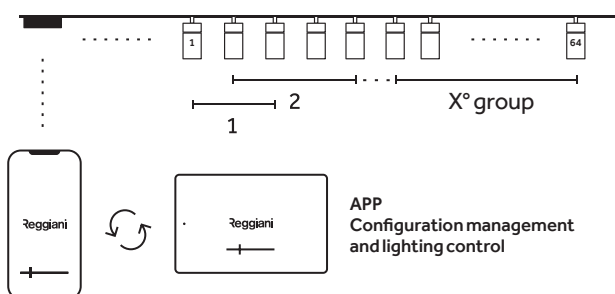



^{EN} The system enables:


- Up to 64 lamps programming in DALI mode;
- More than 64 lamps programming in DALI broadcast mode;
- Group scene modification;
- BUS electrical diagnostics;
- Test and control interface;
- Automatic software update;
- Compatibility with existing DALI systems;
- Broadcast / single point (up to 64 lamps) control mode or in lamp groups.

^{IT} Il sistema permette:

- Programmazione fino a 64 lampade in modalità DALI;
- Programmazione di più 64 lampade in modalità DALI broadcast;
- Modifica delle scene a gruppi;
- Diagnostica elettrica del BUS;
- Interfaccia di test e controllo;
- Compatibilità con impianti DALI già esistenti;
- Controllo in modalità broadcast / single point (fino a 64 lampade) o gruppi di lampade.

87

		
	Wireless control device for Mains Voltage 0.26103.00**	Wireless control device for Low Voltage 0.26105.00**
Nominal input Voltage	100-240 Vac	24- 50 Vdc
Current:	0,025 – 0,06 A	48V – 0,06 A
Output Voltage:	18 -18.5 V DC	18 -18.5 V DC
Output current in short circuit:	250 mA	250 mA
Output channel:	1	1
Management protocol:	DALI	DALI



^{EN} Reggiani APP available from March 2019

^{IT} Reggiani APP disponibile da Marzo 2019


Codes

89


Mains Voltage Range




Suspension Kit

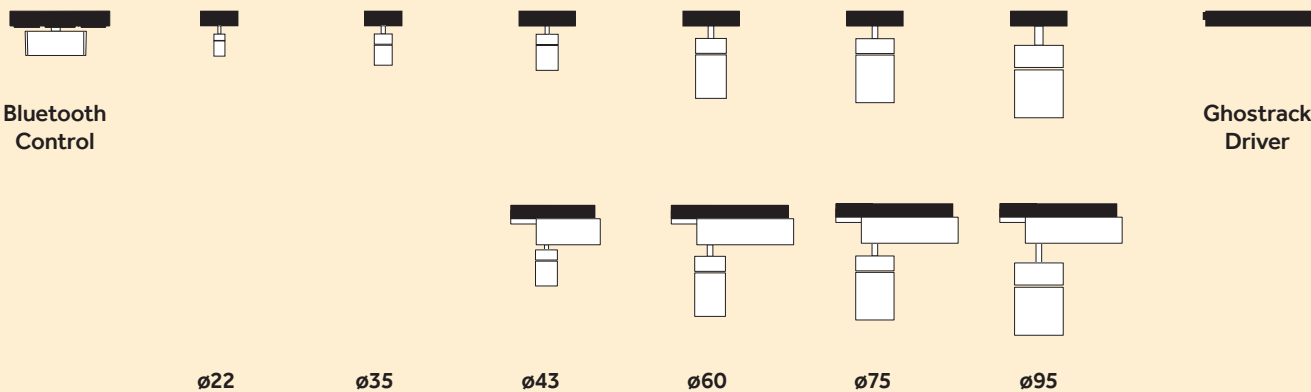

90

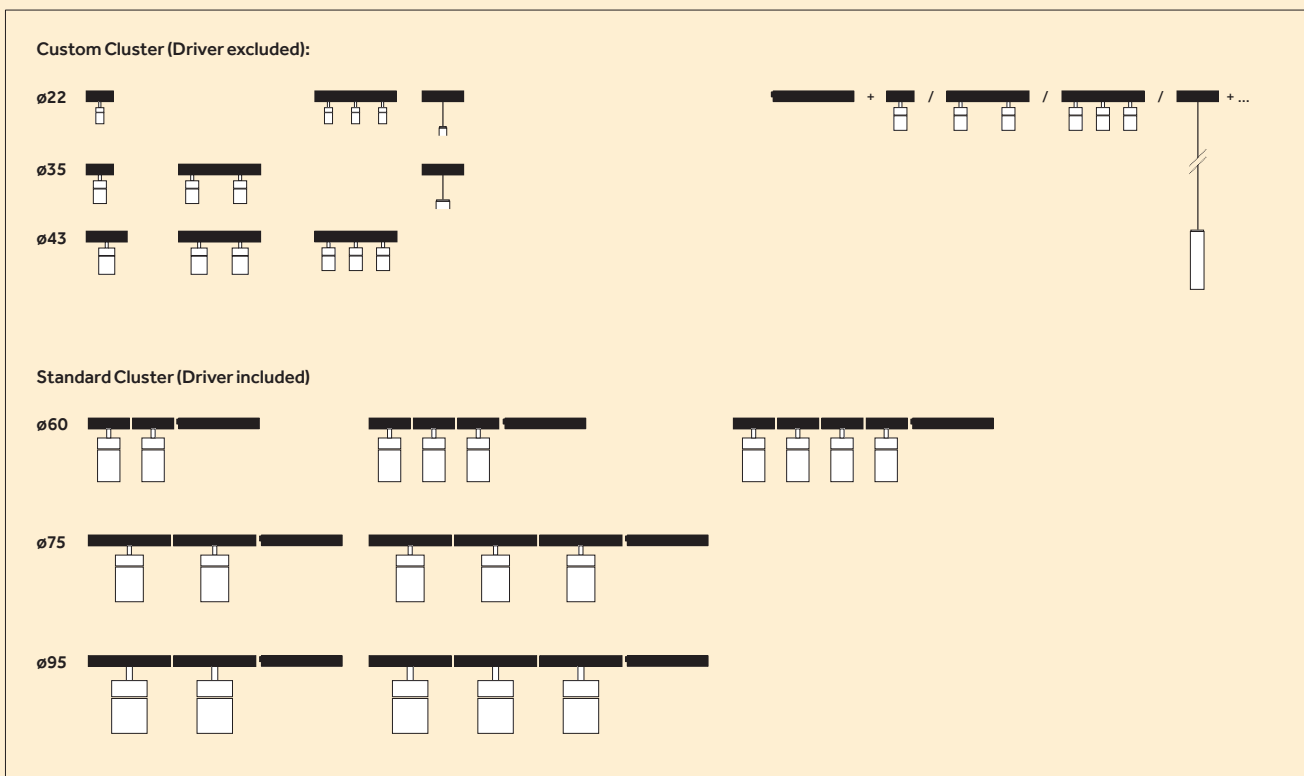

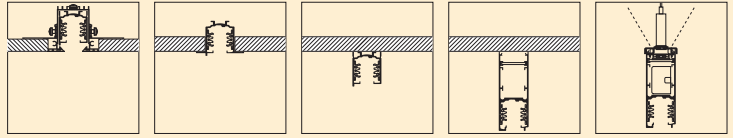

Supertrack


Track Recessed

Track Surface/Pendant

HTrack Surface/Pendant

HTrack Pendant Indirect

114.7

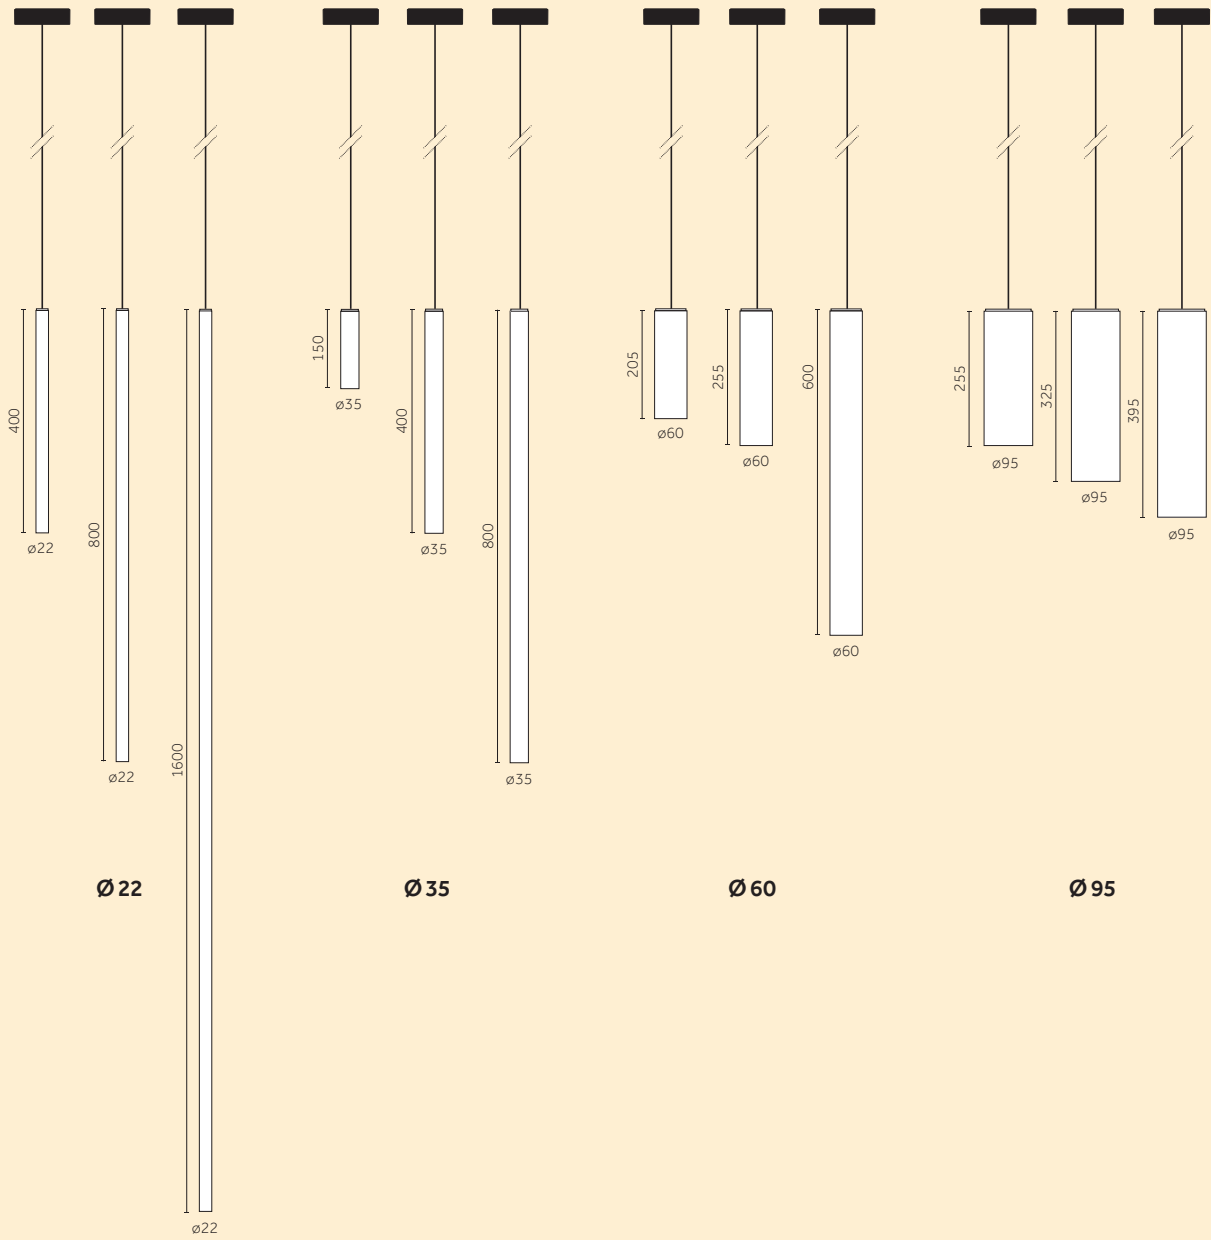

Mains Voltage

Mains Voltage products



Yori Evo Ghostrack



96 Yori Pendant Ghostrack



120 Yori Evo Box

128

Mains Voltage tracks



Supertrack



138 Track Recessed



142 Track Surface/Pendant




144 HTrack Surface/Pendant 148

94



HTrack Pendant Indirect 150

Yori Evo Ghostrack

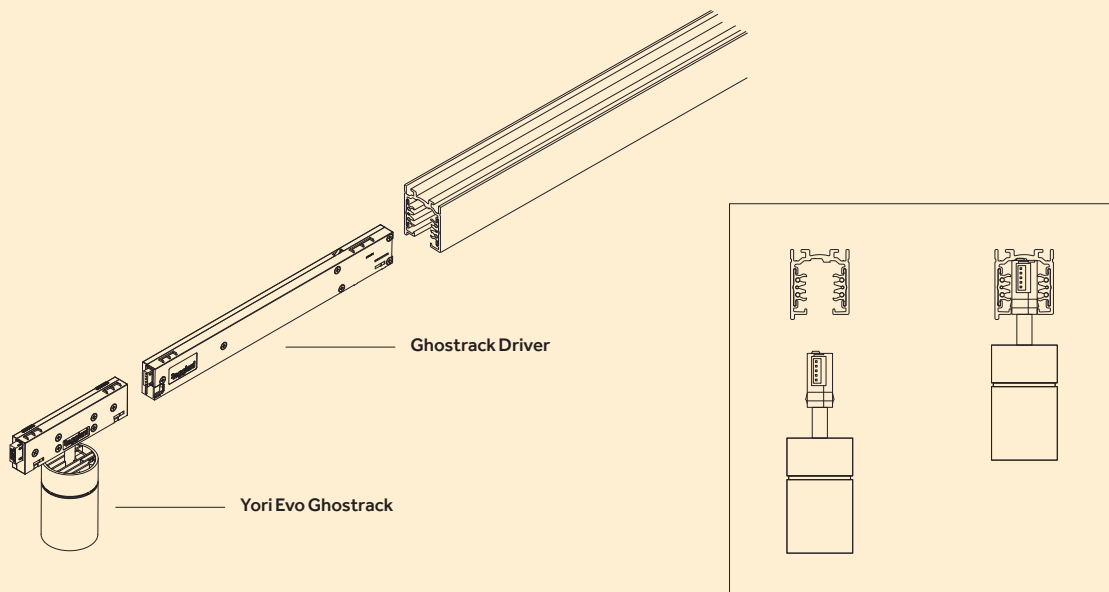

96



Ø 22 mm		Ø 35 mm		Ø 43 mm		Ø 60 mm		Ø 75 mm		Ø 95 mm	
Precision (1X)	p.97	Precision (1X)	p.98	Precision (1X)	p.99	Precision (1X)	p.102	Precision (1X)	p.108	Precision (1X)	p.114
Precision (3X)	p.97	Precision (2X)	p.98	Precision (2X)	p.100	Precision (2X)	p.104	Precision (2X)	p.110	Precision (2X)	p.116
		Precision (3X)	p.98			Precision (3X)	p.105	Precision (3X)	p.112	Precision (3X)	p.118
						Precision (4X)	p.106				
				Performance (1X)	p.100	Performance (1X)	p.103	Performance (1X)	p.109	Performance (1X)	p.115
				Performance (2X)	p.101	Performance (2X)	p.104	Performance (2X)	p.111	Performance (2X)	p.117
						Performance (3X)	p.106	Performance (3X)	p.113	Performance (3X)	p.118
						Performance (4X)	p.107				
POWERLED		POWERLED		POWERLED		COBLED		COBLED		COBLED	
2 W		2,7 W		2,5 W, 4 W, 9 W		9 W, 12 W, 17 W		12 W, 17 W, 24 W, 28 W		12 W, 17 W, 24 W, 33 W	
140lm - 200lm		270lm - 372lm		215lm - 940lm		960lm-2400lm		1323lm-4054lm		1323lm-4695lm	
L90 B10=50,000h		L90 B10=50,000h		L90 B10=50,000h		L90 B10=50,000h		L90 B10=50,000h		L90 B10=50,000h	
2700K, 3000K, 4000K		2700K, 3000K, 4000K		2700K, 3000K, 4000K		2700K, 3000K, 4000K		2700K, 3000K, 4000K		2700K, 3000K, 4000K	
SDCM <3		SDCM <3		SDCM <3		SDCM <2 <3		SDCM <2 <3		SDCM <2 <3	
CRI >80, CRI >90		CRI >80, CRI >90		CRI >80, CRI >90		CRI >80, CRI >90, CRI >98		CRI >80, CRI >90, CRI >98		CRI >80, CRI >90, CRI >98	
				Warm Dimming COBLED		Warm Dimming COBLED		Warm Dimming COBLED		Warm Dimming COBLED	
				6,5 W		12 W		25 W		33 W	
				10lm - 550lm		100lm - 1000lm		100lm - 2500lm		100lm - 3100lm	
				L70 B50=50,000h		L70 B50=50,000h		L70 B50=50,000h		L70 B50=50,000h	
				1800K-2800K		1700K-3000K		1700K-3000K		1700K-3000K	
				SDCM <4		SDCM <4		SDCM <4		SDCM <4	
				CRI >95		CRI >95		CRI >95		CRI >95	

*Cluster configuration with 220 mm adapter/*Configurazione cluster con adattatore da 220 mm

Ø 22 mm | Precision (1X)




* Pending



Code example:

X . 1X.BH60 B . HW 01

Accessories: p.187/198
 Spacers/Distanziali: p.198
 Mains Voltage Tracks: p.137-153
 Finishes: p.82-83
 Photometric data:
 www.reggiani.net
 Ghostrack driver: p.119



2 W POWER LED



Lumen delivered up to 110 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	1X.BH60 Precision	B 10° Narrow	HW	2700	>90	140	<3	01
		E 28° Medium	HQ	3000	>90	145	<3	12
		H 33° Wide	WW	3000	>80	190	<3	31
			NN	4000	>80	200	<3	B0
			LED nominal lumen					CO
								DO
								EO
								LO
								MO
								NO

Ø 22 mm | Precision (3X)




* Pending



Code example:

X . 3X.BH60 B . HW 01


Accessories: p.187/198
 Spacers/Distanziali: p.198
 Mains Voltage Tracks: p.137-153
 Finishes: p.82-83
 Photometric data:
 www.reggiani.net
 Ghostrack driver: p.119





3x2 W POWER LED

Lumen delivered up to 3x110 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	3X.BH60 Precision	B 10° Narrow	HW	2700	>90	3x140	<3	01
		E 28° Medium	HQ	3000	>90	3x145	<3	12
		H 33° Wide	WW	3000	>80	3x190	<3	31
			NN	4000	>80	3x200	<3	B0
			LED nominal lumen					CO
								DO
								EO
								LO
								MO
								NO

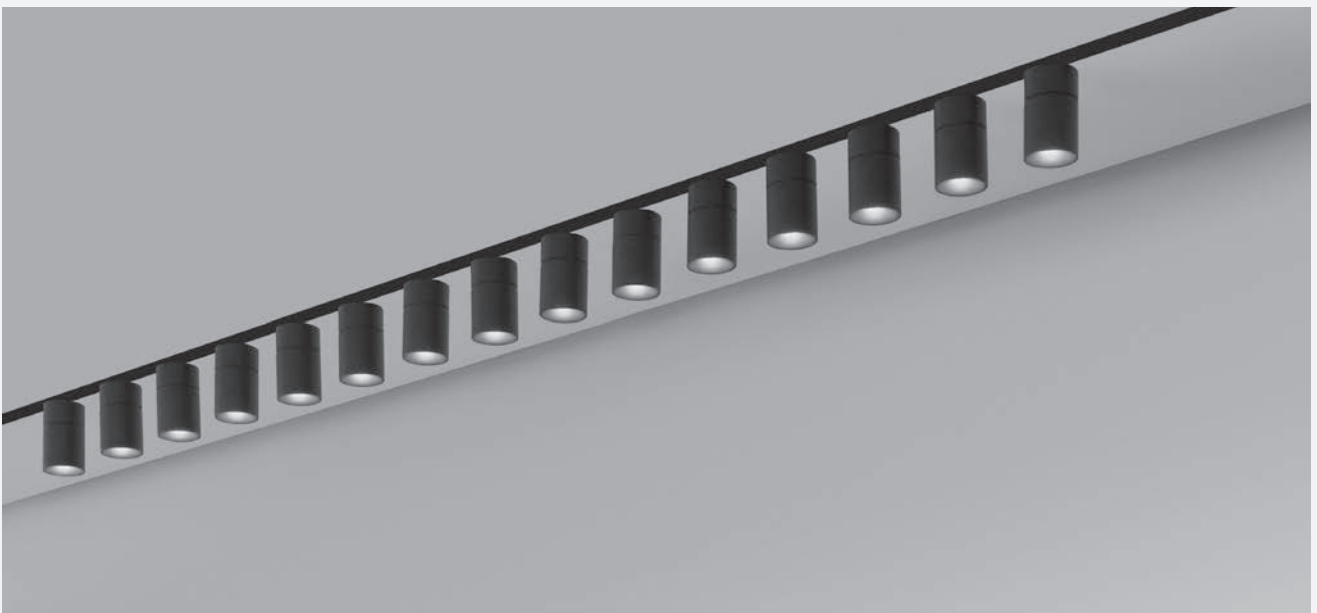

Ø 43 mm | Precision (1X)



Code example:

X . 1X.FH60 B . HW 01

Accessories: p.189/198

Spacers/Distanziali: p.198

Mains Voltage Tracks: p.137-153

Finishes: p.82-83

Photometric data:

www.reggiani.net


Ghosttrack driver: p.119



2,5 W POWER LED Lumen delivered up to 250 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	1X.FH60 Precision	A 6° Very narrow	HW	2700	>90	215	<3	01
		B 10° Narrow	HQ	3000	>90	220	<3	12
		E 22° Medium	WW	3000	>80	253	<3	31
		H 38° Wide	NN	4000	>80	288	<3	B0

LED nominal lumen



4 W POWER LED Lumen delivered up to 435 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	1X.FH61 Precision	A 8° Very narrow	HW	2700	>90	410	<3	01
		B 11° Narrow	HQ	3000	>90	415	<3	12
		E 23° Medium	WW	3000	>80	485	<3	31
		H 40° Wide	NN	4000	>80	530	<3	B0

LED nominal lumen



9 W POWER LED Lumen delivered up to 750 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	1X.FH62 Precision	A 8° Very narrow	HW	2700	>90	725	<3	01
		B 11° Narrow	HQ	3000	>90	730	<3	12
		E 23° Medium	WW	3000	>80	845	<3	31
		H 40° Wide	NN	4000	>80	940	<3	B0

LED nominal lumen



6,5 W Warm Dimming COBLED Lumen delivered up to 130 lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	1X.FH62 Precision	B 27° Medium	DT	1800-2800	>95	10-550	<4	01

LED nominal lumen





Yori Evo Ghostrack

2x9 W POWER LED			Lumen delivered up to 2x750 lm / Lumen maintenance: L90 B10=50,000h					Finishes
Driver	Version		Optics	LED	K	CRI	lm	SDCM
X Not included	2X.FH62	Precision	A 8° Very narrow	HW	2700	>90	2x725	<3
			B 11° Narrow	HQ	3000	>90	2x730	<3
			E 23° Medium	WW	3000	>80	2x845	<3
			H 40° Wide	NN	4000	>80	2x940	<3
LED nominal lumen								
								01
								12
								31
								B0
								C0
								D0
								E0
								L0
								M0
								N0

2x6,5 W Warm Dimming COB LED			Lumen delivered up to 2x130 lm / Lumen maintenance: L70 B50=50,000h					Finishes
Driver	Version		Optics	LED	K	CRI	lm	SDCM
X Not included	2X.FH62	Precision	B 27° Medium	DT	1800-2800	>95	2x10-550	<4
LED nominal lumen								
								01
								12
								31
								B0
								C0
								D0
								E0
								L0
								M0
								N0

Ø 43 mm | Performance (2X)



Code example:

X . 2X.FH71 B . HW 01

Accessories: p.190/198
Spacers/Distanziali: p.198
Mains Voltage Tracks: p.137-153

Finishes: p.82-83

Photometric data:

www.reggiani.net



Ghostrack driver: p.119




2x4 W POWER LED			Lumen delivered up to 2x450 lm / Lumen maintenance: L90 B10=50,000h					Finishes
Driver	Version		Optics	LED	K	CRI	lm	SDCM
X Not included	2X.FH71	Performance	B 8° Narrow	HW	2700	>90	2x410	<3
			E 18° Medium	HQ	3000	>90	2x415	<3
			H 29° Wide	WW	3000	>80	2x485	<3
				NN	4000	>80	2x530	<3
LED nominal lumen								
								01
								12
								31
								B0
								C0
								D0
								E0
								L0
								M0
								N0

2x9 W POWER LED			Lumen delivered up to 2x780 lm / Lumen maintenance: L90 B10=50,000h					Finishes
Driver	Version		Optics	LED	K	CRI	lm	SDCM
X Not included	2X.FH72	Performance	B 8° Narrow	HW	2700	>90	2x725	<3
			E 18° Medium	HQ	3000	>90	2x730	<3
			H 29° Wide	WW	3000	>80	2x845	<3
				NN	4000	>80	2x940	<3
LED nominal lumen								
								01
								12
								31
								B0
								C0
								D0
								E0
								L0
								M0
								N0

Ø 60 mm | Precision (1X)



On-Off

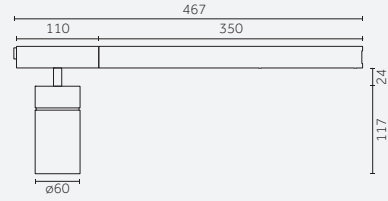

DALI



Code example:

0 . 1X.GH62 B . HC 01

Accessories: p.191-192 /198

Spacers/Distanziali: p.198

Mains Voltage Tracks: p.137-153

Finishes: p.82-83

Photometric data:

www.reggiani.net



9 W		COBLED		Lumen delivered up to 1115 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
0 On-Off	1X.GH62 Precision	B 12° Narrow	HC	3000	>98	960	<2	01		
D DALI		E 20° Medium	HW	2700	>90	1050	<2	12		
		K - Without optics	HQ	3000	>90	1100	<2	31		
			WW	3000	>80	1300	<3	B0		
			NN	4000	>80	1360	<3	C0		
			LED nominal lumen					D0		
								E0		
								L0		
								M0		
								NO		

12 W		COBLED		Lumen delivered up to 1455 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
0 On-Off	1X.GH63 Precision	B 12° Narrow	HC	3000	>98	1250	<2	01		
D DALI		E 20° Medium	HW	2700	>90	1370	<2	12		
		K - Without optics	HQ	3000	>90	1420	<2	31		
			WW	3000	>80	1700	<3	B0		
			NN	4000	>80	1775	<3	C0		
			LED nominal lumen					D0		
								E0		
								L0		
								M0		
								NO		


17 W		COBLED		Lumen delivered up to 1970 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
0 On-Off	1X.GH64 Precision	B 12° Narrow	HC	3000	>98	1700	<2	01		
D DALI		E 20° Medium	HW	2700	>90	1870	<2	12		
		K - Without optics	HQ	3000	>90	1920	<2	31		
			WW	3000	>80	2320	<3	B0		
			NN	4000	>80	2400	<3	C0		
			LED nominal lumen					D0		
								E0		
								L0		
								M0		
								NO		

12 W		Warm Dimming COBLED		Lumen delivered up to 690 lm / Lumen maintenance: L70 B50=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
D DALI	1X.GH63 Precision	B 27° Medium	DT	1700-3000	>95	100-1000	<4	01		
			LED nominal lumen					12		
								31		
								B0		
								C0		
								D0		
								E0		
								L0		
								M0		
								NO		

Ø 60 mm | Performance (1X)



On-Off

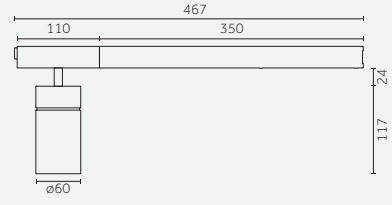

DALI



Code example:

0 . 1X.GH72 B . HC 01

Accessories: p.193 /198
 Spacers/Distanziali: p.198
 Mains Voltage Tracks: p.137-153
 Finishes: p.82-83
 Photometric data:
 www.reggiani.net

9 W COBLED		Lumen delivered up to 1200 lm / Lumen maintenance: L90 B10=50,000h							Finishes	
Driver	Version	Optics	LED	K	CRI	lm	SDCM			
0 On-Off	1X.GH72 Performance	B 13° Narrow	HC	3000	>98	960	<2	01		
D DALI		E 24° Medium	HW	2700	>90	1050	<2	12		
		H 39° Wide	HQ	3000	>90	1100	<2	31		
		K - Without optics	WW	3000	>80	1300	<3	B0		
			NN	4000	>80	1360	<3	C0		
			LED nominal lumen						D0	
								E0		
								L0		
								M0		
								NO		




12 W COBLED		Lumen delivered up to 1560 lm / Lumen maintenance: L90 B10=50,000h							Finishes	
Driver	Version	Optics	LED	K	CRI	lm	SDCM			
0 On-Off	1X.GH73 Performance	B 13° Narrow	HC	3000	>98	1250	<2	01		
D DALI		E 24° Medium	HW	2700	>90	1370	<2	12		
		H 39° Wide	HQ	3000	>90	1420	<2	31		
		K - Without optics	WW	3000	>80	1700	<3	B0		
			NN	4000	>80	1775	<3	C0		
			LED nominal lumen						D0	
								E0		
								L0		
								M0		
								NO		

17 W COBLED		Lumen delivered up to 2110 lm / Lumen maintenance: L90 B10=50,000h							Finishes	
Driver	Version	Optics	LED	K	CRI	lm	SDCM			
0 On-Off	1X.GH74 Performance	B 13° Narrow	HC	3000	>98	1700	<2	01		
D DALI		E 24° Medium	HW	2700	>90	1870	<2	12		
		H 39° Wide	HQ	3000	>90	1920	<2	31		
		K - Without optics	WW	3000	>80	2320	<3	B0		
			NN	4000	>80	2400	<3	C0		
			LED nominal lumen						D0	
								E0		
								L0		
								M0		
								NO		

2x12 W COBLED		Lumen delivered up to 2x1560 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	2X.GH73 Performance	B 13° Narrow	HC	3000	>98	2x1250	<2	01
D DALI		E 24° Medium	HW	2700	>90	2x1370	<2	12
		H 39° Wide	HQ	3000	>90	2x1420	<2	31
		K - Without optics	WW	3000	>80	2x1700	<3	B0
			NN	4000	>80	2x1775	<3	C0
			LED nominal lumen					D0
								E0
								L0
								M0
								N0

2x17 W COBLED		Lumen delivered up to 2x2110 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	2X.GH74 Performance	B 13° Narrow	HC	3000	>98	2x1700	<2	01
D DALI		E 24° Medium	HW	2700	>90	2x1870	<2	12
		H 39° Wide	HQ	3000	>90	2x1920	<2	31
		K - Without optics	WW	3000	>80	2x2320	<3	B0
			NN	4000	>80	2x2400	<3	C0
			LED nominal lumen					D0
								E0
								L0
								M0
								N0

Ø 60 mm | Precision (3X)

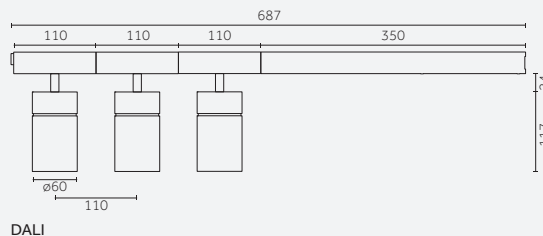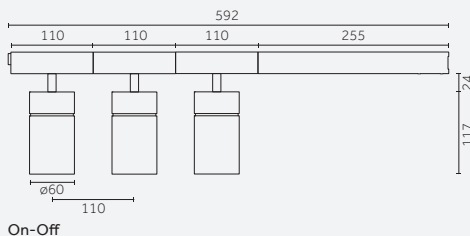

Code example:
0 . 3X.GH62 B . HC 01

Accessories: p.191-192/198
 Spacers/Distanziali: p.198
 Mains Voltage Tracks: p.137-153
 Finishes: p.82-83
 Photometric data:
 www.reggiani.net



Notes:
 Version with 220mm
 interdistance adapter is available
 on request / Versione con
 adattatore per interdistanza
 220mm disponibile su richiesta

3x9 W COBLED		Lumen delivered up to 3x1115 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	3X.GH62 Precision	B 12° Narrow	HC	3000	>98	3x960	<2	01
D DALI		E 20° Medium	HW	2700	>90	3x1050	<2	12
		K - Without optics	HQ	3000	>90	3x1100	<2	31
			WW	3000	>80	3x1300	<3	B0
			NN	4000	>80	3x1360	<3	C0
			LED nominal lumen					D0
								E0
								L0
								M0
								N0


3x12 W COBLED		Lumen delivered up to 3x1455 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	3X.GH63 Precision	B 12° Narrow	HC	3000	>98	3x1250	<2	01
D DALI		E 20° Medium	HW	2700	>90	3x1370	<2	12
		K - Without optics	HQ	3000	>90	3x1420	<2	31
			WW	3000	>80	3x1700	<3	B0
			NN	4000	>80	3x1775	<3	C0
			LED nominal lumen					D0
								E0
								L0
								M0
								N0

Yori Evo Ghosttrack

Ø 60 mm | Performance (3X)

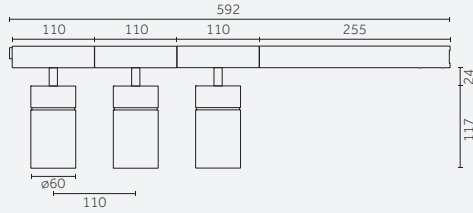

On-Off

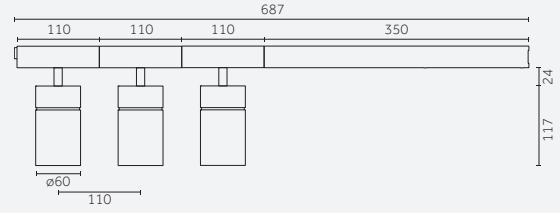

DALI



Code example:

0 . 3X.GH72 B . HC 01

Accessories: p.193 /198

Spacers/Distanziali: p.198

Mains Voltage Tracks: p.137-153

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Version with 220mm interdistance adapter is available on request / Versione con adattatore per interdistanza 220mm disponibile su richiesta

3x9W COBLED

Lumen delivered up to 3x1200 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	3X.GH72 Performance	B 13° Narrow	HC	3000	>98	3x960	<2	01
D DALI		E 24° Medium	HW	2700	>90	3x1050	<2	12
		H 39° Wide	HQ	3000	>90	3x1100	<2	31
		K - Without optics	WW	3000	>80	3x1300	<3	B0
			NN	4000	>80	3x1360	<3	C0
								D0
								E0
								L0
								M0
								N0

LED nominal lumen


3x12W COBLED

Lumen delivered up to 3x1560 lm / Lumen maintenance: L90 B10=50,000h


Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	3X.GH73 Performance	B 13° Narrow	HC	3000	>98	3x1250	<2	01
D DALI		E 24° Medium	HW	2700	>90	3x1370	<2	12
		H 39° Wide	HQ	3000	>90	3x1420	<2	31
		K - Without optics	WW	3000	>80	3x1700	<3	B0
			NN	4000	>80	3x1775	<3	C0
								D0
								E0
								L0
								M0
								N0

LED nominal lumen

106 Ø 60 mm | Precision (4X)

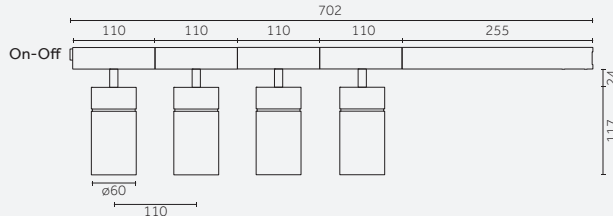

On-Off

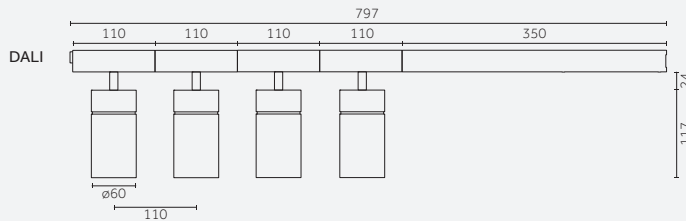

DALI



Code example:

0 . 4X.GH62 B . HC 01

Accessories: p.191-192 /198

Spacers/Distanziali: p.198

Mains Voltage Tracks: p.137-153

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Version with 220mm interdistance adapter is available on request / Versione con adattatore per interdistanza 220mm disponibile su richiesta

4x9W COBLED


Lumen delivered up to 4x1115 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	4X.GH62 Precision	B 12° Narrow	HC	3000	>98	4x960	<2	01
D DALI		E 20° Medium	HW	2700	>90	4x1050	<2	12
		K - Without optics	HQ	3000	>90	4x1100	<2	31
			WW	3000	>80	4x1300	<3	B0
			NN	4000	>80	4x1360	<3	C0
								D0
								E0
								L0
								M0
								N0

LED nominal lumen

Yori Evo Ghostrack

Ø 60 mm | Performance (4X)

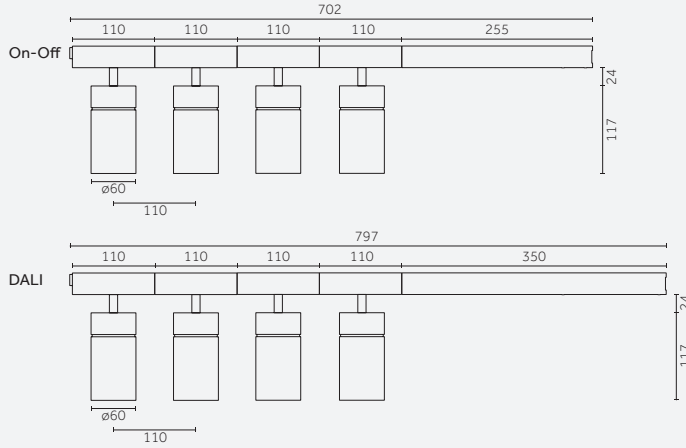

Code example:

0 . **4X.GH72** **B** . **HC** **01**

Accessories: p.193 /198

Spacers/Distanziali: p.198

Mains Voltage Tracks: p.137-153

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Version with 220mm interdistance adapter is available on request / Versione con adattatore per interdistanza 220mm disponibile su richiesta

4x9 W COBLED




Lumen delivered up to 4x1200 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	4X.GH72 Performance	B 13° Narrow	HC	3000	>98	4x960	<2	01
D DALI		E 24° Medium	HW	2700	>90	4x1050	<2	12
		H 39° Wide	HQ	3000	>90	4x1100	<2	31
		K - Without optics	WW	3000	>80	4x1300	<3	B0
			NN	4000	>80	4x1360	<3	C0
								D0
								E0
								L0
								M0
								NO

LED nominal lumen



Ø 75 mm | Precision (1X)

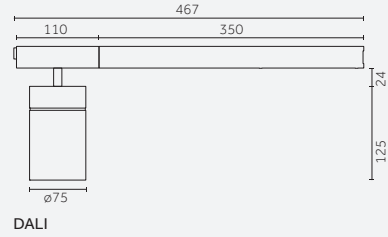

Code example:

0 . 1X.LH63 B . HC 01

Accessories: p.194/198

Spacers/Distanziali: p.198

Mains Voltage Tracks: p.137-153

Finishes: p.82-83

Photometric data:

www.reggiani.net

12 W		COBLED		Lumen delivered up to 1575 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
0 On-Off	1X.LH63 Precision	B 12° Narrow	HC	3000	>98	1323	<2	01		
D DALI		E 23° Medium	HW	2700	>90	1491	<2	12		
		K - Without optics	HQ	3000	>90	1533	<2	31		
			WW	3000	>80	1859	<3	B0		
			NN	4000	>80	1920	<3	C0		
			LED nominal lumen					D0		
								E0		
								L0		
								M0		
								NO		

17 W		COBLED		Lumen delivered up to 2190 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
0 On-Off	1X.LH64 Precision	B 12° Narrow	HC	3000	>98	1834	<2	01		
D DALI		E 23° Medium	HW	2700	>90	2067	<2	12		
		K - Without optics	HQ	3000	>90	2122	<2	31		
			WW	3000	>80	2582	<3	B0		
			NN	4000	>80	2665	<3	C0		
			LED nominal lumen					D0		
								E0		
								L0		
								M0		
								NO		

17 W		COBLED		Lumen delivered up to 1465 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
0 On-Off	1X.NH64 Precision	A 7° Very narrow	HC	3000	>98	1700	<2	01		
D DALI			HW	2700	>90	1870	<2	12		
			HQ	3000	>90	1920	<2	31		
			WW	3000	>80	2320	<3	B0		
			NN	4000	>80	2400	<3	C0		
			LED nominal lumen					D0		
								E0		
								L0		
								M0		
								NO		



24 W		COBLED		Lumen delivered up to 2955 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
0 On-Off	1X.LH66 Precision	B 12° Narrow	HC	3000	>98	2476	<2	01		
D DALI		E 23° Medium	HW	2700	>90	2792	<2	12		
		K - Without optics	HQ	3000	>90	2860	<2	31		
			WW	3000	>80	3487	<3	B0		
			NN	4000	>80	3602	<3	C0		
			LED nominal lumen					D0		
								E0		
								L0		
								M0		
								NO		

28 W		COBLED		Lumen delivered up to 3325 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
0 On-Off	1X.LH67 Precision	B 12° Narrow	HC	3000	>98	2777	<2	01		
D DALI		E 23° Medium	HW	2700	>90	3137	<2	12		
		K - Without optics	HQ	3000	>90	3207	<2	31		
			WW	3000	>80	3898	<3	B0		
			NN	4000	>80	4054	<3	C0		
			LED nominal lumen					D0		
								E0		
								L0		
								M0		
								NO		


Yori Evo Ghostrack

25 W		Warm Dimming COBLED		Lumen delivered up to 1100 lm / Lumen maintenance: L70 B50=50,000h				
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
D DALI	1X.LH66 Precision	B 25° Medium	DT	1700-3000	>95	100-2500	<4	01 12 31 B0 C0 D0 E0 L0 M0 N0
LED nominal lumen								

Ø 75 mm | Performance (1X)



On-Off

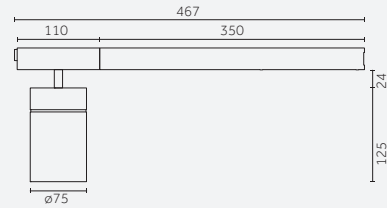

DALI



Code example:

0 . 1X.LH73 B . HW 01

Accessories: p.195/198
 Spacers/Distanziali: p.198
 Mains Voltage Tracks: p.137-153
 Finishes: p.82-83
 Photometric data:
 www.reggiani.net


12 W		COBLED		Lumen delivered up to 1800 lm / Lumen maintenance: L90 B10=50,000h				
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	1X.LH73 Performance	B 12° Narrow	HC	3000	>98	1323	<2	01 12 31 B0 C0 D0 E0 L0 M0 N0
D DALI		E 23° Medium	HW	2700	>90	1491	<2	
		F 37° Medium-wide	HQ	3000	>90	1533	<2	
		H 48° Wide	WW	3000	>80	1859	<3	
		K - Without optics	NN	4000	>80	1920	<3	
LED nominal lumen								

17 W		COBLED		Lumen delivered up to 2480 lm / Lumen maintenance: L90 B10=50,000h				
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	1X.LH74 Performance	B 12° Narrow	HC	3000	>98	1834	<2	01 12 31 B0 C0 D0 E0 L0 M0 N0
D DALI		E 23° Medium	HW	2700	>90	2067	<2	
		F 37° Medium-wide	HQ	3000	>90	2122	<2	
		H 48° Wide	WW	3000	>80	2582	<3	
		K - Without optics	NN	4000	>80	2665	<3	
LED nominal lumen								

24 W		COBLED		Lumen delivered up to 3350 lm / Lumen maintenance: L90 B10=50,000h				
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	1X.LH76 Performance	B 12° Narrow	HC	3000	>98	2476	<2	01 12 31 B0 C0 D0 E0 L0 M0 N0
D DALI		E 23° Medium	HW	2700	>90	2792	<2	
		F 37° Medium-wide	HQ	3000	>90	2860	<2	
		H 48° Wide	WW	3000	>80	3487	<3	
		K - Without optics	NN	4000	>80	3602	<3	
LED nominal lumen								

28 W		COBLED		Lumen delivered up to 3770 lm / Lumen maintenance: L90 B10=50,000h				
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	1X.LH77 Performance	B 12° Narrow	HC	3000	>98	2777	<2	01 12 31 B0 C0 D0 E0 L0 M0 N0
D DALI		E 23° Medium	HW	2700	>90	3137	<2	
		F 37° Medium-wide	HQ	3000	>90	3207	<2	
		H 48° Wide	WW	3000	>80	3898	<3	
		K - Without optics	NN	4000	>80	4054	<3	
LED nominal lumen								

Ø 75 mm | Precision (2X)



Code example:

0 . **2X.LH62** **B** . **HW** **01**

Accessories: p.194/198


Spacers/Distanziali: p.198

Mains Voltage Tracks: p.137-153

Finishes: p.82-83

Photometric data:

www.reggiani.net

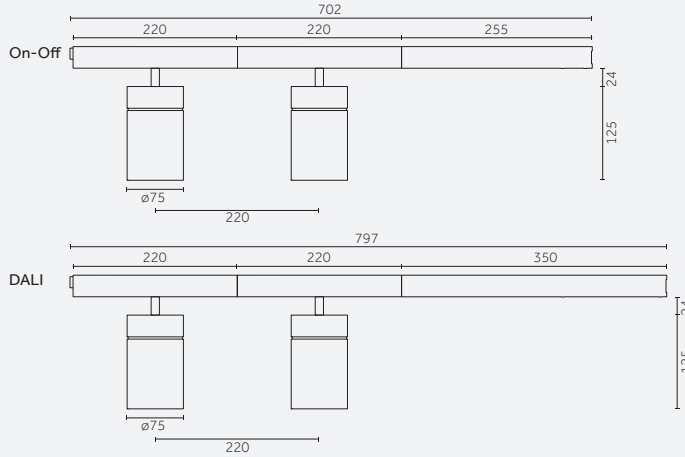

2x9 W COB LED Lumen delivered up to 2x1450 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	2X.LH62 Precision	B 12° Narrow	HC	3000	>98	2x1215	<2	01
D DALI		E 23° Medium	HW	2700	>90	2x1370	<2	12
		K - Without optics	HQ	3000	>90	2x1410	<2	31
			WW	3000	>80	2x1710	<3	B0
			NN	4000	>80	2x1765	<3	C0
			LED nominal lumen					D0
								E0
								L0
								M0
								N0

2x12 W COB LED Lumen delivered up to 2x1575 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	2X.LH63 Precision	B 12° Narrow	HC	3000	>98	2x1323	<2	01
D DALI		E 23° Medium	HW	2700	>90	2x1491	<2	12
		K - Without optics	HQ	3000	>90	2x1533	<2	31
			WW	3000	>80	2x1859	<3	B0
			NN	4000	>80	2x1920	<3	C0
			LED nominal lumen					D0
								E0
								L0
								M0
								N0

2x17 W COB LED Lumen delivered up to 2x1465 lm / Lumen maintenance: L90 B10=50,000h



Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	2X.NH64 Precision	A 7° Verynarrow	HC	3000	>98	2x1700	<2	01
D DALI			HW	2700	>90	2x1870	<2	12
			HQ	3000	>90	2x1920	<2	31
			WW	3000	>80	2x2320	<3	B0
			NN	4000	>80	2x2400	<3	C0
			LED nominal lumen					D0
								E0
								L0
								M0
								N0

2x17 W COB LED Lumen delivered up to 2x2190 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	2X.LH64 Precision	B 12° Narrow	HC	3000	>98	2x1834	<2	01
D DALI		E 23° Medium	HW	2700	>90	2x2067	<2	12
		K - Without optics	HQ	3000	>90	2x2122	<2	31
			WW	3000	>80	2x2582	<3	B0
			NN	4000	>80	2x2665	<3	C0
			LED nominal lumen					D0
								E0
								L0
								M0
								N0

Yori Evo Ghosttrack

Ø 75 mm | Performance (2X)

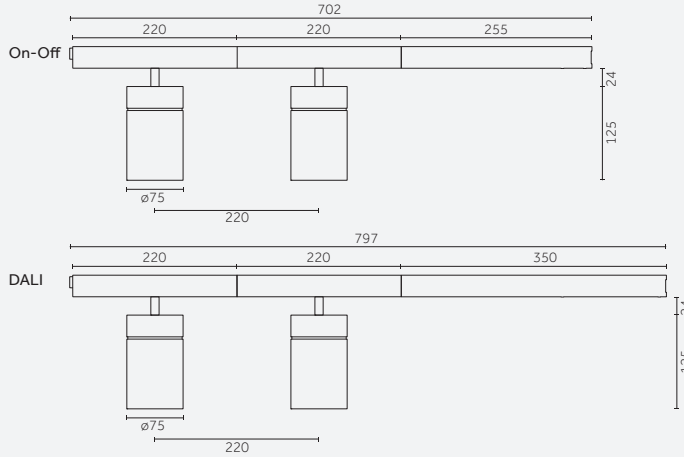

Code example:

0 . **2X.LH72** **B** . **HW** **01**

Accessories: p.195 /198
 Spacers/Distanziali: p.198
 Mains Voltage Tracks: p.137-153
 Finishes: p.82-83
 Photometric data:
 www.reggiani.net


2x9 W		COBLED		Lumen delivered up to 2x1650 lm / Lumen maintenance: L90B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
0 On-Off	2X.LH72 Performance	B 12° Narrow	HC	3000	>98	2x1215	<2	01		
D DALI		E 23° Medium	HW	2700	>90	2x1370	<2	12		
		F 37° Medium-wide	HQ	3000	>90	2x1410	<2	31		
		H 48° Wide	WW	3000	>80	2x1710	<3	B0		
		K - Without optics	NN	4000	>80	2x1765	<3	C0		
								D0		
								E0		
								L0		
								M0		
								N0		

2x12 W		COBLED		Lumen delivered up to 2x1800 lm / Lumen maintenance: L90B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
0 On-Off	2X.LH73 Performance	B 12° Narrow	HC	3000	>98	2x1323	<2	01		
D DALI		E 23° Medium	HW	2700	>90	2x1491	<2	12		
		F 37° Medium-wide	HQ	3000	>90	2x1533	<2	31		
		H 48° Wide	WW	3000	>80	2x1859	<3	B0		
		K - Without optics	NN	4000	>80	2x1920	<3	C0		
								D0		
								E0		
								L0		
								M0		
								N0		

2x17 W		COBLED		Lumen delivered up to 2x2480 lm / Lumen maintenance: L90B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
0 On-Off	2X.LH74 Performance	B 12° Narrow	HC	3000	>98	2x1834	<2	01		
D DALI		E 23° Medium	HW	2700	>90	2x2067	<2	12		
		F 37° Medium-wide	HQ	3000	>90	2x2122	<2	31		
		H 48° Wide	WW	3000	>80	2x2582	<3	B0		
		K - Without optics	NN	4000	>80	2x2665	<3	C0		
								D0		
								E0		
								L0		
								M0		
								N0		


Yori Evo Ghostrack

Ø 75 mm | Precision (3X)



Code example:
0 - **3X.LH62** **B** - **HW** **01**

Accessories: p.194 /198
 Spacers/Distanziali: p.198
 Mains Voltage Tracks: p.137-153
 Finishes: p.82-83
 Photometric data:
 www.reggiani.net

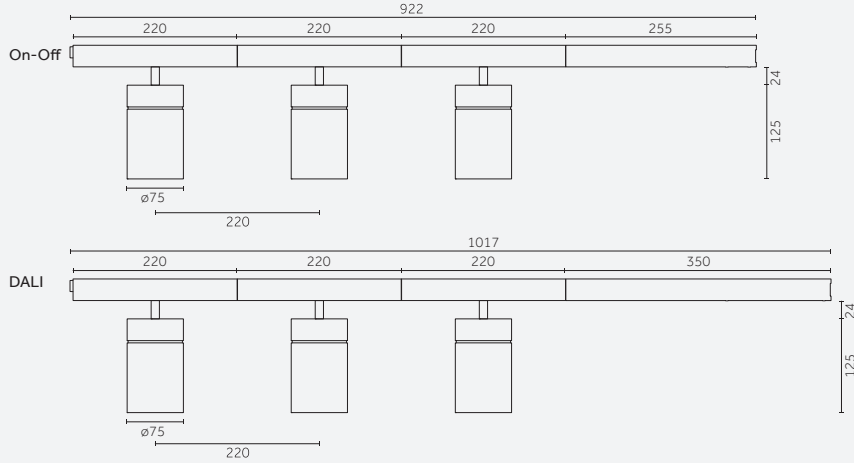


3x9 W		COB LED		Lumen delivered up to 3x1450 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
0 On-Off	3X.LH62 Precision	B 12° Narrow	HC	3000	>98	3x1215	<2	01		
D DALI		E 23° Medium	HW	2700	>90	3x1370	<2	12		
		K - Without optics	HQ	3000	>90	3x1410	<2	31		
			WW	3000	>80	3x1710	<3	B0		
			NN	4000	>80	3x1765	<3	C0		
			LED nominal lumen					D0		
								E0		
								L0		
								M0		
								N0		

3x12 W		COB LED		Lumen delivered up to 3x1575 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
0 On-Off	3X.LH63 Precision	B 12° Narrow	HC	3000	>98	3x1323	<2	01		
D DALI		E 23° Medium	HW	2700	>90	3x1491	<2	12		
		K - Without optics	HQ	3000	>90	3x1533	<2	31		
			WW	3000	>80	3x1859	<3	B0		
			NN	4000	>80	3x1920	<3	C0		
			LED nominal lumen					D0		
								E0		
								L0		
								M0		
								N0		

Yori Evo Ghosttrack


Ø 75 mm | Performance (3X)



Code example:

0 . **3X.LH72** **B** . **HW** **01**

Accessories: p.195 /198
 Spacers/Distanziali: p.198
 Mains Voltage Tracks: p.137-153
 Finishes: p.82-83
 Photometric data:
 www.reggiani.net

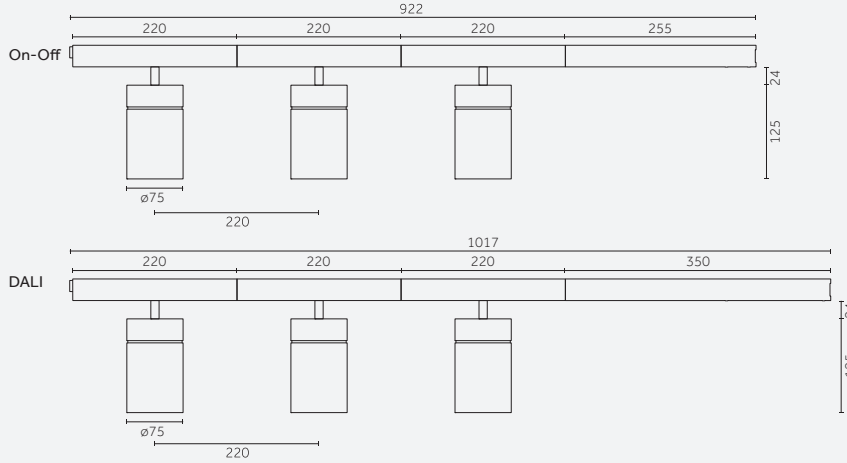

3x9 W COBLED Lumen delivered up to 3x1650 lm / Lumen maintenance: L90 B10=50,000h




Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	3X.LH72 Performance	B 12° Narrow	HC	3000	>98	3x1215	<2	01
D DALI		E 23° Medium	HW	2700	>90	3x1370	<2	12
		F 37° Medium-wide	HQ	3000	>90	3x1410	<2	31
		H 48° Wide	WW	3000	>80	3x1710	<3	B0
		K - Without optics	NN	4000	>80	3x1765	<3	C0
						LED nominal lumen		D0
								E0
								L0
								M0
								N0

3x12 W COBLED Lumen delivered up to 3x1800 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	3X.LH73 Performance	B 12° Narrow	HC	3000	>98	3x1323	<2	01
D DALI		E 23° Medium	HW	2700	>90	3x1491	<2	12
		F 37° Medium-wide	HQ	3000	>90	3x1533	<2	31
		H 48° Wide	WW	3000	>80	3x1859	<3	B0
		K - Without optics	NN	4000	>80	3x1920	<3	C0
						LED nominal lumen		D0
								E0
								L0
								M0
								N0



Ø 95 mm | Precision (1X)

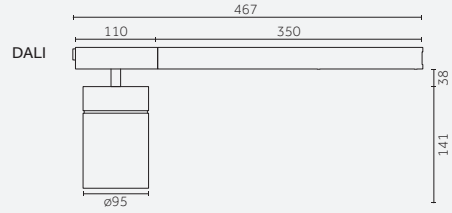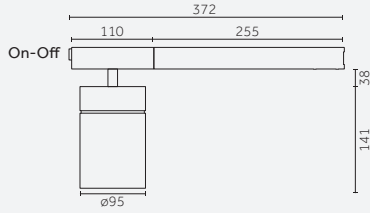

Code example:

0 . 1X.MH63 B . HC 01

Accessories: p.196 /198

Spacers/Distanziali: p.198

Mains Voltage Tracks: p.137-153

Finishes: p.82-83

Photometric data:

www.reggiani.net

12 W		COBLED		Lumen delivered up to 1690 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
0 On-Off	1X.MH63 Precision	B 12° Narrow	HC	3000	>98	1323	<2	01		
D DALI		E 23° Medium	HW	2700	>90	1491	<2	12		
		K - Without optics	HQ	3000	>90	1533	<2	31		
			WW	3000	>80	1859	<3	B0		
			NN	4000	>80	1920	<3	C0		
			LED nominal lumen					D0		
								E0		
								L0		
								M0		
								NO		

17 W		COBLED		Lumen delivered up to 1510 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
0 On-Off	1X.PH64 Precision	A 7° Very narrow	HC	3000	>98	1700	<2	01		
D DALI			HW	2700	>90	1870	<2	12		
			HQ	3000	>90	1920	<2	31		
			WW	3000	>80	2320	<3	B0		
			NN	4000	>80	2400	<3	C0		
			LED nominal lumen					D0		
								E0		
								L0		
								M0		
								NO		

17 W		COBLED		Lumen delivered up to 2350 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
0 On-Off	1X.MH64 Precision	B 12° Narrow	HC	3000	>98	1834	<2	01		
D DALI		E 23° Medium	HW	2700	>90	2067	<2	12		
		K - Without optics	HQ	3000	>90	2122	<2	31		
			WW	3000	>80	2582	<3	B0		
			NN	4000	>80	2665	<3	C0		
			LED nominal lumen					D0		
								E0		
								L0		
								M0		
								NO		




24 W		COBLED		Lumen delivered up to 3170 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
0 On-Off	1X.MH66 Precision	B 12° Narrow	HC	3000	>98	2476	<2	01		
D DALI		E 23° Medium	HW	2700	>90	2792	<2	12		
		K - Without optics	HQ	3000	>90	2860	<2	31		
			WW	3000	>80	3487	<3	B0		
			NN	4000	>80	3602	<3	C0		
			LED nominal lumen					D0		
								E0		
								L0		
								M0		
								NO		

33 W		COBLED		Lumen delivered up to 4130 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
0 On-Off	1X.MH68 Precision	B 12° Narrow	HC	3000	>98	3142	<2	01		
D DALI		E 23° Medium	HW	2700	>90	3635	<2	12		
		K - Without optics	HQ	3000	>90	3735	<2	31		
			WW	3000	>80	4510	<3	B0		
			NN	4000	>80	4695	<3	C0		
			LED nominal lumen					D0		
								E0		
								L0		
								M0		
								NO		

33 W		Warm Dimming COBLED		Lumen delivered up to 1520 lm / Lumen maintenance: L70 B50=50,000h					Finishes	
Driver	Version	Optics	LED	K	CRI	lm	SDCM			
D DALI	1X.MH68 Precision	B 25° Medium	DT	1700-3000	>95	100-3100	<4	01		
								12		
								31		
								B0		
								Co		
								Do		
								E0		
								Lo		
								Mo		
								NO		

LED nominal lumen

Ø 95 mm | Performance (1X)

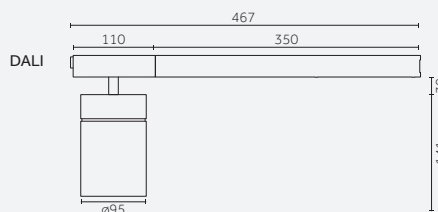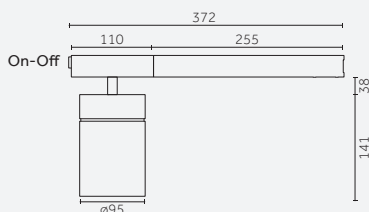

Code example:
0 . 1X.MH73 B . HW 01

Accessories: p.196/198
Spacers/Distanziali: p.198
Mains Voltage Tracks: p.137-153
Finishes: p.82-83
Photometric data:
www.reggiani.net

12 W		COBLED		Lumen delivered up to 1800 lm / Lumen maintenance: L90 B10=50,000h					Finishes	
Driver	Version	Optics	LED	K	CRI	lm	SDCM			
0 On-Off	1X.MH73 Performance	B 10° Narrow	HC	3000	>98	1323	<2	01		
D DALI		E 20° Medium	HW	2700	>90	1491	<2	12		
								31		
								B0		
								Co		
								Do		
								E0		
								Lo		
								Mo		
								NO		

LED nominal lumen

17 W		COBLED		Lumen delivered up to 2500 lm / Lumen maintenance: L90 B10=50,000h					Finishes	
Driver	Version	Optics	LED	K	CRI	lm	SDCM			
0 On-Off	1X.MH74 Performance	B 10° Narrow	HC	3000	>98	1834	<2	01		
D DALI		E 20° Medium	HW	2700	>90	2067	<2	12		
								31		
								B0		
								Co		
								Do		
								E0		
								Lo		
								Mo		
								NO		

LED nominal lumen



24 W		COBLED		Lumen delivered up to 3300 lm / Lumen maintenance: L90 B10=50,000h					Finishes	
Driver	Version	Optics	LED	K	CRI	lm	SDCM			
0 On-Off	1X.MH76 Performance	B 10° Narrow	HC	3000	>98	2476	<2	01		
D DALI		E 20° Medium	HW	2700	>90	2792	<2	12		
								31		
								B0		
								Co		
								Do		
								E0		
								Lo		
								Mo		
								NO		

LED nominal lumen

33 W		COBLED		Lumen delivered up to 4110 lm / Lumen maintenance: L90 B10=50,000h					Finishes	
Driver	Version	Optics	LED	K	CRI	lm	SDCM			
0 On-Off	1X.MH78 Performance	B 10° Narrow	HC	3000	>98	3142	<2	01		
D DALI		E 20° Medium	HW	2700	>90	3635	<2	12		
								31		
								B0		
								Co		
								Do		
								E0		
								Lo		
								Mo		
								NO		

LED nominal lumen

Ø 95 mm | Precision (2X)

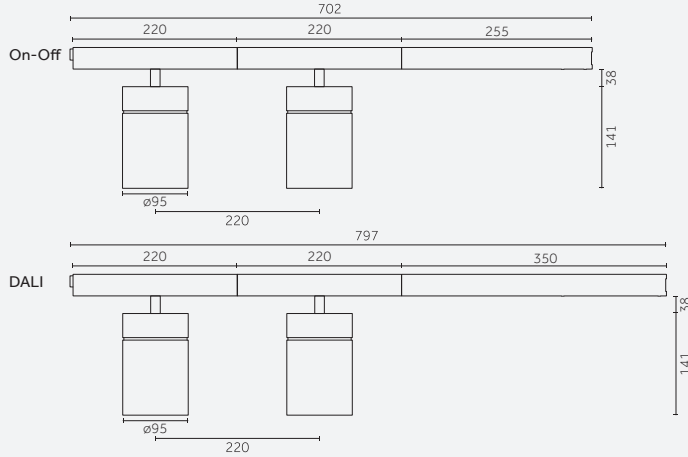

Code example:

0 . **2X.MH63** **B** . **HC** **01**

Accessories: p.196 /198

Spacers/Distanziali: p.198

Mains Voltage Tracks: p.137-153

Finishes: p.82-83

Photometric data:

www.reggiani.net

2x12 W		COBLED		Lumen delivered up to 2x1690 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
0 On-Off	2X.MH63 Precision	B 12° Narrow	HC	3000	>98	2x1323	<2	01		
D DALI		E 23° Medium	HW	2700	>90	2x1491	<2	12		
		K - Without optics	HQ	3000	>90	2x1533	<2	31		
			WW	3000	>80	2x1859	<3	B0		
			NN	4000	>80	2x1920	<3	C0		
			LED nominal lumen					D0		
								E0		
								L0		
								M0		
								N0		

2x17 W		COBLED		Lumen delivered up to 2x1510 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
0 On-Off	2X.PH64 Precision	A 7° Very narrow	HC	3000	>98	2x1700	<2	01		
D DALI			HW	2700	>90	2x1870	<2	12		
			HQ	3000	>90	2x1920	<2	31		
			WW	3000	>80	2x2320	<3	B0		
			NN	4000	>80	2x2400	<3	C0		
			LED nominal lumen					D0		
								E0		
								L0		
								M0		
								N0		

2x17 W		COBLED		Lumen delivered up to 2x2350 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
0 On-Off	2X.MH64 Precision	B 12° Narrow	HC	3000	>98	2x1834	<2	01		
D DALI		E 23° Medium	HW	2700	>90	2x2067	<2	12		
		K - Without optics	HQ	3000	>90	2x2122	<2	31		
			WW	3000	>80	2x2582	<3	B0		
			NN	4000	>80	2x2665	<3	C0		
			LED nominal lumen					D0		
								E0		
								L0		
								M0		
								N0		

Yori Evo Ghostrack


Ø 95 mm | Performance (2X)



Code example:

0 . **2X.MH73** **B** . **HC** **01**

Accessories: p.197/198
 Spacers/Distanziali: p.198
 Mains Voltage Tracks: p.137-153
 Finishes: p.82-83
 Photometric data:
 www.reggiani.net

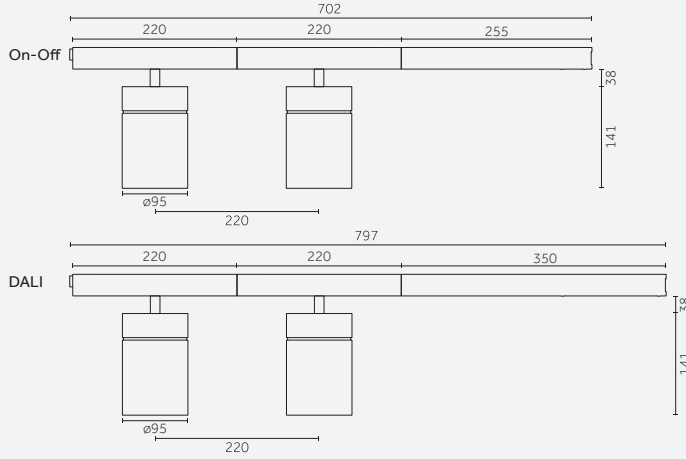

2x12 W COBLED Lumen delivered up to 2x1800 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	2X.MH73 Performance	B 10° Narrow	HC	3000	>98	2x1323	<2	01
D DALI		E 20° Medium	HW	2700	>90	2x1491	<2	12
		H 31° Medium-wide	HQ	3000	>90	2x1533	<2	31
		M 40° Wide	WW	3000	>80	2x1859	<3	B0
		K - Without optics	NN	4000	>80	2x1920	<3	C0
								D0
								E0
								L0
								M0
								N0

LED nominal lumen


2x17 W COBLED Lumen delivered up to 2x2500 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	2X.MH74 Performance	B 10° Narrow	HC	3000	>98	2x1834	<2	01
D DALI		E 20° Medium	HW	2700	>90	2x2067	<2	12
		H 31° Medium-wide	HQ	3000	>90	2x2122	<2	31
		M 40° Wide	WW	3000	>80	2x2582	<3	B0
		K - Without optics	NN	4000	>80	2x2665	<3	C0
								D0
								E0
								L0
								M0
								N0

LED nominal lumen

Yori Evo Ghostrack

Ø 95 mm | Precision (3X)



Code example:

0 . 3X.MH63 B . HC 01

Accessories: p.196/198


Spacers/Distanziali: p.198

Mains Voltage Tracks: p.137-153

Finishes: p.82-83

Photometric data:

www.reggiani.net

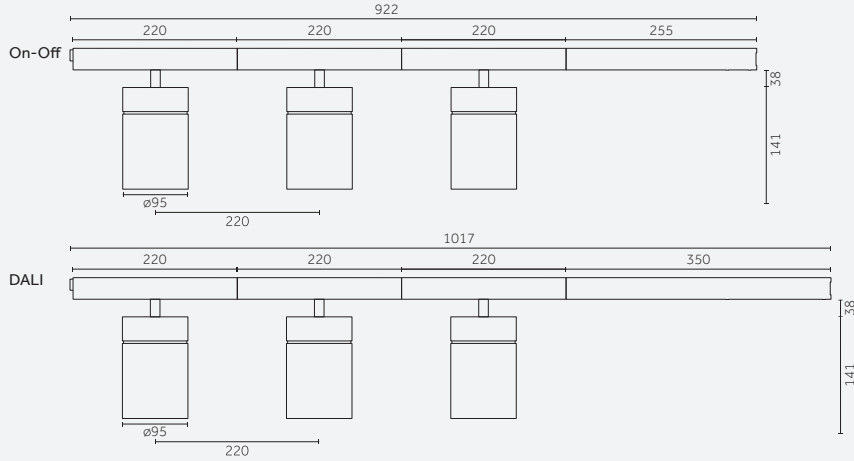

3x12 W

COBLED

Lumen delivered up to 3x1690 lm / Lumen maintenance: L90 B10=50,000h


Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	3X.MH63 Precision	B 10° Narrow	HC	3000	>98	3x1323	<2	01
D DALI		E 20° Medium	HW	2700	>90	3x1491	<2	12
		H 31° Medium-wide	HQ	3000	>90	3x1533	<2	31
		M 40° Wide	WW	3000	>80	3x1859	<3	B0
		K - Without optics	NN	4000	>80	3x1920	<3	C0
								D0
								E0
								L0
								M0
								N0

LED nominal lumen

Ø 95 mm | Performance (3X)



118



Code example:

0 . 3X.MH73 B . HC 01

Accessories: p.197 /198


Spacers/Distanziali: p.198

Mains Voltage Tracks: p.137-153

Finishes: p.82-83

Photometric data:

www.reggiani.net

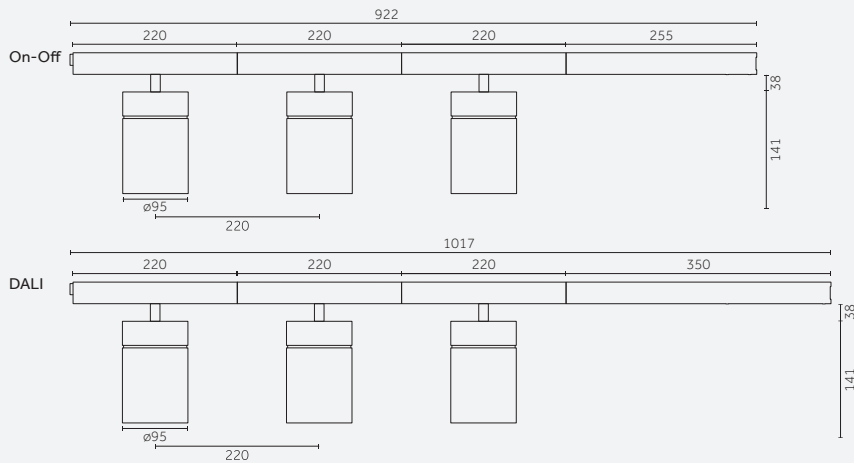

3x12 W

COBLED

Lumen delivered up to 3x1800 lm / Lumen maintenance: L90 B10=50,000h


Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	3X.MH73 Performance	B 10° Narrow	HC	3000	>98	3x1323	<3	01
D DALI		E 20° Medium	HW	2700	>90	3x1491	<3	12
		H 31° Medium-wide	HQ	3000	>90	3x1533	<3	31
		M 40° Wide	WW	3000	>80	3x1859	<3	B0
		K - Without optics	NN	4000	>80	3x1920	<3	C0
								D0
								E0
								L0
								M0
								N0

LED nominal lumen

Electrical devices

- ^{EN} 1. Choose one size (Ø22, Ø35, Ø43 mm)
 2. Check the Ghostrack driver chart to know the min/max number of products to connect (from 1 to 15)
 3. Create your custom cluster

- ^{IT} 1. Scegli una misura (Ø22, Ø35, Ø43 mm)
 2. Controlla la tabella Ghostrack driver per conoscere il numero minimo/massimo di prodotti utilizzabili (da 1 a 15)
 3. Crea il tuo cluster personalizzato

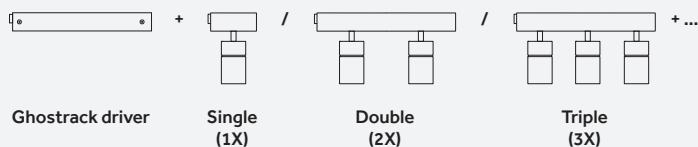

Ø 22 mm | Electrical Devices

Ghostrack driver

		2 W	3x2 W	POWER LED			
Type	Code	W	Size (mm)	Tech. info	mA	Connectable fixtures (Min-Max)	
On/Off	0.30457.0000	35 max	256	220-240Vac / 50/60Hz	700	9-15 (1X)	3-5 (3X)
DALI	D.30457.0000	35 max	350	120-277Vac / 50/60Hz	700	3-15 (1X)	1-5 (3X)

Ø 35 mm | Electrical Devices

Ghostrack driver

		2,7 W	2x2,7 W	3x2,7 W	POWER LED			
Type	Code	W	Size (mm)	Tech. info	mA	Connectable fixtures (Min-Max)		
On/Off	0.30455.0000	35 max	256	220-240Vac / 50/60Hz	900	9-13 (1X)	5-6 (2X)	3-4 (3X)
DALI	D.30455.0000	35 max	350	120-277Vac / 50/60Hz	900	3-13 (1X)	2-6 (2X)	1-4 (3X)

Ø 43 mm | Electrical Devices

Ghostrack driver



		2,5 W	2x2,5 W	POWER LED			
Type	Code	W	Size (mm)	Tech. info	mA	Connectable fixtures (Min-Max)	
On/Off	0.30456.0000	35 max	256	220-240Vac / 50/60Hz	700	8-14 (1X)	4-7 (2X)
DALI	D.30456.0000	35 max	350	120-277Vac / 50/60Hz	700	3-14 (1X)	2-7 (2X)

		4 W	2x4 W	POWER LED			
Type	Code	W	Size (mm)	Tech. info	mA	Connectable fixtures (Min-Max)	
On/Off	0.30451.0000	35 max	256	220-240Vac / 50/60Hz	350	3-4 (1X)	2 (2X)
DALI	D.30451.0000	35 max	350	120-277Vac / 50/60Hz	350	1-4 (1X)	1-2 (2X)

		9 W	2x9 W	POWER LED			
Type	Code	W	Size (mm)	Tech. info	mA	Connectable fixtures (Min-Max)	
On/Off	0.30453.0000	35 max	256	220-240Vac / 50/60Hz	700	3-4 (1X)	2 (2X)
DALI	D.30453.0000	35 max	350	120-277Vac / 50/60Hz	700	1-4 (1X)	1-2 (2X)

		6,5 W	Warm dimming COB LED				
Type	Code	W	Size (mm)	Tech. info	mA	Connectable fixtures (Min-Max)	
DALI	D.30453.0000	35 max	350	120-277Vac / 50/60Hz	700	2-5 (1X)	1-2 (2X)

Yori Pendant Ghostrack

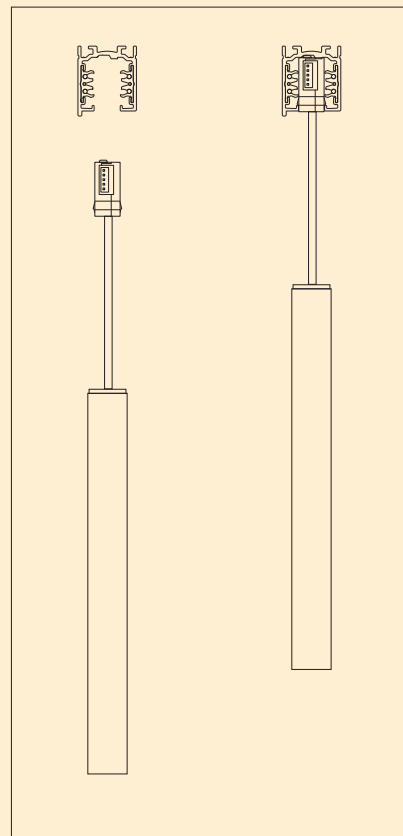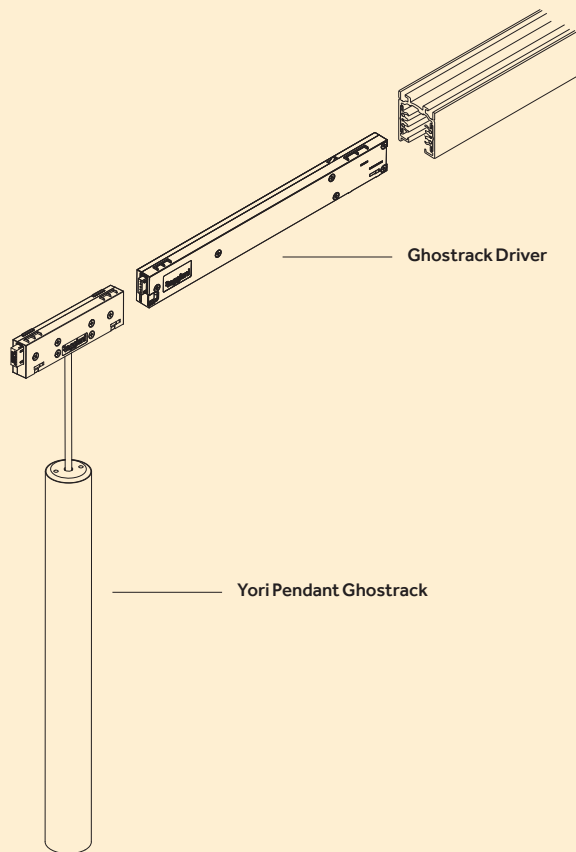

120

Ø 22 mm			Ø 35 mm			Ø 60 mm			Ø 95 mm		
p.121	p.121	p.122	p.122	p.123	p.123	p.124	p.124	p.125	p.125	p.126	p.126

POWERLED
2W
140lm - 200lm
L90 B10=50,000h
2700K, 3000K, 4000K
SDCM <3
CRI >80, CRI >90

POWERLED
2,7W
270lm - 372lm
L90 B10=50,000h
2700K, 3000K, 4000K
SDCM <3
CRI >80, CRI >90

COBLED
9W, 12W
1050lm - 1775lm
L90 B10=50,000h
2700K, 3000K, 4000K
SDCM <3
CRI >85, CRI >90

Warm Dimming COBLED
6W, 12W
100lm - 1000lm
L70 B50=50,000h
1700K-3000K
SDCM <4
CRI >95

COBLED
12W, 17W, 24W
1491lm - 3602lm
L90 B10=50,000h
2700K, 3000K, 4000K
SDCM <2, <3
CRI >80, CRI >90

Warm Dimming COBLED
25W
100lm - 2500lm
L70 B50=50,000h
1700K-3000K
SDCM <4
CRI >95

Yori Pendant Ghostrack

Ø 22 mm | H 400 mm



* Pending



Code example:

X . **BM70** B . **HW 12**

Accessories: p.187

Spacers/Distanziali: p.198


Mains Voltage Tracks: p.137-153

Finishes: p.82-83

Photometric data:

www.reggiani.net

Ghostrack driver: p.127



Notes:

Cable length 3mt/

Lunghezza cavo 3mt

2W POWERLED

Lumen delivered up to 110 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	BM70	B 10° Narrow	HW	2700	>90	140	<3	01
		E 28° Medium	HQ	3000	>90	145	<3	12
		H 33° Wide	WW	3000	>80	190	<3	31
			NN	4000	>80	200	<3	B0
			LED nominal lumen					C0
								DO
								EO
								LO
								MO
								NO

Ø 22 mm | H 800 mm



* Pending



Code example:

X . **CM70** B . **HW 12**

Accessories: p.187

Spacers/Distanziali: p.198


Mains Voltage Tracks: p.137-153

Finishes: p.82-83

Photometric data:

www.reggiani.net

Ghostrack driver: p.127



Notes:

Cable length 3mt/

Lunghezza cavo 3mt

2W POWERLED

Lumen delivered up to 110 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	CM70	B 10° Narrow	HW	2700	>90	140	<3	01
		E 28° Medium	HQ	3000	>90	145	<3	12
		H 33° Wide	WW	3000	>80	190	<3	31
			NN	4000	>80	200	<3	B0
			LED nominal lumen					C0
								DO
								EO
								LO
								MO
								NO

Yori Pendant Ghostrack

Ø 35 mm | H 400 mm



* Pending



Code example:

X . **GM71** B . **HW 12**

Accessories: p.188

Spacers/Distanziali: p.198


Mains Voltage Tracks: p.137-153

Finishes: p.82-83

Photometric data:

www.reggiani.net

Ghostrack driver: p.127



Notes:

Cable length 3mt/

Lunghezza cavo 3mt

2,7 W POWER LED

Lumen delivered up to 290 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GM71	B 10° Narrow	HW	2700	>90	270	<3	01
		E 22° Medium	HQ	3000	>90	280	<3	12
		H 31° Wide	WW	3000	>80	340	<3	31
			NN	4000	>80	372	<3	B0
			LED nominal lumen					C0
								DO
								E0
								L0
								M0
								NO

Ø 35 mm | H 800 mm



* Pending



Code example:

X . **HM71** B . **HW 12**

Accessories: p.188

Spacers/Distanziali: p.198

Mains Voltage Tracks: p.137-153

Finishes: p.82-83

Photometric data:

www.reggiani.net

Ghostrack driver: p.127



Notes:

Cable length 3mt/

Lunghezza cavo 3mt

2,7 W POWER LED

Lumen delivered up to 290 lm / Lumen maintenance: L90 B10=50,000h


Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	HM71	B 10° Narrow	HW	2700	>90	270	<3	01
		E 22° Medium	HQ	3000	>90	280	<3	12
		H 31° Wide	WW	3000	>80	340	<3	31
			NN	4000	>80	372	<3	B0
			LED nominal lumen					C0
								DO
								E0
								L0
								M0
								NO

Yori Pendant Ghostrack


Ø 60 mm | H 205 mm



* Pending



On-Off



DALI



Code example:

0 . **LM72** B . **HW** **12**

Accessories: p.191
 Spacers/Distanziali: p.198
 Mains Voltage Tracks: p.137-153
 Finishes: p.82-83
 Photometric data:
 www.reggiani.net

Notes:

Cable length 3mt/
 Lunghezza cavo 3mt
 Driver included/
 Driver incluso

9W COB LED Lumen delivered up to 1000lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LM72	B 12° Narrow	HW	2700	>90	1050	<2	01
D DALI		E 20° Medium	HQ	3000	>90	1100	<2	12
		H 32° Wide	WW	3000	>80	1300	<3	31
		K - Without optics	NN	4000	>80	1360	<3	B0
								C0
								D0
								E0
								L0
								M0
								N0


LED nominal lumen

124


Ø 60 mm | H 255 mm



* Pending



On-Off



DALI



Code example:

0 . **MM72** B . **HW** **12**

Accessories: p.191
 Spacers/Distanziali: p.198
 Mains Voltage Tracks: p.137-153
 Finishes: p.82-83
 Photometric data:
 www.reggiani.net

Notes:

Cable length 3mt/
 Lunghezza cavo 3mt
 Driver included/
 Driver incluso

9W COB LED Lumen delivered up to 1000lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	MM72	B 12° Narrow	HW	2700	>90	1050	<2	01
D DALI		E 20° Medium	HQ	3000	>90	1100	<2	12
		H 32° Wide	WW	3000	>80	1300	<3	31
		K - Without optics	NN	4000	>80	1360	<3	B0
								C0
								D0
								E0
								L0
								M0
								N0

LED nominal lumen


6W Warm Dimming COB LED Lumen delivered up to 390lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
D DALI	MM72	B 27° Medium	DT	1700-3000	>95	100-550	<4	01
								12
								31
								B0
								C0
								D0
								E0
								L0
								M0
								N0

LED nominal lumen

Yori Pendant Ghostrack

Ø 60 mm | H 600 mm



On-Off



DALI

* Pending



Code example:

0 . **MM73** B . **HW** **12**

Accessories: p.191
 Spacers/Distanziali: p.198
 Mains Voltage Tracks: p.137-153
 Finishes: p.82-83
 Photometric data:
 www.reggiani.net

Notes:

Cable length 3mt/
 Lunghezza cavo 3mt
 Driver included/
 Driver incluso

12 W COBLED

Lumen delivered up to 1400 lm / Lumen maintenance: L90 B10=50,000h


Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	MM73	B 12° Narrow	HW	2700	>90	1370	<2	01
D DALI		E 20° Medium	HQ	3000	>90	1420	<2	12
		H 32° Wide	WW	3000	>80	1700	<3	31
		K - Without optics	NN	4000	>80	1775	<3	B0
LED nominal lumen								
								C0
								D0
								E0
								L0
								M0
								N0

12 W Warm Dimming COBLED

Lumen delivered up to 690 lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
D DALI	MM73	B 27° Medium	DT	1700-3000	>95	100-1000	<4	01
								12
LED nominal lumen								
								31
								B0
								C0
								D0
								E0
								L0
								M0
								N0

Ø 95 mm | H 255 mm



On-Off



DALI

* Pending



Code example:

0 . **NM73** B . **HW** **12**

Accessories: p.196
 Spacers/Distanziali: p.198
 Mains Voltage Tracks: p.137-153
 Finishes: p.82-83
 Photometric data:
 www.reggiani.net

Notes:

Cable length 3mt/
 Lunghezza cavo 3mt
 Driver included/
 Driver incluso

12 W COBLED


Lumen delivered up to 1500 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	NM73	B 12° Narrow	HW	2700	>90	1491	<2	01
D DALI		E 23° Medium	HQ	3000	>90	1533	<2	12
		H 38° Wide	WW	3000	>80	1859	<3	31
		M 53° Very wide	NN	4000	>80	1920	<3	B0
LED nominal lumen								
								C0
								D0
								E0
								L0
								M0
								N0

Electrical devices

- ^{EN} 1. Choose one size (Ø22, Ø35 mm)
 2. Check the Ghostrack driver chart to know the min/max number of products to connect (from 3 to 15)
 3. Create your custom cluster

- ^{IT} 1. Scegli una misura (Ø22, Ø35 mm)
 2. Controlla la tabella Ghostrack driver per conoscere il numero minimo/massimo di prodotti utilizzabili (da 3 a 15)
 3. Crea il tuo cluster personalizzato





Ghostrack driver Single

Ø 22 mm | Electrical Devices

Ghostrack driver



2 W POWERLED

Type	Code	W	Size (mm)	Tech. info	mA	Connectable fixtures (Min-Max)
On/Off	0.30457.0000	35 max		220-240Vac / 50/60Hz	700	9-15
DALI	D.30457.0000	35 max		120-277Vac / 50/60Hz	700	3-15

Ø 35 mm | Electrical Devices





Ghostrack driver

2,7 W POWERLED

Type	Code	W	Size (mm)	Tech. info	mA	Connectable fixtures (Min-Max)
On/Off	0.30455.0000	35 max		220-240Vac / 50/60Hz	900	9-13
DALI	D.30455.0000	35 max		120-277Vac / 50/60Hz	900	3-13



Yori Evo Box

128


Ø 43 mm		Ø 60 mm		Ø 75 mm		Ø 95 mm	
							
Precision	p.129	Precision	p.130	Precision	p.132	Precision	p.134
Performance	p.129	Performance	p.131	Performance	p.133	Performance	p.135
POWERLED 4 W, 9 W 410lm-940lm L90 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >80, CRI >90		COBLED 9 W, 12 W, 17 W 725lm-2400lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <2 <3 CRI >80, CRI >90, CRI >98		COBLED 12 W, 17 W, 24 W, 28 W 1323lm-4054lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <2 <3 CRI >80, CRI >90, CRI >98		COBLED 12 W, 17 W, 24 W, 33 W, 37 W 1323lm-5090lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <2 <3 CRI >80, CRI >90, CRI >98	
Warm Dimming COBLED 6,5 W 10lm - 550lm L70 B50=50,000h 1800K-2800K SDCM <4 CRI >95		Warm Dimming COBLED 12 W 100lm - 1000lm L70 B50=50,000h 1700K-3000K SDCM <4 CRI >95		Warm Dimming COBLED 25 W 100lm - 2500lm L70 B50=50,000h 1700K-3000K SDCM <4 CRI >95		Warm Dimming COBLED 33 W 100lm - 3100lm L70 B50=50,000h 1700K-3000K SDCM <4 CRI >95	

*Phase-cut / DALI / Dimmer on board / Bluetooth

Ø 43 mm | Precision



On-Off



Phase-cut / DALI / Dimmer on board / Bluetooth



Code example:

0 . **FH81** A . **HW 12**

Accessories: p.189

Mains Voltage Tracks: p.137-153

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:


Dimm 1-10V version on request/
Versione Dimm-1-10V
su richiesta

4 W POWER LED		Lumen delivered up to 435 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	FH81 Precision	A 8° Very narrow	HW	2700	>90	410	<3	12
T Phase-cut		B 11° Narrow	HQ	3000	>90	415	<3	31
D DALI		E 23° Medium	WW	3000	>80	485	<3	
P Dimmer on board		H 40° Wide	NN	4000	>80	530	<3	
H Bluetooth								


9 W POWER LED		Lumen delivered up to 750 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	FH82 Precision	A 8° Very narrow	HW	2700	>90	725	<3	12
T Phase-cut		B 11° Narrow	HQ	3000	>90	730	<3	31
D DALI		E 23° Medium	WW	3000	>80	845	<3	
P Dimmer on board		H 40° Wide	NN	4000	>80	940	<3	
H Bluetooth								

6,5 W Warm Dimming COB LED		Lumen delivered up to 130 lm / Lumen maintenance: L70 B50=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
D DALI	FH82 Precision	B 27° Medium	DT	1800-2800	>95	10-550	<4	12
P Dimmer on board								31
H Bluetooth								

Ø 43 mm | Performance



On-Off



Phase-cut / DALI / Dimmer on board / Bluetooth



Code example:

0 . **FH91** B . **HW 12**

Accessories: p.190

Mains Voltage Tracks: p.137-153

Finishes: p.82-83

Photometric data:

www.reggiani.net



Notes:

Dimm 1-10V version on request/
Versione Dimm-1-10V
su richiesta

4 W POWER LED		Lumen delivered up to 450 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	FH91 Performance	B 8° Narrow	HW	2700	>90	410	<3	12
T Phase-cut		E 18° Medium	HQ	3000	>90	415	<3	31
D DALI		H 29° Wide	WW	3000	>80	485	<3	
P Dimmer on board			NN	4000	>80	530	<3	
H Bluetooth								

9 W POWER LED		Lumen delivered up to 780 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	FH92 Performance	B 8° Narrow	HW	2700	>90	725	<3	12
T Phase-cut		E 18° Medium	HQ	3000	>90	730	<3	31
D DALI		H 29° Wide	WW	3000	>80	845	<3	
P Dimmer on board			NN	4000	>80	940	<3	
H Bluetooth								

Ø 60 mm | Precision



Code example:

0 . **RH82** **A** . **HW** **12**

Accessories: p.191-192

Mains Voltage Tracks: p.137-153

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Dimm 1-10V version on request/
Versione Dimm-1-10V
su richiesta

9 W POWERLED Lumen delivered up to 772 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	RH82 Precision	A 8° Very narrow	HW 2700	>90	725	<2	12	<input type="checkbox"/>
T Phase-cut			HQ 3000	>90	730	<2	31	<input checked="" type="checkbox"/>
D DALI			WW 3000	>80	844	<3		
P Dimmer on board			NN 4000	>80	941	<3		

LED nominal lumen

9 W COB LED Lumen delivered up to 1115 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	GH82 Precision	B 12° Narrow	HC 3000	>98	960	<2	12	<input type="checkbox"/>
T Phase-cut		E 20° Medium	HW 2700	>90	1050	<2	31	<input checked="" type="checkbox"/>
D DALI		K - Without optics	HQ 3000	>90	1100	<2		
P Dimmer on board			WW 3000	>80	1300	<3		
H Bluetooth			NN 4000	>80	1360	<3		

LED nominal lumen

12 W COB LED Lumen delivered up to 1455 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	GH83 Precision	B 12° Narrow	HC 3000	>98	1250	<2	12	<input type="checkbox"/>
T Phase-cut		E 20° Medium	HW 2700	>90	1370	<2	31	<input checked="" type="checkbox"/>
D DALI		K - Without optics	HQ 3000	>90	1420	<2		
P Dimmer on board			WW 3000	>80	1700	<3		
H Bluetooth			NN 4000	>80	1775	<3		

LED nominal lumen

17 W COB LED Lumen delivered up to 1970 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	GH84 Precision	B 12° Narrow	HC 3000	>98	1700	<2	12	<input type="checkbox"/>
T Phase-cut		E 20° Medium	HW 2700	>90	1870	<2	31	<input checked="" type="checkbox"/>
D DALI		K - Without optics	HQ 3000	>90	1920	<2		
P Dimmer on board			WW 3000	>80	2320	<3		
H Bluetooth			NN 4000	>80	2400	<3		



LED nominal lumen

12 W Warm Dimming COB LED Lumen delivered up to 690 lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
D DALI	GH83 Precision	B 27° Medium	DT 1700-3000	>95	100-1000	<4	12	<input type="checkbox"/>
P Dimmer on board							31	<input checked="" type="checkbox"/>

LED nominal lumen

Ø 60 mm | Performance



Code example:

0 . **GH92** **B** . **HW** **12**

Accessories: p.193

Mains Voltage Tracks: p.137-153

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Dimm 1-10V version on request/
Versione Dimm-1-10V
su richiesta

9W COBLED Lumen delivered up to 1200 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	GH92 Performance	B 13° Narrow	HC	3000	>98	960	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	1050	<2	31
D DALI		H 39° Wide	HQ	3000	>90	1100	<2	
P Dimmer on board		K - Without optics	WW	3000	>80	1300	<3	
H Bluetooth			NN	4000	>80	1360	<3	

LED nominal lumen

12W COBLED Lumen delivered up to 1560 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	GH93 Performance	B 13° Narrow	HC	3000	>98	1250	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	1370	<2	31
D DALI		H 39° Wide	HQ	3000	>90	1420	<2	
P Dimmer on board		K - Without optics	WW	3000	>80	1700	<3	
H Bluetooth			NN	4000	>80	1775	<3	

LED nominal lumen



17W COBLED Lumen delivered up to 2110 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	GH94 Performance	B 13° Narrow	HC	3000	>98	1700	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	1870	<2	31
D DALI		H 39° Wide	HQ	3000	>90	1920	<2	
P Dimmer on board		K - Without optics	WW	3000	>80	2320	<3	
H Bluetooth			NN	4000	>80	2400	<3	

LED nominal lumen



Ø 75 mm | Precision



Code example:

0 . LH83 B . HC 12

Accessories: p.194

Mains Voltage Tracks: p.137-153

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Dimm 1-10V version on request/
Versione Dimm-1-10V
su richiesta

12 W COB LED Lumen delivered up to 1575 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	LH83 Precision	B 12° Narrow	HC	3000	>98	1323	<2	12 <input type="checkbox"/>
T Phase-cut		E 23° Medium	HW	2700	>90	1491	<2	31 <input checked="" type="checkbox"/>
D DALI		K - Without optics	HQ	3000	>90	1533	<2	
P Dimmer on board			WW	3000	>80	1859	<3	
H Bluetooth			NN	4000	>80	1920	<3	

LED nominal lumen

17 W COB LED Lumen delivered up to 1465 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	NH84 Precision	A 7° Very narrow	HC	3000	>98	1700	<2	12 <input type="checkbox"/>
T Phase-cut			HW	2700	>90	1870	<2	31 <input checked="" type="checkbox"/>
D DALI			HQ	3000	>90	1920	<2	
P Dimmer on board			WW	3000	>80	2320	<3	
H Bluetooth			NN	4000	>80	2400	<3	

LED nominal lumen

17 W COB LED Lumen delivered up to 2190 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	LH84 Precision	B 12° Narrow	HC	3000	>98	1834	<2	12 <input type="checkbox"/>
T Phase-cut		E 23° Medium	HW	2700	>90	2067	<2	31 <input checked="" type="checkbox"/>
D DALI		K - Without optics	HQ	3000	>90	2122	<2	
P Dimmer on board			WW	3000	>80	2582	<3	
H Bluetooth			NN	4000	>80	2665	<3	

LED nominal lumen

24 W COB LED Lumen delivered up to 2955 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	LH86 Precision	B 12° Narrow	HC	3000	>98	2476	<3	12 <input type="checkbox"/>
T Phase-cut		E 23° Medium	HW	2700	>90	2792	<3	31 <input checked="" type="checkbox"/>
D DALI		K - Without optics	HQ	3000	>90	2860	<3	
P Dimmer on board			WW	3000	>80	3487	<3	
H Bluetooth			NN	4000	>80	3602	<3	

LED nominal lumen

28 W COB LED Lumen delivered up to 3325 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	LH87 Precision	B 12° Narrow	HC	3000	>98	2777	<3	12 <input type="checkbox"/>
T Phase-cut		E 23° Medium	HW	2700	>90	3137	<3	31 <input checked="" type="checkbox"/>
D DALI		K - Without optics	HQ	3000	>90	3207	<3	
P Dimmer on board			WW	3000	>80	3898	<3	
H Bluetooth			NN	4000	>80	4054	<3	



LED nominal lumen

25 W Warm Dimming COB LED Lumen delivered up to 1100lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
D DALI	LH86 Precision	B 25° Medium	DT	1700-3000	>95	100-2500	<4	12 <input type="checkbox"/>
P Dimmer on board								31 <input checked="" type="checkbox"/>
H Bluetooth								

LED nominal lumen

Ø 75 mm | Performance



Code example:

0 . **LH93** **B** . **HC** **12**

Accessories: p.195

Mains Voltage Tracks: p.137-153

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Dimm 1-10V version on request/
Versione Dimm-1-10V
su richiesta

12 W COBLED Lumen delivered up to 1800 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LH93 Performance	B 12° Narrow	HC	3000	>98	1323	<2	12
T Phase-cut		E 23° Medium	HW	2700	>90	1491	<2	31
D DALI		F 37° Medium-wide	HQ	3000	>90	1533	<2	
P Dimmer on board		H 48° Wide	WW	3000	>80	1859	<3	
H Bluetooth		K - Without optics	NN	4000	>80	1920	<3	

LED nominal lumen

17 W COBLED Lumen delivered up to 2480 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LH94 Performance	B 12° Narrow	HC	3000	>98	1834	<2	12
T Phase-cut		E 23° Medium	HW	2700	>90	2067	<2	31
D DALI		F 37° Medium-wide	HQ	3000	>90	2122	<2	
P Dimmer on board		H 48° Wide	WW	3000	>80	2582	<3	
H Bluetooth		K - Without optics	NN	4000	>80	2665	<3	

LED nominal lumen

24 W COBLED Lumen delivered up to 3550 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LH96 Performance	B 12° Narrow	HC	3000	>98	2476	<2	12
T Phase-cut		E 23° Medium	HW	2700	>90	2792	<2	31
D DALI		F 37° Medium-wide	HQ	3000	>90	2860	<2	
P Dimmer on board		H 48° Wide	WW	3000	>80	3487	<3	
H Bluetooth		K - Without optics	NN	4000	>80	3602	<3	


LED nominal lumen

28 W COBLED Lumen delivered up to 3770 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LH97 Performance	B 12° Narrow	HC	3000	>98	2777	<2	12
T Phase-cut		E 23° Medium	HW	2700	>90	3137	<2	31
D DALI		F 37° Medium-wide	HQ	3000	>90	3207	<2	
P Dimmer on board		H 48° Wide	WW	3000	>80	3898	<3	
H Bluetooth		K - Without optics	NN	4000	>80	4054	<3	

LED nominal lumen

Ø 95 mm | Precision

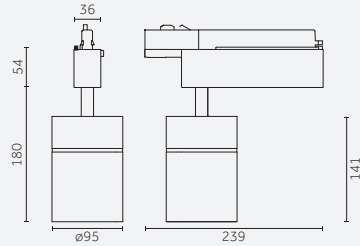

Code example:

0 . **MH83** **B** . **HC** **12**

Accessories: p.196

Mains Voltage Tracks: p.137-153

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Dimm 1-10V version on request/
Versione Dimm-1-10V
su richiesta

12 W COB LED Lumen delivered up to 1690 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	MH83 Precision	B 12° Narrow	HC	3000	>98	1323	<3	12 <input type="checkbox"/>
T Phase-cut		E 23° Medium	HW	2700	>90	1491	<3	31 <input type="checkbox"/>
D DALI		K - Without optics	HQ	3000	>90	1533	<3	
P Dimmer on board			WW	3000	>80	1859	<3	
H Bluetooth			NN	4000	>80	1920	<3	

LED nominal lumen

17 W COB LED Lumen delivered up to 1510 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	PH84 Precision	A 7° Very narrow	HC	3000	>98	1700	<2	12 <input type="checkbox"/>
T Phase-cut			HW	2700	>90	1870	<2	31 <input type="checkbox"/>
D DALI			HQ	3000	>90	1920	<2	
P Dimmer on board			WW	3000	>80	2320	<3	
H Bluetooth			NN	4000	>80	2400	<3	

LED nominal lumen

17 W COB LED Lumen delivered up to 2350 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	MH84 Precision	B 12° Narrow	HC	3000	>98	1834	<3	12 <input type="checkbox"/>
T Phase-cut		E 23° Medium	HW	2700	>90	2067	<3	31 <input type="checkbox"/>
D DALI		K - Without optics	HQ	3000	>90	2122	<3	
P Dimmer on board			WW	3000	>80	2582	<3	
H Bluetooth			NN	4000	>80	2665	<3	

LED nominal lumen

24 W COB LED Lumen delivered up to 3170 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	MH86 Precision	B 12° Narrow	HC	3000	>98	2476	<3	12 <input type="checkbox"/>
T Phase-cut		E 23° Medium	HW	2700	>90	2792	<3	31 <input type="checkbox"/>
D DALI		K - Without optics	HQ	3000	>90	2860	<3	
P Dimmer on board			WW	3000	>80	3487	<3	
H Bluetooth			NN	4000	>80	3602	<3	

LED nominal lumen

33 W COB LED Lumen delivered up to 4130 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	MH88 Precision	B 12° Narrow	HC	3000	>98	3142	<3	12 <input type="checkbox"/>
D DALI		E 23° Medium	HW	2700	>90	3635	<3	31 <input type="checkbox"/>
P Dimmer on board		K - Without optics	HQ	3000	>90	3735	<3	
H Bluetooth			WW	3000	>80	4510	<3	
			NN	4000	>80	4695	<3	

LED nominal lumen

37 W COB LED Lumen delivered up to 4476 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	MH89 Precision	B 12° Narrow	HC	3000	>98	3473	<3	12 <input type="checkbox"/>
D DALI		E 23° Medium	HW	2700	>90	3940	<3	31 <input type="checkbox"/>
P Dimmer on board		K - Without optics	HQ	3000	>90	4000	<3	
H Bluetooth			WW	3000	>80	4880	<3	
			NN	4000	>80	5090	<3	


LED nominal lumen

33 W Warm Dimming COB LED Lumen delivered up to 1520 lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
D DALI	MH88 Precision	B 25° Narrow	DT	1700-3000	>95	100-3100	<4	12 <input type="checkbox"/>
P Dimmer on board								31 <input type="checkbox"/>
H Bluetooth								

LED nominal lumen

Ø 95 mm | Performance

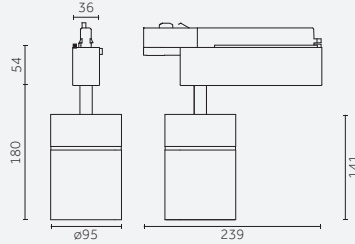

Code example:

O . **MH93** **B** . **HC** **12**

Accessories: p.197

Mains Voltage Tracks: p.137-153

Finishes: p.82-83

Photometric data:

www.reggiani.net

Notes:

Dimm 1-10V version on request/
Versione Dimm-1-10V
su richiesta

12 W COBLED Lumen delivered up to 1800 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	MH93 Performance	B 10° Narrow	HC	3000	>98	1323	<3	12
T Phase-cut		E 20° Medium	HW	2700	>90	1491	<3	31
D DALI		H 31° Medium-wide	HQ	3000	>90	1533	<3	
P Dimmer on board		M 40° Wide	WW	3000	>80	1859	<3	
H Bluetooth		K - Without optics	NN	4000	>80	1920	<3	

LED nominal lumen

17 W COBLED Lumen delivered up to 2500 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	MH94 Performance	B 10° Narrow	HC	3000	>98	1834	<3	12
T Phase-cut		E 20° Medium	HW	2700	>90	2067	<3	31
D DALI		H 31° Medium-wide	HQ	3000	>90	2122	<3	
P Dimmer on board		M 40° Wide	WW	3000	>80	2582	<3	
H Bluetooth		K - Without optics	NN	4000	>80	2665	<3	

LED nominal lumen

24 W COBLED Lumen delivered up to 3300 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	MH96 Performance	B 10° Narrow	HC	3000	>98	2476	<3	12
T Phase-cut		E 20° Medium	HW	2700	>90	2792	<3	31
D DALI		H 31° Medium-wide	HQ	3000	>90	2860	<3	
P Dimmer on board		M 40° Wide	WW	3000	>80	3487	<3	
H Bluetooth		K - Without optics	NN	4000	>80	3602	<3	

LED nominal lumen

33 W COBLED Lumen delivered up to 4110 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	MH98 Performance	B 10° Narrow	HC	3000	>98	3142	<3	12
D DALI		E 20° Medium	HW	2700	>90	3635	<3	31
P Dimmer on board		H 31° Medium-wide	HQ	3000	>90	3735	<3	
H Bluetooth		M 40° Wide	WW	3000	>80	4510	<3	
		K - Without optics	NN	4000	>80	4695	<3	

LED nominal lumen

37 W COBLED Lumen delivered up to 4530 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	MH99 Performance	B 10° Narrow	HC	3000	>98	3473	<3	12
D DALI		E 20° Medium	HW	2700	>90	3940	<3	31
P Dimmer on board		H 31° Medium-wide	HQ	3000	>90	4000	<3	
H Bluetooth		M 40° Wide	WW	3000	>80	4880	<3	
		K - Without optics	NN	4000	>80	5090	<3	


LED nominal lumen



Mains Voltage Tracks

Mains Voltage Tracks

Supertrack

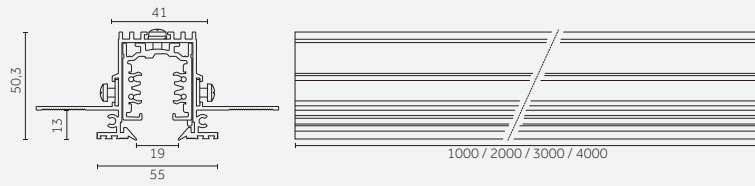

Code example:
0.27101.00 21

Version	Length mm	Weight kg	Finishes
0.27101.00	1000	1,38	21
0.27102.00	2000	2,76	
0.27103.00	3000	4,14	
0.27104.00	4000	5,52	

Supertrack | Accessories



















Accessories/ Accessori

138





		<p>Description</p> <p>Ghost lock - Accessory for vertical installation - max 3,5kg weight/ Ghost lock - Accessorio per installazione verticale - Peso max 3,5kg</p>	<p>Code</p> <p>0.26508.0000</p>	
		<p>Description</p> <p>Safety suspension system/ Sistema di sospensione di sicurezza</p>	<p>Code</p> <p>0.27113.00</p>	<p>Finishes</p> <p>21 </p>
		<p>Description</p> <p>End cap/ Tappo di chiusura</p>	<p>Code</p> <p>0.27109.00</p>	<p>Finishes</p> <p>21 </p>
		<p>Description</p> <p>Mechanical joint for square installation/ Giunto meccanico per installazione quadrata</p>	<p>Code</p> <p>0.27112.00</p>	<p>Finishes</p> <p>21 </p>
		<p>Description</p> <p>Ghostrack cover for track - 3000mm/ Copertura Ghostrack per binario - 3000mm</p>	<p>Code</p> <p>0.27116.00</p>	<p>Finishes</p> <p>21 </p>
		<p>Description</p> <p>Trimless inspection hatch/ Botola d'ispezione Trimless</p>	<p>Code</p> <p>0.40020.0000</p>	<p></p>
		<p>Description</p> <p>Cable cutter/ Tronchese per taglio conduttori del binario</p>	<p>Code</p> <p>0.02064.0000</p>	

Mains Voltage Tracks

Accessories for electromechanical connections/ Accessori connessioni elettromeccaniche


		Description Straight connector/ Giunto passante	Code 0.20240.00	Finishes 21
		Description Right power feed unit - polarity right / earth left/ Unità di alimentazione destra - polarità a destra / conduttore di terra a sinistra	Code 0.27105.00	Finishes 21
		Description Left power feed unit - polarity left / earth right/ Unità di alimentazione sinistra - polarità a sinistra / conduttore di terra a destra	Code 0.27106.00	Finishes 21
		Description 90° ceiling corner with feeding unit - polarity in - earth out / Angolo di 90° a soffitto con unità di alimentazione - polarità interna - conduttore di terra esterna	Code 0.27107.00	Finishes 21
		Description 90° ceiling corner with feeding unit - polarity out - earth in / Angolo di 90° a soffitto con unità di alimentazione - polarità esterna - conduttore di terra interna	Code 0.27115.00	Finishes 21
		Description 90° ceiling corner (no feed) - earth out / Angolo di 90° a soffitto (senza alimentazione) - conduttore di terra esterna	Code 0.27108.00	Finishes 21
		Description 90° ceiling corner (no feed) - earth in / Angolo di 90° a soffitto (senza alimentazione) - conduttore di terra interna	Code 0.27114.00	Finishes 21
		Description Ceiling to wall corner 90° with feeding unit / Angolo 90° soffitto/parete con unità di alimentazione	Code 0.27110.00	Finishes 21
		Description Ceiling to wall corner 90° mechanical joint (no feed) / Angolo 90° soffitto/parete (senza alimentazione)	Code 0.27111.00	Finishes 21

Control systems/ Sistemi di controllo

		Description Wireless control device for 220V track (see p.86-87)/ Dispositivo di controllo wireless per binario 220V (vedi p.86-87) Casambi - Control up to 64 drivers divided in 4 groups/ Casambi - Controllo fino a 64 driver divisi in 4 gruppi	Code 0.26102.00	Finishes 10 21
		Description Wireless control device for 220V track (see p.86-87)/ Dispositivo di controllo wireless per binario 220V (vedi p.86-87) Control up to 64 drivers individually/ Controllo fino a 64 driver individualmente	Code 0.26103.00	Finishes 10 21

Mains Voltage Tracks

140


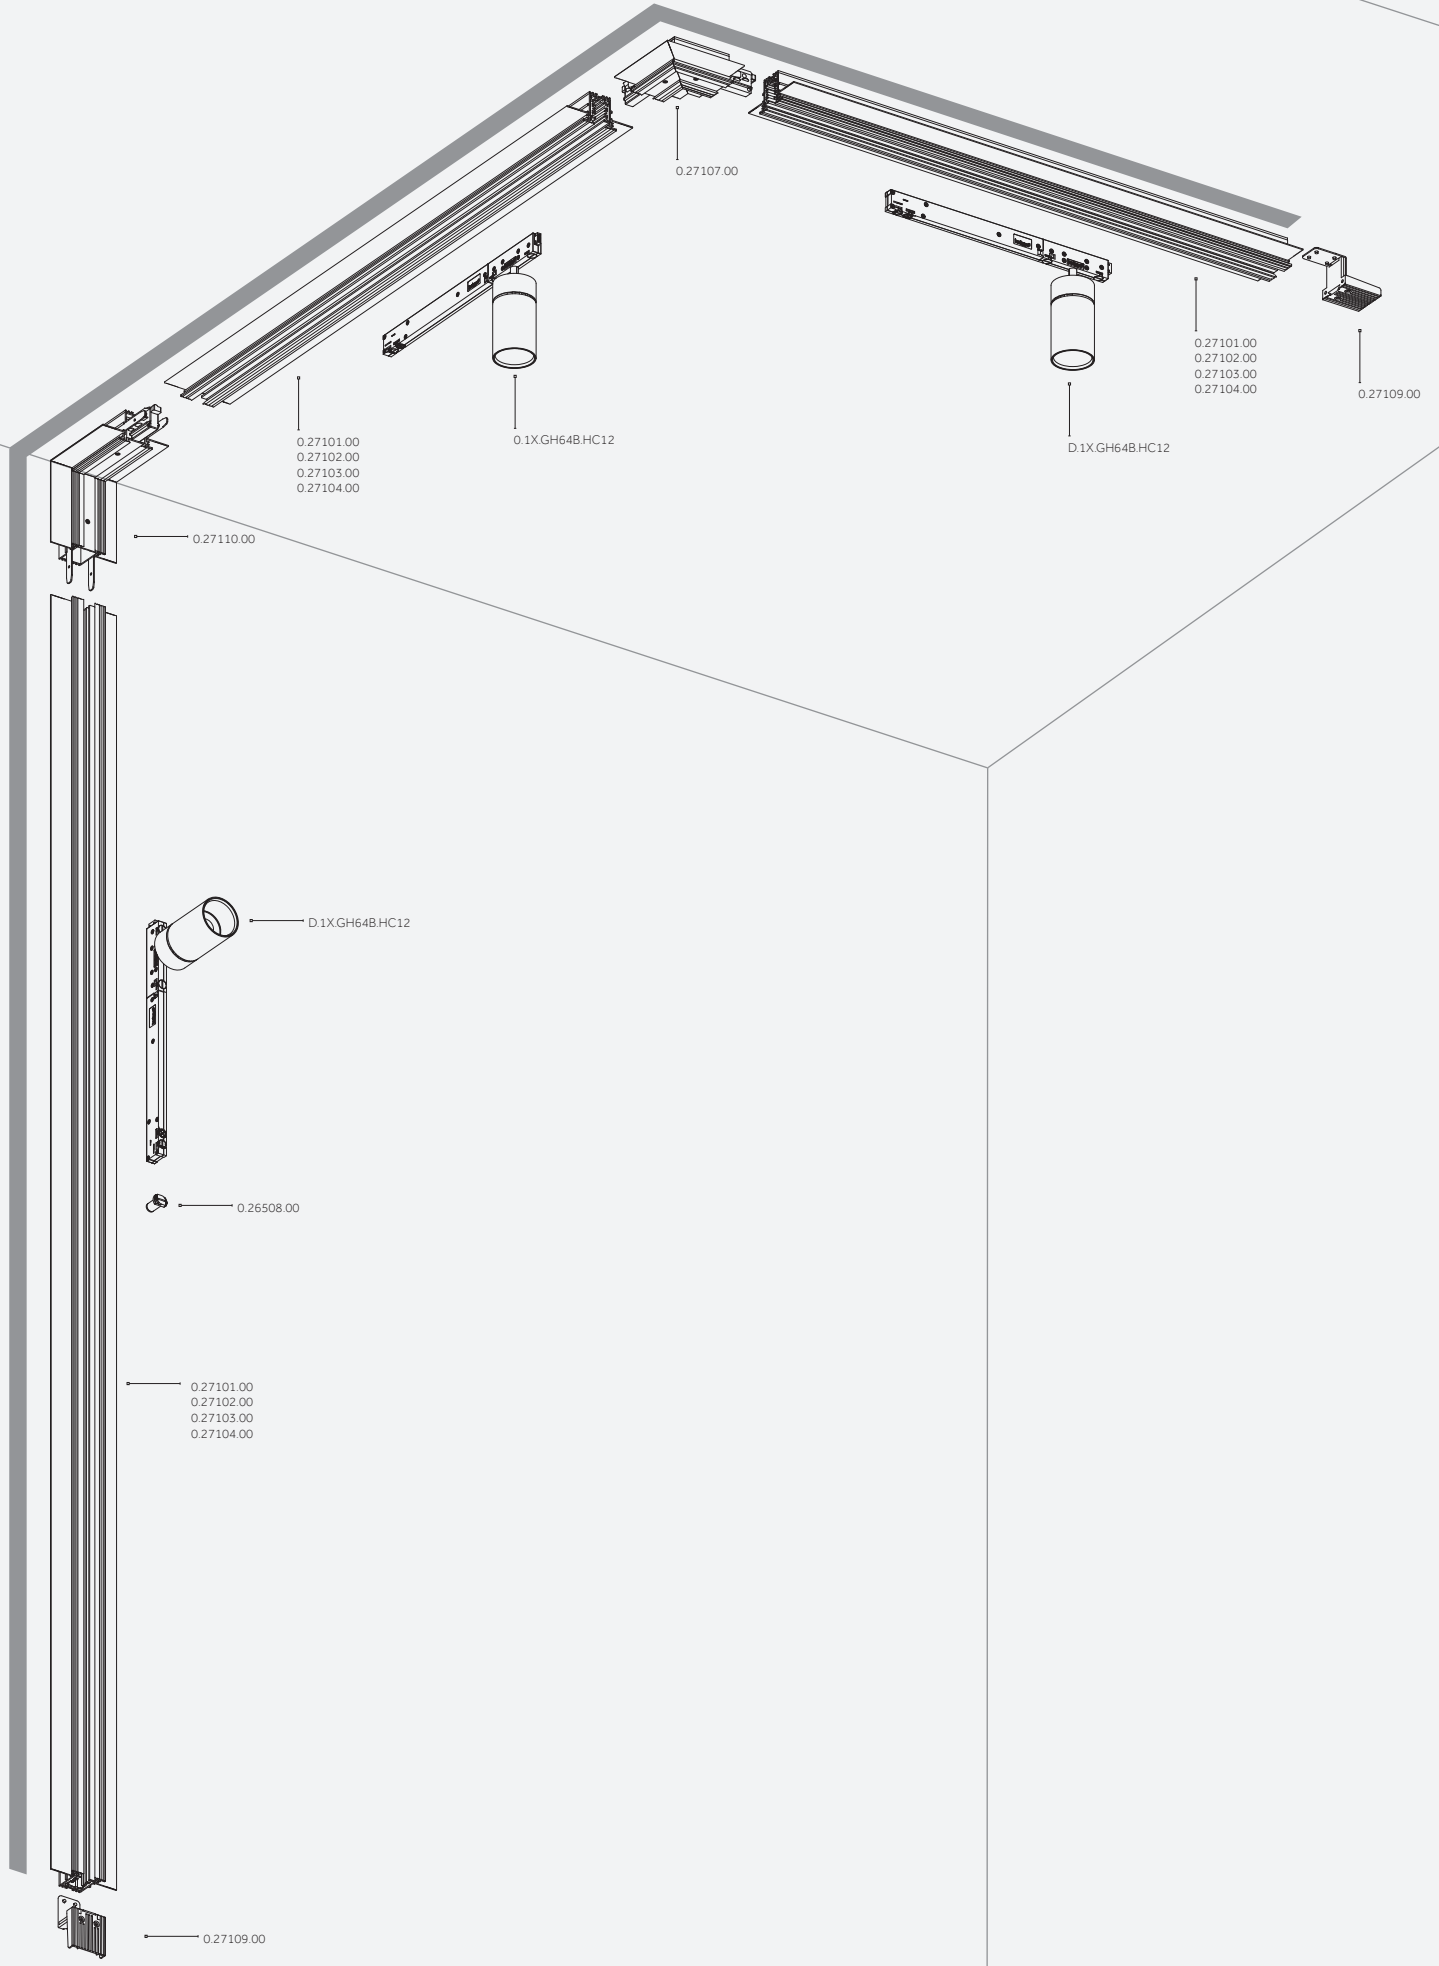


Mains Voltage Tracks



Mains Voltage Tracks

Track Recessed



Code example:
0.02034.00 10

Electromechanical connections and Control systems: p.146-147
Connessioni elettromeccaniche e Sistemi di controllo: p.146-147

Version	Length mm	Weight kg	Finishes
0.02034.00	1000	1,00	10
0.02035.00	2000	2,00	21
0.02036.00	3000	3,00	28
0.02037.00	4000	4,00	

Track Recessed | Accessories

Accessories for electromechanical connections (Recessed track)/
Accessori per connessioni elettromeccaniche (Binario da incasso)

142

		Description Live end feed cover/ Copertura per testata	Code 0.02059.00	Finishes 10 21 28
		Description Live middle feed cover/ Copertura per giunto diretto	Code 0.02060.00	Finishes 10 21 28
		Description L-connector cover/ Copertura per giunto a L	Code 0.02056.00	Finishes 10 21 28
		Description T-connector cover/ Copertura per giunto a T	Code 0.02057.00	Finishes 10 21 28
		Description X-connector cover/ Copertura per giunto a X	Code 0.02058.00	Finishes 10 21 28
		Description End cap (dead end) track with locking screw/ Tappo di chiusura con vite di blocco	Code 0.02041.00	Finishes 10 21 28
		Description Track cover - 1000mm/ Copertura per binario - 1000mm	Code 0.02071.00	Finishes 10 21
		Description Trimless inspection hatch/ Botola d'ispezione Trimless	Code 0.40020.0000	


Accessories/ Accessori



Description
Cable cutter/
Tronchese per taglio conduttori del binario



Code
0.02064.0000

Mains Voltage Tracks

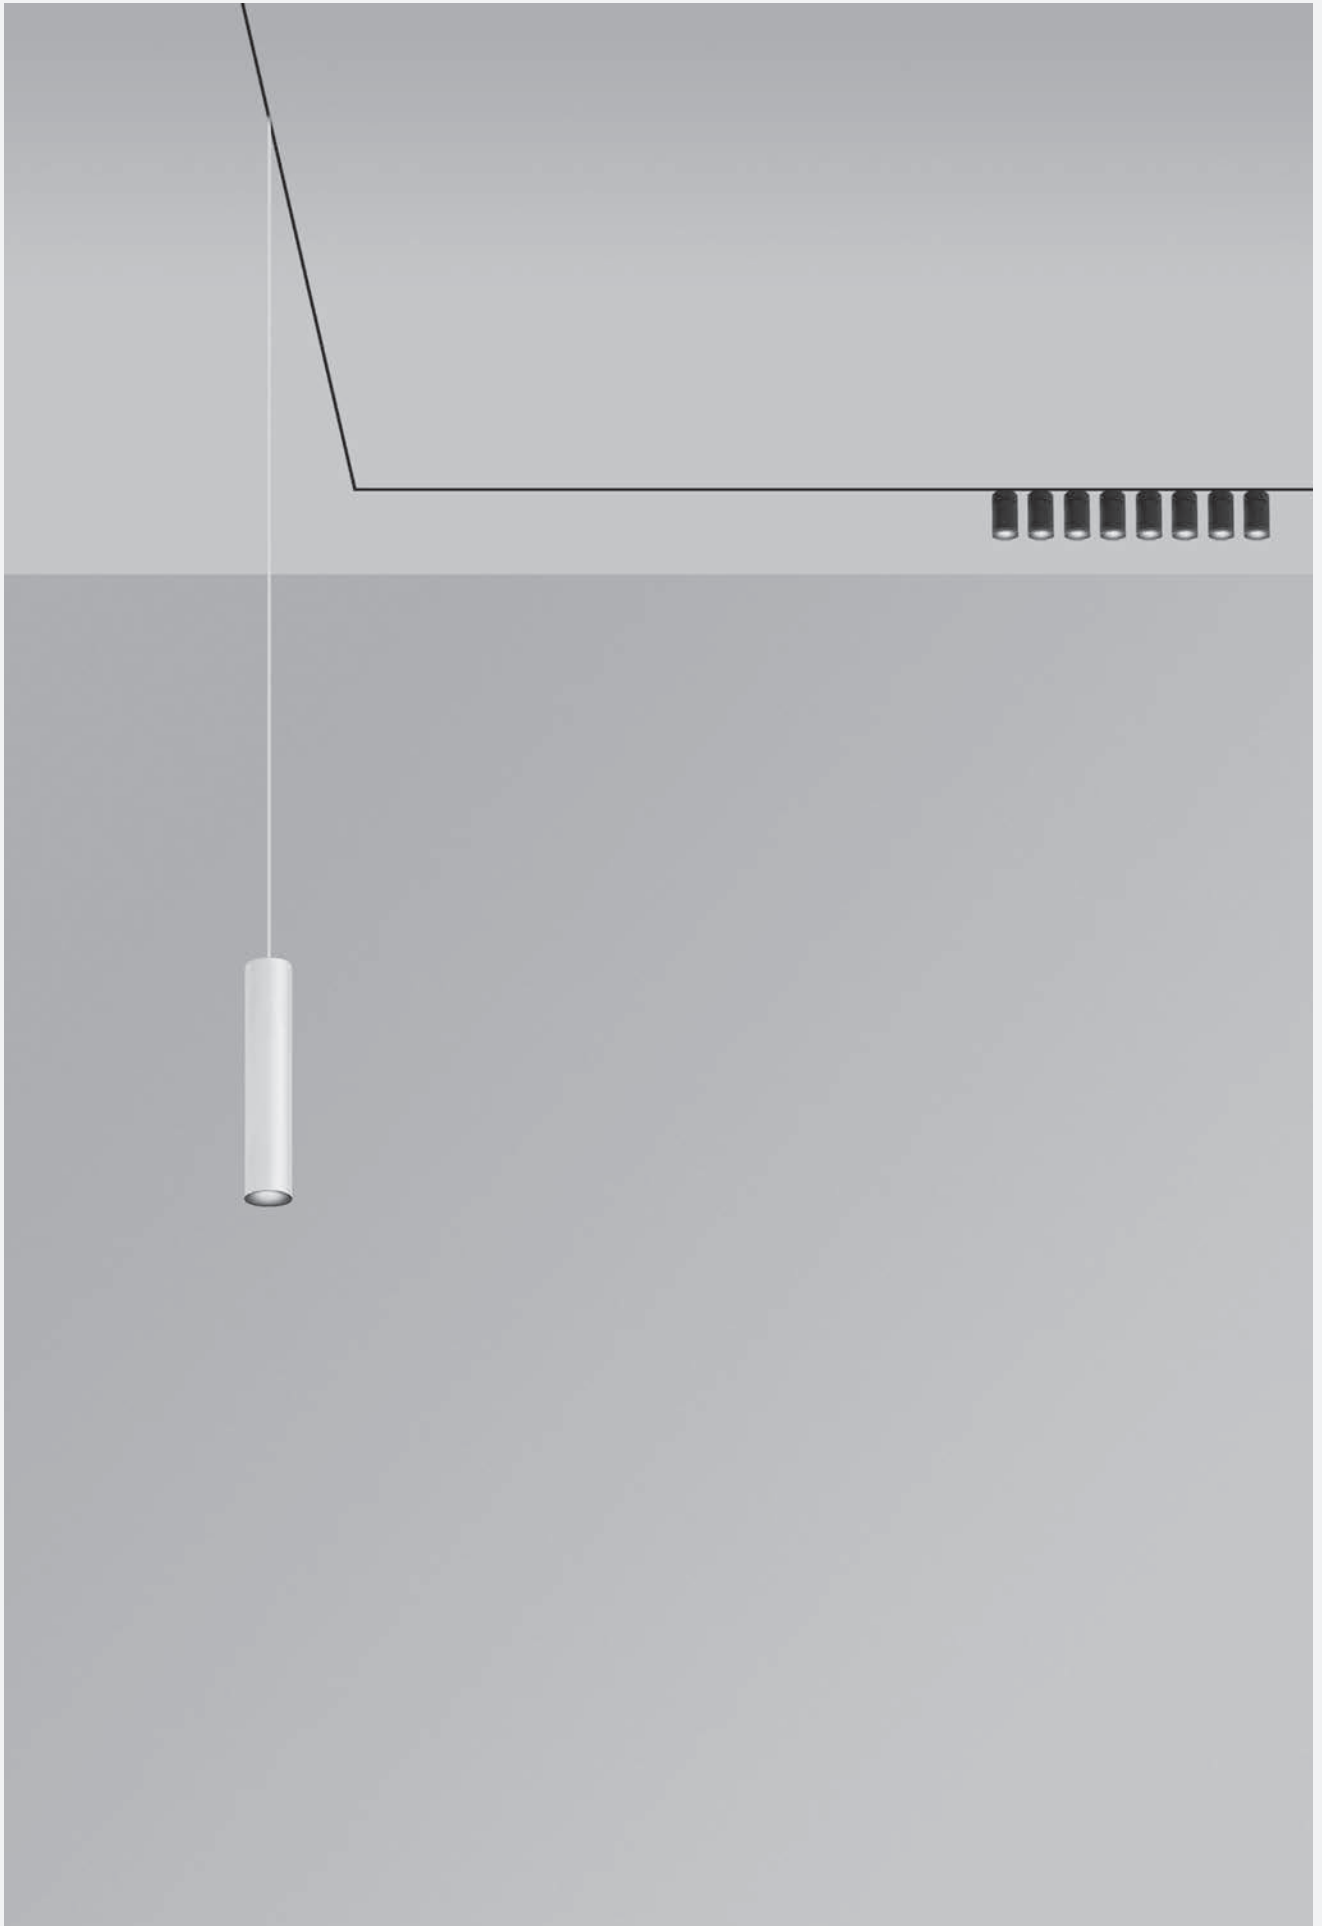

Mains Voltage Tracks

Track Surface/Pendant




Code example:
0.02030.00 10

Electromechanical connections and Control systems: p.146-147
Connessioni elettromeccaniche e Sistemi di controllo: p.146-147

Version	Length mm	Weight kg	Finishes
0.02030.00	1000	1,00	10
0.02031.00	2000	2,00	21
0.02032.00	3000	3,00	28
0.02033.00	4000	4,00	

Track Surface/Pendant | Accessories

Accessories (surface-mounted track)/ Accessori (binario da superficie)



Description


End cap (dead end) for surface-mounted track with locking screw/
Tappo di chiusura per binario a superficie con vite di blocco

Code

0.02041.00

Finishes

10
21
28



Description


Ceiling bracket/
Staffa a per fi ssaggio a soffitto

Code

0.02054.00

Finishes

10
21
28



Description

Ceiling clamp/
Clip per fi ssaggio a soffitto

Code

0.02065.00

Finishes

00



Description

Track cover - 1000mm/
Copertura per binario - 1000mm

Code

0.02071.00

Finishes

10
21




Description


Cable cutter/
Tronchese per taglio conduttori del binario

Code

0.02064.0000



Pendant mounting (surface-mounted track)/ Fissaggio a sospensione (binario da superficie)



Description

Suspension set, 1500 mm/
Set parte sospensione, 1500 mm

Code

0.02052.00



Finishes

10
21
28

Suspension set, 5000 mm/
Set parte sospensione, 5000 mm

0.02053.00

Composed of: - ceiling bracket - wire clamp - plastic ceiling rose (Ø 32 mm)
- steel wire (Ø 1.5 mm; L=1500/5000 mm) with M6 terminal/
Composto da: - staffa per fissaggio a soffitto - tenditore a vite - rosone
plastico Ø 32 mm - filo in acciaio Ø 1.5 mm (L=1500/5000 mm) con
terminale M6



Description

Suspension kit with 2-m long wire and counter-balance system/
Set sospensione con cavo da 2m e sistema di contro-bilanciamento


Code

0.25864.00

Finishes

10
21

Mains Voltage Tracks



Description
 Suspension kit with 1m tige.
 Ceiling bracket, plastic ceiling rose, threaded M6 rod/
 Set per fissaggio a sospensione con tige 1m.
 Staffa per fissaggio a soffitto, rosone in plastica, barra filettata M6

Code	Finishes
0.02070.00	10
	21
	28



Description
 Short bracket M6 for track/
 Staffa corta con inserto M6 per binario
 Composed of: - point clamp suspension M6 - plastic cover/
 Composto da: - clip con tenditore M6 - copertura plastica

Code	Finishes
0.02051.00	10
	21
	28




Description
 Short T-bracket for suspension/
 Staffa a T corta per sospensioni

Code	Finishes
0.02055.00	10
	21
	28























Description
 Clamp with gripper for rapid track installation for cable Ø 1,5m/
 Clip con tenditore per fissaggio rapido del binario per cavo Ø 1,5m

Code	Finishes
0.02061.00	10
	21
	28

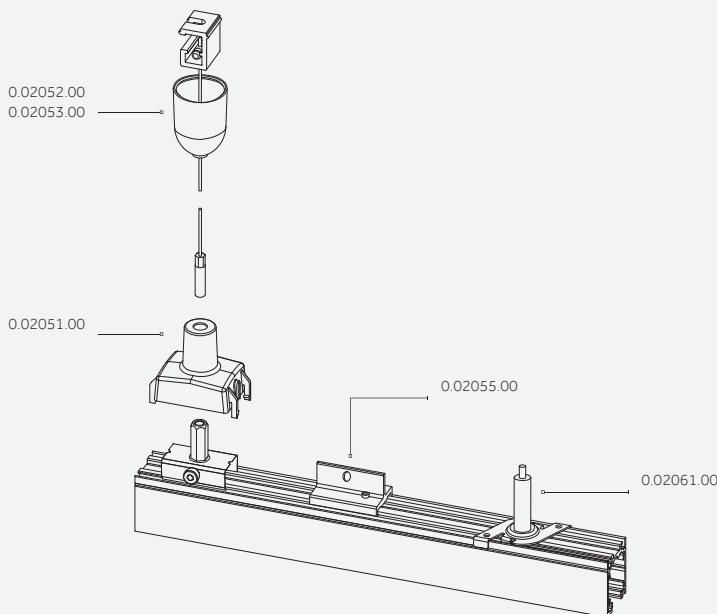


Track Recessed | Track Surface/Pendant | Accessories

Electromechanical connections/ Connessioni elettromeccaniche

		Description Left End-feed. Polarity - Left, Earth conductor - Right./ Testata Sinistra. Conduttore terra a destra. Polarità a sinistra.	Code 0.02038.00	Finishes 10 21 28	
		Description Right End-feed. Polarity - Right, Earth conductor - Left./ Testata Destra. Conduttore terra a sinistra. Polarità a destra.	Code 0.02039.00	Finishes 10 21 28	
		Description Straight connector/ Giunto passante	Code 0.02040.00	Finishes 10 21 28	
		Description Live middle feed/ Giunto diretto	Code 0.02042.00	Finishes 10 21 28	
		Description L-connector. Earth outside/ Giunto a L. Conduttore di terra esterna	Code 0.02043.00	Finishes 10 21 28	
		Description L-connector. Earth inside/ Giunto a L. Conduttore di terra interna	Code 0.02044.00	Finishes 10 21 28	
146			Description T-connector. Earth inside / left/ Giunto a T. Conduttore di terra interna / sinistra	Code 0.02045.00	Finishes 10 21 28
			Description T-connector. Earth inside / right/ Giunto a T. Conduttore di terra interna / destra	Code 0.02046.00	Finishes 10 21 28
			Description T-connector. Earth outside / left/ Giunto a T. Conduttore di terra esterna / sinistra	Code 0.02047.00	Finishes 10 21 28
			Description T-connector. Earth outside / right/ Giunto a T. Conduttore di terra esterna / destra	Code 0.02048.00	Finishes 10 21 28
		Description Flexible connector/ Giunto flessibile	Code 0.02050.00	Finishes 10 21 28	
		Description X-connector. Earth inside / inside/ Giunto a X. Conduttore di terra interna / interna	Code 0.02049.00	Finishes 10 21 28	
		Description X-connector. Earth inside / outside/ Giunto a X. Conduttore di terra interna / esterna	Code 0.02068.00	Finishes 10 21 28	

Mains Voltage Tracks

Adapter/ Adattatore



Description

6-conductor asymmetric adapter (3 circuits+N+control system) with circuit selector/
Adattatore Asimmetrico a 6 conduttori (3 fasi+N+ sistema di controllo) con selettore di fase


Code

0.02066.00

Finishes

10	<input type="checkbox"/>
21	<input type="checkbox"/>
28	<input type="checkbox"/>

Control systems/ Sistemi di controllo



Description

Wireless control device for 220V track (see p.86-87)/
Dispositivo di controllo wireless per binario 220V (vedi p.86-87)


Casambi - Control up to 64 drivers divided in 4 groups/
Casambi - Controllo fino a 64 driver divisi in 4 gruppi

Code

0.26102.00

Finishes

10	<input type="checkbox"/>
21	<input type="checkbox"/>



Description

Wireless control device for 220V track (see p.86-87)/
Dispositivo di controllo wireless per binario 220V (vedi p.86-87)


Control up to 64 drivers individually/
Controllo fino a 64 driver individualmente

Code

0.26103.00

Finishes

10	<input type="checkbox"/>
21	<input type="checkbox"/>

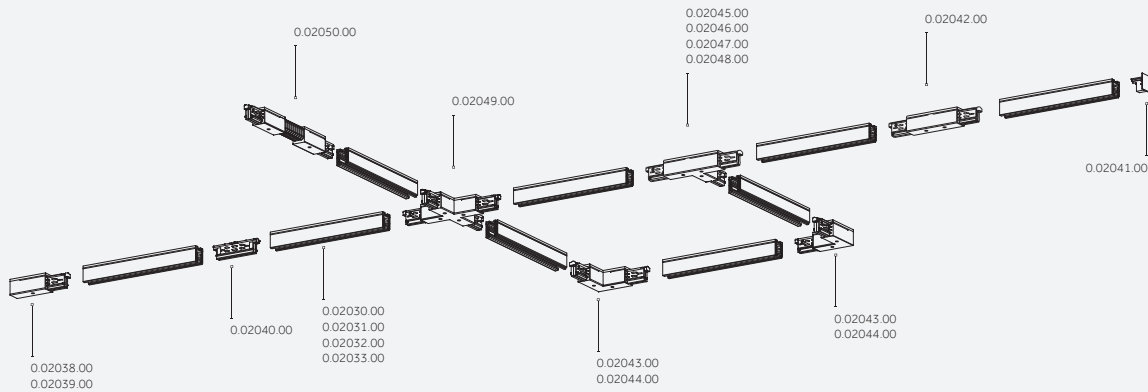


^{EN} Use specialised technicians only to install systems and replace parts. Disconnect system from power supply and ensure compliance of installation procedure with national standards. The user and/or installer are responsible for ensuring electrical, mechanical and thermal compatibility of the system with the structures where they will be anchored and with regard to the luminaires connected to them.

^{IT} Tutte le operazioni di installazione e sostituzione dei componenti devono essere eseguite da personale specializzato, escludendo tensione dall'impianto e rispettando le norme nazionali d'installazione. È responsabilità dell'utente e/o dell'installatore assicurare la compatibilità elettrica, meccanica e termica del sistema rispetto alle strutture sulle quali viene ancorato e rispetto agli apparecchi ad esso connessi.

Mains Voltage Tracks

H Track | Surface/Pendant

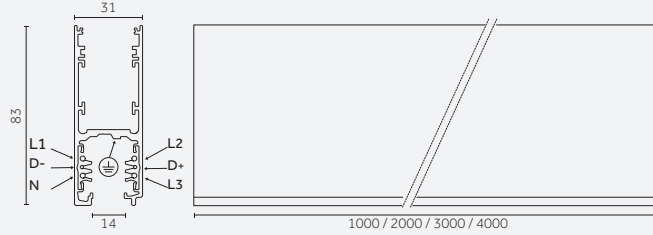

Code example:
0.02505.00 10

Pendant mounting and other accessories: p.152-153
Fissaggio a sospensione e altri accessori: p.152-153

Version	Length mm	Weight kg	Finishes
0.02505.00	1000	1,60	10 <input type="checkbox"/>
0.02506.00	2000	3,20	21 <input type="checkbox"/>
0.02507.00	3000	4,80	<input type="checkbox"/>
0.02508.00	4000	6,40	<input type="checkbox"/>

H Track | Surface/Pendant | Accessories

Accessories (surface-mounted track)/
Accessori (binario da superficie)

148



Description
Clip for ceiling fixing/
Clip per fissaggio a soffitto

Code
0.02537.00

Finishes
10
21



Description
Rail cover 1000mm/
Copertura per binario - 1000mm

Code
0.02071.00

Finishes
10
21

Electromechanical connections/
Conessioni elettromeccaniche



Description
Left End-feed. Polarity - Left, Earth conductor - Right./
Testata Sinistra. Conduttore terra a destra. Polarità a sinistra.

Code
0.02509.00

Finishes
10
21



Description
Right End-feed. Polarity - Right, Earth conductor - Left./
Testata Destra. Conduttore terra a sinistra. Polarità a destra.

Code
0.02510.00


Finishes
10
21



Description
Straight connector/
Giunto passante

Code
0.02040.00

Finishes
10
21













Description
Live middle feed/
Giunto diretto





Code
0.02541.00

Finishes
10
21

Mains Voltage Tracks



		Description L-connector. Earth inside/ Giunto a L. Conduttore di terra interna	Code 0.02511.00	Finishes 10 <input type="checkbox"/> 21 <input type="checkbox"/>
		Description L-connector. Earth outside/ Giunto a L. Conduttore di terra esterna	Code 0.02512.00	Finishes 10 <input type="checkbox"/> 21 <input type="checkbox"/>
		Description T-connector. Earth outside / right/ Giunto a T. Conduttore di terra esterna / destra	Code 0.02513.00	Finishes 10 <input type="checkbox"/> 21 <input type="checkbox"/>
		Description T-connector. Earth outside / left/ Giunto a T. Conduttore di terra esterna / sinistra	Code 0.02514.00	Finishes 10 <input type="checkbox"/> 21 <input type="checkbox"/>
		Description T-connector. Earth inside / right/ Giunto a T. Conduttore di terra interna / destra	Code 0.02515.00	Finishes 10 <input type="checkbox"/> 21 <input type="checkbox"/>
		Description T-connector. Earth inside / left/ Giunto a T. Conduttore di terra interna / sinistra	Code 0.02516.00	Finishes 10 <input type="checkbox"/> 21 <input type="checkbox"/>
		Description X-connector. Earth inside / inside/ Giunto a X. Conduttore di terra interna / interna	Code 0.02517.00	Finishes 10 <input type="checkbox"/> 21 <input type="checkbox"/>

Control system/ Sistemi di controllo

		Description Wireless control device for 220V track (see p.86-87)/ Dispositivo di controllo wireless per binario 220V (vedi p.86-87) Casambi - Control up to 64 drivers divided in 4 groups/ Casambi - Controllo fino a 64 driver divisi in 4 gruppi	Code 0.26102.00	Finishes 10 <input type="checkbox"/> 21 <input type="checkbox"/>
		Description Wireless control device for 220V track (see p.86-87)/ Dispositivo di controllo wireless per binario 220V (vedi p.86-87) Control up to 64 drivers individually/ Controllo fino a 64 driver individualmente	Code 0.26103.00	Finishes 10 <input type="checkbox"/> 21 <input type="checkbox"/>

Mains Voltage Tracks

H Track | Pendant Indirect

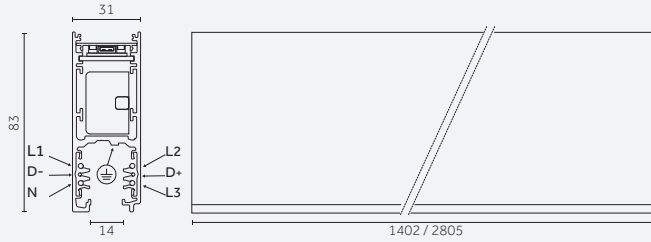

Code example:

0 . **02531** . **HQ** **10**

Pendant mounting and other accessories: p.152-153
Fissaggio a sospensione e altri accessori: p.152-153

Notes:

Kit for suspended application to be ordered separately, see p.152-153/Kit per l'applicazione a sospensione da ordinare separatamente vedi p.152-153

Maximum number of modules connectable in continuous line:
60 modules of 1402mm, 30 modules of 2805mm, power cable section 1.5mm² / Numero massimo di moduli collegabili in linea continua:
N° 60 moduli da 1402mm;
N° 30 moduli da 2805mm,
cavo di alimentazione sezione 1,5mm²


25 W		POWER LED				Lumen delivered up to 2350 lm / Lumen maintenance: L90 B5=50,000h					
Driver	Version	Length mm	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes	
0 On/Off	02531	1402	Opal	105°	HW	2700	>90	3390	<3	10	<input type="checkbox"/>
D DALI					HQ	3000	>90	3450	<3	21	<input type="checkbox"/>
					HN	4000	>90	3755	<3		<input type="checkbox"/>
LED nominal lumen											

50 W		POWER LED				Lumen delivered up to 4700 lm / Lumen maintenance: L90 B5=50,000h					
Driver	Version	Length mm	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes	
0 On/Off	02532	2805	Opal	105°	HW	2700	>90	6780	<3	10	<input type="checkbox"/>
D DALI					HQ	3000	>90	6900	<3	21	<input type="checkbox"/>
					HN	4000	>90	7510	<3		<input type="checkbox"/>
LED nominal lumen											

H Track | Pendant Indirect | Tunable white



150

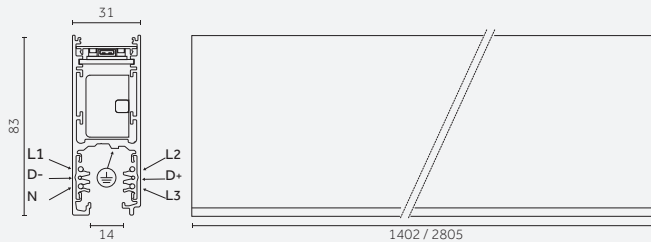

Code example:

X . **02533** . **WT** **10**

Driver Tunable white: p.185
Pendant mounting and other accessories: p.152-153
Fissaggio a sospensione e altri accessori: p.152-153

Notes:

Kit for suspended application to be ordered separately, see p.152-153/Kit per l'applicazione a sospensione da ordinare separatamente vedi p.152-153

20 W		MID POWER LED				Lumen delivered up to 2350 lm / Lumen maintenance: L90 B5=50,000h					
Driver	Version	Length mm	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes	
X Not included	02533	1402	Opal	105°	WT	2200-6500	>80	2800	<3	10	<input type="checkbox"/>
					QT	2200-6500	>90	2310	<3	21	<input type="checkbox"/>
LED nominal lumen											

40 W		MID POWER LED				Lumen delivered up to 4700 lm / Lumen maintenance: L90 B5=50,000h					
Driver	Version	Length mm	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes	
X Not included	02534	2805	Opal	105°	WT	2200-6500	>80	5600	<3	10	<input type="checkbox"/>
					QT	2200-6500	>90	4670	<3	21	<input type="checkbox"/>
LED nominal lumen											

H Track | Pendant Indirect | Tunable white | Electrical Devices











Driver

20/40 W MID POWER LED





Type	Code	W	Size (mm)	Tech. info	CV	Connectable fixtures	Max. distance	Cable section
DALI	D.31640.0000	75		120-277V / 50/60Hz	24V	Max: 67 W	Max: 20m	2.5 mm ²
DMX	G.31640.0000	75		120-277V / 50/60Hz	24V	Max: 67 W	Max: 20m	2.5 mm ²

H Track | Pendant Indirect | Accessories

Electromechanical connections/ Connessioni elettromeccaniche

















		<p>Description</p> <p>Left End-feed. Polarity - Left, Earth conductor - Right./ Testata Sinistra. Conduttore terra a destra. Polarità a sinistra.</p>	<p>Code</p> <p>0.02583.00</p>	<p>Finishes</p> <p>10 <input type="checkbox"/></p> <p>21 <input type="checkbox"/></p>
		<p>Description</p> <p>Right End-feed. Polarity - Right, Earth conductor - Left./ Testata Destra. Conduttore terra a sinistra. Polarità a destra.</p>	<p>Code</p> <p>0.02584.00</p>	<p>Finishes</p> <p>10 <input type="checkbox"/></p> <p>21 <input type="checkbox"/></p>
		<p>Description</p> <p>Straight connector/ Giunto passante</p>	<p>Code</p> <p>0.02040.00</p>	<p>Finishes</p> <p>10 <input type="checkbox"/></p> <p>21 <input type="checkbox"/></p>
		<p>Description</p> <p>Live middle feed/ Giunto diretto</p>	<p>Code</p> <p>0.02582.00</p>	<p>Finishes</p> <p>10 <input type="checkbox"/></p> <p>21 <input type="checkbox"/></p>
		<p>Description</p> <p>L-connector. Earth outside/ Giunto a L. Conduttore di terra esterna</p>	<p>Code</p> <p>0.02546.00</p>	<p>Finishes</p> <p>10 <input type="checkbox"/></p> <p>21 <input type="checkbox"/></p>
		<p>Description</p> <p>L-connector. Earth inside/ Giunto a L. Conduttore di terra interna</p>	<p>Code</p> <p>0.02547.00</p>	<p>Finishes</p> <p>10 <input type="checkbox"/></p> <p>21 <input type="checkbox"/></p>

Control system/ Sistemi di controllo

		<p>Description</p> <p>Wireless control device for 220V track (see p.86-87)/ Dispositivo di controllo wireless per binario 220V (vedi p.86-87)</p> <p>Casambi - Control up to 64 drivers divided in 4 groups/ Casambi - Controllo fino a 64 driver divisi in 4 gruppi</p>	<p>Code</p> <p>0.26102.00</p>	<p>Finishes</p> <p>10 <input type="checkbox"/></p> <p>21 <input type="checkbox"/></p>
		<p>Description</p> <p>Wireless control device for 220V track (see p.86-87)/ Dispositivo di controllo wireless per binario 220V (vedi p.86-87)</p> <p>Control up to 64 drivers individually/ Controllo fino a 64 driver individualmente</p>	<p>Code</p> <p>0.26103.00</p>	<p>Finishes</p> <p>10 <input type="checkbox"/></p> <p>21 <input type="checkbox"/></p>

H Track | Accessories

Pendant mounting/ Fissaggio a sospensione

		<p>Description</p> <p>Wire suspension set with 3000mm cable + cylinder ceiling rose/ Set sospensione con cavo 3000mm + rosone cilindrico</p>	<p>Code</p> <p>0.02522.00</p>	<p>Finishes</p> <p>00 <input type="checkbox"/></p>
		<p>Description</p> <p>Wire suspension set with 5000mm cable + cylinder ceiling rose/ Set sospensione con cavo 5000mm + rosone cilindrico</p>	<p>Code</p> <p>0.02523.00</p>	<p>Finishes</p> <p>00 <input type="checkbox"/></p>
		<p>Description</p> <p>Wire suspension set with 3000mm cable + ceiling rose/ Set sospensione con cavo 3000mm + rosone</p>	<p>Code</p> <p>0.02524.00</p>	<p>Finishes</p> <p>00 <input type="checkbox"/></p>
		<p>Description</p> <p>Wire suspension set with 5000mm cable + ceiling rose/ Set sospensione con cavo 5000mm + rosone</p>	<p>Code</p> <p>0.02525.00</p>	<p>Finishes</p> <p>00 <input type="checkbox"/></p>
		<p>Description</p> <p>Short bracket with gripper for rapid track installation for Ø1,5m cable/ Staffa corta con tenditore per fissaggio rapido del binario per cavo Ø 1,5m</p>	<p>Code</p> <p>0.02538.00</p>	<p>Finishes</p> <p>00 <input type="checkbox"/></p>
		<p>Description</p> <p>Long bracket with gripper for rapid track installation for Ø1,5m cable/ Staffa lunga con tenditore per fissaggio rapido del binario per cavo Ø 1,5m</p>	<p>Code</p> <p>0.02539.00</p>	<p>Finishes</p> <p>00 <input type="checkbox"/></p>
		<p>Description</p> <p>Clamp with gripper for rapid track installation for cable Ø 1,5m/ Clip con tenditore per fissaggio rapido del binario per cavo Ø 1,5m</p>	<p>Code</p> <p>0.02536.00</p>	<p>Finishes</p> <p>10 <input type="checkbox"/> 21 <input checked="" type="checkbox"/></p>
		<p>Description</p> <p>Suspension kit with 2m long cable and counter-balance system/ Set sospensione con cavo da 2m e sistema di contro-bilanciamento</p>	<p>Code</p> <p>0.02535.00</p>	<p>Finishes</p> <p>10 <input type="checkbox"/> 21 <input checked="" type="checkbox"/></p>

Mains Voltage Tracks

		Description Suspension kit with 1m tige. Ceiling bracket, plastic ceiling rose, threaded M6 rod/ Set per fissaggio a sospensione con tige 1m. Staffa per fissaggio a soffitto, rosone in plastica, barra filettata M6	Code 0.02070.00	Finishes 10 21
		Description Short bracket M6 for H track/ Staffa corta con inserto M6 binario H	Code 0.02526.00	Finishes 00
		Description Long bracket M6 for H track/ Staffa lunga con inserto M6 binario H	Code 0.02527.00	Finishes 00
		Description Suspension with tige M13 1,2m/ Sospensione con tige M13 1,2m	Code 0.02528.00	Finishes 10 21
		Description Short bracket M13 for H track/ Staffa corta con inserto M13 binario H	Code 0.02530.0000	Finishes 00
		Description Long bracket M13 for h track/ Staffa lunga con inserto M13 binario H	Code 0.02529.0000	Finishes 00

Other accessories/ Altri accessori










		Description End cap / Tappo di chiusura	Code 0.02521.00	Finishes 10 21
		Description Cable cutter/ Tronchese per taglio conduttori del binario	Code 0.02064.0000	
		Description Joining Bracket/ Staffa di giunzione	Code 0.02540.0000	
		Description Upper cover for power feed (cod. 02583-02584 p.151) with cable passage/ Copertura superiore per testata di alimentazione (cod. 02583-02584 p.151) con passaggio cavo	Code 0.02542.00	Finishes 10 21
		Description Upper cover for power feed (cod. 02509-02510) without cable passage/ Copertura superiore per testata di alimentazione (cod. 02509-02510) senza passaggio cavo	Code 0.02543.00	Finishes 10 21
		Description Track cover 1000mm/ Copertura per binario - 1000mm	Code 0.02071.00	Finishes 10 21

Accessories

Ø 22 mm | Accessories




Optics accessories/ Accessori ottiche

Yori Evo Ghostrack | Yori Evo 48V | Yori Pendant Ghostrack | Yori Pendant 48V



Description	Code	Finishes	Description	Code
 Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm Holder included	0.26700.00	4A Red 5A Green 6A Blue 7A Pink 8A Yellow 9A Orange	 Selective filter 3000K - 3500K / Filtro selettivo 3000K - 3500K Holder included	0.26705.00
 Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K Holder included	0.26701.00		 Elliptical beam lens / Lente per fascio ellittico Holder included	0.26707.00
 Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K Holder included	0.26702.00		 Opal lens / Lente opale Holder included	0.26708.00
 Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K Holder included	0.26703.00		 Spread lens / Lente diffondente Holder included	0.26709.00
 Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K Holder included	0.26704.00			

Decorative accessories/ Accessori decorativi

Yori Evo Ghostrack | Yori Evo 48V | Yori Pendant Ghostrack | Yori Pendant 48V

Description	Code	Description	Code
  Cylinder, solid version (Ø 22 mm, h 22 mm) / Cilindro versione piena (Ø 22 mm, h 22 mm)	0.26040.00	  Cylinder, solid version (Ø 22 mm, h 80 mm) / Cilindro versione piena (Ø 22 mm, h 80 mm)	0.26041.00

Yori Pendant Ghostrack | Yori Pendant 48V











Description	Code
  Coloured cables / Cavi colorati	On request



Ø 35 mm | Accessories

Optics accessories/ Accessori ottiche









Yori Evo Ghostrack | Yori Evo 48V | Yori Pendant Ghostrack | Yori Pendant 48V

Description	Code	Finishes	Description	Code
 <p>Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm</p> <p>Holder included</p>	0.26710.00	4A Red 5A Green 6A Blue 7A Pink 8A Yellow 9A Orange	 <p>Selective filter 3000K - 3500K / Filtro selettivo 3000K - 3500K</p> <p>Holder included</p>	0.26715.00
 <p>Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K</p> <p>Holder included</p>	0.26711.00		 <p>Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K</p> <p>Holder included</p>	0.26716.00
 <p>Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K</p> <p>Holder included</p>	0.26712.00		 <p>Elliptical beam lens / Lente per fascio ellittico</p> <p>Holder included</p>	0.26717.00
 <p>Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K</p> <p>Holder included</p>	0.26713.00		 <p>Opal lens / Lente opale</p> <p>Holder included</p>	0.26718.00
 <p>Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K</p> <p>Holder included</p>	0.26714.00		 <p>Spread lens / Lente diffondente</p> <p>Holder included</p>	0.26719.00



188

Decorative accessories/ Accessori decorativi

Yori Evo Ghostrack | Yori Evo 48V | Yori Pendant Ghostrack | Yori Pendant 48V

  <p>Description Cylinder, solid version (Ø 35 mm, h 35 mm) / Cilindro versione piena (Ø 35 mm, h 35 mm)</p>	Code 0.26042.00	  <p>Description Cylinder, hollow version (Ø 35 mm, h 35 mm) / Cilindro versione cava (Ø 35 mm, h 35 mm)</p>	Code 0.26044.00
  <p>Description Cylinder, solid version (Ø 35 mm, h 70 mm) / Cilindro versione piena (Ø 35 mm, h 70 mm)</p>	Code 0.26043.00	  <p>Description Cylinder, hollow version (Ø 35 mm, h 70 mm) / Cilindro versione cava (Ø 35 mm, h 70 mm)</p>	Code 0.26045.00

Yori Pendant Ghostrack | Yori Pendant 48V

  <p>Description Coloured cables / Cavicolorati</p>	Code On request
---	----------------------------------

Ø 43 mm | Precision | Accessories

Optics accessories/ Accessori ottiche
















Yori Evo Ghostrack | Yori Evo Box | Yori Evo 48V

Image	Description	Code	Finishes		Image	Description	Code	Finishes	
			4A Red	5A Green				6A Blue	7A Pink
	Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm Holder included	0.26400.00	4A Red	5A Green		Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta Holder included	0.26440.0000		
	Colored gels slides (2 pieces)/ Vetrini per gel colorato (2 pezzi)/ Holder included	0.26408.0000	6A Blue	7A Pink		Wide texture honeycomb louvre/ Griglia alveolare a maglia larga Holder included	0.26448.0000		
	Selective filter 3000K - 2700K/ Filtro selettivo 3000K - 2700K Holder included	0.26557.0000	8A Yellow	9A Orange		Elliptical beam lens / Lente per fascio ellittico Holder included	0.26456.0000		
	Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K Holder included	0.26416.0000				Opal lens/ Lente opale Holder included	0.26460.0000		
	Selective filter 2700K - 2200K/ Filtro selettivo 2700K - 2200K Holder included	0.26424.0000				Spread lens/ Lente diffondente Holder included	0.26468.0000		
	Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K Holder included	0.26432.0000				Cross blade louvre/ Griglia a croce	0.26476.0000		
	Selective filter 3000K - 3500K / Filtro selettivo 3000K - 3500K Holder included	0.26565.0000				Barn doors/ Alette rompiflusso	0.26484.0000		
	Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K Holder included	0.26573.0000				Cone 45° wall washer/ Cono 45° wall washer	0.26488.00	12	31
						Short snoot/ Cilindro corto	0.26556.00	12	31

Ø 43 mm | Performance | Accessories

Optics accessories/
Accessori ottiche







Yori Evo Ghostack | Yori Evo Box | Yori Evo 48V

Image	Description	Code	Finishes	Image	Description	Code	
	Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm Holder included	0.26401.00	4A Red 5A Green 6A Blue 7A Pink 8A Yellow 9A Orange		Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K Holder included	0.26574.0000	
	Colored gel slides (2 pieces)/ Vetrini per gel colorato (2 pezzi)/ Holder included	0.26409.0000			Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta Holder included	0.26441.0000	
	Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K Holder included	0.26558.0000			Wide texture honeycomb louvre/ Griglia alveolare a maglia larga Holder included	0.26449.0000	
	Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K Holder included	0.26417.0000			Elliptical beam lens / Lente per fascio ellittico Holder included	0.26492.0000	
	Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K Holder included	0.26425.0000			Opal lens/ Lente opale Holder included	0.26461.0000	
	Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K Holder included	0.26433.0000			Spread lens/ Lente diffondente Holder included	0.26469.0000	
	Selective filter 3000K - 3500K / Filtro selettivo 3000K - 3500K Holder included	0.26566.0000			Cross blade louvre/ Griglia a croce Holder included	0.26480.0000	
					Cone 45° wall washer/ Cono 45° wall washer	0.26496.00	Finishes 12 31

Ø 60 mm | Precision | Accessories

Interchangeable IOS optics/
Ottiche intercambiabili IOS

Yori Evo Ghostrack | Yori Evo Box | Yori Pendant Ghostrack | Yori Evo 48V | Yori Pendant 48V

















		Description Precision - Narrow beam/ Precision - Fascio stretto (12°- 9W, 12W, 17W)	Code <u>0.35125.0000</u>			Description Precision - Medium beam/ Precision - Fascio medio (20°- 9W, 12W, 17W)	Code <u>0.35126.0000</u>
		Description Precision - Wide beam/ Precision - Fascio largo (32°- 9W, 12W, 17W)	Code <u>0.35127.0000</u>				

Not for codes/Non per codici: 1X.GH63B.DT / RH82A / GH83B.DT / MM73B.DT / MM72B.DT KN62 / YN62 / XN62

Not for codes/Non per codici: 1X.GH63B.DT / RH82A / GH83B.DT / MM73B.DT / MM72B.DT KN62 / YN62 / XN62

Optics accessories/
Accessori ottiche


Yori Evo Ghostrack | Yori Evo Box | Yori Pendant Ghostrack | Yori Evo 48V | Yori Pendant 48V

	Description Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm Holder included	Code <u>0.26402.00</u>	Finishes 4A Red 5A Green 6A Blue 7A Pink 8A Yellow 9A Orange		Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta Holder included	Code <u>0.26442.0000</u>	
	Description Colored gel slides (2 pieces)/ Vetrini per gel colorato (2 pezzi) Holder included	Code <u>0.26410.0000</u>			Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga Holder included	Code <u>0.26450.0000</u>	
	Description Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K Holder included	Code <u>0.26559.0000</u>			Description Elliptical beam lens / Lente per fascio ellittico Holder included	Code <u>0.26457.0000</u>	
	Description Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K Holder included	Code <u>0.26418.0000</u>			Description Opal lens/ Lente opale Holder included	Code <u>0.26462.0000</u>	
	Description Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K Holder included	Code <u>0.26426.0000</u>			Description Spread lens/ Lente diffondente Holder included	Code <u>0.26470.0000</u>	
	Description Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K Holder included	Code <u>0.26434.0000</u>			Description Cross blade louvre/ Griglia a croce	Code <u>0.26477.0000</u>	
	Description Selective filter 3000K - 3500K / Filtro selettivo 3000K - 3500K Holder included	Code <u>0.26567.0000</u>			Description Barn doors/ Alette rompiflusso	Code <u>0.26485.0000</u>	
	Description Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K Holder included	Code <u>0.26575.0000</u>			Description Cone 45° wall washer/ Cono 45° wall washer Not for codes/Non per codici: Yori Pendant Ghostrack Yori Pendant 48V	Code <u>0.26489.00</u>	Finishes 12 31

Accessories

Decorative accessories/ Accessori decorativi

Yori Evo Ghostrack | Yori Evo Box | Yori Pendant Ghostrack | Yori Evo 48V | Yori Pendant 48V



Description
Cylinder, hollow version
(\varnothing 60 mm, h 40 mm)/
Cilindro versione cava
(\varnothing 60 mm, h 40 mm)

Code
0.26046.00

Yori Pendant Ghostrack | Yori Pendant 48V





Description
Coloured cables/
Cavi colorati

Code
On request

Framing accessory/ Sagomatore



Yori Evo Ghostrack | Yori Evo Box



Description
Framing accessory,
light shape - square/
Sagomatore,
forma di luce - quadrata

Code
0.26651.0021

To be used without optics (Precision / Performance)/
Da utilizzare senza ottica (Precision / Performance)



Description
Framing accessory,
light shape - round/
Sagomatore,
forma di luce - tonda







Code
0.26650.0021

To be used without optics (Precision / Performance)/
Da utilizzare senza ottica (Precision / Performance)

Ø 60 mm | Performance | Accessories
















Interchangeable IOS optics/
Ottiche intercambiabili IOS

Yori Evo Ghostrack | Yori Evo Box | Yori Evo 48V

		Description Performance - Narrow beam/ Performance - Fascio stretto (13°-9W, 12W, 17W)	Code 0.35145.0000			Description Performance - Wide beam/ Performance - Fascio largo (39°-9W, 12W, 17W)	Code 0.35147.0000
		Description Performance - Medium beam/ Performance - Fascio medio (24°-9W, 12W, 17W)	Code 0.35146.0000				


Optics accessories/
Accessori ottiche

Yori Evo Ghostrack | Yori Evo Box | Yori Evo 48V

	Description Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm Holder included	Code 0.26403.00	Finishes 4A Red 5A Green 6A Blue 7A Pink 8A Yellow 9A Orange		Description Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K Holder included	Code 0.26576.0000	
	Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta Holder included	Code 0.26443.0000			Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga Holder included	Code 0.26451.0000	
	Description Colored gel slides (2 pieces)/ Vetrini per gel colorato (2 pezzi)/ Holder included	Code 0.26411.0000			Description Elliptical beam lens / Lente per fascio ellittico Holder included	Code 0.26493.0000	
	Description Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K Holder included	Code 0.26560.0000			Description Opal lens/ Lente opale Holder included	Code 0.26463.0000	
	Description Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K Holder included	Code 0.26419.0000			Description Spread lens/ Lente diffondente Holder included	Code 0.26471.0000	
	Description Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K Holder included	Code 0.26427.0000			Description Cross blade louvre/ Griglia a croce Holder included	Code 0.26481.0000	
	Description Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K Holder included	Code 0.26435.0000			Description Cone 45° wall washer/ Cono 45° wall washer	Code 0.26497.00	Finishes 12 31
	Description Selective filter 3000K - 3500K / Filtro selettivo 3000K - 3500K Holder included	Code 0.26568.0000					

Framing accessory/
Sagomatore

Yori Evo Ghostrack | Yori Evo Box

		Description Framing accessory, light shape - square/ Sagomatore, forma di luce - quadrata	Code 0.26651.0021			Description Framing accessory, light shape - round/ Sagomatore, forma di luce - tonda	Code 0.26650.0021
---	---	--	------------------------------------	---	--	--	------------------------------------


To be used without optics (Precision / Performance)/
Da utilizzare senza ottica (Precision / Performance)

To be used without optics (Precision / Performance)/
Da utilizzare senza ottica (Precision / Performance)

Ø 75 mm | Precision | Accessories

Interchangeable IOS optics/ Ottiche intercambiabili IOS

Yori Evo Ghostack | Yori Evo Box

	Description Precision - Narrow beam/ Precision - Fascio stretto (12°-12W, 17W, 24W, 28W)	Code <u>0.35130.0000</u>
---	--	------------------------------------


Not for codes/Non per codici: 1X.NH64A / 2X.NH64A / 1X.LH66B.DT / NH84A / LH86B.DT


	Description Precision - Medium beam/ Precision - Fascio medio (23°-12W, 17W, 24W, 28W)	Code <u>0.35131.0000</u>
---	--	------------------------------------


Not for codes/Non per codici: 1X.NH64A / 2X.NH64A / 1X.LH66B.DT / NH84A / LH86B.DT


Optics accessories/ Accessori ottiche


Yori Evo Ghostack | Yori Evo Box


	Description Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm Holder included	Code <u>0.26404.00</u>	Finishes 4A Red 5A Green 6A Blue 7A Pink 8A Yellow 9A Orange
---	--	----------------------------------	---


	Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta Holder included	Code <u>0.26444.0000</u>
---	--	------------------------------------


	Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga Holder included	Code <u>0.26452.0000</u>
---	---	------------------------------------


	Description Colored gel slides (2 pieces)/ Vetrini per gel colorato (2 pezzi) Holder included	Code <u>0.26412.0000</u>
---	---	------------------------------------


	Description Elliptical beam lens/ Lente per fascio ellittico Holder included	Code <u>0.26458.0000</u>
---	--	------------------------------------


	Description Selective filter 3000K - 2700K/ Filtro selettivo 3000K - 2700K Holder included	Code <u>0.26561.0000</u>
---	--	------------------------------------


	Description Opal lens/ Lente opale Holder included	Code <u>0.26464.0000</u>
---	--	------------------------------------


	Description Selective filter 2700K - 2500K/ Filtro selettivo 2700K - 2500K Holder included	Code <u>0.26420.0000</u>
---	--	------------------------------------

	Description Spread lens/ Lente diffondente Holder included	Code <u>0.26472.0000</u>
---	--	------------------------------------


	Description Selective filter 2700K - 2200K/ Filtro selettivo 2700K - 2200K Holder included	Code <u>0.26428.0000</u>
---	--	------------------------------------


	Description Cross blade louvre/ Griglia a croce	Code <u>0.26478.0000</u>
---	--	------------------------------------

	Description Selective filter 2700K - 2000K/ Filtro selettivo 2700K - 2000K Holder included	Code <u>0.26436.0000</u>
---	--	------------------------------------

	Description Barn doors/ Alette rompiflusso	Code <u>0.26486.0000</u>
---	---	------------------------------------

	Description Selective filter 3000K - 3500K/ Filtro selettivo 3000K - 3500K Holder included	Code <u>0.26569.0000</u>
---	--	------------------------------------









	Description Cone 45° wall washer/ Cono 45° wall washer	Code <u>0.26490.00</u>	Finishes 12 31
---	---	----------------------------------	-----------------------------

	Description Selective filter 3000K - 4000K/ Filtro selettivo 3000K - 4000K Holder included	Code <u>0.26577.0000</u>
---	--	------------------------------------

Ø 75 mm | Performance | Accessories
















Interchangeable IOS optics/
Ottiche intercambiabili IOS

Yori Evo Ghostrack | Yori Evo Box

		Description Performance - Narrow beam/ Performance - Fascio stretto (12°-12W, 17W, 24W, 28W)	Code 0.35150.0000			Description Performance - Medium-wide beam/ Performance - Fascio medio largo (37°-12W, 17W, 24W, 28W)	Code 0.35153.0000
		Description Performance - Medium beam/ Performance - Fascio medio (23°-12W, 17W, 24W, 28W)	Code 0.35151.0000			Description Performance - Wide beam/ Performance - Fascio largo (48°-12W, 17W, 24W, 28W)	Code 0.35152.0000

Optics accessories/
Accessori ottiche



Yori Evo Ghostrack | Yori Evo Box

	Description Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm Holder included	Code 0.26405.00	Finishes 4A Red 5A Green 6A Blue 7A Pink 8A Yellow 9A Orange		Description Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K Holder included	Code 0.26578.0000	
	Description Colored gel slides (2 pieces)/ Vetrini per gel colorato (2 pezzi)/ Holder included	Code 0.26413.0000			Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta Holder included	Code 0.26445.0000	
	Description Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K Holder included	Code 0.26562.0000			Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga Holder included	Code 0.26453.0000	
	Description Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K Holder included	Code 0.26421.0000			Description Elliptical beam lens / Lente per fascio ellittico Holder included	Code 0.26494.0000	
	Description Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K Holder included	Code 0.26429.0000			Description Opal lens/ Lente opale Holder included	Code 0.26465.0000	
	Description Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K Holder included	Code 0.26437.0000			Description Spread lens/ Lente diffondente Holder included	Code 0.26473.0000	
	Description Selective filter 3000K - 3500K / Filtro selettivo 3000K - 3500K Holder included	Code 0.26570.0000			Description Cross blade louvre/ Griglia a croce Holder included	Code 0.26482.0000	
					Description Cone 45° wall washer/ Cono 45° wall washer	Code 0.26498.00	Finishes 12 31



Ø 95 mm | Precision | Accessories



Interchangeable IOS optics/ Ottiche intercambiabili IOS

Yori Evo Ghostrack | Yori Evo Box | Yori Pendant Ghostrack

		Description Precision - Narrow beam / Precision - Fascio stretto (12°-12W, 17W, 24W, 33W)	Code <u>0.35135.0000</u>
---	---	---	------------------------------------

		Description Precision - Medium beam/ Precision - Fascio medio (23°-12W, 17W, 24W, 33W)	Code <u>0.35136.0000</u>
---	--	--	------------------------------------

		Description Precision - Wide beam / Precision - Fascio largo (38°-12W, 17W, 24W, 33W)	Code <u>0.35037.0000</u>
---	---	---	------------------------------------

		Description Precision - Very wide beam/ Precision - Fascio molto largo (53°-12W, 17W, 24W, 33W)	Code <u>0.35038.0000</u>
---	--	---	------------------------------------


Not for codes/Non per codici: 1X.PH64A / 2X.PH64A / 1X.MH68B.DT / PH84A / MH88B.DT


Not for codes/Non per codici: 1X.PH64A / 2X.PH64A / 1X.MH68B.DT / PH84A / MH88B.DT


Optics accessories/ Accessori ottiche


Yori Evo Ghostrack | Yori Evo Box | Yori Pendant Ghostrack


	Description Colored glass filter 1 mm / Filtro in vetro colorato 1 mm Holder included	Code <u>0.26406.00</u>	Finishes 4A Red 5A Green 6A Blue 7A Pink 8A Yellow 9A Orange
---	---	----------------------------------	---


	Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta Holder included	Code <u>0.26446.0000</u>
---	--	------------------------------------


	Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga Holder included	Code <u>0.26454.0000</u>
---	---	------------------------------------


	Description Colored gel slides (2 pieces) / Vetrini per gel colorato (2 pezzi) Holder included	Code <u>0.26414.0000</u>
--	--	------------------------------------


	Description Elliptical beam lens / Lente per fascio ellittico Holder included	Code <u>0.26459.0000</u>
--	---	------------------------------------


	Description Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K Holder included	Code <u>0.26563.0000</u>
---	---	------------------------------------


	Description Opal lens / Lente opale Holder included	Code <u>0.26466.0000</u>
---	---	------------------------------------


	Description Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K Holder included	Code <u>0.26422.0000</u>
---	---	------------------------------------


	Description Spread lens / Lente diffondente Holder included	Code <u>0.26474.0000</u>
---	---	------------------------------------


	Description Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K Holder included	Code <u>0.26430.0000</u>
---	---	------------------------------------


	Description Cross blade louvre / Griglia a croce Holder included	Code <u>0.26479.0000</u>
---	--	------------------------------------

	Description Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K Holder included	Code <u>0.26438.0000</u>
---	---	------------------------------------

	Description Barn doors / Alette rompiflusso Holder included	Code <u>0.26487.0000</u>
---	---	------------------------------------



	Description Selective filter 3000K - 3500K / Filtro selettivo 3000K - 3500K Holder included	Code <u>0.26571.0000</u>
---	---	------------------------------------

	Description Cone 45° wall washer / Cono 45° wall washer Not for codes/Non per codici: Yori Pendant Ghostrack	Code <u>0.26491.00</u>	Finishes 12 31
---	---	----------------------------------	-----------------------------



	Description Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K Holder included	Code <u>0.26579.0000</u>
---	---	------------------------------------

Decorative accessories/ Accessori decorativi

Yori Evo Ghostrack | Yori Evo Box | Yori Pendant Ghostrack

		Description Cylinder, hollow version (Ø 95 mm, h 60 mm) / Cilindro versione cava (Ø 95 mm, h 60 mm)	Code <u>0.26047.0000</u>
---	---	--	------------------------------------









Yori Pendant Ghostrack | Yori Pendant 48V

		Description Coloured cables / Cavi colorati	Code <u>Onrequest</u>
---	--	--	---------------------------------

Ø 95 mm | Performance | Accessories
















Interchangeable IOS optics/ Ottiche intercambiabili IOS

Yori Evo Ghostrack | Yori Evo Box

		Description Performance - Narrow beam/ Performance - Fascio stretto (10°-12W, 17W, 24W, 33W)	Code 0.35155.0000			Description Performance - Medium-wide beam/ Performance - Fascio Medio-largo (31°-12W, 17W, 24W, 33W)	Code 0.35157.0000
		Description Performance - Medium beam/ Performance - Fascio medio (20°-12W, 17W, 24W, 33W)	Code 0.35156.0000			Description Performance - Wide beam/ Performance - Fascio largo (40°-12W, 17W, 24W, 33W)	Code 0.35158.0000

Optics accessories/ Accessori ottiche















Yori Evo Ghostrack | Yori Evo Box

	Description Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm Holder included	Code 0.26407.00	Finishes 4A Red 5A Green 6A Blue 7A Pink 8A Yellow 9A Orange		Description Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K Holder included	Code 0.26580.0000	
	Description Colored gel slides (2 pieces)/ Vetrini per gel colorato (2 pezzi)/ Holder included	Code 0.26415.0000			Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta Holder included	Code 0.26447.0000	
	Description Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K Holder included	Code 0.26564.0000			Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga Holder included	Code 0.26455.0000	
	Description Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K Holder included	Code 0.26423.0000			Description Elliptical beam lens / Lente per fascio ellittico Holder included	Code 0.26495.0000	
	Description Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K Holder included	Code 0.26431.0000			Description Opal lens/ Lente opale Holder included	Code 0.26467.0000	
	Description Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K Holder included	Code 0.26439.0000			Description Spread lens/ Lente diffondente Holder included	Code 0.26475.0000	
	Description Selective filter 3000K - 3500K / Filtro selettivo 3000K - 3500K Holder included	Code 0.26572.0000			Description Cross blade louvre/ Griglia a croce	Code 0.26483.0000	
					Description Cone 45° wall washer/ Cono 45° wall washer	Code 0.26499.00	Finishes 12 31

Spacers | Accessories




Mounting accessories/ Accessori montaggio

Yori Evo Ghostrack | Yori Pendant Ghostrack

	Description Standard spacer - 110mm/ Distanziale standard - 110mm	Code <u>0.26500.0000</u>		Description Customizable spacer - 600mm/ Distanziale personalizzabile - 600mm  p. 22-23	Code <u>0.26504.0000</u>
	Description Standard spacer - 220mm/ Distanziale standard - 220mm	Code <u>0.26501.0000</u>		Description Customizable spacer - 800mm/ Distanziale personalizzabile - 800mm  p. 22-23	Code <u>0.26505.0000</u>
	Description Customizable spacer - 300mm/ Distanziale personalizzabile - 300mm  p. 22-23	Code <u>0.26502.0000</u>		Description Customizable spacer - 1000mm/ Distanziale personalizzabile - 1000mm  p. 22-23	Code <u>0.26506.0000</u>
	Description Customizable spacer - 400mm/ Distanziale personalizzabile - 400mm  p. 22-23	Code <u>0.26503.0000</u>		Description Customizable spacer - 1200mm/ Distanziale personalizzabile - 1200mm  p. 22-23	Code <u>0.26507.0000</u>

Other accessories/ Altri accessori

Yori Evo Ghostrack

			Description Ghost lock - Accessory for vertical installation - max 3,5kg weight/ Ghost lock - Accessorio per installazione verticale - Peso max 3,5kg	Code <u>0.26508.0000</u>
--	---	--	--	------------------------------------