




Trybeca





Trybeca

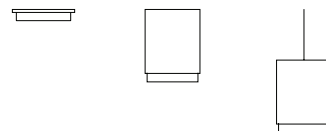













DE Räume durch diffuse Beleuchtung verändern: Trybeca ist eine Familie von Einbau-, Anbau- und Pendelleuchten mit den essentiellen Linien dreier einfacher Formen: rund, quadratisch und rechteckig.


RU Преобразуйте интерьер при помощи рассеянного освещения. Trybeca - это семейство осветительных приборов, предназначенных для встраивания, установки на поверхность и для подвешивания, дизайн которых основан на немногословных очертаниях трех простых форм: круга, квадрата и прямоугольника.














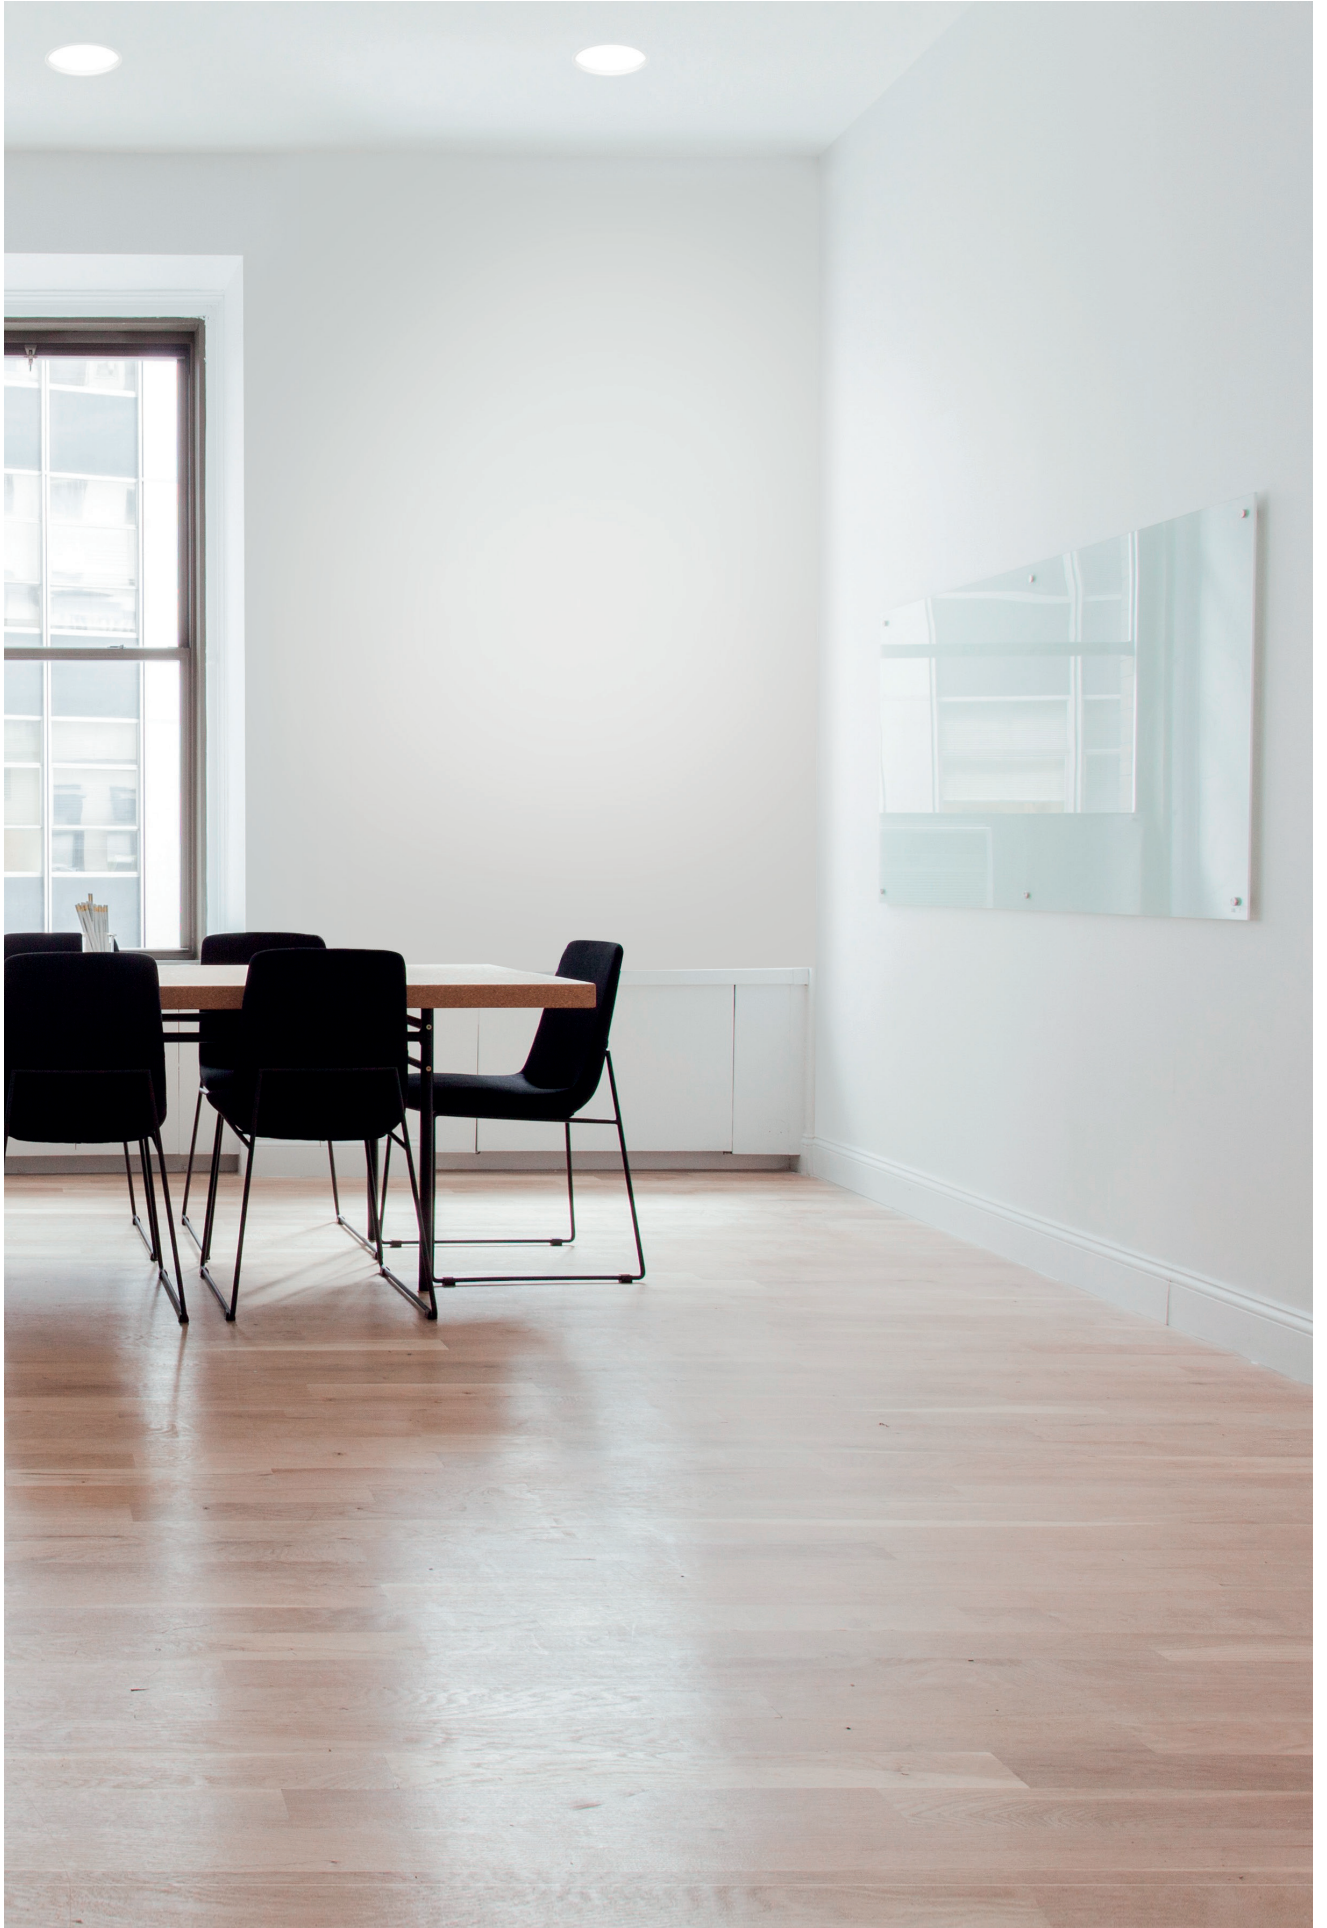







Overview









| | |
|------------------|--------------------------------------|
| Application: | Recessed, Surface, Pendant |
| Light source: | COB LED, LED ARRAY |
| W: | 3 W - 35 W |
| K: | 2700 K, 3000 K, 4000 K |
| Lumen: | 320 lm - 4096 lm |
| CRI: | >80 , >90, >95 |
| SDCM: | <3, <4 |
| IP: | 20 |
| Control options: | On/Off, Phase-cut , Dimm 1-10V, DALI |
| Technologies: | Warm Dimming, Bluetooth |








| | | | | | |
|--|--|--|---|--|---|
| System/ Система | | | | | |
| Trybeca Recessed p.251 |  Trybeca Recessed Round |  Trybeca Recessed Square |  Trybeca Recessed Rectangular |  Trybeca Recessed Round Drop |  Trybeca Recessed Square Drop |
| Trybeca Surface p.273 |  Trybeca Surface Round |  Trybeca Surface Square | | | |
| Version as with accessories |  Trybeca Surface Round Pendant |  Trybeca Surface Square Pendant | | | |
| Farben/ Отделка |  12 Weiß matt bossiert/ Рельефный белый матовый |  31 Schwarz matt bossiert/ Рельефный черный матовый | | | |
| Ausstrahlungswinkel/ Варианты пучка |  Breit strahlend/ Широкий пучок | | | | |



| Abmessungen und technische Daten/ Размеры и технические характеристики | RECESSED | | | |
|---|--|--|--|--|
| | 38 mm | 75 mm | 150 mm | 300 mm |
| Trybeca Recessed Round |  Visible trim Ø57mm Trimless Ø38mm p.256 |  Visible trim Ø93mm Trimless Ø75mm p.256 |  Visible trim Ø170mm Trimless Ø150mm p.257 |  Visible trim Ø330mm Trimless Ø300mm p.257 |
| Trybeca Recessed Square |  Visible trim 57x57mm Trimless 38x38mm p.260 |  Visible trim 93x93mm Trimless 75x75mm p.260 |  Visible trim 170x170mm Trimless 150x150mm p.261 |  Visible trim 330x330mm Trimless 300x300mm p.261 |
| Trybeca Recessed Rectangular | |  Visible trim 136x93mm Trimless 118x75mm p.264 |  Visible trim 230x170mm Trimless 210x150mm p.264 |  Visible trim 330x213mm Trimless 300x183mm p.265 |
| Trybeca Recessed Drop Round |  Visible trim Ø57mm Trimless Ø38mm p.266 |  Visible trim Ø93mm Trimless Ø75mm p.266 |  Visible trim Ø170mm Trimless Ø150mm p.267 | |
| Trybeca Recessed Drop Square |  Visible trim 57x57mm Trimless 38x38mm p.268 |  Visible trim 93x93mm Trimless 75x75mm p.268 |  Visible trim 170x170mm Trimless 150x150mm p.269 | |
| Maximale Innenabmessungen/ Максимальные внутренние габаритные размеры |  Ø49 49x49 |  Ø85 85x85 |  Ø162 162x162 |  Ø313 313x313 |
| Ausstrahlungswinkel/ Угол раскрытия пучка | 66°, 110°, 152° | 96°, 106°, 142° | 104°, 107°, 120° | 106°, 110°, 116° |
| Lichtquelle/ Источник света | COB LED 3 W 320lm - 413 lm L80 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >80, CRI >90 | COB LED 8 W 900lm - 1116lm L80 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >80, CRI >90 Warm Dimming COB LED 12 W 100lm - 1000lm L70 B50=50,000h 1700 K - 3000 K SDCM <4 CRI >95 | COB LED 17 W, 24 W 2066 lm - 3537 lm L80 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >80, CRI >90 Warm Dimming COB LED 25 W 100lm - 2500lm L70 B50=50,000h 1700 K - 3000 K SDCM <4 CRI >95 | LED ARRAY 26 W, 35 W 1789 lm - 4096 lm L70 B50=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >80, CRI >90 |





| Abmessungen und technische Daten/ Размеры и технические характеристики | SURFACE | | | |
|---|---|--|--|---|
| | 38 mm | 75 mm | 150 mm | 300 mm |
| Trybeca Surface Round |  Ø44 mm 216 mm p.278 |  Ø81mm 216/320 mm p.278 |  Ø158mm 216 mm p.279 |  Ø340mm 160 mm p.280 |
| Trybeca Surface Square |  44x44mm 216 mm p.282 |  81x81mm 216/320 mm p.282 |  158x158mm 216 mm p.283 |  340x340mm 160 mm p.284 |
| Ausstrahlungswinkel/ Угол раскрытия пучка | 66°, 110°, 152° | 96°, 106°, 142° | 104°, 107°, 120° | 106°, 110°, 116° |
| Lichtquelle/ Источник света | COB LED 3 W 320 lm - 413 lm L80 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >80, CRI >90 | COB LED 8 W 900 lm - 1116 lm L80 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >80, CRI >90 Warm Dimming COB LED 12 W 100 lm - 1000 lm L70 B50=50,000h 2000 K - 3000 K SDCM <4 CRI >95 | COB LED 17 W, 24 W 2066 lm - 3537 lm L80 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >80, CRI >90 Warm Dimming COB LED 25 W 100 lm - 2500 lm L70 B50=50,000h 2000 K - 3000 K SDCM <4 CRI >95 | LED ARRAY 35 W 2797 lm - 4096 lm L70 B50=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >80, CRI >90 |


| | |
|--|---|
| <p>Zubehör/ Дополнительное оборудование</p> <hr/> <p>Montagezubehör/ Дополнительное оборудование для монтажа</p> | <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>Schalung/ Форма</p> </div> <div style="text-align: center;">  <p>Set Abstandshalter/ Комплект проставок</p> </div> </div> |
| <p>Trybeca Surface Version as accessories</p> | <div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;">  <p>Pendelrohr mit runder Basis/ Штанга с круглым основанием</p> <div style="display: flex; justify-content: center; gap: 5px;"> <div style="width: 10px; height: 10px; background-color: white; border: 1px solid black;"></div> 12 <div style="width: 10px; height: 10px; background-color: black; border: 1px solid black;"></div> 31 </div> </div> <div style="text-align: center;">  <p>Pendelrohr mit quadratischer Basis/ Штанга с квадратным основанием</p> <div style="display: flex; justify-content: center; gap: 5px;"> <div style="width: 10px; height: 10px; background-color: white; border: 1px solid black;"></div> 12 <div style="width: 10px; height: 10px; background-color: black; border: 1px solid black;"></div> 31 </div> </div> <div style="text-align: center;">  <p>Rotes Stoffkabel mit runder Basis/ Кабель в красной тканевой оплетке с круглым основанием</p> <div style="display: flex; justify-content: center; gap: 5px;"> <div style="width: 10px; height: 10px; background-color: white; border: 1px solid black;"></div> 12 <div style="width: 10px; height: 10px; background-color: black; border: 1px solid black;"></div> 31 </div> </div> </div> |

Diffusers

DE Trybeca wird mit drei wechselbaren Abstandshaltern geliefert für die einglassene, bündig abgeschlossene und vorgesetzte Montage der Abdeckung. Die Version Trybeca Recessed Drop bietet eine noch weiter vorgesetzte Abdeckung, die für eine weichere und ansprechendere Lichtverteilung sorgt.


RU Trybeca оснащена тремя взаимозаменяемыми проставками, которые позволяют перемещать диффузор во встроенное положение, вровень с окружающей поверхностью или в выступающее положение. Версия Trybeca Recessed Drop предлагает еще более выступающий диффузор для еще более мягкого и эстетически привлекательного распределения света.

| | | | |
|---|--|---|---|
|  -15 mm |  0 mm |  +15 mm (38) +25 mm (75, 150, 300) |  +30 mm (38) +50 mm (75) +75 mm (150) |
| DE Konfiguration: eingelassen RU Встроенная конфигурация | DE Konfiguration: bündig abgeschlossen RU Конфигурация вровень с поверхностью | DE Konfiguration: vorgesetzt RU Выступающая конфигурация | DE Trybeca Recessed Drop RU Trybeca Recessed Drop |

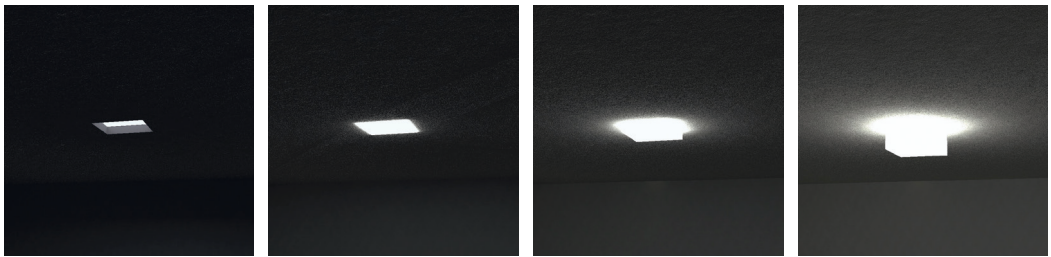

LED

COB




2700 K, 3000 K, 4000 K
SDCM <3
CRI > 80, CRI > 90


TM30
Rf: 89, Rg: 103

L80 B10 = 50,000h
Ta: 85°
Tc: 85°
~6.000hr
Lm Maintainance: 98%
(Source: LM80 test report)

Note:
Trybeca 300 mm
(MID POWER LED)

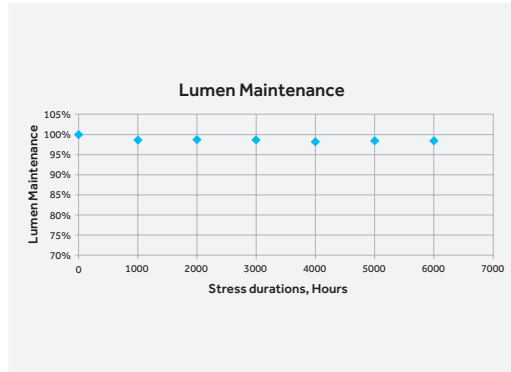


^{DE} COB LED mit exzellenten Leistungen bis 154 lm/W (3000 K, CRI > 80). Lichtaustrittsfläche (LES) 6 bis 13 mm, Nennlichtstrom 400 bis 5238 lm. Gleichmäßiges, leuchtendes Weißlicht mit getreuer Farbwiedergabe.

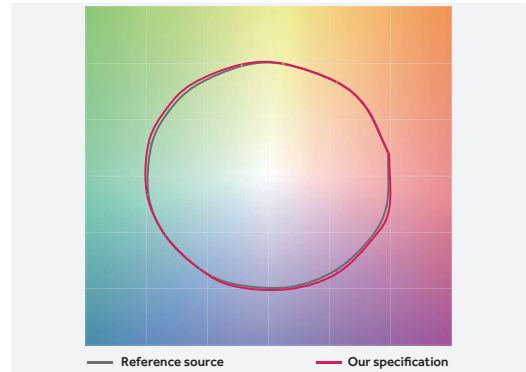


^{RU} COB LED с отличной производительностью, до 154 лм/Вт (3000 К, CRI > 80). Излучающая поверхность (LES) от 6 мм до 13 мм, номинальный поток составляет от 400 лм до 5238 лм. Равномерный и яркий белый свет с точным воспроизведением цветов.

Warm Dimming



1700K-3000K
SDCM <4
CRI >95
L70/B50=50,000h

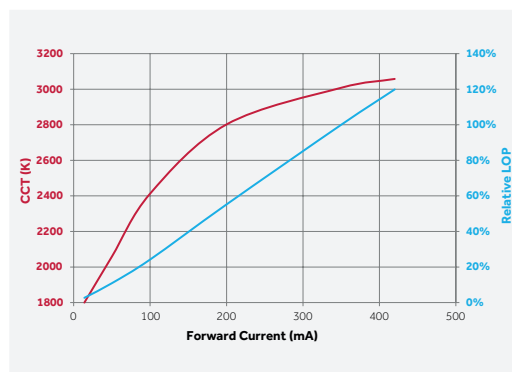

| Ra | R1 | R2 | R3 | R4 | R5 | R6 | R7 | R8 | R9 | R10 | R11 | R12 | R13 | R14 | R15 |
|----------|----|----|----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|
| 1700K 94 | 94 | 95 | 97 | 90 | 91 | 88 | 97 | 97 | 94 | 92 | 81 | 78 | 93 | 96 | 98 |
| 3000K 97 | 95 | 97 | 97 | 97 | 96 | 95 | 99 | 97 | 94 | 97 | 94 | 86 | 95 | 97 | 95 |


^{DE} Bei unserer Lösung sind zwei Chips in nur einer COB LED vereint. In dieser Konfiguration kommt nur ein Treiber als Betriebsgerät zum Einsatz, der die Amperezahl am Eingang je nach gewünschtem Wirkungsgrad stufenweise reduziert. Durch die Reduzierung der Stromstärke zur Versorgung der Chips nimmt der Lichtstrom ab und die Farbtemperatur, die sich aus der Kombination der einzelnen festgelegten Farbtemperaturen ergibt, wird entsprechend automatisch ausgewogen. Diese Technik bietet einen äußerst umfangreichen Dimmbereich mit einer sehr sanften, stufenweisen Änderung der Farbtemperatur von einem Höchstwert von 3000 K bis zu einem Mindestwert von 1700 K. CRI und Farbwiedergabe sind über den gesamten Dimmbereich mit einem CRI-Wert bis 97 und einem R9-Wert von 94 herausragend.

^{RU} Наше решение объединяет два чипа в одном светодиоде COB LED. В этой конфигурации источник питания - это единственный драйвер, который постепенно уменьшает силу тока на входе в зависимости от требуемой производительности. При снижении подачи питания на чипы уменьшаются поток, а цветовая температура, которая складывается из комбинации отдельных установленных цветовых температур, следовательно автоматически уравнивается. Данная технология предоставляет очень широкий диапазон регулировки яркости с очень мягким и постепенным изменением цветовой температуры, от максимальной температуры 3000K до минимальной 1700K. CRI и цветопередача очень высоки на всем диапазоне регулировки яркости свечения, со значениями CRI до 97 и R9 - 94.


DE Leuchtenkörper
RU Корпус светильника



DE Kunststoffabstandshalter für drei Positionen der Abdeckung: eingelassen, bündig abgeschlossen, vorgesetzt.
RU Пластиковая прокладка для трех положений диффузора: встроеное, вровень с поверхностью, выступающее



DE Wärmeableiter
RU Радиатор

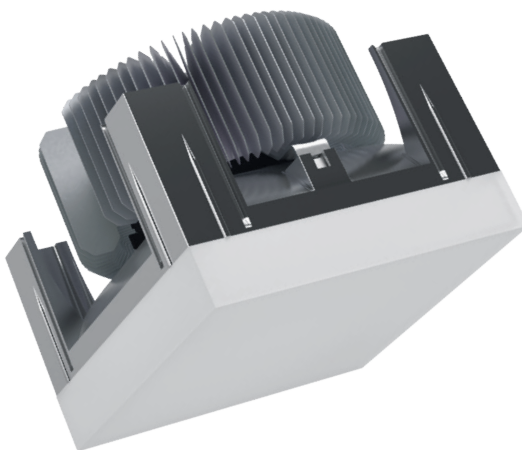

DE Die Abdeckung aus hochwertigem Material mit Nano-Oberflächenbeschichtung ermöglicht exzellente Leistungen und eine gleichförmige Lichtverteilung mit Wirkungsgraden bis 87%.
RU Диффузор из высококачественного материала с нано-обработкой поверхности обеспечивает отличную производительность и равномерное излучение света с выходом до 87%.



Trybeca Recessed

www.reggiani.net

#theilluminationcollective





—

Trybeca Recessed

— Trybeca Recessed

DE Trybeca Recessed ist eine Familie von Einbauleuchten in 3 geometrischen Grundformen – Quadrat, Rechteck und Kreis – sowie 4 Größen, wobei die Maße der unterschiedlichen Formen in den einzelnen Größen jeweils aufeinander abgestimmt sind, was die Kombination der Leuchten miteinander und die harmonische Raumgestaltung ermöglicht. Trybeca Recessed ist in den Ausführungen Round Drop und Square Drop verfügbar.


RU Trybeca Recessed - это семейство встроенных светильников, доступных в формах: квадрат, прямоугольник и круг, представленных в четырех вариантах размера. В рамках каждого из данных вариантов светильники разной формы могут быть взаимозаменяемыми, что позволяет сочетать различные размеры. Trybeca Recessed предлагается также в варианте Round Drop и Square Drop.

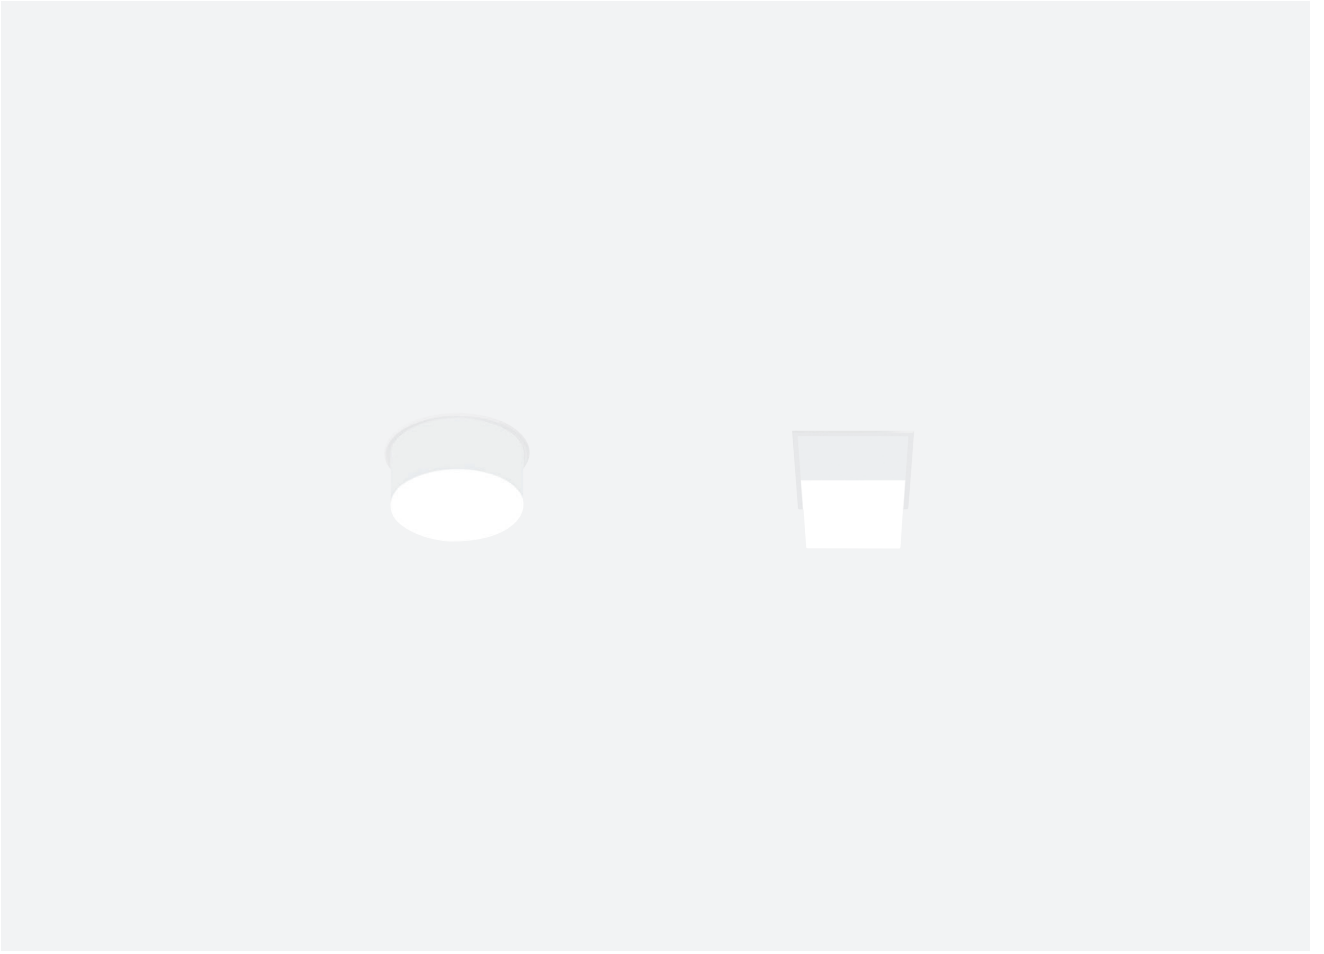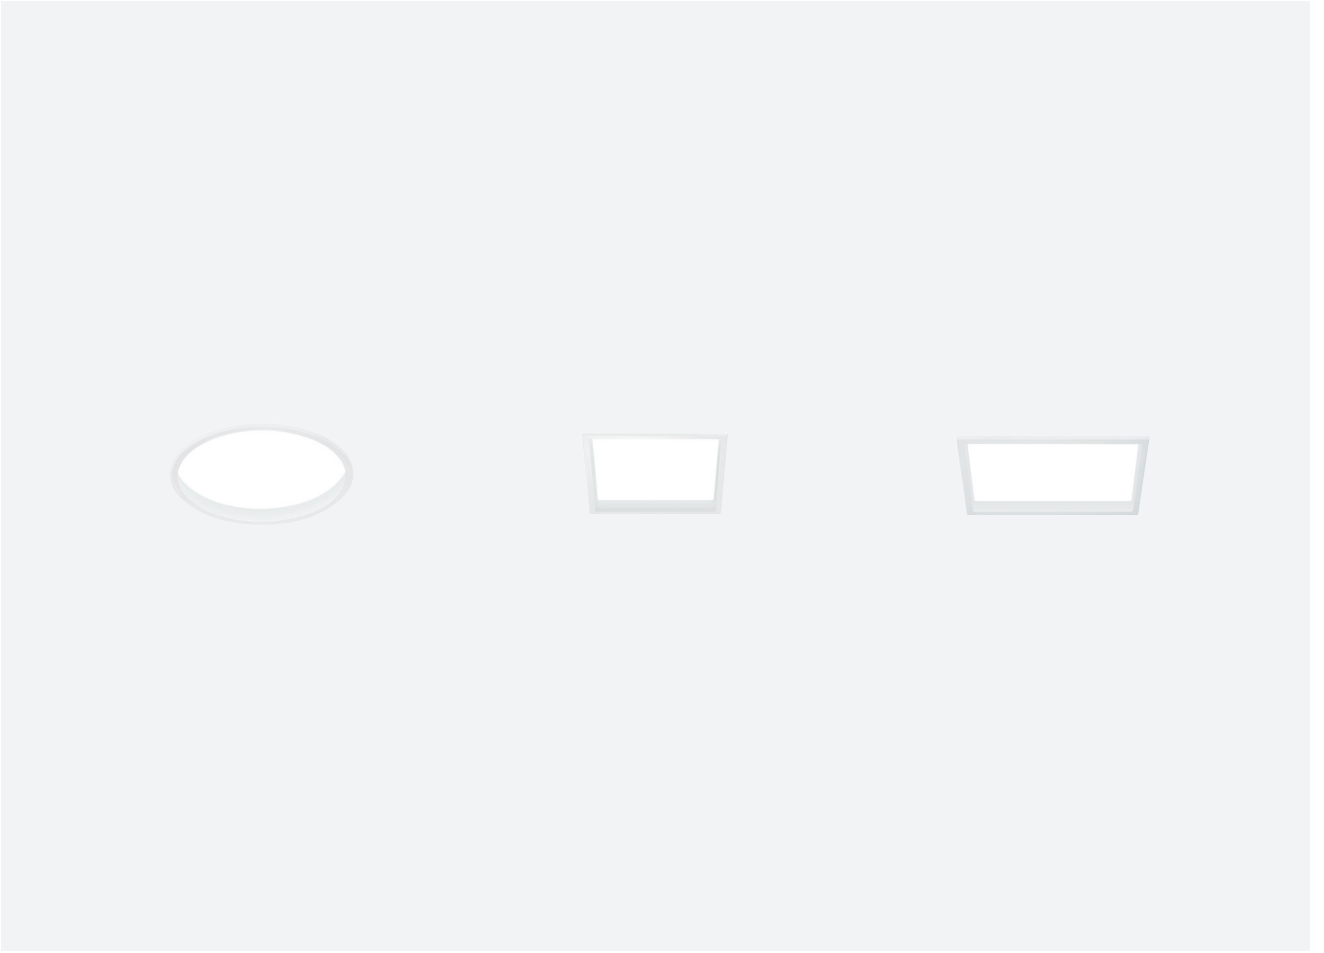







Round | 38 mm



Mit Blendrahmen/
Свидимой рамкой



Mit Einputzrahmen/
Сневидимой рамкой




Code example:

X . BH1A0 . HW 12

Accessories: p.258
Drivers: p.270-271
Finishes: p.240
Photometric data:
www.reggiani.net

Diffuser positions:




3 W COB LED

Lumen delivered up to 290 lm / Lumen maintenance: L80 B10=50,000h


| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|----------------|-------------------|-------------|-----|------|-----|-----|------|----------|
| X Not included | BH1A0 Visibletrim | Very-wide | HW | 2700 | >90 | 320 | < 3 | 12 |
| | CH1A0 Trimless | Very-wide | HQ | 3000 | >90 | 346 | < 3 | 31 |
| | | | WW | 3000 | >80 | 401 | < 3 | |
| | | | NN | 4000 | >80 | 413 | < 3 | |

LED nominal lumen


Round | 75 mm



Mit Blendrahmen/
Свидимой рамкой



Mit Einputzrahmen/
Сневидимой рамкой




Code example:

X . BH1C0 . HW 12

Accessories: p.258
Drivers: p.270-271
Finishes: p.240
Photometric data:
www.reggiani.net

Diffuser positions:



8 W COB LED

Lumen delivered up to 890 lm / Lumen maintenance: L80 B50=50,000h

| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|----------------|-------------------|-------------|-----|------|-----|------|------|----------|
| X Not included | BH1C0 Visibletrim | Very-wide | HW | 2700 | >90 | 900 | < 3 | 12 |
| | CH1C0 Trimless | Very-wide | HQ | 3000 | >90 | 936 | < 3 | 31 |
| | | | WW | 3000 | >80 | 1104 | < 3 | |
| | | | NN | 4000 | >80 | 1116 | < 3 | |

LED nominal lumen


12 W Warm Dimming COB LED

Lumen delivered up to 790 lm / Lumen maintenance: L70 B50=50,000h


| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|----------------|-------------------|-------------|-----|-----------|-----|----------|------|----------|
| X Not included | BC030 Visibletrim | Very-wide | DT | 1700-3000 | >95 | 100-1000 | < 4 | 12 |
| | CC030 Trimless | Very-wide | | | | | | 31 |

LED nominal lumen



Round | 150 mm



Mit Blendrahmen/
Свидимой рамкой




Mit Einputzrahmen/
Сневидимой рамкой



Code example:
X . BH1H0 . HW 12

Accessories: p.258
Drivers: p.270-271
Finishes: p.240
Photometric data:
www.reggiani.net

Diffuser positions:



17 W COB LED Lumen delivered up to 2100 lm / Lumen maintenance: L80 B10=50,000h

| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|----------------|---------------------------|-------------|-----------|------|-----|------|------|-----------|
| X Not included | BH1H0 Visible trim | Very-wide | HW | 2700 | >90 | 2066 | < 3 | 12 |
| | CH1H0 Trimless | Very-wide | HQ | 3000 | >90 | 2072 | < 3 | 31 |
| | | | WW | 3000 | >80 | 2543 | < 3 | |
| | | | NN | 4000 | >80 | 2668 | < 3 | |

LED nominal lumen

24 W COB LED Lumen delivered up to 2800 lm / Lumen maintenance: L80 B10=50,000h

| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|----------------|---------------------------|-------------|-----------|------|-----|------|------|-----------|
| X Not included | BH1E0 Visible trim | Very-wide | HW | 2700 | >90 | 2690 | < 3 | 12 |
| | CH1E0 Trimless | Very-wide | HQ | 3000 | >90 | 2744 | < 3 | 31 |
| | | | WW | 3000 | >80 | 3384 | < 3 | |
| | | | NN | 4000 | >80 | 3537 | < 3 | |


LED nominal lumen

25 W Warm Dimming COB LED Lumen delivered up to 1900 lm / Lumen maintenance: L70 B50=50,000h


| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|----------------|---------------------------|-------------|-----------|-----------|-----|----------|------|-----------|
| X Not included | BC070 Visible trim | Very-wide | DT | 1700-3000 | >95 | 100-2500 | < 4 | 12 |
| | CC070 Trimless | Very-wide | | | | | | 31 |

LED nominal lumen


Round | 300 mm



Mit Blendrahmen/
Свидимой рамкой

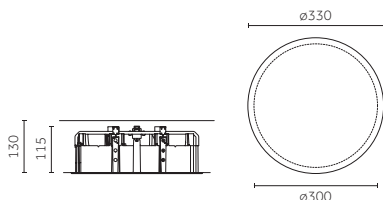


Mit Einputzrahmen/
Сневидимой рамкой

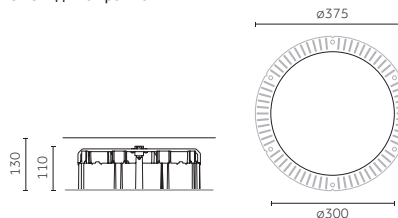

Code example:
X . BC0L0 . HW 12

Accessories: p.258
Drivers: p.270-271
Finishes: p.240
Photometric data:
www.reggiani.net

Diffuser positions:



35 W LED ARRAY Lumen delivered up to 3275 lm / Lumen maintenance: L70 B50=50,000h

| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|----------------|---------------------------|-------------|-----------|------|-----|------|------|-----------|
| X Not included | BC0L0 Visible trim | Very-wide | HW | 2700 | >90 | 2797 | < 3 | 12 |
| | CC0L0 Trimless | Very-wide | HQ | 3000 | >90 | 3360 | < 3 | 31 |
| | | | WW | 3000 | >80 | 3818 | < 3 | |
| | | | NN | 4000 | >80 | 4096 | < 3 | |


LED nominal lumen

Round | Accessories

Montagezubehör/

Дополнительное оборудование для монтажа

Round | 38 mm



Description

Schalung/
Форма

Code

0.40190.0000




Description

Set Abstandshalter/
Комплект проставок

Code

1.38223.0000

Round | 75 mm




Description

Schalung/
Форма

Code

0.40191.0000




Description

Set Abstandshalter/
Комплект проставок

Code

1.37824.0000

Round | 150 mm




Description

Schalung/
Форма

Code

0.40193.0000



Description

Set Abstandshalter/
Комплект проставок

Code

1.37824.0000

Round | 300 mm



Description


Set Abstandshalter/
Комплект проставок

Code

1.38410.0000




Square | 38 mm



Mit Blendrahmen/
Свидимой рамкой




Mit Einputzrahmen/
Сневидимой рамкой



Code example:
X . **DH1A0** . **HW** **12**

Accessories: p.262
Drivers: p.270-271
Finishes: p.240
Photometric data:
www.reggiani.net

Diffuser positions:




3 W COB LED

Lumen delivered up to 290lm / Lumen maintenance: L80 B10=50,000h


| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|-----------------------|--------------------------|-------------|-----------|------|-----|-----|------|-----------|
| X Not included | DH1A0 Visibletrim | Very-wide | HW | 2700 | >90 | 320 | < 3 | 12 |
| | FH1A0 Trimless | Very-wide | HQ | 3000 | >90 | 346 | < 3 | 31 |
| | | | WW | 3000 | >80 | 401 | < 3 | |
| | | | NN | 4000 | >80 | 413 | < 3 | |

LED nominal lumen


Square | 75 mm



Mit Blendrahmen/
Свидимой рамкой




Mit Einputzrahmen/
Сневидимой рамкой



Code example:
X . **DH1C0** . **HW** **12**

Accessories: p.262
Drivers: p.270-271
Finishes: p.240
Photometric data:
www.reggiani.net

Diffuser positions:



8 W COB LED

Lumen delivered up to 890lm / Lumen maintenance: L80 B10=50,000h

| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|-----------------------|--------------------------|-------------|-----------|------|-----|------|------|-----------|
| X Not included | DH1C0 Visibletrim | Very-wide | HW | 2700 | >90 | 900 | < 3 | 12 |
| | FH1C0 Trimless | Very-wide | HQ | 3000 | >90 | 936 | < 3 | 31 |
| | | | WW | 3000 | >80 | 1104 | < 3 | |
| | | | NN | 4000 | >80 | 1116 | < 3 | |

LED nominal lumen


12 W Warm Dimming COB LED

Lumen delivered up to 790lm / Lumen maintenance: L70 B50=50,000h


| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|-----------------------|--------------------------|-------------|-----------|-----------|-----|----------|------|-----------|
| X Not included | DC030 Visibletrim | Very-wide | DT | 1700-3000 | >95 | 100-1000 | < 4 | 12 |
| | FC030 Trimless | Very-wide | | | | | | 31 |

LED nominal lumen


Square | 150 mm



Mit Blendrahmen/
Свидимой рамкой




Mit Einputzrahmen/
Сневидимой рамкой

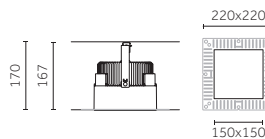

Code example:
X . DH1H0 . HW 12

Accessories: p.262
Drivers: p.270-271
Finishes: p.240
Photometric data:
www.reggiani.net

Diffuser positions:



17 W COB LED Lumen delivered up to 2100 lm / Lumen maintenance: L80 B10=50,000h

| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|----------------|--------------------|-------------|-----|------|-----|------|------|----------|
| X Not included | DH1H0 Visible trim | Very-wide | HW | 2700 | >90 | 2066 | < 3 | 12 |
| | FH1H0 Trimless | Very-wide | HQ | 3000 | >90 | 2072 | < 3 | 31 |
| | | | WW | 3000 | >80 | 2543 | < 3 | |
| | | | NN | 4000 | >80 | 2668 | < 3 | |

LED nominal lumen

24 W COB LED Lumen delivered up to 2800 lm / Lumen maintenance: L80 B10=50,000h

| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|----------------|--------------------|-------------|-----|------|-----|------|------|----------|
| X Not included | DH1E0 Visible trim | Very-wide | HW | 2700 | >90 | 2690 | < 3 | 12 |
| | FH1E0 Trimless | Very-wide | HQ | 3000 | >90 | 2744 | < 3 | 31 |
| | | | WW | 3000 | >80 | 3384 | < 3 | |
| | | | NN | 4000 | >80 | 3537 | < 3 | |


LED nominal lumen

25 W Warm Dimming COB LED Lumen delivered up to 1900 lm / Lumen maintenance: L70 B50=50,000h


| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|----------------|--------------------|-------------|-----|-----------|-----|----------|------|----------|
| X Not included | DC070 Visible trim | Very-wide | DT | 1700-3000 | >95 | 100-2500 | < 4 | 12 |
| | FC070 Trimless | Very-wide | | | | | | 31 |

LED nominal lumen


Square | 300 mm



Mit Blendrahmen/
Свидимой рамкой

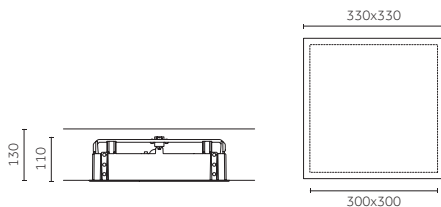


Mit Einputzrahmen/
Сневидимой рамкой

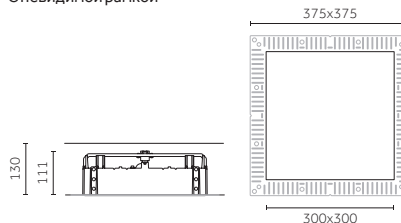

Code example:
X . DC0L0 . HW 12

Accessories: p.262
Drivers: p.270-271
Finishes: p.240
Photometric data:
www.reggiani.net

Diffuser positions:



35 W LED ARRAY Lumen delivered up to 3200 lm / Lumen maintenance: L70 B50=50,000h

| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|----------------|--------------------|-------------|-----|------|-----|------|------|----------|
| X Not included | DC0L0 Visible trim | Very-wide | HW | 2700 | >90 | 2913 | < 3 | 12 |
| | FC0L0 Trimless | Very-wide | HQ | 3000 | >90 | 3500 | < 3 | 31 |
| | | | WW | 3000 | >80 | 3800 | < 3 | |
| | | | NN | 4000 | >80 | 4070 | < 3 | |


LED nominal lumen

Square | Accessories

Montagezubehör/

Дополнительное оборудование для монтажа

Round | 38 mm



Description

Schalung/
Форма

Code

0.40190.0000




Description

Set Abstandshalter/
Комплект проставок

Code

1.38223.0000

Round | 75 mm



Description

Schalung/
Форма

Code

0.40191.0000




Description

Set Abstandshalter/
Комплект проставок

Code

1.37824.0000

Round | 150 mm




Description

Schalung/
Форма

Code

0.40193.0000




Description

Set Abstandshalter/
Комплект проставок

Code

1.37824.0000

Round | 300 mm



Description


Set Abstandshalter/
Комплект проставок

Code


1.38410.0000




Rectangular | 75 mm



Mit Blendrahmen/
Свидимой рамкой




Mit Einputzrahmen/
Сневидимой рамкой



Code example:
X . GH1C0 . HW 12

Accessories: p.265
Drivers: p.270-271
Finishes: p.240
Photometric data:
www.reggiani.net

Diffuser positions:



8 W COB LED Lumen delivered up to 890 lm / Lumen maintenance: L80 B10=50,000h

| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|----------------|--------------------------|-------------|-----------|------|-----|------|------|-----------|
| X Not included | GH1C0 Visibletrim | Very-wide | HW | 2700 | >90 | 900 | < 3 | 12 |
| | HH1C0 Trimless | Very-wide | HQ | 3000 | >90 | 936 | < 3 | 31 |
| | | | WW | 3000 | >80 | 1104 | < 3 | |
| | | | NN | 4000 | >80 | 1116 | < 3 | |

LED nominal lumen

12 W Warm Dimming COB LED Lumen delivered up to 790 lm / Lumen maintenance: L70 B50=50,000h


| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|----------------|--------------------------|-------------|-----------|-----------|-----|----------|------|-----------|
| X Not included | GC030 Visibletrim | Very-wide | DT | 1700-3000 | >95 | 100-1000 | < 4 | 12 |
| | HC030 Trimless | Very-wide | | | | | | 31 |

LED nominal lumen


Rectangular | 150 mm



Mit Blendrahmen/
Свидимой рамкой




Mit Einputzrahmen/
Сневидимой рамкой



Code example:
X . GH1H0 . HW 12

Accessories: p.265
Drivers: p.270-271
Finishes: p.240
Photometric data:
www.reggiani.net

Diffuser positions:



17 W COB LED Lumen delivered up to 2100 lm / Lumen maintenance: L80 B10=50,000h

| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|----------------|--------------------------|-------------|-----------|------|-----|------|------|-----------|
| X Not included | GH1H0 Visibletrim | Very-wide | HW | 2700 | >90 | 2066 | < 3 | 12 |
| | HH1H0 Trimless | Very-wide | HQ | 3000 | >90 | 2072 | < 3 | 31 |
| | | | WW | 3000 | >80 | 2543 | < 3 | |
| | | | NN | 4000 | >80 | 2668 | < 3 | |

LED nominal lumen

24 W COB LED Lumen delivered up to 2800 lm / Lumen maintenance: L80 B10=50,000h

| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|----------------|--------------------------|-------------|-----------|------|-----|------|------|-----------|
| X Not included | GH1E0 Visibletrim | Very-wide | HW | 2700 | >90 | 2690 | < 3 | 12 |
| | HH1E0 Trimless | Very-wide | HQ | 3000 | >90 | 2744 | < 3 | 31 |
| | | | WW | 3000 | >80 | 3384 | < 3 | |
| | | | NN | 4000 | >80 | 3537 | < 3 | |

LED nominal lumen

25 W Warm Dimming COB LED Lumen delivered up to 1900 lm / Lumen maintenance: L70 B50=50,000h

| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|----------------|--------------------------|-------------|-----------|-----------|-----|----------|------|-----------|
| X Not included | GC070 Visibletrim | Very-wide | DT | 1700-3000 | >95 | 100-2500 | < 4 | 12 |
| | HC070 Trimless | Very-wide | | | | | | 31 |


LED nominal lumen

Rectangular | 300 mm


Risk 1 1.82 IP20 850° CE CB EAC



Mit Blendrahmen/
Свидимой рамкой



Mit Einputzrahmen/
Сневидимой рамкой

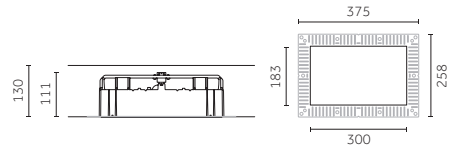

Code example:

X . GC0F0 . HW 12

Accessories: p.265


Drivers: p.270-271

Finishes: p.240

Photometric data:

www.reggiani.net

Diffuser positions:



26 W LED ARRAY

Lumen delivered up to 2090 lm / Lumen maintenance: L70 B50=50,000h


| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|----------------|--------------------|-------------|-----|------|-----|------|------|----------|
| X Not included | GC0F0 Visible trim | Very-wide | HW | 2700 | >90 | 1789 | < 3 | 12 |
| | HC0F0 Trimless | Very-wide | HQ | 3000 | >90 | 2150 | < 3 | 31 |
| | | | WW | 3000 | >80 | 2436 | < 3 | |
| | | | NN | 4000 | >80 | 2613 | < 3 | |

LED nominal lumen

Rectangular | Accessories

Montagezubehör/
Дополнительное оборудование для монтажа

Rectangular | 75 mm



Description

Schalung/
Форма

Code

0.40192.0000




Description

Set Abstandshalter/
Комплект проставок

Code

1.37824.0000

Rectangular | 150 mm



Description

Schalung/
Форма

Code

0.40193.0000



Description

Set Abstandshalter/
Комплект проставок

Code

1.37824.0000

Rectangular | 300 mm




Description

Set Abstandshalter/
Комплект проставок


Code

1.38410.0000



Round Drop | 38 mm



Mit Blendrahmen/
Свидимой рамкой



Mit Einputzrahmen/
Сневидимой рамкой



Code example:

X . LC0A0 . HW 12

Accessories: p.267
Drivers: p.270-271
Finishes: p.240
Photometric data:
www.reggiani.net

Diffuser positions:



*152°


3 W COB LED

Lumen delivered up to 290lm / Lumen maintenance: L80 B10=50,000h


| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|----------------|-------------------|-------------|-----|------|-----|-----|------|----------|
| X Not included | LC0A0 Visibletrim | Very-wide | HW | 2700 | >90 | 320 | < 3 | 12 |
| | MC0A0 Trimless | Very-wide | HQ | 3000 | >90 | 346 | < 3 | 31 |
| | | | WW | 3000 | >80 | 401 | < 3 | |
| | | | NN | 4000 | >80 | 413 | < 3 | |

LED nominal lumen


Round Drop | 75 mm



Mit Blendrahmen/
Свидимой рамкой



Mit Einputzrahmen/
Сневидимой рамкой



Code example:

X . LC0C0 . HW 12

Accessories: p.267
Drivers: p.270-271
Finishes: p.240
Photometric data:
www.reggiani.net

Diffuser positions:



*142°


8 W COB LED

Lumen delivered up to 890lm / Lumen maintenance: L80 B10=50,000h


| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|----------------|-------------------|-------------|-----|------|-----|------|------|----------|
| X Not included | LC0C0 Visibletrim | Very-wide | HW | 2700 | >90 | 900 | < 3 | 12 |
| | MC0C0 Trimless | Very-wide | HQ | 3000 | >90 | 936 | < 3 | 31 |
| | | | WW | 3000 | >80 | 1104 | < 3 | |
| | | | NN | 4000 | >80 | 1116 | < 3 | |

LED nominal lumen



Round Drop | 150 mm



Mit Blendrahmen/
Свидимой рамкой

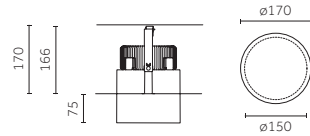

Mit Einputzrahmen/
Сневидимой рамкой

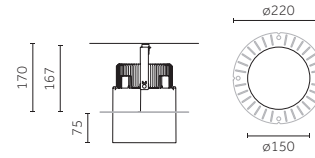

Code example:

X . LH1H0 . HW 12

Accessories: p.267

Drivers: p.270-271

Finishes: p.240

Photometric data:

www.reggiani.net

Diffuser positions:



*120°

17 W COB LED

Lumen delivered up to 2100 lm / Lumen maintenance: L80 B10=50,000h

| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|----------------|--------------------|-------------|-----|------|-----|------|------|----------|
| X Not included | LH1H0 Visible trim | Very-wide | HW | 2700 | >90 | 2066 | <3 | 12 |
| | MH1H0 Trimless | Very-wide | HQ | 3000 | >90 | 2072 | <3 | 31 |
| | | | WW | 3000 | >80 | 2543 | <3 | |
| | | | NN | 4000 | >80 | 2668 | <3 | |

LED nominal lumen

24 W COB LED

Lumen delivered up to 2800 lm / Lumen maintenance: L80 B10=50,000h

| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|----------------|--------------------|-------------|-----|------|-----|------|------|----------|
| X Not included | LC0E0 Visible trim | Very-wide | HW | 2700 | >90 | 2690 | <3 | 12 |
| | MC0E0 Trimless | Very-wide | HQ | 3000 | >90 | 2744 | <3 | 31 |
| | | | WW | 3000 | >80 | 3384 | <3 | |
| | | | NN | 4000 | >80 | 3537 | <3 | |

LED nominal lumen

25 W Warm Dimming COB LED

Lumen delivered up to 1900 lm / Lumen maintenance: L70 B50=50,000h


| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|----------------|--------------------|-------------|-----|-----------|-----|----------|------|----------|
| X Not included | LC070 Visible trim | Very-wide | DT | 1700-3000 | >95 | 100-2500 | <4 | 12 |
| | MC070 Trimless | Very-wide | | | | | | 31 |

LED nominal lumen

Round Drop | Accessories

Montagezubehör/
Дополнительное оборудование для монтажа

Round Drop | 38 mm




Description

Schalung/
Форма

Code

0.40190.0000

Round Drop | 75 mm




Description

Schalung/
Форма

Code

0.40191.0000

Round Drop | 150 mm




Description

Schalung/
Форма


Code

0.40193.0000


Square Drop | 38 mm



Mit Blendrahmen/
Свидимой рамкой



Mit Einputzrahmen/
Сневидимой рамкой



Code example:

X . **NC0A0** . **HW** **12**

Accessories: p.269
Drivers: p.270-271
Finishes: p.240
Photometric data:
www.reggiani.net

Diffuser positions:



*152°


3 W COB LED

Lumen delivered up to 290lm / Lumen maintenance: L80 B10=50,000h


| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|----------------|-------------------|-------------|-----|------|-----|-----|------|----------|
| X Not included | NC0A0 Visibletrim | Very-wide | HW | 2700 | >90 | 320 | <3 | 12 |
| | | | HQ | 3000 | >90 | 346 | <3 | 31 |
| | PC0A0 Trimless | Very-wide | WW | 3000 | >80 | 401 | <3 | |
| | | | NN | 4000 | >80 | 413 | <3 | |

LED nominal lumen


Square Drop | 75 mm



Mit Blendrahmen/
Свидимой рамкой



Mit Einputzrahmen/
Сневидимой рамкой

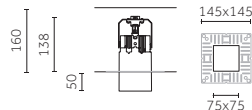

Code example:

X . **NC0C0** . **HW** **12**

Accessories: p.269
Drivers: p.270-271
Finishes: p.240
Photometric data:
www.reggiani.net

Diffuser positions:



*142°

8 W COB LED

Lumen delivered up to 890lm / Lumen maintenance: L80 B10=50,000h


| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|----------------|-------------------|-------------|-----|------|-----|------|------|----------|
| X Not included | NC0C0 Visibletrim | Very-wide | HW | 2700 | >90 | 900 | <3 | 12 |
| | | | HQ | 3000 | >90 | 936 | <3 | 31 |
| | PC0C0 Trimless | Very-wide | WW | 3000 | >80 | 1104 | <3 | |
| | | | NN | 4000 | >80 | 1116 | <3 | |

LED nominal lumen


Square Drop | 150 mm



Mit Blendrahmen/
Свидимой рамкой

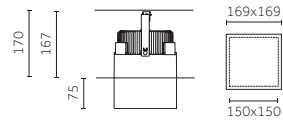

Mit Einputzrahmen/
Сневидимой рамкой



Code example:

X . NH1H0 . HW 12

Accessories: p.269

Drivers: p.270-271

Finishes: p.240

Photometric data:

www.reggiani.net

Diffuser positions:



*120°

17 W COB LED

Lumen delivered up to 2100 lm/ Lumen maintenance: L80 B10=50,000h

| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|----------------|--------------------|-------------|-----|------|-----|------|------|----------|
| X Not included | NH1H0 Visible trim | Very-wide | HW | 2700 | >90 | 2066 | <3 | 12 |
| | PH1H0 Trimless | Very-wide | HQ | 3000 | >90 | 2072 | <3 | 31 |
| | | | WW | 3000 | >80 | 2543 | <3 | |
| | | | NN | 4000 | >80 | 2668 | <3 | |

LED nominal lumen

24 W COB LED

Lumen delivered up to 2800 lm/ Lumen maintenance: L80 B10=50,000h

| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|----------------|--------------------|-------------|-----|------|-----|------|------|----------|
| X Not included | NC0E0 Visible trim | Very-wide | HW | 2700 | >90 | 2690 | <3 | 12 |
| | PC0E0 Trimless | Very-wide | HQ | 3000 | >90 | 2744 | <3 | 31 |
| | | | WW | 3000 | >80 | 3384 | <3 | |
| | | | NN | 4000 | >80 | 3537 | <3 | |

LED nominal lumen

25 W Warm Dimming COB LED

Lumen delivered up to 1900 lm/ Lumen maintenance: L70 B50=50,000h

| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|----------------|--------------------|-------------|-----|-----------|-----|----------|------|----------|
| X Not included | NC070 Visible trim | Very-wide | DT | 1700-3000 | >95 | 100-2500 | <4 | 12 |
| | PC070 Trimless | Very-wide | | | | | | 31 |


LED nominal lumen

Square Drop | Accessories

Montagezubehör/
Дополнительное оборудование для монтажа

Дополнительное оборудование для монтажа

Square Drop | 38 mm




Description

Schalung/
Форма

Code

0.40190.0000

Square Drop | 75 mm




Description

Schalung/
Форма

Code

0.40191.0000

Square Drop | 150 mm



Description

Schalung/
Форма


Code

0.40193.0000

Electrical Devices | 38 mm

Betriebsgeräte/
Блоки питания




3 W COBLED

| Type | Code | W | Size (mm) | Cut-out | Tech. specifications | mA | Connectable fixtures | Max.distance | Cable section |
|--------|--------------|----|---|---------|----------------------|-----|----------------------|--------------|---------------------|
| On/Off | 0.30350.0000 | 10 |  | 29 mm | 220-240Vac / 50/60Hz | 350 | Max: 1 | 20 m | 1.5 mm ² |




Electrical Devices | 75 mm

Betriebsgeräte/
Блоки питания

8 W COBLED

| Type | Code | W | Size (mm) | Cut-out | Tech. specifications | mA | Connectable fixtures | Max.distance | Cable section |
|------------|--------------|----|---|---------|-----------------------------------|-----|----------------------|--------------|---------------------|
| On/Off | 0.30351.0000 | 20 |  | 56 mm | 198-264Vac 170-280Vdc / 0,50/60Hz | 500 | Max: 1 | 20 m | 1.5 mm ² |
| Dimm 1-10V | V.30351.0000 | 20 |  | 56 mm | 99-264Vac 170-280Vdc / 0,50/60Hz | 500 | Max: 1 | 20 m | 1.5 mm ² |
| DALI | D.30351.0000 | 20 |  | 56 mm | 99-264Vac 176-264Vdc / 0,50/60Hz | 500 | Max: 1 | 20 m | 1.5 mm ² |




12 W Warm Dimming COBLED

| Type | Code | W | Size (mm) | Cut-out | Tech. specifications | mA | Connectable fixtures | Max.distance | Cable section |
|------------|--------------|----|---|---------|-----------------------------------|-----|----------------------|--------------|---------------------|
| Phase-cut | T.30412.0000 | 18 |  | 52 mm | 220-240Vac / 50/60Hz | 350 | Max: 1 | 20 m | 1.5 mm ² |
| Dimm 1-10V | V.30341.0000 | 33 |  | 45 mm | 120-277Vac / 50/60Hz | 350 | Max: 1 | 20 m | 1.5 mm ² |
| DALI | D.30341.0000 | 36 |  | 54 mm | 198-264Vac 170-280Vdc / 0,50/60Hz | 350 | Max: 1 | 20 m | 1.5 mm ² |




Electrical Devices | 150 mm

Betriebsgeräte/
Блоки питания




17 W COBLED

| Type | Code | W | Size (mm) | Cut-out | Tech. specifications | mA | Connectable fixtures | Max.distance | Cable section |
|------------|--------------|----|---|---------|-----------------------------------|-----|----------------------|--------------|---------------------|
| On/Off | 0.30352.0000 | 20 |  | 56 mm | 198-264Vac 170-280Vdc / 0,50/60Hz | 500 | Max: 1 | 20 m | 1.5 mm ² |
| Dimm 1-10V | V.30400.0000 | 20 |  | 45 mm | 99-264Vac 170-280Vdc / 0,50/60Hz | 500 | Max: 1 | 20 m | 1.5 mm ² |
| DALI | D.30400.0000 | 20 |  | 56 mm | 99-264Vac 176-264Vdc / 0,50/60Hz | 500 | Max: 1 | 20 m | 1.5 mm ² |

24 W COBLED

| Type | Code | W | Size (mm) | Cut-out | Tech. specifications | mA | Connectable fixtures | Max.distance | Cable section |
|------------|--------------|----|---|---------|-----------------------------------|-----|----------------------|--------------|---------------------|
| On/Off | 0.30353.0000 | 38 |  | 52 mm | 198-264Vac 176-264Vdc / 0,50/60Hz | 700 | Max: 1 | 20 m | 1.5 mm ² |
| Dimm 1-10V | V.30023.0000 | 33 |  | 45 mm | 220-240Vac / 50/60Hz | 700 | Max: 1 | 20 m | 1.5 mm ² |
| DALI | D.30023.0000 | 32 |  | 70 mm | 99-264Vac 176-264Vdc / 0,50/60Hz | 700 | Max: 1 | 20 m | 1.5 mm ² |




25 W Warm Dimming COBLED

| Type | Code | W | Size (mm) | Cut-out | Tech. specifications | mA | Connectable fixtures | Max.distance | Cable section |
|------------|--------------|----|---|---------|-----------------------------------|-----|----------------------|--------------|---------------------|
| Phase-cut | M.30023.T000 | 33 |  | 45 mm | 220-240Vac / 50/60Hz | 700 | Max: 1 | 20 m | 1.5 mm ² |
| Dimm 1-10V | V.30343.0000 | 33 |  | 45 mm | 120-277Vac / 50/60Hz | 700 | Max: 1 | 20 m | 1.5 mm ² |
| DALI | D.30344.0000 | 36 |  | 45 mm | 198-264Vac 170-280Vdc / 0,50/60Hz | 700 | Max: 1 | 20 m | 1.5 mm ² |

Electrical Devices | 300 mm | Round | Square

Betriebsgeräte/ Блоки питания




35 W COB LED

| Type | Code | W | Size (mm) | Cut-out | Tech. specifications | mA | Connectable fixtures | Max.distance | Cable section |
|------------|---------------------|----|---|---------|----------------------------------|------|----------------------|--------------|---------------------|
| On/Off | 0.30403.0000 | 45 |  | 82 mm | 99-264Vac 170-280Vdc / 0,50/60Hz | 1400 | Min: 1 | 20m | 1.5 mm ² |
| Dimm 1-10V | V.30407.0000 | 40 |  | 81 mm | 220-240Vac / 50/60Hz | 1400 | Min: 1 | 20m | 1.5 mm ² |
| DALI | D.30403.0000 | 50 |  | 80 mm | 99-264Vac 176-264Vdc / 0,50/60Hz | 1400 | Min: 1 | 20m | 1.5 mm ² |





Electrical Devices | 300 mm | Rectangular

Betriebsgeräte/ Блоки питания

26 W COB LED

| Type | Code | W | Size (mm) | Cut-out | Tech. specifications | mA | Connectable fixtures | Max.distance | Cable section |
|------------|---------------------|----|---|---------|----------------------------------|------|----------------------|--------------|---------------------|
| On/Off | 0.30406.0000 | 35 |  | 53 mm | 220-240Vac / 50/60Hz | 1050 | Min: 1 | 20m | 1.5 mm ² |
| Dimm 1-10V | V.30406.0000 | 39 |  | 71 mm | 99-264Vac 170-280Vdc / 0,50/60Hz | 1050 | Min: 1 | 20m | 1.5 mm ² |
| DALI | D.30406.0000 | 35 |  | 80 mm | 220-240Vac / 50/60Hz | 1050 | Min: 1 | 20m | 1.5 mm ² |

Weitere Vorrichtungen/ Другие устройства

| Type | Code | Size (mm) | Cut-out | Tech. specifications | Connectable fixtures | Max.distance | Cable section |
|---|---------------------|---|---------|----------------------|----------------------|--------------|---------------------|
|  Notlichtversorgungseinheit mit Dauerschaltung 1 Std.*/ Блокаварийного освещения типа "всегда включен" 1ч* | 0.35081.0000 |  | 106 mm | 220-240V / 50/60 Hz | Max: 1 | 20 m | 1.5 mm ² |
|  Notlichtversorgungseinheit mit Dauerschaltung 3 Std.*/ Блокаварийного освещения типа "всегда включен" 3ч* | 0.35081.UK00 |  | 106 mm | 220-240V / 50/60 Hz | Max: 1 | 20 m | 1.5 mm ² |

* Für LED-Leuchten (8,5–17 W), Ni/Cd-Akku/Для светодиодных светильников (8,5–17Вт), Ni/Cd-аккумуляторы



—

Trybeca Surface

— Trybeca Surface


DE Die Version Trybeca Surface bietet große Leistungen und Flexibilität. Und mit den vier verschiedenen Größen lassen sich maßgeschneiderte Lösungen je nach Höhe und Proportionen der Räume entwerfen. Das Design, frei von Schrauben und sichtbaren technischen Details, ermöglicht eine diskrete und elegante Platzierung im Raum.

RU Trybeca Surface сочетает в себе высокие эксплуатационные качества и гибкость. Возможность выбора из четырех вариантов размера позволяет проектировать решения с учетом индивидуальных потребностей, на основании пропорций и высоты потолков в освещаемых помещениях. Конструкция, отличающаяся отсутствием винтов и видимых технических деталей, позволяет выполнять установку светильника с элегантным и неброским результатом.



DE Trybeca Surface lässt sich mit Hilfe des Zubehörs in Form von Pendelrohr oder Stoffkabel ganz einfach in eine Pendelleuchte verwandeln.


RU Trybeca Surface может легко стать подвесным светильником, для этого достаточно использовать дополнительное оборудование - штангу или кабель в тканевой оплетке.

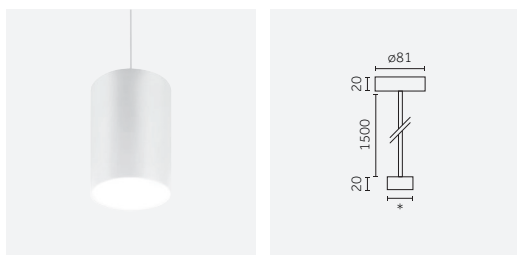

DE *Für 38, 75, 150 mm erhältlich.
Länge: bis 1500 mm.
Über 1500 mm auf Anfrage.

RU *Доступно для: 38, 75, 150 мм.
Длина: до 1500 мм.
Более 1500 мм по требованию.

DE Pendelrohr mit runder Basis
RU Штанга с круглым основанием

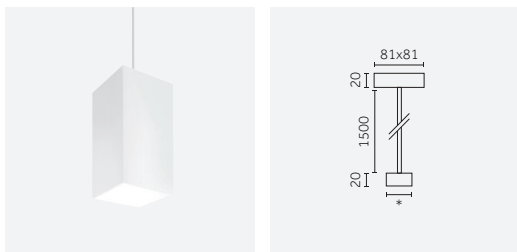

DE *Für 38, 75, 150 mm erhältlich.
Länge: bis 1500 mm.
Über 1500 mm auf Anfrage.
Weißes oder schwarzes Stoffkabel auf Anfrage.

RU *Доступно для: 38, 75, 150 мм.
Длина: до 1500 мм.
Более 1500 мм по требованию.
Кабель в белой или черной тканевой оплетке по требованию.

DE Pendelrohr mit quadratischer Basis
RU Штанга с квадратным основанием



DE *Für 38, 75, 150 mm erhältlich.
Länge: bis 3000 mm.
Maßgeschneiderte Länge auf Anfrage.


RU *Доступно для: 38, 75, 150 мм.
Длина: до 3000 мм.
Персонализированная длина по требованию.

DE Rotes Stoffkabel mit runder Basis
RU Кабель в красной тканевой оплетке с круглым основанием





Round | 38 mm - H 216 mm



3 W COB LED

Lumen delivered up to 290lm / Lumen maintenance: L80 B10=50,000h

| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|-------------------------|--------------|-------------|-----------|------|-----|-----|------|-----------|
| 0 On-Off | QC0A0 | Very-wide | HW | 2700 | >90 | 320 | < 3 | 12 |
| Onrequest remote | | | HQ | 3000 | >90 | 346 | < 3 | 31 |
| H Bluetooth | | | WW | 3000 | >80 | 401 | < 3 | |
| | | | NN | 4000 | >80 | 413 | < 3 | |

LED nominal lumen

Code example:

0 . QC0A0 . HW 12

Accessories: p.281

Finishes: p.240

Photometric data:


www.reggiani.net

Diffuser positions:



*66° *110° *152°

Round | 75 mm - H 216 mm



8 W COB LED

Lumen delivered up to 890lm / Lumen maintenance: L80 B10=50,000h

| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|-------------------------|--------------|-------------|-----------|------|-----|------|------|-----------|
| 0 On-Off | QC0C0 | Very-wide | HW | 2700 | >90 | 900 | < 3 | 12 |
| Onrequest remote | | | HQ | 3000 | >90 | 936 | < 3 | 31 |
| H Bluetooth | | | WW | 3000 | >80 | 1104 | < 3 | |
| | | | NN | 4000 | >80 | 1116 | < 3 | |

LED nominal lumen

Code example:

0 . QC0C0 . HW 12

Accessories: p.281

Finishes: p.240

Photometric data:


www.reggiani.net

Diffuser positions:



*96° *106° *142°

Round | 75 mm - H 320 mm



Code example:

0 . **QC0D0** . **HW 12**

Accessories: p.281

Finishes: p.240

Photometric data:

www.reggiani.net

Diffuser positions:




*96° *106° *142°

| 8 W COB LED | | Lumen delivered up to 890 lm / Lumen maintenance: L80 B10=50,000h | | | | | | Finishes |
|---------------------|--------------|---|-------------------|------|-----|------|------|-----------|
| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
| 0 On-Off | QC0D0 | Very-wide | HW | 2700 | >90 | 900 | <3 | 12 |
| V Dimm 1-10V | | | HQ | 3000 | >90 | 936 | <3 | 31 |
| D DALI | | | WW | 3000 | >80 | 1104 | <3 | |
| On request | | | NN | 4000 | >80 | 1116 | <3 | |
| H Bluetooth | | | LED nominal lumen | | | | | |

| 6,5 W Warm Dimming COB LED | | Lumen delivered up to 790 lm / Lumen maintenance: L80 B50=50,000h | | | | | | Finishes |
|----------------------------|--------------|---|-------------------|-----------|-----|---------|------|-----------|
| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
| V Dimm 1-10V | QC0D0 | Very-wide | DT | 1700-2700 | >95 | 10-1000 | <4 | 12 |
| D DALI | | | LED nominal lumen | | | | | |
| On request | | | | | | | | 31 |
| H Bluetooth | | | | | | | | |

Round | 150 mm - H 216 mm



Code example:

0 . **QH1H0** . **HW 12**

Accessories: p.281

Finishes: p.240

Photometric data:

www.reggiani.net

Diffuser positions:




*104° *107° *120°

| 17 W COB LED | | Lumen delivered up to 2100 lm / Lumen maintenance: L80 B10=50,000h | | | | | | Finishes |
|---------------------|--------------|--|-------------------|------|-----|------|------|-----------|
| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
| 0 On-Off | QH1H0 | Very-wide | HW | 2700 | >90 | 2066 | <3 | 12 |
| T Phase-cut | | | HQ | 3000 | >90 | 2072 | <3 | 31 |
| V Dimm 1-10V | | | WW | 3000 | >80 | 2543 | <3 | |
| D DALI | | | NN | 4000 | >80 | 2668 | <3 | |
| On request | | | LED nominal lumen | | | | | |
| H Bluetooth | | | | | | | | |

| 24 W COB LED | | Lumen delivered up to 2800 lm / Lumen maintenance: L80 B10=50,000h | | | | | | Finishes |
|---------------------|--------------|--|-------------------|------|-----|------|------|-----------|
| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
| 0 On-Off | QC0E0 | Very-wide | HW | 2700 | >90 | 2690 | <3 | 12 |
| T Phase-cut | | | HQ | 3000 | >90 | 2744 | <3 | 31 |
| V Dimm 1-10V | | | WW | 3000 | >80 | 3384 | <3 | |
| D DALI | | | NN | 4000 | >80 | 3537 | <3 | |
| On request | | | LED nominal lumen | | | | | |
| H Bluetooth | | | | | | | | |

| 25 W Warm Dimming COB LED | | Lumen delivered up to 1900 lm / Lumen maintenance: L70 B50=50,000h | | | | | | Finishes |
|---------------------------|--------------|--|-------------------|-----------|-----|----------|------|-----------|
| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
| T Phase-cut | QC0E0 | Very-wide | DT | 1700-3000 | >95 | 100-2500 | <4 | 12 |
| V Dimm 1-10V | | | LED nominal lumen | | | | | |
| D DALI | | | | | | | | 31 |
| On request | | | | | | | | |
| H Bluetooth | | | | | | | | |

Round | 300 mm - H 160 mm

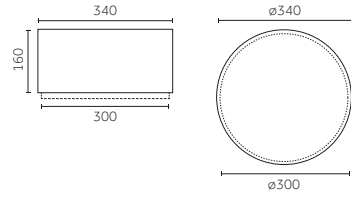


35 W LED ARRAY Lumen delivered up to 3275 lm / Lumen maintenance: L70 B50=50,000h

| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|---------------------|--------------|-------------|-----------|------|-----|------|------|-----------|
| 0 On-Off | QC0L0 | Very-wide | HW | 2700 | >90 | 2797 | < 3 | 12 |
| V Dimm 1-10V | | | HQ | 3000 | >90 | 3360 | < 3 | 31 |
| D DALI | | | WW | 3000 | >80 | 3818 | < 3 | |
| Onrequest | | | NN | 4000 | >80 | 4096 | < 3 | |

LED nominal lumen

Code example:
0 . QC0L0 . HW 12

Accessories: p.281
 Finishes: p.240
 Photometric data:
 www.reggiani.net




Round | Accessories

Montagezubehör/

Дополнительное оборудование для монтажа

Round | 38 mm - H 216 mm



Description

Pendelrohr mit runder Basis (Pendelrohlänge: 1,5 m)/
Штанга с круглым основанием (Длина штанги: 1,5 м)



Code

0.26050.00

Finishes

12

31



Description

Rotes Stoffkabel mit runder Basis (Kabellänge: 3 m)/
Кабель в красной тканевой оплетке с круглым основанием (Длина
кабеля: 3 м)

Code


0.26056.00

Finishes

12

31

Round | 75 mm - H 216, 320 mm



Description

Pendelrohr mit runder Basis (Pendelrohlänge: 1,5 m)/
Штанга с круглым основанием (Длина штанги: 1,5 м)



Code

0.26052.00

Finishes

12

31



Description

Rotes Stoffkabel mit runder Basis (Kabellänge: 3 m)/
Кабель в красной тканевой оплетке с круглым основанием (Длина
кабеля: 3 м)

Code


0.26057.00

Finishes

12

31

Round | 150 mm - H 216 mm



Description

Pendelrohr mit runder Basis (Pendelrohlänge: 1,5 m)/
Штанга с круглым основанием (Длина штанги: 1,5 м)


Code

0.26054.00

Finishes

12

31



Description

Rotes Stoffkabel mit runder Basis (Kabellänge: 3 m)/
Кабель в красной тканевой оплетке с круглым основанием (Длина
кабеля: 3 м)

Code



0.26058.00

Finishes

12

31

Square | 38 mm - H 216 mm




3 W COB LED

Lumen delivered up to 290lm / Lumen maintenance: L80 B10=50,000h

Code example:
0 . TC0A0 . HW 12

Accessories: p.285
 Finishes: p.240
 Photometric data:
 www.reggiani.net



Diffuser positions:



| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|-------------------------|--------------|-------------|-----------|------|-----|-----|------|-----------|
| <u>0</u> On-Off | <u>TC0A0</u> | Very-wide | <u>HW</u> | 2700 | >90 | 320 | < 3 | <u>12</u> |
| <u>Onrequest remote</u> | | | <u>HQ</u> | 3000 | >90 | 346 | < 3 | <u>31</u> |
| <u>H</u> Bluetooth | | | <u>WW</u> | 3000 | >80 | 401 | < 3 | |
| | | | <u>NN</u> | 4000 | >80 | 413 | < 3 | |

LED nominal lumen

Square | 75 mm - H 216 mm




8 W COB LED

Lumen delivered up to 890lm / Lumen maintenance: L80 B10=50,000h

Code example:
0 . TC0C0 . HW 12

Accessories: p.285
 Finishes: p.240
 Photometric data:
 www.reggiani.net



Diffuser positions:



| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|-------------------------|--------------|-------------|-----------|------|-----|------|------|-----------|
| <u>0</u> On-Off | <u>TC0C0</u> | Very-wide | <u>HW</u> | 2700 | >90 | 900 | < 3 | <u>12</u> |
| <u>Onrequest remote</u> | | | <u>HQ</u> | 3000 | >90 | 936 | < 3 | <u>31</u> |
| <u>H</u> Bluetooth | | | <u>WW</u> | 3000 | >80 | 1104 | < 3 | |
| | | | <u>NN</u> | 4000 | >80 | 1116 | < 3 | |

LED nominal lumen

Square | 75 mm - H 320 mm



Code example:

0 . **TC0D0** . **HW 12**

Accessories: p.285

Finishes: p.240

Photometric data:
www.reggiani.net

Diffuser positions:






*96° *106° *142°

| 8 W COB LED | | Lumen delivered up to 890 lm / Lumen maintenance: L80 B10=50,000h | | | | | | Finishes |
|---------------------|--------------|---|-------------------|------|-----|------|------|-----------|
| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
| 0 On-Off | TC0D0 | Very-wide | HW | 2700 | >90 | 900 | <3 | 12 |
| V Dimm 1-10V | | | HQ | 3000 | >90 | 936 | <3 | 31 |
| D DALI | | | WW | 3000 | >80 | 1104 | <3 | |
| On request | | | NN | 4000 | >80 | 1116 | <3 | |
| H Bluetooth | | | LED nominal lumen | | | | | |

| 6,5 W Warm Dimming COB LED | | Lumen delivered up to 790 lm / Lumen maintenance: L80 B50=50,000h | | | | | | Finishes |
|----------------------------|--------------|---|-------------------|-----------|-----|----------|------|-----------|
| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
| V Dimm 1-10V | TC0D0 | Very-wide | DT | 1700-2700 | >95 | 100-1000 | <4 | 12 |
| D DALI | | | LED nominal lumen | | | | | |
| On request | | | | | | | | 31 |
| H Bluetooth | | | | | | | | |

Square | 150 mm - H 216 mm



Code example:

0 . **TH1H0** . **HW 12**

Accessories: p.285

Finishes: p.240

Photometric data:
www.reggiani.net

Diffuser positions:




*104° *107° *120°

| 17 W COB LED | | Lumen delivered up to 2100 lm / Lumen maintenance: L80 B10=50,000h | | | | | | Finishes |
|---------------------|--------------|--|-------------------|------|-----|------|------|-----------|
| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
| 0 On-Off | TH1H0 | Very-wide | HW | 2700 | >90 | 2066 | <3 | 12 |
| T Phase-cut | | | HQ | 3000 | >90 | 2072 | <3 | 31 |
| V Dimm 1-10V | | | WW | 3000 | >80 | 2543 | <3 | |
| D DALI | | | NN | 4000 | >80 | 2668 | <3 | |
| On request | | | LED nominal lumen | | | | | |
| H Bluetooth | | | | | | | | |

| 24 W COB LED | | Lumen delivered up to 2800 lm / Lumen maintenance: L70 B50=50,000h | | | | | | Finishes |
|---------------------|--------------|--|-------------------|------|-----|------|------|-----------|
| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
| 0 On-Off | TC0E0 | Very-wide | HW | 2700 | >90 | 2690 | <3 | 12 |
| T Phase-cut | | | HQ | 3000 | >90 | 2744 | <3 | 31 |
| V Dimm 1-10V | | | WW | 3000 | >80 | 3384 | <3 | |
| D DALI | | | NN | 4000 | >80 | 3537 | <3 | |
| On request | | | LED nominal lumen | | | | | |
| H Bluetooth | | | | | | | | |

| 25 W Warm Dimming COB LED | | Lumen delivered up to 1900 lm / Lumen maintenance: L70 B50=50,000h | | | | | | Finishes |
|---------------------------|--------------|--|-------------------|-----------|-----|----------|------|-----------|
| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
| T Phase-cut | TC0E0 | Very-wide | DT | 1700-3000 | >95 | 100-2500 | <4 | 12 |
| V Dimm 1-10V | | | LED nominal lumen | | | | | |
| D DALI | | | | | | | | 31 |
| On request | | | | | | | | |
| H Bluetooth | | | | | | | | |

Square | 300 mm - H 160 mm



35 W LED ARRAY

Lumen delivered up to 3200 lm / Lumen maintenance: L70 B50=50,000h

| Driver | Version | Light beam* | LED | K | CRI | lm | SDCM | Finishes |
|---------------------|--------------|-------------|-----------|------|-----|------|------|-----------|
| 0 On-Off | TC0L0 | Very-wide | HW | 2700 | >90 | 2913 | < 3 | 12 |
| V Dimm 1-10V | | | HQ | 3000 | >90 | 3500 | < 3 | 31 |
| D DALI | | | WW | 3000 | >80 | 3800 | < 3 | |
| Onrequest | | | NN | 4000 | >80 | 4070 | < 3 | |

LED nominal lumen

Code example:

0 . **TC0L0** . **HW** **12**

Accessories: p.285

Finishes: p.240

Photometric data:
www.reggiani.net

Diffuser positions:




*106° *110° *116°

Square | Accessories

Montagezubehör/

Дополнительное оборудование для монтажа

Square | 38 mm - H216 mm



Description

Pendelrohr mit quadratischer Basis (Pendelrohrlänge: 1,5 m)/
Штанга с квадратным основанием (Длина штанги: 1,5 м)

Code


0.26051.00

Finishes

12

31

Square | 75 mm - H216, 320 mm



Description

Pendelrohr mit quadratischer Basis (Pendelrohrlänge: 1,5 m)/
Штанга с квадратным основанием (Длина штанги: 1,5 м)

Code


0.26053.00

Finishes

12

31

Square | 150 mm - H216 mm



Description

Pendelrohr mit quadratischer Basis (Pendelrohrlänge: 1,5 m)/
Штанга с квадратным основанием (Длина штанги: 1,5 м)

Code

0.26055.00

Finishes

12

31