




—

Yori Channel

Yori Channel

EN The Yori Channel projector is built into a bespoke designed aluminium rail for surface installation or recessed trimless mounting. The highly compact mounting rail means the projector discreetly blends into its surroundings. The lighting bodies of Yori Channel incorporate the standout features of the Yori range such as retracted optics, advanced technology lenses and optics, plus a wide range of accessories.

IT Yori Channel è un proiettore integrato all'interno di una canalina in alluminio appositamente sviluppata, disponibile nelle versioni a incasso trimless e da superficie. La dimensione dell'estruso risulta molto compatta e il prodotto si inserisce così in maniera discreta nell'ambiente. I corpi illuminanti di Yori Channel presentano le caratteristiche distintive della gamma Yori come l'ottica in posizione arretrata, la disponibilità di lenti e ottiche di ultima generazione e un'ampia scelta di accessori.


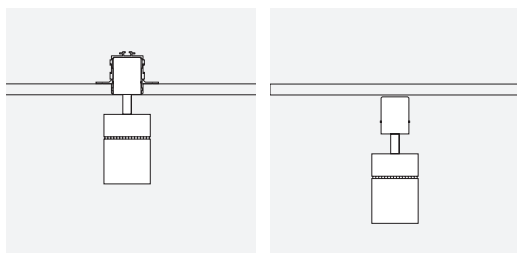


EN Recessed trimless version
IT Versione a incasso trimless

EN Surface version
IT Versione a superficie



Ø 43 mm | Precision



Code example:

0 . **FM11** . **B** . **HW** **12**

Accessories: p.541
Channel/Canale: p.556-561
Finishes: p.380
Photometric data:
www.reggiani.net

4 W POWERLED Lumen delivered up to 435 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	FM11 Precision	A 7° Very narrow	HW	2700	>90	410	<3	12
T Phase-cut		B 11° Narrow	HQ	3000	>90	415	<3	31
D DALI		E 23° Medium	WW	3000	>80	485	<3	
		H 40° Wide	NN	4000	>80	530	<3	

LED nominal lumen

9 W POWERLED Lumen delivered up to 750 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	FM12 Precision	A 7° Very narrow	HW	2700	>90	725	<3	12
T Phase-cut		B 11° Narrow	HQ	3000	>90	730	<3	31
D DALI		E 23° Medium	WW	3000	>80	845	<3	
		H 40° Wide	NN	4000	>80	940	<3	



LED nominal lumen

6,5 W Warm Dimming COB LED Lumen delivered up to 130 lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
D DALI	FM12 Precision	B 27° Medium	DT	1800-2800	>95	10-550	<4	12
								31

LED nominal lumen

Ø 43 mm | Performance



Code example:

0 . **FM21** . **B** . **HW** **12**

Accessories: p.542
Channel/Canale: p.556-561
Finishes: p.380
Photometric data:
www.reggiani.net

4 W POWERLED Lumen delivered up to 450 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	FM21 Performance	B 6° Narrow	HW	2700	>90	410	<3	12
T Phase-cut		E 18° Medium	HQ	3000	>90	415	<3	31
D DALI		H 36° Wide	WW	3000	>80	485	<3	
			NN	4000	>80	530	<3	

LED nominal lumen

9 W POWERLED Lumen delivered up to 780 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	FM22 Performance	B 6° Narrow	HW	2700	>90	725	<3	12
T Phase-cut		E 18° Medium	HQ	3000	>90	730	<3	31
D DALI		H 36° Wide	WW	3000	>80	845	<3	
			NN	4000	>80	940	<3	

LED nominal lumen

Ø 43 mm | Precision | Accessories

Interchangeable IOS optics/ Ottiche intercambiabili IOS

Image	Description	Code	Finishes		Image	Description	Code	Finishes	
			4A	5A				12	31
	Glass filter 1 mm/ Filtro vetro 1 mm	<u>0.26400.00</u>	4A	5A		Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta	<u>0.26440.0000</u>		
			6A	7A		Wide texture honeycomb louvre/ Griglia alveolare a maglia larga	<u>0.26448.0000</u>		
			8A	9A		Elliptical beam lens/ Lente per fascio ellittico	<u>0.26456.0000</u>		
	Colored Gel Slides (2 pieces)/ Vetrini per gel colorato (2 pezzi)	<u>0.26408.0000</u>				Opal lens/ Lente opale	<u>0.26460.0000</u>		
	Selective filter 3000K - 2700K/ Filtro selettivo 3000K - 2700K	<u>0.26557.0000</u>				Spread lens/ Lente diffondente	<u>0.26468.0000</u>		
	Selective filter 2700K - 2500K/ Filtro selettivo 2700K - 2500K	<u>0.26416.0000</u>				Cross blade louvre/ Griglia a croce	<u>0.26476.0000</u>		
	Selective filter 2700K - 2200K/ Filtro selettivo 2700K - 2200K	<u>0.26424.0000</u>				Barn doors/ Alette rompiflusso	<u>0.26484.0000</u>		
	Selective filter 2700K - 2000K/ Filtro selettivo 2700K - 2000K	<u>0.26432.0000</u>				Cone 45° wall washer/ Cono 45° wall washer	<u>0.26488.00</u>	12	31
	Selective filter 3000K - 3600K/ Filtro selettivo 3000K - 3600K	<u>0.26565.0000</u>				Short snoot/ Cilindro corto	<u>0.26556.0000</u>	12	31
	Selective filter 3000K - 4000K/ Filtro selettivo 3000K - 4000K	<u>0.26573.0000</u>							

Ø 43 mm | Performance | Accessories


Optics accessories/ Accessori ottiche

Image	Description	Code	Finishes		Image	Description	Code	Finishes
			4A	5A				
	Glass filter 1 mm/ Filtro vetro 1 mm	0.26401.00	4A	5A		Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K	0.26574.0000	
			6A	7A		Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta	0.26441.0000	
			8A	9A		Wide texture honeycomb louvre/ Griglia alveolare a maglia larga	0.26449.0000	
	Colored Gel Slides (2 pieces)/ Vetrini per gel colorato (2 pezzi)/	0.26409.0000				Elliptical beam lens/ Lente per fascio ellittico	0.26492.0000	
	Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K	0.26558.0000				Opal lens/ Lente opale	0.26461.0000	
	Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K	0.26417.0000				Spread lens/ Lente diffondente	0.26469.0000	
	Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K	0.26425.0000				Cross blade louvre/ Griglia a croce	0.26480.0000	
	Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K	0.26433.0000				Cone 45° wall washer/ Cono 45° wall washer	0.26496.00	12
	Selective filter 3000K - 3600K / Filtro selettivo 3000K - 3600K	0.26566.0000					31	



Ø 60 mm | Precision

Risk 1 0.65 IP20 850° CE CB EAC



Code example:

0 . HM12 A . HW 12

Accessories: p.546
 Channel/Canale: p.556-561
 Finishes: p.380
 Photometric data:
 www.reggiani.net

9 W POWERLED Lumen delivered up to 770 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	HM12 Precision	A 8° Very narrow	HW	2700	>90	725	<3	12 <input type="checkbox"/>
T Phase-cut			HQ	3000	>90	730	<3	31 <input type="checkbox"/>
D DALI			WW	3000	>80	845	<3	
			NN	4000	>80	940	<3	

LED nominal lumen

9 W COB LED Lumen delivered up to 1115 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	GM12 Precision	B 12° Narrow	HC	3000	>98	960	<2	12 <input type="checkbox"/>
T Phase-cut		E 20° Medium	HW	2700	>90	1050	<2	31 <input type="checkbox"/>
D DALI		K - Without optics	HQ	3000	>90	1100	<2	
			WW	3000	>80	1300	<3	
			NN	4000	>80	1360	<3	

LED nominal lumen

12 W COB LED Lumen delivered up to 1455 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	GM13 Precision	B 12° Narrow	HC	3000	>98	1250	<2	12 <input type="checkbox"/>
T Phase-cut		E 20° Medium	HW	2700	>90	1370	<2	31 <input type="checkbox"/>
D DALI		K - Without optics	HQ	3000	>90	1420	<2	
			WW	3000	>80	1700	<3	
			NN	4000	>80	1775	<3	

LED nominal lumen

17 W COB LED Lumen delivered up to 1970 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	GM14 Precision	B 12° Narrow	HC	3000	>98	1700	<2	12 <input type="checkbox"/>
T Phase-cut		E 20° Medium	HW	2700	>90	1870	<2	31 <input type="checkbox"/>
D DALI		K - Without optics	HQ	3000	>90	1920	<2	
			WW	3000	>80	2320	<3	
			NN	4000	>80	2400	<3	


LED nominal lumen

12 W Warm Dimming COB LED Lumen delivered up to 690 lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
D DALI	GM13 Precision	B 27° Medium	DT	1700-3000	>95	100-1000	<4	12 <input type="checkbox"/>
								31 <input type="checkbox"/>

LED nominal lumen

Ø 60 mm | Performance



Code example:

X . GM22 B . HC 12

Accessories: p.547
 Channel/Canale: p.556-561
 Finishes: p.380
 Photometric data:
 www.reggiani.net

9W COBLED Lumen delivered up to 1200lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	GM22 Performance	B 13° Narrow	HC	3000	>98	960	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	1050	<2	31
D DALI		H 40° Wide	HQ	3000	>90	1100	<2	
		K - Without optics	WW	3000	>80	1300	<3	
			NN	4000	>80	1360	<3	

LED nominal lumen

12W COBLED Lumen delivered up to 1560lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	GM23 Performance	B 13° Narrow	HC	3000	>98	1250	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	1370	<2	31
D DALI		H 40° Wide	HQ	3000	>90	1420	<2	
		K - Without optics	WW	3000	>80	1700	<3	
			NN	4000	>80	1775	<3	

LED nominal lumen


17W COBLED Lumen delivered up to 2110lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	GM24 Performance	B 13° Narrow	HC	3000	>98	1700	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	1870	<2	31
D DALI		H 30° Wide	HQ	3000	>90	1920	<2	
		K - Without optics	WW	3000	>80	2320	<3	
			NN	4000	>80	2400	<3	

LED nominal lumen


Ø 60 mm | Precision | Accessories

Interchangeable IOS optics/ Ottiche intercambiabili IOS



Description
Precision - Narrow beam/
Precision - Fascio stretto
(12°-9W, 12W, 17W)

Code
0.35125.0000



Description
Precision - Medium beam/
Precision - Fascio medio
(20°-9W, 12W, 17W)

Code
0.35126.0000

Not for codes/Non per codici: **HM12A / GM13B.DT**

Not for codes/Non per codici: **HM12A / GM13B.DT**

Optics accessories/ Accessori ottiche



Description
Glass filter 1 mm/
Filtro vetro 1 mm

Code
0.26402.00


Finishes

4A	Red
5A	Green
6A	Blue
7A	Pink
8A	Yellow
9A	Orange



Description
Dense texture honeycomb louvre/
Griglia alveolare a maglia fitta

Code
0.26442.0000



Description
Wide texture honeycomb louvre/
Griglia alveolare a maglia larga

Code
0.26450.0000



Description
Colored Gel Slides (2 pieces)/
Vetrini per gel colorato (2 pezzi/)

Code
0.26410.0000



Description
Elliptical beam lens/
Lente per fascio ellittico

Code
0.26457.0000



Description
Selective filter 3000K - 2700K/
Filtro selettivo 3000K - 2700K

Code
0.26559.0000




Description
Opal lens/
Lente opale

Code
0.26462.0000




Description
Selective filter 2700K - 2500K/
Filtro selettivo 2700K - 2500K

Code
0.26418.0000



Description
Spread lens/
Lente diffondente

Code
0.26470.0000




Description
Selective filter 2700K - 2200K/
Filtro selettivo 2700K - 2200K

Code
0.26426.0000



Description
Cross blade louvre/
Griglia a croce

Code
0.26477.0000



Description
Selective filter 2700K - 2000K/
Filtro selettivo 2700K - 2000K

Code
0.26434.0000



Description
Barn doors/
Alette rompiflusso

Code
0.26485.0000



Description
Selective filter 3000K - 3600K/
Filtro selettivo 3000K - 3600K

Code
0.26567.0000



Description
Cone 45° wall washer/
Cono 45° wall washer

Code
0.26489.00

Finishes


12	White
31	Black



Description
Selective filter 3000K - 4000K/
Filtro selettivo 3000K - 4000K

Code
0.26575.0000

Framing accessory/ Sagomatore




Description
Framing accessory, light shape - square/
Sagomatore, forma di luce - quadrata

Code
0.26651.00

Finishes

21	Black
----	-------



Description
Framing accessory, light shape - round/
Sagomatore, forma di luce - tonda







Code
0.26650.00

Finishes
























21	Black
----	-------

Ø 60 mm | Performance | Accessories







Interchangeable IOS optics/ Ottiche intercambiabili IOS

		Description Performance - Narrow beam/ Performance - Fascio stretto (13°-9W, 12W, 17W)	Code 0.35145.0000			Description Performance - Wide beam/ Performance - Fascio largo (40°-9W, 12W, 17W)	Code 0.35147.0000
		Description Performance - Medium beam/ Performance - Fascio medio (24°-9W, 12W, 17W)	Code 0.35146.0000				

Optics accessories/ Accessori ottiche


	Description Glass filter 1 mm/ Filtro vetro 1 mm	Code 0.26403.00	Finishes 4A  5A  6A  7A  8A  9A 		Description Selective filter 3000K - 4000K/ Filtro selettivo 3000K - 4000K	Code 0.26576.0000	
	Description Colored Gel Slides (2 pieces)/ Vetri per gel colorato (2 pezzi)	Code 0.26411.0000			Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta	Code 0.26443.0000	
	Description Selective filter 3000K - 2700K/ Filtro selettivo 3000K - 2700K	Code 0.26560.0000			Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga	Code 0.26451.0000	
	Description Selective filter 2700K - 2500K/ Filtro selettivo 2700K - 2500K	Code 0.26419.0000			Description Elliptical beam lens/ Lente per fascio ellittico	Code 0.26493.0000	
	Description Selective filter 2700K - 2200K/ Filtro selettivo 2700K - 2200K	Code 0.26427.0000			Description Opal lens/ Lente opale	Code 0.26463.0000	
	Description Selective filter 2700K - 2000K/ Filtro selettivo 2700K - 2000K	Code 0.26435.0000			Description Spread lens/ Lente diffondente	Code 0.26471.0000	
	Description Selective filter 3000K - 3600K/ Filtro selettivo 3000K - 3600K	Code 0.26568.0000			Description Cross blade louvre/ Griglia a croce	Code 0.26481.0000	
					Description Cone 45° wall washer/ Cono 45° wall washer	Code 0.26497.00	Finishes 12  31 

Framing accessory/ Sagomatore

		Description Framing accessory, light shape - square/ Sagomatore, forma di luce - quadrata	Code 0.26651.00	Finishes 21 
		Description Framing accessory, light shape - round/ Sagomatore, forma di luce - tonda	Code 0.26650.00	Finishes 21 

Ø 75 mm | Precision

Risk 1 0.95 IP20 850° CE CB EAC



Code example:

0 . LM13 B . HC 12

Accessories: p.550
 Channel/Canale: p.556-561
 Finishes: p.380
 Photometric data:
 www.reggiani.net

12 W COB LED Lumen delivered up to 1575 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LM13 Precision	B 12° Narrow	HC	3000	>98	1323	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	1491	<2	31
D DALI		K - Without optics	HQ	3000	>90	1533	<2	
			WW	3000	>80	1859	<3	
			NN	4000	>80	1920	<3	

LED nominal lumen

17 W COB LED Lumen delivered up to 1465 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	MM14 Precision	A 7° Very narrow	HC	3000	>98	1700	<2	12
T Phase-cut			HW	2700	>90	1870	<2	31
D DALI			HQ	3000	>90	1920	<2	
			WW	3000	>80	2320	<3	
			NN	4000	>80	2400	<3	

LED nominal lumen

17 W COB LED Lumen delivered up to 2190 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LM14 Precision	B 12° Narrow	HC	3000	>98	1834	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	2067	<2	31
D DALI		K - Without optics	HQ	3000	>90	2122	<2	
			WW	3000	>80	2582	<3	
			NN	4000	>80	2665	<3	

LED nominal lumen

24 W COB LED Lumen delivered up to 2955 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LM16 Precision	B 12° Narrow	HC	3000	>98	2476	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	2792	<2	31
D DALI		K - Without optics	HQ	3000	>90	2860	<2	
			WW	3000	>80	3487	<3	
			NN	4000	>80	3602	<3	

LED nominal lumen

28 W COB LED Lumen delivered up to 3325 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LM17 Precision	B 12° Narrow	HC	3000	>98	2777	<2	12
D DALI		E 24° Medium	HW	2700	>90	3137	<2	31
		K - Without optics	HQ	3000	>90	3207	<2	
			WW	3000	>80	3898	<3	
			NN	4000	>80	4054	<3	


LED nominal lumen

25 W Warm Dimming COB LED Lumen delivered up to 1100 lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
D DALI	LM16 Precision	B 25° Medium	DT	1700-3000	>95	100-2500	<4	12
								31

LED nominal lumen

Ø 75 mm | Performance



Code example:

0 . **LM23** **B** . **HC** **12**

Accessories: p.551
 Channel/Canale: p.556-561
 Finishes: p.380
 Photometric data:
 www.reggiani.net

12 W COBLED Lumen delivered up to 1800 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LM23 Performance	B 12° Narrow	HC	3000	>98	1323	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	1491	<2	31
D DALI		H 48° Wide	HQ	3000	>90	1533	<2	
		K - Without optics	WW	3000	>80	1859	<3	
			NN	4000	>80	1920	<3	

LED nominal lumen

17 W COBLED Lumen delivered up to 2480 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LM24 Performance	B 12° Narrow	HC	3000	>98	1834	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	2067	<2	31
D DALI		H 48° Wide	HQ	3000	>90	2122	<2	
		K - Without optics	WW	3000	>80	2582	<3	
			NN	4000	>80	2665	<3	

LED nominal lumen

24 W COBLED Lumen delivered up to 3550 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LM26 Performance	B 12° Narrow	HC	3000	>98	2476	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	2792	<2	31
D DALI		H 48° Wide	HQ	3000	>90	2860	<2	
		K - Without optics	WW	3000	>80	3487	<3	
			NN	4000	>80	3602	<3	

LED nominal lumen

28 W COBLED Lumen delivered up to 3770 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LM27 Performance	B 12° Narrow	HC	3000	>98	2777	<2	12
D DALI		E 24° Medium	HW	2700	>90	3137	<2	31
		H 48° Wide	HQ	3000	>90	3207	<2	
		K - Without optics	WW	3000	>80	3898	<3	
			NN	4000	>80	4054	<3	

LED nominal lumen


Ø 75 mm | Precision | Accessories

Interchangeable IOS optics/ Ottiche intercambiabili IOS



Description
Precision - Narrow beam/
Precision - Fascio stretto
(12°-12W, 17W, 24W, 28W)

Code
0.35130.0000



Description
Precision - Medium beam/
Precision - Fascio medio
(24°-12W, 17W, 24W, 28W)

Code
0.35131.0000

Not for codes/Non per codici: **LM16B.DT / MM14A**

Not for codes/Non per codici: **LM16B.DT / MM14A**

Optics accessories/ Accessori ottiche



Description
Glass filter 1 mm/
Filtro vetro 1 mm

Code
0.26404.00


Finishes

4A	Red
5A	Green
6A	Blue
7A	Pink
8A	Yellow
9A	Orange



Description
Dense texture honeycomb louvre/
Griglia alveolare a maglia fitta

Code
0.26444.0000



Description
Wide texture honeycomb louvre/
Griglia alveolare a maglia larga

Code
0.26452.0000



Description
Colored Gel Slides (2 pieces)/
Vetринi per gel colorato (2 pezzi/)

Code
0.26412.0000



Description
Elliptical beam lens/
Lente per fascio ellittico

Code
0.26458.0000



Description
Selective filter 3000K - 2700K /
Filtro selettivo 3000K - 2700K

Code
0.26561.0000




Description
Opal lens/
Lente opale

Code
0.26464.0000




Description
Selective filter 2700K - 2500K /
Filtro selettivo 2700K - 2500K

Code
0.26420.0000



Description
Spread lens/
Lente diffondente

Code
0.26472.0000




Description
Selective filter 2700K - 2200K /
Filtro selettivo 2700K - 2200K

Code
0.26428.0000




Description
Cross blade louvre/
Griglia a croce

Code
0.26478.0000



Description
Selective filter 2700K - 2000K /
Filtro selettivo 2700K - 2000K

Code
0.26436.0000




Description
Barn doors/
Alette rompiflusso

Code
0.26486.0000



Description
Selective filter 3000K - 3600K /
Filtro selettivo 3000K - 3600K

Code
0.26569.0000



Description
Cone 45° wall washer/
Cono 45° wall washer

Code
0.26490.00

Finishes

12	White
31	Black









Description
Selective filter 3000K - 4000K /
Filtro selettivo 3000K - 4000K
























Code
0.26577.0000

Ø 75 mm | Performance | Accessories

Interchangeable IOS optics/
Ottiche intercambiabili IOS


		Description Performance - Narrow beam/ Performance - Fascio stretto (12°-12W, 17W, 24W, 28W)	Code <u>0.35150.0000</u>			Description Performance - Wide beam/ Performance - Fascio largo (48°-12W, 17W, 24W, 28W)	Code <u>0.35152.0000</u>
		Description Performance - Medium beam/ Performance - Fascio medio (24°-12W, 17W, 24W, 28W)	Code <u>0.35151.0000</u>				

Optics accessories/
Accessori ottiche

	Description Glass filter 1 mm/ Filtro vetro 1 mm	Code <u>0.26405.00</u>	Finishes 4A  5A  6A  7A  8A  9A 		Description Selective filter 3000K - 4000K/ Filtro selettivo 3000K - 4000K	Code <u>0.26578.0000</u>	
	Description Colored Gel Slides (2 pieces)/ Vetrini per gel colorato (2 pezzi)	Code <u>0.26413.0000</u>			Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta	Code <u>0.26445.0000</u>	
	Description Selective filter 3000K - 2700K/ Filtro selettivo 3000K - 2700K	Code <u>0.26562.0000</u>			Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga	Code <u>0.26453.0000</u>	
	Description Selective filter 2700K - 2500K/ Filtro selettivo 2700K - 2500K	Code <u>0.26421.0000</u>			Description Elliptical beam lens/ Lente per fascio ellittico	Code <u>0.26494.0000</u>	
	Description Selective filter 2700K - 2200K/ Filtro selettivo 2700K - 2200K	Code <u>0.26429.0000</u>			Description Opal lens/ Lente opale	Code <u>0.26465.0000</u>	
	Description Selective filter 2700K - 2000K/ Filtro selettivo 2700K - 2000K	Code <u>0.26437.0000</u>			Description Spread lens/ Lente diffondente	Code <u>0.26473.0000</u>	
	Description Selective filter 3000K - 3600K/ Filtro selettivo 3000K - 3600K	Code <u>0.26570.0000</u>			Description Cross blade louvre/ Griglia a croce	Code <u>0.26482.0000</u>	
					Description Cone 45° wall washer/ Cono 45° wall washer	Code <u>0.26498.00</u>	Finishes 12  31 

Ø 95 mm | Precision

Risk 1 1.30 IP20 850° CE CB EAC



Code example:

0 . NM13 B . HC 12

Accessories: p.554
 Channel/Canale: p.556-561
 Finishes: p.380
 Photometric data:
 www.reggiani.net

12 W COB LED		Lumen delivered up to 1690lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	NM13 Precision	B 12° Narrow	HC	3000	>98	1323	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	1491	<2	31
D DALI		K - Without optics	HQ	3000	>90	1533	<2	
			WW	3000	>80	1859	<3	
			NN	4000	>80	1920	<3	
LED nominal lumen								

17 W COB LED		Lumen delivered up to 1510lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	PM14 Precision	A 7° Very narrow	HC	3000	>98	1700	<2	12
T Phase-cut			HW	2700	>90	1870	<2	31
D DALI			HQ	3000	>90	1920	<2	
			WW	3000	>80	2320	<3	
			NN	4000	>80	2400	<3	
LED nominal lumen								

17 W COB LED		Lumen delivered up to 2350lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	NM14 Precision	B 12° Narrow	HC	3000	>98	1834	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	2067	<2	31
D DALI		K - Without optics	HQ	3000	>90	2122	<2	
			WW	3000	>80	2582	<3	
			NN	4000	>80	2665	<3	
LED nominal lumen								


24 W COB LED		Lumen delivered up to 3170lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	NM16 Precision	B 12° Narrow	HC	3000	>98	2476	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	2792	<2	31
D DALI		K - Without optics	HQ	3000	>90	2860	<2	
			WW	3000	>80	3487	<3	
			NN	4000	>80	3602	<3	
LED nominal lumen								

33 W COB LED		Lumen delivered up to 4080lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	NM18 Precision	B 12° Narrow	HC	3000	>98	3142	<2	12
D DALI		E 24° Medium	HW	2700	>90	3635	<2	31
		K - Without optics	HQ	3000	>90	3735	<2	
			WW	3000	>80	4510	<3	
			NN	4000	>80	4695	<3	
LED nominal lumen								

37 W COB LED		Lumen delivered up to 4480lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	NM19 Precision	B 12° Narrow	HC	3000	>98	3473	<2	12
D DALI		E 24° Medium	HW	2700	>90	3940	<2	31
		K - Without optics	HQ	3000	>90	4000	<2	
			WW	3000	>80	4880	<3	
			NN	4000	>80	5090	<3	
LED nominal lumen								

33 W Warm Dimming COB LED		Lumen delivered up to 1520lm / Lumen maintenance: L70 B50=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
D DALI	NM18 Precision	B 25° Medium	DT	1700-3000	>95	100-3100	<4	12
LED nominal lumen								
31								

Ø 95 mm | Performance



Code example:

0 . **NM23** **B** . **HW** **12**

Accessories: p.555
 Channel/Canale: p.556-561
 Finishes: p.380
 Photometric data:
 www.reggiani.net

12 W COBLED Lumen delivered up to 1800 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	NM23 Performance	B 10° Narrow	HC	3000	>98	1323	<2	12
T Phase-cut		E 20° Medium	HW	2700	>90	1491	<2	31
D DALI		H 31° Wide	HQ	3000	>90	1533	<2	
		K - Without optics	WW	3000	>80	1859	<3	
			NN	4000	>80	1920	<3	

LED nominal lumen

17 W COBLED Lumen delivered up to 2500 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	NM24 Performance	B 10° Narrow	HC	3000	>98	1834	<2	12
T Phase-cut		E 20° Medium	HW	2700	>90	2067	<2	31
D DALI		H 31° Wide	HQ	3000	>90	2122	<2	
		K - Without optics	WW	3000	>80	2582	<3	
			NN	4000	>80	2665	<3	

LED nominal lumen

24 W COBLED Lumen delivered up to 3300 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	NM26 Performance	B 10° Narrow	HC	3000	>98	2476	<2	12
T Phase-cut		E 20° Medium	HW	2700	>90	2792	<2	31
D DALI		H 31° Wide	HQ	3000	>90	2860	<2	
		K - Without optics	WW	3000	>80	3487	<3	
			NN	4000	>80	3602	<3	

LED nominal lumen

33 W COBLED Lumen delivered up to 4130 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	NM28 Performance	B 10° Narrow	HC	3000	>98	3142	<2	12
D DALI		E 20° Medium	HW	2700	>90	3635	<2	31
		H 31° Wide	HQ	3000	>90	3735	<2	
		K - Without optics	WW	3000	>80	4510	<3	
			NN	4000	>80	4695	<3	

LED nominal lumen

37 W COBLED Lumen delivered up to 4530 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	NM29 Performance	B 10° Narrow	HC	3000	>98	3473	<2	12
D DALI		E 20° Medium	HW	2700	>90	3940	<2	31
		H 31° Wide	HQ	3000	>90	4000	<2	
		K - Without optics	WW	3000	>80	4880	<3	
			NN	4000	>80	5090	<3	

LED nominal lumen


Ø 95 mm | Precision | Accessories

Interchangeable IOS optics/ Ottiche intercambiabili IOS



Description
Precision - Narrow beam /
Precision - Fascio stretto
(12°-12W, 17W, 24W, 33W, 37W)

Code
0.35135.0000



Description
Precision - Medium beam /
Precision - Fascio medio
(24°-12W, 17W, 24W, 33W, 37W)

Code
0.35136.0000

Not for codes/Non per codici: **PM14A / NM18B.DT**

Not for codes/Non per codici: **PM14A / NM18B.DT**

Optics accessories/ Accessori ottiche



Description
Glass filter 1 mm /
Filtro vetro 1 mm

Code
0.26406.00


Finishes

4A	Red
5A	Green
6A	Blue
7A	Pink
8A	Yellow
9A	Orange



Description
Dense texture honeycomb louvre /
Griglia alveolare a maglia fitta

Code
0.26446.0000



Description
Wide texture honeycomb louvre /
Griglia alveolare a maglia larga

Code
0.26454.0000



Description
Colored Gel Slides (2 pieces) /
Vetrini per gel colorato (2 pezzi)

Code
0.26414.0000



Description
Elliptical beam lens /
Lente per fascio ellittico

Code
0.26459.0000



Description
Selective filter 3000K - 2700K /
Filtro selettivo 3000K - 2700K

Code
0.26563.0000




Description
Opal lens /
Lente opale

Code
0.26466.0000




Description
Selective filter 2700K - 2500K /
Filtro selettivo 2700K - 2500K

Code
0.26422.0000



Description
Spread lens /
Lente diffondente

Code
0.26474.0000



Description
Selective filter 2700K - 2200K /
Filtro selettivo 2700K - 2200K

Code
0.26430.0000




Description
Cross blade louvre /
Griglia a croce

Code
0.26479.0000



Description
Selective filter 2700K - 2000K /
Filtro selettivo 2700K - 2000K

Code
0.26438.0000




Description
Barn doors /
Alette rompiflusso

Code
0.26487.0000



Description
Selective filter 3000K - 3600K /
Filtro selettivo 3000K - 3600K

Code
0.26571.0000



Description
Cone 45° wall washer /
Cono 45° wall washer

Code
0.26491.00

Finishes

12	White
31	Black









Description
Selective filter 3000K - 4000K /
Filtro selettivo 3000K - 4000K
























Code
0.26579.0000

Ø 95 mm | Performance | Accessories

Interchangeable IOS optics/
Ottiche intercambiabili IOS

		Description Performance - Narrow beam/ Performance - Fascio stretto (10°-12W, 17W, 24W, 33W, 37W))	Code <u>0.35155.0000</u>			Description Performance - Wide beam/ Performance - Fascio largo (31°-12W, 17W, 24W, 33W, 37W))	Code <u>0.35157.0000</u>
		Description Performance - Medium beam/ Performance - Fascio medio (20°-12W, 17W, 24W, 33W, 37W))	Code <u>0.35156.0000</u>				

Optics accessories/
Accessori ottiche

	Description Glass filter 1 mm/ Filtro vetro 1 mm	Code <u>0.26407.00</u>	Finishes 4A  5A  6A  7A  8A  9A 		Description Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K	Code <u>0.26580.0000</u>	
	Description Colored Gel Slides (2 pieces) / Vetri per gel colorato (2 pezzi)	Code <u>0.26415.0000</u>			Description Dense texture honeycomb louvre / Griglia alveolare a maglia fitta	Code <u>0.26447.0000</u>	
	Description Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K	Code <u>0.26564.0000</u>			Description Wide texture honeycomb louvre / Griglia alveolare a maglia larga	Code <u>0.26455.0000</u>	
	Description Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K	Code <u>0.26423.0000</u>			Description Elliptical beam lens / Lente per fascio ellittico	Code <u>0.26495.0000</u>	
	Description Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K	Code <u>0.26431.0000</u>			Description Opal lens / Lente opale	Code <u>0.26467.0000</u>	
	Description Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K	Code <u>0.26439.0000</u>			Description Spread lens / Lente diffondente	Code <u>0.26475.0000</u>	
	Description Selective filter 3000K - 3600K / Filtro selettivo 3000K - 3600K	Code <u>0.26572.0000</u>			Description Cross blade louvre / Griglia a croce	Code <u>0.26483.0000</u>	
					Description Cone 45° wall washer / Cono 45° wall washer	Code <u>0.26499.00</u>	Finishes 12  31 

Surface | Accessories

Components for installation of projectors on surface/
Componenti per l'installazione di proiettori per canalina a superficie

		Description Surface-mounted rail + connecting piece length: 2400 mm/ Canalina da superficie + congiunzione lunghezza: 2.400 mm	Code <u>0.25401.00</u>	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description Mounting rail cover including spring clips length: 2.400 mm/ Copertura canalina comprensiva di molle. lunghezza: 2.400 mm	Code <u>0.25432.00</u>	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description 2300 mm surface-mounted rail module add-on 0.25402.00 for strip configuration for up to 10 YORI luminaires on total section, including mechanical coupler/ Canalina a superficie L. 2.300 addizionale a modulo 0.25401.00 per fila continua con massimo di 10 YORI su tratta totale, comprensiva di giunzione meccanica	Code <u>0.25801.00</u>	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description Mounting rail cover including spring clips length: 2300 mm/ Copertura canalina comprensiva di molle. lunghezza: 2.300 mm	Code <u>0.25874.00</u>	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description Live end cap (dead end) module composed of: connector, 41 mm pronged base cap, fill-in space cover, 81 mm mounting rail cap/ Modulo di testata di alimentazione composto da connettore; tappo da 41 mm, base tappo da 41 mm con forchetta, copertura fuga, tappo canalina da 81 mm	Code <u>0.25850.00</u>	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description Terminal end cap (dead end) module composed of: 41 mm cap, 41 mm pronged base cap, fill-in space cover, 20 mm mounting rail cap/ Modulo di testata terminale composto da tappo da 41 mm, base tappo da 41 mm con forchetta, copertura fuga, tappo canalina da 20 mm	Code <u>0.25851.00</u>	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description Centre feed module composed of: central body, mechanical coupler and 142 mm cover/ Modulo di alimentazione centrale composto da corpo centrale, congiunzione meccanica e copertura da 142 mm	Code <u>0.25852.00</u>	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description Mounting rail retainer device for surface installation/ Modulo per fissaggio della canalina a superficie	Code <u>0.25410.00</u>	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description Connector with plug and socket for electric cable with maximum section of 1.5 mm/ Connettore con spina e presa per cavo elettrico con sezione massima di 1,5 mm	Code <u>0.25417.00</u>	Finishes 00 <input type="checkbox"/>
		Description "Elbow" coupler for surfacemounted rail/ Giunto ad "L" per canalina a superficie	Code <u>0.25853.00</u>	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description "T" coupler for surface-mounted rail/ Giunto ad "T" per canalina a superficie	Code <u>0.25854.00</u>	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description "X" coupler for surface-mounted rail/ giunto ad "X" per canalina a superficie	Code <u>0.25855.00</u>	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description Concealed mounting rail bracket/ Supporto canalina scomparsa	Code <u>0.25431.00</u>	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>

Pendant | Accessories

Components for installation of projectors on suspended-mounted rail/ Componenti per l'installazione di proiettori per canalina a sospensione

		Description Surface-mounted rail + connecting piece length: 2400 mm/ Canalina da superficie + congiunzione lunghezza: 2.400 mm	Code 0.25401.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description Mounting rail cover including spring clips length: 2.400 mm/ Copertura canalina comprensiva di molle. lunghezza: 2.400 mm	Code 0.25432.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description 2300 mm surface-mounted rail module add-on 0.25402.00 for strip configuration for up to 10 YORI luminaires on total section, including mechanical coupler/ Canalina a superficie L.2.300 addizionale a modulo 0.25401.00 per fila continua con massimo di 10 YORI su tratta totale, comprensiva di giunzioni meccanica	Code 0.25801.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description Mounting rail cover including spring clips length: 2300 mm/ Copertura canalina comprensiva di molle. lunghezza: 2.300 mm	Code 0.25874.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description Live end cap (dead end) module composed of: connector, 41 mm pronged base cap, fill-in space cover, 81 mm mounting rail cap/ Modulo di testata di alimentazione composto da connettore; tappo da 41 mm, base tappo da 41 mm con forchetta, copertura fuga, tappo canalina da 81 mm	Code 0.25850.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description Terminal end cap (dead end) module composed of: 41 mm cap, 41 mm pronged base cap, fill-in space cover, 20 mm mounting rail cap/ Modulo di testata terminale composto da tappo da 41 mm, base tappo da 41 mm con forchetta, copertura fuga, tappo canalina da 20 mm	Code 0.25851.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description Centre feed module composed of: central body, mechanical coupler and 142 mm cover/ Modulo di alimentazione centrale composto da corpo centrale, congiunzione meccanica e copertura da 142 mm	Code 0.25857.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description Mounting rail retainer device for surface installation/ Modulo per fissaggio della canalina a superficie	Code 0.25856.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description Connector with plug and socket for electric cable with maximum section of 1.5 mm/ Connettore con spina e presa per cavo elettrico con sezione massima di 1,5 mm	Code 0.25417.00	Finishes 00 <input type="checkbox"/>
		Description "Elbow" coupler for surface-mounted rail/ Giunto ad "L" per canalina a superficie	Code 0.25858.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description "T" coupler for surface-mounted rail/ Giunto ad "T" per canalina a superficie	Code 0.25859.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description "X" coupler for surface-mounted rail/ giunto ad "X" per canalina a superficie	Code 0.25860.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>


Pendant | Accessories

Components for installation of projectors on suspended mounting rail/ Componenti per l'installazione di proiettori per canalina a sospensione




Description
Point clamp suspension/
Modulo per fissaggio della canalina a sospensione

Code	Finishes
0.02283.00	12
	31



Description
Rod suspension set. M6 F max 20kg. Length: 1000 mm/
Set di sospensione. M6 ad asta F max 20kg. Lunghezza: 1.000 mm

Code	Finishes
0.02223.00	12
	31



Description
Conduit suspension set. F max 20kg. Length: 2000 mm, Ø16 mm/
Set di sospensione a tubo. F max 20kg. Lunghezza: 2.000 mm Ø16 mm


Code	Finishes
0.25862.00	12
	31

EN Possible configurations of mounting rails/ Possible strip configuration for up to 10 luminaires using the same power cable/

Possibile configurazione di canaline fino a 10 apparecchi utilizzando lo stesso cavo di alimentazione.

IT Esempio di configurazione di canaline








Possibile configurazione in file continua fino ad un massimo di 10 apparecchi utilizzando lo stesso cavo di alimentazione.

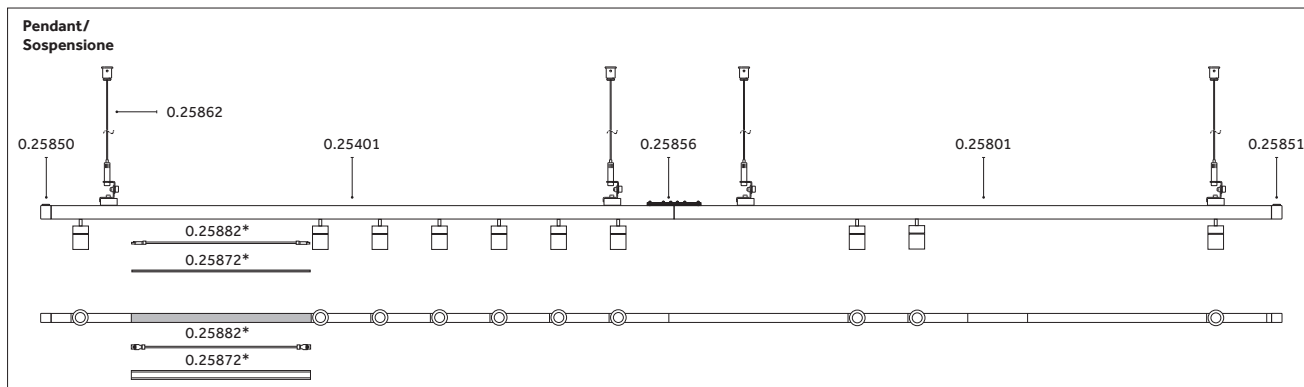

* For cable and covers: p.561/
* Per cavi e coperture: p.561

Recessed | Accessories

Components for installation of projectors on trimless mounting rail/
Componenti per l'installazione di proiettori per canalina trimless


	Description Trimless mounting rail mounting rail + connecting piece length: 2.400 mm/ Canalina trimless + congiunzione lunghezza: 2.400 mm	Code 0.25402.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
	Description Mounting rail cover including spring clips length: 2.400 mm/ Copertura canalina comprensiva di molle. lunghezza: 2.400 mm	Code 0.25432.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
	Description 2300 mm surface-mounted rail module add-on 0.25402.00 for strip configuration for up to 10 YORI luminaires on total section, including mechanical coupler/ Canalina Trimless L. 2.300 addizionale a modulo 0.25402.00 per fila continua con massimo di 10 YORI su tratta totale, comprensiva di giunzione meccanica	Code 0.25811.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
	Description Mounting rail cover including spring clips length: 2300 mm/ Copertura canalina comprensiva di molle. lunghezza: 2.300 mm	Code 0.25874.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
	Description Live end cap (dead end) module composed of: connector, 46.5 mm pronged base cap, fill-in space cover, 129 mm long mounting rail cap/ Modulo di testata di alimentazione composto da connettore; base con tappo da 46,5 mm con forchetta, copertura fuga, tappo canalina da 129 mm	Code 0.25433.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
	Description Description for suspended installation/ Accessorio per pendinatura	Code 0.25430.00	
	Description Connector with plug and socket for electric cable with maximum section of 1.5 mm/ Connettore con spina e presa per cavo elettrico con sezione massima di 1,5 mm	Code 0.25417.00	Finishes 00 <input type="checkbox"/>

EN Possible configurations of mounting rails/

Possible strip configuration for up to 10 luminaires using the same power cable/













IT Esempio di configurazione di canaline


Possibile configurazione in fila continua fino ad un massimo di 10 apparecchi utilizzando lo stesso cavo di alimentazione.

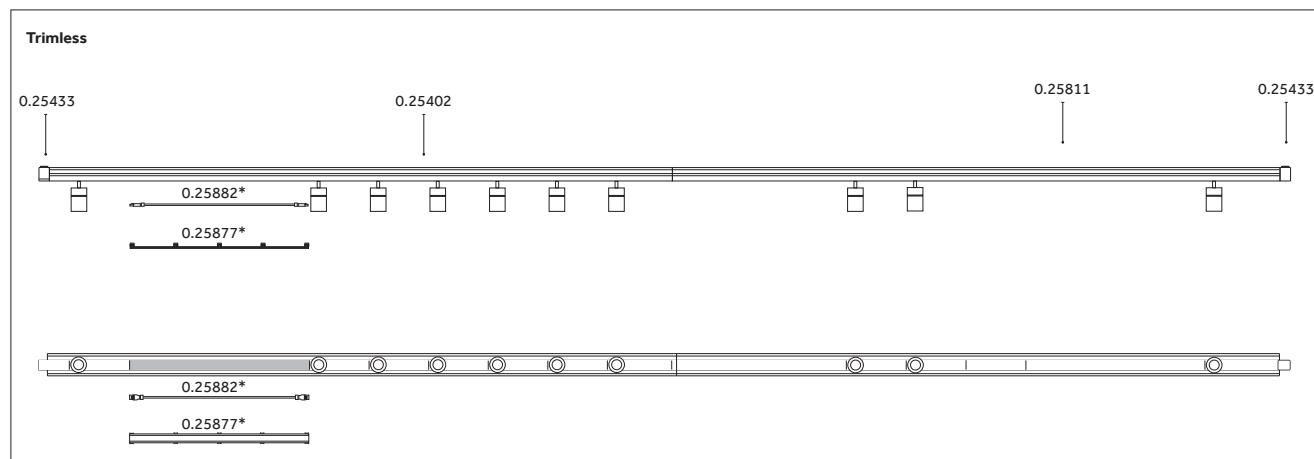* For cable and covers: p.561/
* Per cavi e coperture: p.561

Recessed | Accessories

Components for installation of projectors on trimless mounting rail/ Componenti per l'installazione di proiettori per canalina trimless

		Description Pre-wired power cable with plug and socket. Length: 230 mm/ Cavo di alimentazione pre-cablato completo di spina e presa. Lunghezza: 230 mm	Code 0.25880.00	Finishes 00 <input type="checkbox"/>
		Description Pre-wired power cable with plug and socket. Length: 460 mm/ Cavo di alimentazione pre-cablato completo di spina e presa. Lunghezza: 460 mm	Code 0.25881.00	Finishes 00 <input type="checkbox"/>
		Description Pre-wired power cable with plug and socket. Length: 690 mm/ Cavo di alimentazione pre-cablato completo di spina e presa. Lunghezza: 690 mm	Code 0.25882.00	Finishes 00 <input type="checkbox"/>
		Description Hard cover for surface-mounted and suspended mounting rail. Length: 230 mm/ Copertura rigida per canalina superficie e sospensione. Lunghezza: 230 mm	Code 0.25870.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description Hard cover for surface-mounted and suspended mounting rail. Length: 460 mm/ Copertura rigida per canalina superficie e sospensione. Lunghezza: 460 mm	Code 0.25871.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description Hard cover for surface-mounted and suspended mounting rail Length: 690 mm/ Copertura rigida per canalina superficie e sospensione. Lunghezza: 690 mm	Code 0.25872.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>

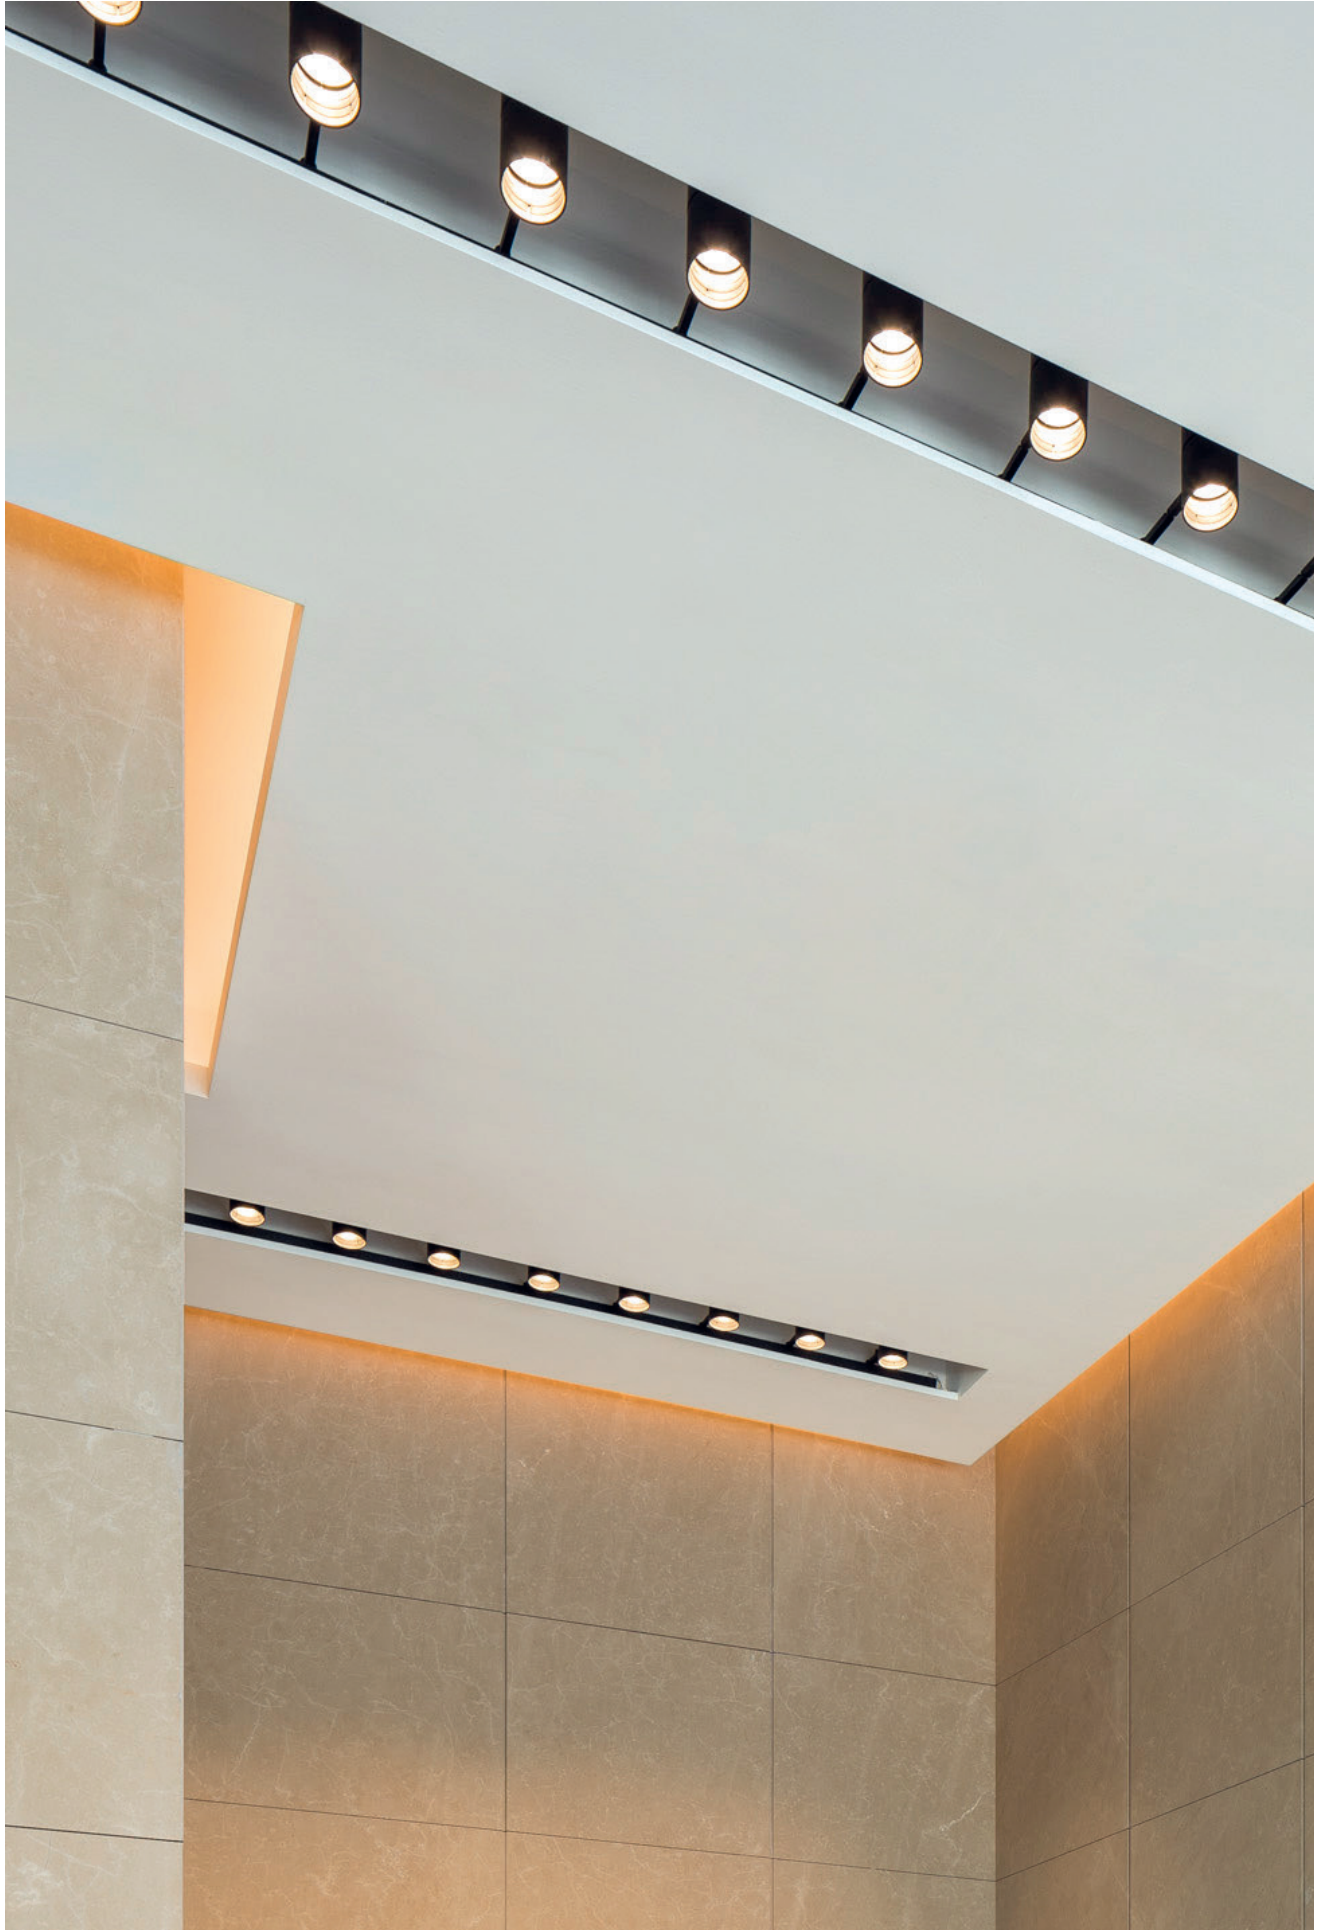

—


Yori Channel Arm

Yori Channel Arm


EN Yori Channel arm is a projector fitted with a special articulated arm for luminaire adjustment. Its features make it perfect for cove installations in confined spaces. The joint is so versatile that the projector can be adjusted to the perfect position even without protruding from the false ceiling.

IT Yori Channel arm è un proiettore dotato di uno speciale braccio snodabile articolato per il puntamento dell'apparecchio. Le sue caratteristiche lo rendono ideale per installazioni in gole di dimensioni ridotte. La grande flessibilità dello snodo permette di posizionare il prodotto nella maniera ottimale anche senza sporgere dal livello del controsoffitto.

EN Adjustability
IT Orientabilità

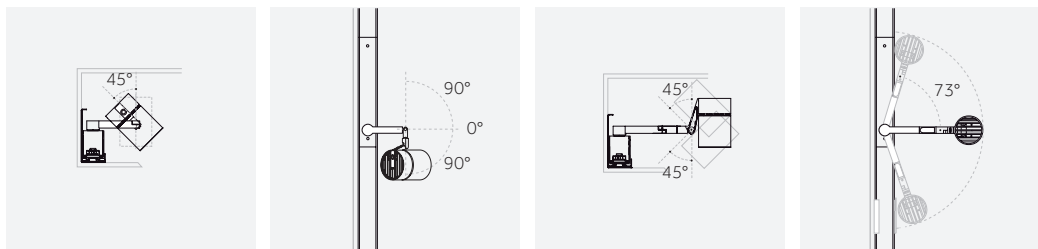


Yori Channel Arm Ø 60 mm

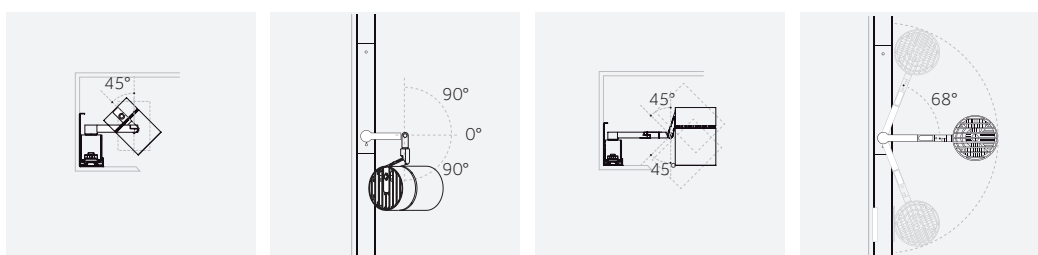

Yori Channel Arm Ø 95 mm



Ø 60 mm | Precision

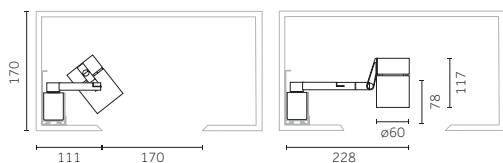

Code example:
0 . UM12 A . HC 12

Accessories: p.568
 Channel/Canale: p.574-575
 Finishes: p.380
 Photometric data:
 www.reggiani.net

Notes:
 *Adjustability/Orientabilità
 p.564


9W POWERLED		Lumen delivered up to 770lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	UM12 Precision	A 8° Verynarrow	HW	2700	>90	725	<3	12 <input type="checkbox"/>
T Phase-cut			HQ	3000	>90	730	<3	31 <input type="checkbox"/>
D DALI			WW	3000	>80	845	<3	
			NN	4000	>80	940	<3	
LED nominal lumen								

9W COBLED		Lumen delivered up to 1115lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	QM12 Precision	B 12° Narrow	HC	3000	>98	960	<2	12 <input type="checkbox"/>
T Phase-cut		E 20° Medium	HW	2700	>90	1050	<2	31 <input type="checkbox"/>
D DALI		K - Without optics	HQ	3000	>90	1100	<2	
			WW	3000	>80	1300	<3	
			NN	4000	>80	1360	<3	
LED nominal lumen								

12W COBLED		Lumen delivered up to 1455lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	QM13 Precision	B 12° Narrow	HC	3000	>98	1250	<2	12 <input type="checkbox"/>
T Phase-cut		E 20° Medium	HW	2700	>90	1370	<2	31 <input type="checkbox"/>
D DALI		K - Without optics	HQ	3000	>90	1420	<2	
			WW	3000	>80	1700	<3	
			NN	4000	>80	1775	<3	
LED nominal lumen								

17W COBLED		Lumen delivered up to 1970lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	QM14 Precision	B 12° Narrow	HC	3000	>98	1700	<2	12 <input type="checkbox"/>
T Phase-cut		E 20° Medium	HW	2700	>90	1870	<2	31 <input type="checkbox"/>
D DALI		K - Without optics	HQ	3000	>90	1920	<2	
			WW	3000	>80	2320	<3	
			NN	4000	>80	2400	<3	
LED nominal lumen								

Ø 60 mm | Performance

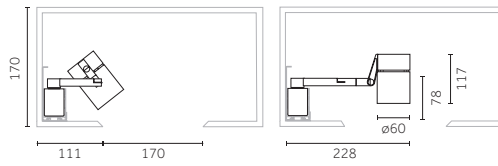

Code example:

0 . **QM22** **B** . **HC** **12**

Accessories: p.569
 Channel/Canale: p.574-575
 Finishes: p.380
 Photometric data:
 www.reggiani.net

Notes:
 *Adjustability/Orientabilità
 p.564

9 W COBLED Lumen delivered up to 1200 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	QM22 Performance	B 13° Narrow	HC	3000	>98	960	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	1050	<2	31
D DALI		H 40° Wide	HQ	3000	>90	1100	<2	
		K - Without optics	WW	3000	>80	1300	<3	
			NN	4000	>80	1360	<3	

LED nominal lumen

12 W COBLED Lumen delivered up to 1560 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	QM23 Performance	B 13° Narrow	HC	3000	>98	1250	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	1370	<2	31
D DALI		H 40° Wide	HQ	3000	>90	1420	<2	
		K - Without optics	WW	3000	>80	1700	<3	
			NN	4000	>80	1775	<3	

LED nominal lumen

17 W COBLED Lumen delivered up to 2110 lm / Lumen maintenance: L80 B10=50,000h


Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	QM24 Performance	B 13° Narrow	HC	3000	>98	1700	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	1870	<2	31
D DALI		H 40° Wide	HQ	3000	>90	1920	<2	
		K - Without optics	WW	3000	>80	2320	<3	
			NN	4000	>80	2400	<3	

LED nominal lumen




Ø 60 mm | Precision | Accessories

Interchangeable IOS optics/ Ottiche intercambiabili IOS



Description
Precision - Narrow beam/
Precision - Fascio stretto
(12°-9W, 12W, 17W)

Code
0.35125.0000



Description
Precision - Medium beam/
Precision - Fascio medio
(20°-9W, 12W, 17W)

Code
0.35126.0000

Not for codes/Non per codici: **UM12A**

Not for codes/Non per codici: **UM12A**

Optics accessories/ Accessori ottiche



Description
Glass filter 1 mm/
Filtro vetro 1 mm

Code
0.26402.00


Finishes

4A	Red
5A	Green
6A	Blue
7A	Pink
8A	Yellow
9A	Orange



Description
Dense texture honeycomb louvre/
Griglia alveolare a maglia fitta

Code
0.26442.0000



Description
Wide texture honeycomb louvre/
Griglia alveolare a maglia larga

Code
0.26450.0000



Description
Colored Gel Slides (2 pieces)/
Vetrini per gel colorato (2 pezzi/)

Code
0.26410.0000



Description
Elliptical beam lens/
Lente per fascio ellittico

Code
0.26457.0000



Description
Selective filter 3000K - 2700K/
Filtro selettivo 3000K - 2700K

Code
0.26559.0000




Description
Opal lens/
Lente opale

Code
0.26462.0000




Description
Selective filter 2700K - 2500K/
Filtro selettivo 2700K - 2500K

Code
0.26418.0000



Description
Spread lens/
Lente diffondente

Code
0.26470.0000




Description
Selective filter 2700K - 2200K/
Filtro selettivo 2700K - 2200K

Code
0.26426.0000



Description
Cross blade louvre/
Griglia a croce

Code
0.26477.0000



Description
Selective filter 2700K - 2000K/
Filtro selettivo 2700K - 2000K

Code
0.26434.0000



Description
Barn doors/
Alette rompiflusso

Code
0.26485.0000



Description
Selective filter 3000K - 3600K/
Filtro selettivo 3000K - 3600K

Code
0.26567.0000



Description
Cone 45° wall washer/
Cono 45° wall washer

Code
0.26489.00

Finishes


12	White
31	Black



Description
Selective filter 3000K - 4000K/
Filtro selettivo 3000K - 4000K

Code
0.26575.0000

Framing accessory/ Sagomatore




Description
Framing accessory, light shape - square/
Sagomatore, forma di luce - quadrata

Code
0.26651.00

Finishes

21	Black
----	-------



Description
Framing accessory, light shape - round/
Sagomatore, forma di luce - tonda







Code
0.26650.00

Finishes
























21	Black
----	-------

Ø 60 mm | Performance | Accessories







Interchangeable IOS optics/
Ottiche intercambiabili IOS

		Description Performance - Narrow beam/ Performance - Fascio stretto (13°-9W, 12W, 17W)	Code <u>0.35145.0000</u>			Description Performance - Wide beam/ Performance - Fascio largo (40°-9W, 12W, 17W)	Code <u>0.35147.0000</u>
		Description Performance - Medium beam/ Performance - Fascio medio (24°-9W, 12W, 17W)	Code <u>0.35146.0000</u>				

Optics accessories/
Accessori ottiche


	Description Glass filter 1 mm/ Filtro vetro 1 mm	Code <u>0.26403.00</u>	Finishes 4A  5A  6A  7A  8A  9A 		Description Selective filter 3000K - 4000K/ Filtro selettivo 3000K - 4000K	Code <u>0.26576.0000</u>	
	Description Colored Gel Slides (2 pieces)/ Vetri per gel colorato (2 pezzi)	Code <u>0.26411.0000</u>			Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta	Code <u>0.26443.0000</u>	
	Description Selective filter 3000K - 2700K/ Filtro selettivo 3000K - 2700K	Code <u>0.26560.0000</u>			Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga	Code <u>0.26451.0000</u>	
	Description Selective filter 2700K - 2500K/ Filtro selettivo 2700K - 2500K	Code <u>0.26419.0000</u>			Description Elliptical beam lens/ Lente per fascio ellittico	Code <u>0.26493.0000</u>	
	Description Selective filter 2700K - 2200K/ Filtro selettivo 2700K - 2200K	Code <u>0.26427.0000</u>			Description Opal lens/ Lente opale	Code <u>0.26463.0000</u>	
	Description Selective filter 2700K - 2000K/ Filtro selettivo 2700K - 2000K	Code <u>0.26435.0000</u>			Description Spread lens/ Lente diffondente	Code <u>0.26471.0000</u>	
	Description Selective filter 3000K - 3600K/ Filtro selettivo 3000K - 3600K	Code <u>0.26568.0000</u>			Description Cross blade louvre/ Griglia a croce	Code <u>0.26481.0000</u>	
					Description Cone 45° wall washer/ Cono 45° wall washer	Code <u>0.26497.00</u>	Finishes 12  31 

Framing accessory/
Sagomatore

		Description Framing accessory, light shape - square/ Sagomatore, forma di luce - quadrata	Code <u>0.26651.00</u>	Finishes 21 
		Description Framing accessory, light shape - round/ Sagomatore, forma di luce - tonda	Code <u>0.26650.00</u>	Finishes 21 

Ø 95 mm | Precision

Risk 1 1.40 IP20 850° CE CB EAC

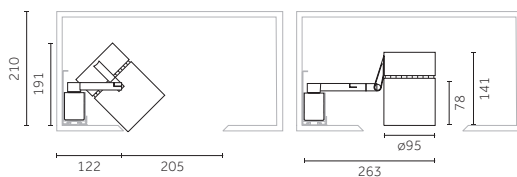

Code example:

0 . RM13 B . HC 12

Accessories: p.572
 Channel/Canale: p.574-575
 Finishes: p.380
 Photometric data:
 www.reggiani.net

Notes:

*Adjustability/Orientabilità
 p.564

12 W COB LED		Lumen delivered up to 1690lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	RM13 Precision	B 12° Narrow	HC	3000	>98	1323	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	1491	<2	31
D DALI		K - Without optics	HQ	3000	>90	1533	<2	
			WW	3000	>80	1859	<3	
			NN	4000	>80	1920	<3	
LED nominal lumen								

17 W COB LED		Lumen delivered up to 1510lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	KM14 Precision	A 7° Verynarrow	HC	3000	>98	1700	<2	12
T Phase-cut			HW	2700	>90	1870	<2	31
D DALI			HQ	3000	>90	1920	<2	
			WW	3000	>80	2320	<3	
			NN	4000	>80	2400	<3	
LED nominal lumen								


17 W COB LED		Lumen delivered up to 2350lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	RM14 Precision	B 12° Narrow	HC	3000	>98	1834	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	2067	<2	31
D DALI		K - Without optics	HQ	3000	>90	2122	<2	
			WW	3000	>80	2582	<3	
			NN	4000	>80	2665	<3	
LED nominal lumen								

24 W COB LED		Lumen delivered up to 3170lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	RM16 Precision	B 12° Narrow	HC	3000	>98	2476	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	2792	<2	31
D DALI		K - Without optics	HQ	3000	>90	2860	<2	
			WW	3000	>80	3487	<3	
			NN	4000	>80	3602	<3	
LED nominal lumen								

33 W COB LED		Lumen delivered up to 4080lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	RM18 Precision	B 12° Narrow	HC	3000	>98	3142	<2	12
D DALI		E 24° Medium	HW	2700	>90	3635	<2	31
		K - Without optics	HQ	3000	>90	3735	<2	
			WW	3000	>80	4510	<3	
			NN	4000	>80	4695	<3	
LED nominal lumen								

37 W COB LED		Lumen delivered up to 4480lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	RM19 Precision	B 12° Narrow	HC	3000	>98	3473	<2	12
D DALI		E 24° Medium	HW	2700	>90	3940	<2	31
		K - Without optics	HQ	3000	>90	4000	<2	
			WW	3000	>80	4880	<3	
			NN	4000	>80	5090	<3	
LED nominal lumen								

Ø 95 mm | Performance

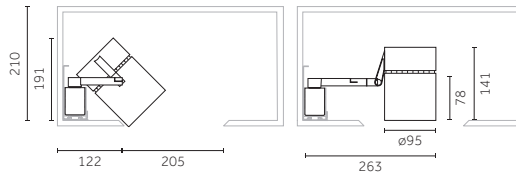

Code example:

O · **RM23** **B** · **HC** **12**

Accessories: p.573
 Channel/Canale: p.574-575
 Finishes: p.380
 Photometric data:
 www.reggiani.net

Notes:
 *Adjustability/Orientabilità
 p.564

12 W COBLED Lumen delivered up to 1800 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	RM23 Performance	B 10° Narrow	HC	3000	>98	1323	<2	12
T Phase-cut		E 20° Medium	HW	2700	>90	1491	<2	31
D DALI		H 31° Wide	HQ	3000	>90	1533	<2	
		K - Without optics	WW	3000	>80	1859	<3	
			NN	4000	>80	1920	<3	

LED nominal lumen

17 W COBLED Lumen delivered up to 2500 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	RM24 Performance	B 10° Narrow	HC	3000	>98	1700	<2	12
T Phase-cut		E 20° Medium	HW	2700	>90	1870	<2	31
D DALI		H 31° Wide	HQ	3000	>90	1920	<2	
		K - Without optics	WW	3000	>80	2320	<3	
			NN	4000	>80	2400	<3	

LED nominal lumen

24 W COBLED Lumen delivered up to 3300 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	RM26 Performance	B 10° Narrow	HC	3000	>98	2476	<2	12
T Phase-cut		E 20° Medium	HW	2700	>90	2792	<2	31
D DALI		H 31° Wide	HQ	3000	>90	2860	<2	
		K - Without optics	WW	3000	>80	3487	<3	
			NN	4000	>80	3602	<3	

LED nominal lumen

33 W COBLED Lumen delivered up to 4130 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	RM28 Performance	B 10° Narrow	HC	3000	>98	3142	<2	12
D DALI		E 20° Medium	HW	2700	>90	3635	<2	31
		H 31° Wide	HQ	3000	>90	3735	<2	
		K - Without optics	WW	3000	>80	4510	<3	
			NN	4000	>80	4695	<3	

LED nominal lumen


37 W COBLED Lumen delivered up to 4530 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	RM29 Performance	B 10° Narrow	HC	3000	>98	3473	<2	12
D DALI		E 20° Medium	HW	2700	>90	3940	<2	31
		H 31° Wide	HQ	3000	>90	4000	<2	
		K - Without optics	WW	3000	>80	4880	<3	
			NN	4000	>80	5090	<3	

LED nominal lumen


Ø 95 mm | Precision | Accessories

Interchangeable IOS optics/
Ottiche intercambiabili IOS



Description
Precision - Narrow beam /
Precision - Fascio stretto
(12°-12W, 17W, 24W, 33W, 37W)

Code
0.35135.0000



Description
Precision - Medium beam /
Precision - Fascio medio
(24°-12W, 17W, 24W, 33W, 37W)

Code
0.35136.0000

Not for codes/Non per codici: **KM14A**

Not for codes/Non per codici: **KM14A**

Optics accessories/
Accessori ottiche



Description
Glass filter 1 mm /
Filtro vetro 1 mm

Code
0.26406.00


Finishes

4A	Red
5A	Green
6A	Blue
7A	Pink
8A	Yellow
9A	Orange



Description
Dense texture honeycomb louvre /
Griglia alveolare a maglia fitta

Code
0.26446.0000



Description
Wide texture honeycomb louvre /
Griglia alveolare a maglia larga

Code
0.26454.0000



Description
Colored Gel Slides (2 pieces) /
Vetrini per gel colorato (2 pezzi)

Code
0.26414.0000



Description
Elliptical beam lens /
Lente per fascio ellittico

Code
0.26459.0000



Description
Selective filter 3000K - 2700K /
Filtro selettivo 3000K - 2700K

Code
0.26563.0000




Description
Opal lens /
Lente opale

Code
0.26466.0000




Description
Selective filter 2700K - 2500K /
Filtro selettivo 2700K - 2500K

Code
0.26422.0000



Description
Spread lens /
Lente diffondente

Code
0.26474.0000




Description
Selective filter 2700K - 2200K /
Filtro selettivo 2700K - 2200K

Code
0.26430.0000




Description
Cross blade louvre /
Griglia a croce

Code
0.26479.0000



Description
Selective filter 2700K - 2000K /
Filtro selettivo 2700K - 2000K

Code
0.26438.0000




Description
Barn doors /
Alette rompiflusso

Code
0.26487.0000



Description
Selective filter 3000K - 3600K /
Filtro selettivo 3000K - 3600K

Code
0.26571.0000



Description
Cone 45° wall washer /
Cono 45° wall washer

Code
0.26491.00

Finishes

12	White
31	Black









Description
Selective filter 3000K - 4000K /
Filtro selettivo 3000K - 4000K
























Code
0.26579.0000

Ø 95 mm | Performance | Accessories

Interchangeable IOS optics/
Ottiche intercambiabili IOS

		Description Performance - Narrow beam/ Performance - Fascio stretto (10°-12W, 17W, 24W, 33W, 37W))	Code <u>0.35155.0000</u>			Description Performance - Wide beam/ Performance - Fascio largo (31°-12W, 17W, 24W, 33W, 37W))	Code <u>0.35157.0000</u>
		Description Performance - Medium beam/ Performance - Fascio medio (20°-12W, 17W, 24W, 33W, 37W))	Code <u>0.35156.0000</u>				

Optics accessories/
Accessori ottiche

	Description Glass filter 1 mm/ Filtro vetro 1 mm	Code <u>0.26407.00</u>	Finishes 4A  5A  6A  7A  8A  9A 		Description Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K	Code <u>0.26580.0000</u>	
	Description Colored Gel Slides (2 pieces) / Vetrini per gel colorato (2 pezzi)	Code <u>0.26415.0000</u>			Description Dense texture honeycomb louvre / Griglia alveolare a maglia fitta	Code <u>0.26447.0000</u>	
	Description Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K	Code <u>0.26564.0000</u>			Description Wide texture honeycomb louvre / Griglia alveolare a maglia larga	Code <u>0.26455.0000</u>	
	Description Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K	Code <u>0.26423.0000</u>			Description Elliptical beam lens / Lente per fascio ellittico	Code <u>0.26495.0000</u>	
	Description Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K	Code <u>0.26431.0000</u>			Description Opal lens / Lente opale	Code <u>0.26467.0000</u>	
	Description Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K	Code <u>0.26439.0000</u>			Description Spread lens / Lente diffondente	Code <u>0.26475.0000</u>	
	Description Selective filter 3000K - 3600K / Filtro selettivo 3000K - 3600K	Code <u>0.26572.0000</u>			Description Cross blade louvre / Griglia a croce	Code <u>0.26483.0000</u>	
					Description Cone 45° wall washer / Cono 45° wall washer	Code <u>0.26499.00</u>	Finishes 12  31 


Surface | Accessories

Components for installation of projectors on surface/
Componenti per l'installazione di proiettori per canalina a superficie

		Description Surface-mounted rail + connecting piece length: 2400 mm/ Canalina da superficie + congiunzione lunghezza: 2.400 mm	Code 0.25401.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description Mounting rail cover including spring clips length: 2.400 mm/ Copertura canalina comprensiva di molle. lunghezza: 2.400 mm	Code 0.25432.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description 2300 mm surface-mounted rail module add-on 0.25401.00 for strip configuration for up to 10 YORI luminaires on total section, including mechanical coupler/ Canalina a superficie L.2.300 addizionale a modulo 0.25401.00 per fila continua con massimo di 10 YORI su tratta totale, comprensiva di giunzione meccanica	Code 0.25801.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description Mounting rail cover including spring clips length: 2300 mm/ Copertura canalina comprensiva di molle. lunghezza: 2.300 mm	Code 0.25874.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description Live end cap (dead end) module composed of: connector, 41 mm pronged base cap, fill-in space cover, 81 mm mounting rail cap/ Modulo di testata di alimentazione composto da connettore; tappo da 41 mm, base tappo da 41 mm con forchetta, copertura fuga, tappo canalina da 81 mm	Code 0.25850.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description Terminal end cap (dead end) module composed of: 41 mm cap, 41 mm pronged base cap, fill-in space cover, 20 mm mounting rail cap/ Modulo di testata terminale composto da tappo da 41 mm, base tappo da 41 mm con forchetta, copertura fuga, tappo canalina da 20 mm	Code 0.25851.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description Centre feed module composed of: central body, mechanical coupler and 142 mm cover/ Modulo di alimentazione centrale composto da corpo centrale, congiunzione meccanica e copertura da 142 mm	Code 0.25852.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description Connector with plug and socket for electric cable with maximum section of 1.5 mm/ Connettore con spina e presa per cavo elettrico con sezione massima di 1,5 mm	Code 0.25417.00	Finishes 00 <input type="checkbox"/>
		Description "Elbow" coupler for surfacemounted rail/ Giunto ad "L" per canalina a superficie	Code 0.25853.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description "T" coupler for surface-mounted rail/ Giunto ad "T" per canalina a superficie	Code 0.25854.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description Concealed mounting rail bracket/ Supporto canalina scomparsa	Code 0.25431.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>

^{EN} Possible configurations of mounting rails. Possible strip configuration for up to 10 luminaires using the same power cable/













^{IT} Esempio di configurazione di canaline. Possibile configurazione in file continua fino ad un massimo di 10 apparecchi utilizzando lo stesso cavo di alimentazione.

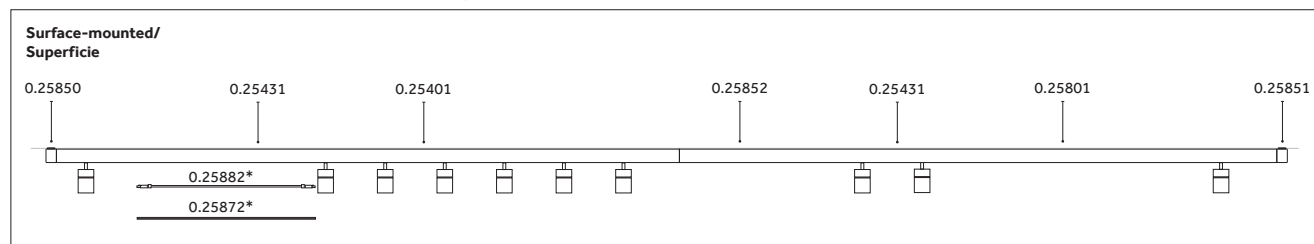

* For cable and covers: p.575/ * Per cavi e coperture: p.575

Surface | Accessories

Components for installation of projectors on surface/ Componenti per l'installazione di proiettori per canalina a superficie

		Description Pre-wired power cable with plug and socket. Length: 230 mm/ Cavo di alimentazione pre-cablato completo di spina e presa. Lunghezza: 230 mm	Code 0.25880.00	Finishes 00 <input type="checkbox"/>
		Description Pre-wired power cable with plug and socket. Length: 460 mm/ Cavo di alimentazione pre-cablato completo di spina e presa. Lunghezza: 460 mm	Code 0.25881.00	Finishes 00 <input type="checkbox"/>
		Description Pre-wired power cable with plug and socket. Length: 690 mm/ Cavo di alimentazione pre-cablato completo di spina e presa. Lunghezza: 690 mm	Code 0.25882.00	Finishes 00 <input type="checkbox"/>
		Description Hard cover for surface-mounted and suspended mounting rail. Length: 230 mm/ Copertura rigida per canalina superficie e sospensione. Lunghezza: 230 mm	Code 0.25870.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description Hard cover for surface-mounted and suspended mounting rail. Length: 460 mm/ Copertura rigida per canalina superficie e sospensione. Lunghezza: 460 mm	Code 0.25871.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>
		Description Hard cover for surface-mounted and suspended mounting rail Length: 690 mm/ Copertura rigida per canalina superficie e sospensione. Lunghezza: 690 mm	Code 0.25872.00	Finishes 12 <input type="checkbox"/> 31 <input type="checkbox"/>






— Yori Edge


— Yori Edge

^{EN} Yori Edge is the solution developed for integration in coves, architectural details and cornices. The lighting body is fitted with a 4-point adjustable articulated arm, has a practical mechanical connector for 3-circuit track and a remote driver with adapter for 3-circuit track (On/Off and Dimm/DALI) to be positioned in the false ceiling. The luminaire assembly is completed by a linear aluminium mounting rail to be integrated in the ceiling and smoothed, available in linear, corner and T modules plus a cover to give the cove an elegant, understated look. The wide range of accessories means Yori Edge can be adapted to environments with different architectural features, making this luminaire flexible, high performance and virtually invisible. The projector with remote driver must be ordered separately from the aluminium mounting rail.


^{IT} Yori Edge è la soluzione sviluppata per essere integrata in gole, dettagli architettonici e cornicioni. Il corpo illuminante, dotato di un braccio snodabile articolato in 4 punti, presenta un pratico attacco meccanico per binario a 3 circuiti e di un driver remoto con adattatore per binario a 3 circuiti (On/Off e Dimm/DALI) da posizionare nel contro soffitto. Completa la soluzione un estruso lineare in alluminio da integrare nel celino e rasare, disponibile in moduli lineari, ad angolo, a T e di una cover per rendere la gola elegante e minimale. Yori Edge, grazie all'ampia gamma di accessori disponibili è in grado di adattarsi a ambienti dalle caratteristiche architettoniche differenti risultando flessibile, performante e virtualmente invisibile. Il proiettore con driver remoto è ordinabile separatamente dall'estruso in alluminio.

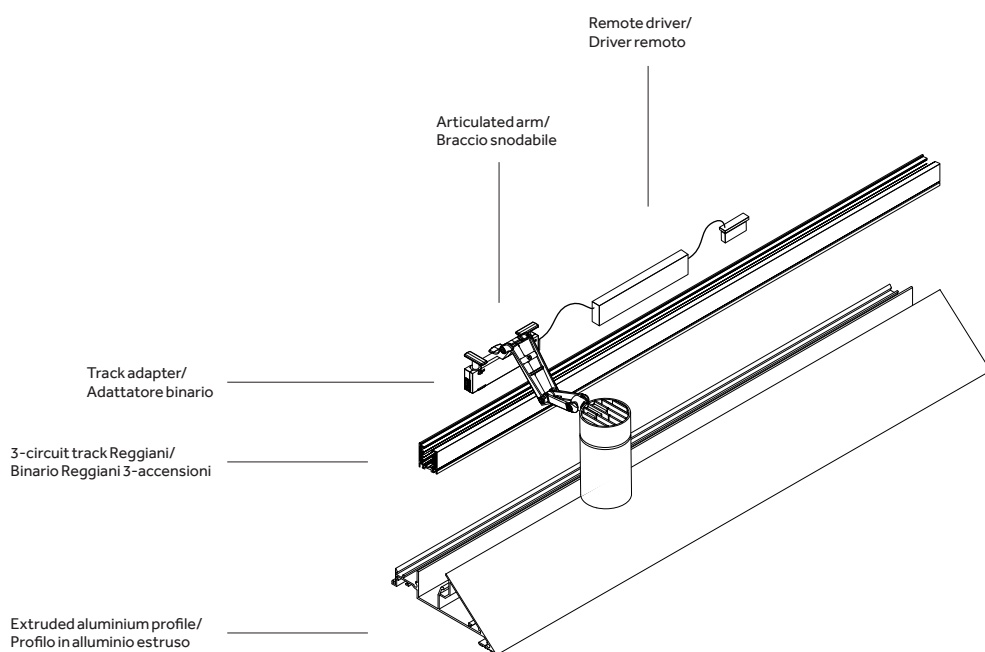


^{EN} Adjustability
^{IT} Orientabilità

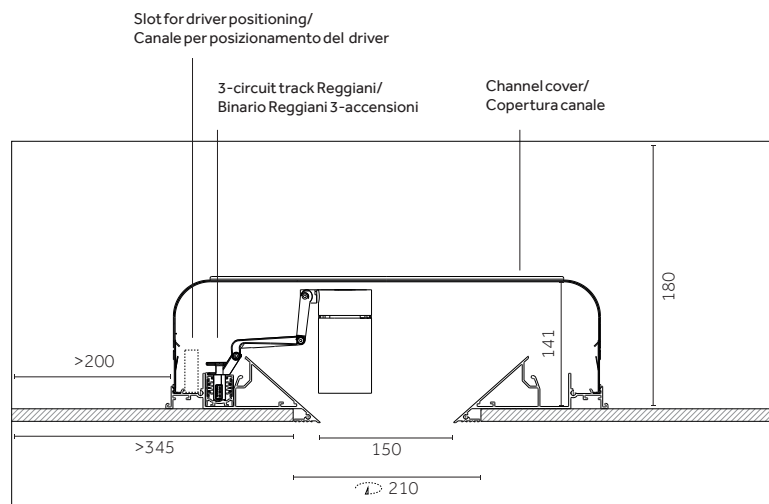

EN Cove 150mm
IT Canale 150mm

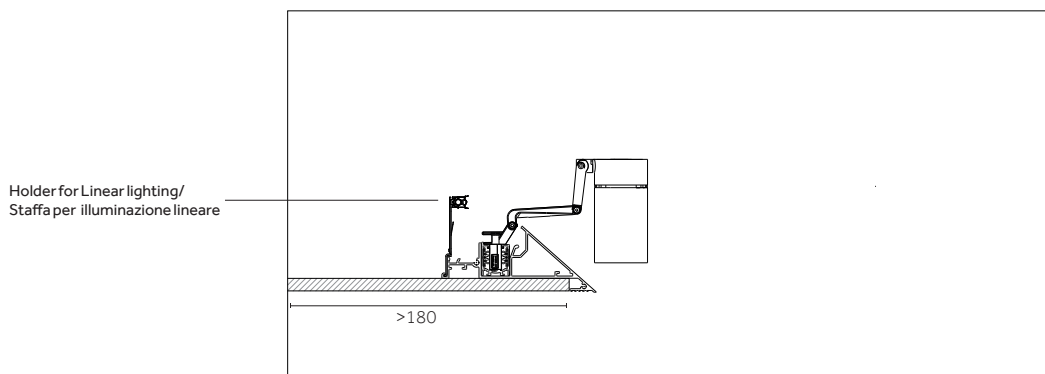

EN Perimeter installation
IT Installazione perimetrale

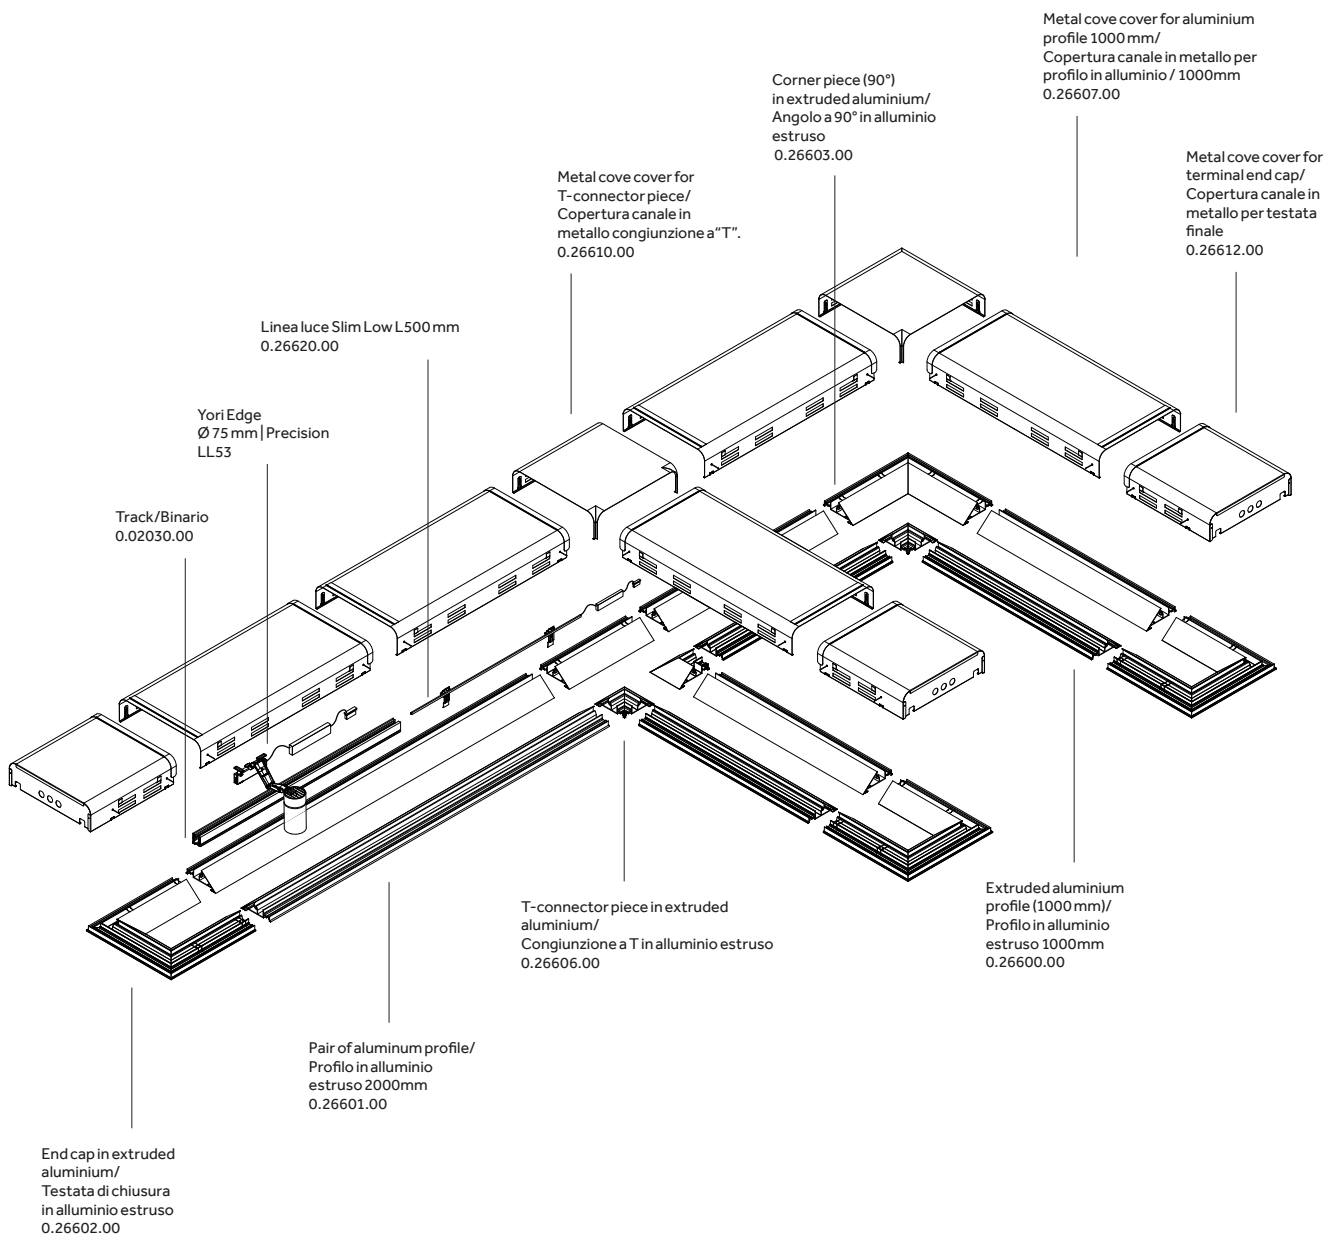






Ø 60 mm | Precision

Risk 1 0.42 IP20 850°



Code example:

X . ML52 B . HW 12

Accessories: p.586
 Drivers: p.596
 Channel/Canale: p.592-595
 Finishes: p.380
 Photometric data:
 www.reggiani.net

Notes:

*Adjustability/Orientabilità
 p.579



9 W POWER LED		Lumen delivered up to 770 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	ML52 Precision	A 8° Very narrow	HW	2700	>90	725	<3	12
			HQ	3000	>90	730	<3	31
			WW	3000	>80	845	<3	
			NN	4000	>80	940	<3	
LED nominal lumen								

9 W COB LED		Lumen delivered up to 1115 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GL52 Precision	B 12° Narrow	HC	3000	>98	960	<2	12
		E 20° Medium	HW	2700	>90	1050	<2	31
		K - Without optics	HQ	3000	>90	1100	<2	
			WW	3000	>80	1300	<3	
			NN	4000	>80	1360	<3	
LED nominal lumen								

12 W COB LED		Lumen delivered up to 1455 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GL53 Precision	B 12° Narrow	HC	3000	>98	1250	<2	12
		E 20° Medium	HW	2700	>90	1370	<2	31
		K - Without optics	HQ	3000	>90	1420	<2	
			WW	3000	>80	1700	<3	
			NN	4000	>80	1775	<3	
LED nominal lumen								

17 W COB LED		Lumen delivered up to 1970 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GL54 Precision	B 12° Narrow	HC	3000	>98	1700	<2	12
		E 20° Medium	HW	2700	>90	1870	<2	31
		K - Without optics	HQ	3000	>90	1920	<2	
			WW	3000	>80	2320	<3	
			NN	4000	>80	2400	<3	
LED nominal lumen								

Ø 60 mm | Performance



Code example:

X . GL62 . B . HC . 12

Accessories: p.587
 Drivers: p.596
 Channel/Canale: p.592-595
 Finishes: p.380
 Photometric data:
 www.reggiani.net

Notes:
 *Adjustability/Orientabilità
 p.579

9W COBLED Lumen delivered up to 1200lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<u>GL62</u> Performance	<u>B</u> 13° Narrow	<u>HC</u>	3000	>98	960	<2	12
		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	1050	<2	31
		<u>H</u> 40° Wide	<u>HQ</u>	3000	>90	1100	<2	
		<u>K</u> - Without optics	<u>WW</u>	3000	>80	1300	<3	
			<u>NN</u>	4000	>80	1360	<3	

LED nominal lumen

12W COBLED Lumen delivered up to 1560lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<u>GL63</u> Performance	<u>B</u> 13° Narrow	<u>HC</u>	3000	>98	1250	<2	12
		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	1370	<2	31
		<u>H</u> 40° Wide	<u>HQ</u>	3000	>90	1420	<2	
		<u>K</u> - Without optics	<u>WW</u>	3000	>80	1700	<3	
			<u>NN</u>	4000	>80	1775	<3	


LED nominal lumen

17W COBLED Lumen delivered up to 2110lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<u>GL64</u> Performance	<u>B</u> 13° Narrow	<u>HC</u>	3000	>98	1700	<2	12
		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	1870	<2	31
		<u>H</u> 40° Wide	<u>HQ</u>	3000	>90	1920	<2	
		<u>K</u> - Without optics	<u>WW</u>	3000	>80	2320	<3	
			<u>NN</u>	4000	>80	2400	<3	


LED nominal lumen

Ø 60 mm | Precision | Accessories

Interchangeable IOS optics/
Ottiche intercambiabili IOS

Description
Precision - Narrow beam/
Precision - Fascio stretto
(12°-9W, 12W, 17W)

Code
0.35125.0000



Description
Precision - Medium beam/
Precision - Fascio medio
(20°-9W, 12W, 17W)

Code
0.35126.0000


Not for codes/Non per codici: **ML52A**Not for codes/Non per codici: **ML52A**Optics accessories/
Accessori ottiche

Description
Glass filter 1 mm/
Filtro vetro 1 mm

Code
0.26402.00


Finishes

4A	Red
5A	Green
6A	Blue
7A	Pink
8A	Yellow
9A	Orange



Description
Dense texture honeycomb louvre/
Griglia alveolare a maglia fitta

Code
0.26442.0000



Description
Wide texture honeycomb louvre/
Griglia alveolare a maglia larga

Code
0.26450.0000



Description
Colored Gel Slides (2 pieces)/
Vetrini per gel colorato (2 pezzi/)

Code
0.26410.0000



Description
Elliptical beam lens/
Lente per fascio ellittico

Code
0.26457.0000



Description
Selective filter 3000K - 2700K/
Filtro selettivo 3000K - 2700K

Code
0.26559.0000




Description
Opal lens/
Lente opale

Code
0.26462.0000




Description
Selective filter 2700K - 2500K/
Filtro selettivo 2700K - 2500K

Code
0.26418.0000



Description
Spread lens/
Lente diffondente

Code
0.26470.0000




Description
Selective filter 2700K - 2200K/
Filtro selettivo 2700K - 2200K

Code
0.26426.0000




Description
Cross blade louvre/
Griglia a croce

Code
0.26477.0000



Description
Selective filter 2700K - 2000K/
Filtro selettivo 2700K - 2000K

Code
0.26434.0000



Description
Barn doors/
Alette rompiflusso

Code
0.26485.0000



Description
Selective filter 3000K - 3600K/
Filtro selettivo 3000K - 3600K

Code
0.26567.0000



Description
Cone 45° wall washer/
Cono 45° wall washer

Code
0.26489.00


Finishes

12	White
31	Black



Description
Selective filter 3000K - 4000K/
Filtro selettivo 3000K - 4000K

Code
0.26575.0000


Framing accessory/
Sagomatore

Description
Framing accessory, light shape - square/
Sagomatore, forma di luce - quadrata

Code
0.26651.00

Finishes

21	Black
----	-------



Description
Framing accessory, light shape - round/
Sagomatore, forma di luce - tonda







Code
0.26650.00

Finishes
























21	Black
----	-------

Ø 60 mm | Performance | Accessories







Interchangeable IOS optics/ Ottiche intercambiabili IOS

		Description Performance - Narrow beam/ Performance - Fascio stretto (13°-9W, 12W, 17W)	Code 0.35145.0000			Description Performance - Wide beam/ Performance - Fascio largo (40°-9W, 12W, 17W)	Code 0.35147.0000
		Description Performance - Medium beam/ Performance - Fascio medio (24°-9W, 12W, 17W)	Code 0.35146.0000				


Optics accessories/ Accessori ottiche

	Description Glass filter 1 mm/ Filtro vetro 1 mm	Code 0.26403.00	Finishes 4A  5A  6A  7A  8A  9A 		Description Selective filter 3000K - 4000K/ Filtro selettivo 3000K - 4000K	Code 0.26576.0000	
	Description Colored Gel Slides (2 pieces)/ Vetri per gel colorato (2 pezzi)	Code 0.26411.0000			Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta	Code 0.26443.0000	
	Description Selective filter 3000K - 2700K/ Filtro selettivo 3000K - 2700K	Code 0.26560.0000			Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga	Code 0.26451.0000	
	Description Selective filter 2700K - 2500K/ Filtro selettivo 2700K - 2500K	Code 0.26419.0000			Description Elliptical beam lens/ Lente per fascio ellittico	Code 0.26493.0000	
	Description Selective filter 2700K - 2200K/ Filtro selettivo 2700K - 2200K	Code 0.26427.0000			Description Opal lens/ Lente opale	Code 0.26463.0000	
	Description Selective filter 2700K - 2000K/ Filtro selettivo 2700K - 2000K	Code 0.26435.0000			Description Spread lens/ Lente diffondente	Code 0.26471.0000	
	Description Selective filter 3000K - 3600K/ Filtro selettivo 3000K - 3600K	Code 0.26568.0000			Description Cross blade louvre/ Griglia a croce	Code 0.26481.0000	
					Description Cone 45° wall washer/ Cono 45° wall washer	Code 0.26497.0000	Finishes 12  31 

Framing accessory/ Sagomatore

		Description Framing accessory, light shape - square/ Sagomatore, forma di luce - quadrata	Code 0.26651.00	Finishes 21 
		Description Framing accessory, light shape - round/ Sagomatore, forma di luce - tonda	Code 0.26650.00	Finishes 21 

Ø 75 mm | Precision

Risk 1 0.55 IP20   850°   

Code example:

X . LL53 B . HC 12

Accessories: p.590

Drivers: p.597

Channel/Canale: p.592-595



Finishes: p.380



Photometric data:



www.reggiani.net



Notes:



*Adjustability/Orientabilità
p.579

12 W		COB LED		Lumen delivered up to 1575 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
X Not included	LL53 Precision	B 12° Narrow	HC	3000	>98	1323	<2	12		
		E 24° Medium	HW	2700	>90	1491	<2	31		
		K - Without optics	HQ	3000	>90	1533	<2			
			WW	3000	>80	1859	<3			
			NN	4000	>80	1920	<3			
LED nominal lumen										


17 W		COB LED		Lumen delivered up to 1465 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
X Not included	NL54 Precision	A 7° Verynarrow	HC	3000	>98	1700	<2	12		
			HW	2700	>90	1870	<2	31		
			HQ	3000	>90	1920	<2			
			WW	3000	>80	2320	<3			
			NN	4000	>80	2400	<3			
LED nominal lumen										

17 W		COB LED		Lumen delivered up to 2190 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
X Not included	LL54 Precision	B 12° Narrow	HC	3000	>98	1834	<2	12		
		E 24° Medium	HW	2700	>90	2067	<2	31		
		K - Without optics	HQ	3000	>90	2122	<2			
			WW	3000	>80	2582	<3			
			NN	4000	>80	2665	<3			
LED nominal lumen										

24 W		COB LED		Lumen delivered up to 2955 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
X Not included	LL56 Precision	B 12° Narrow	HC	3000	>98	2476	<2	12		
		E 24° Medium	HW	2700	>90	2792	<2	31		
		K - Without optics	HQ	3000	>90	2860	<2			
			WW	3000	>80	3487	<3			
			NN	4000	>80	3602	<3			
LED nominal lumen										

28 W		COB LED		Lumen delivered up to 3325 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
X Not included	LL57 Precision	B 12° Narrow	HC	3000	>98	2777	<2	12		
		E 24° Medium	HW	2700	>90	3137	<2	31		
		K - Without optics	HQ	3000	>90	3207	<2			
			WW	3000	>80	3898	<3			
			NN	4000	>80	4054	<3			
LED nominal lumen										

Ø 75 mm | Performance



Code example:

X . **LL63** . B . **HC** . **12**

Accessories: p.591
 Drivers: p.597
 Channel/Canale: p.592-595
 Finishes: p.380
 Photometric data:
 www.reggiani.net

Notes:
 *Adjustability/Orientabilità
 p.579

12 W COBLED Lumen delivered up to 1800 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LL63 Performance	B 12° Narrow	HC	3000	>98	1323	<2	12
		E 24° Medium	HW	2700	>90	1491	<2	31
		H 48° Wide	HQ	3000	>90	1533	<2	
		K - Without optics	WW	3000	>80	1859	<3	
			NN	4000	>80	1920	<3	

LED nominal lumen

17 W COBLED Lumen delivered up to 2480 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LL64 Performance	B 12° Narrow	HC	3000	>98	1834	<2	12
		E 24° Medium	HW	2700	>90	2067	<2	31
		H 48° Wide	HQ	3000	>90	2122	<2	
		K - Without optics	WW	3000	>80	2582	<3	
			NN	4000	>80	2665	<3	

LED nominal lumen

24 W COBLED Lumen delivered up to 3550 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LL66 Performance	B 12° Narrow	HC	3000	>98	2476	<2	12
		E 24° Medium	HW	2700	>90	2792	<2	31
		H 48° Wide	HQ	3000	>90	2860	<2	
		K - Without optics	WW	3000	>80	3487	<3	
			NN	4000	>80	3602	<3	

LED nominal lumen


28 W COBLED Lumen delivered up to 3770 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LL67 Performance	B 12° Narrow	HC	3000	>98	2777	<2	12
		E 24° Medium	HW	2700	>90	3137	<2	31
		H 48° Wide	HQ	3000	>90	3207	<2	
		K - Without optics	WW	3000	>80	3898	<3	
			NN	4000	>80	4054	<3	

LED nominal lumen


Ø 75 mm | Precision | Accessories

Interchangeable IOS optics/ Ottiche intercambiabili IOS



Description
Precision - Narrow beam/
Precision - Fascio stretto
(12°-12W, 17W, 24W, 28W)

Code
0.35130.0000



Description
Precision - Medium beam/
Precision - Fascio medio
(24°-12W, 17W, 24W, 28W)

Code
0.35131.0000

Not for codes/Non per codici: **NL54A**

Not for codes/Non per codici: **NL54A**

Optics accessories/ Accessori ottiche



Description
Glass filter 1 mm/
Filtro vetro 1 mm


Code
0.26404.00

Finishes
4A
5A
6A
7A
8A
9A



Description
Dense texture honeycomb louvre/
Griglia alveolare a maglia fitta

Code
0.26444.0000



Description
Wide texture honeycomb louvre/
Griglia alveolare a maglia larga

Code
0.26452.0000



Description
Colored Gel Slides (2 pieces)/
Vetrini per gel colorato (2 pezzi/)

Code
0.26412.0000



Description
Elliptical beam lens/
Lente per fascio ellittico

Code
0.26458.0000



Description
Selective filter 3000K - 2700K /
Filtro selettivo 3000K - 2700K

Code
0.26561.0000




Description
Opal lens/
Lente opale

Code
0.26464.0000




Description
Selective filter 2700K - 2500K /
Filtro selettivo 2700K - 2500K

Code
0.26420.0000



Description
Spread lens/
Lente diffondente

Code
0.26472.0000




Description
Selective filter 2700K - 2200K /
Filtro selettivo 2700K - 2200K

Code
0.26428.0000



Description
Cross blade louvre/
Griglia a croce

Code
0.26478.0000



Description
Selective filter 2700K - 2000K /
Filtro selettivo 2700K - 2000K

Code
0.26436.0000



Description
Barn doors/
Alette rompiflusso

Code
0.26486.0000



Description
Selective filter 3000K - 3600K /
Filtro selettivo 3000K - 3600K

Code
0.26569.0000



Description
Cone 45° wall washer/
Cono 45° wall washer

Code
0.26490.00

Finishes
12
31









Description
Selective filter 3000K - 4000K /
Filtro selettivo 3000K - 4000K
























Code
0.26577.0000

Ø 75 mm | Performance | Accessories



Interchangeable IOS optics/ Ottiche intercambiabili IOS

		Description Performance - Narrow beam/ Performance - Fascio stretto (12°-12W, 17W, 24W, 28W)	Code <u>0.35150.0000</u>			Description Performance - Wide beam/ Performance - Fascio largo (48°-12W, 17W, 24W, 28W)	Code <u>0.35152.0000</u>
		Description Performance - Medium beam/ Performance - Fascio medio (24°-12W, 17W, 24W, 28W)	Code <u>0.35151.0000</u>				

Optics accessories/ Accessori ottiche

	Description Glass filter 1 mm/ Filtro vetro 1 mm	Code <u>0.26405.00</u>	Finishes 4A  5A  6A  7A  8A  9A 		Description Selective filter 3000K - 4000K/ Filtro selettivo 3000K - 4000K	Code <u>0.26578.0000</u>	
	Description Colored Gel Slides (2 pieces)/ Vetri per gel colorato (2 pezzi)	Code <u>0.26413.0000</u>			Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta	Code <u>0.26445.0000</u>	
	Description Selective filter 3000K - 2700K/ Filtro selettivo 3000K - 2700K	Code <u>0.26562.0000</u>			Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga	Code <u>0.26453.0000</u>	
	Description Selective filter 2700K - 2500K/ Filtro selettivo 2700K - 2500K	Code <u>0.26421.0000</u>			Description Elliptical beam lens/ Lente per fascio ellittico	Code <u>0.26494.0000</u>	
	Description Selective filter 2700K - 2200K/ Filtro selettivo 2700K - 2200K	Code <u>0.26429.0000</u>			Description Opal lens/ Lente opale	Code <u>0.26465.0000</u>	
	Description Selective filter 2700K - 2000K/ Filtro selettivo 2700K - 2000K	Code <u>0.26437.0000</u>			Description Spread lens/ Lente diffondente	Code <u>0.26473.0000</u>	
	Description Selective filter 3000K - 3600K/ Filtro selettivo 3000K - 3600K	Code <u>0.26570.0000</u>			Description Cross blade louvre/ Griglia a croce	Code <u>0.26482.0000</u>	
					Description Cone 45° wall washer/ Cono 45° wall washer	Code <u>0.26498.00</u>	Finishes 12  31 



Accessories

Perimeter installation/
Installazione perimetrale

Description
Extruded aluminium profile (1000mm)/
Profilo in alluminio estruso 1000mm

Code
0.26600.00



Finishes
12
31



Description
Extruded aluminium profile 2000mm/
Profilo in alluminio estruso 2000mm

Code
0.26601.00


Finishes
12
31



Description
External corner piece (90°) in extruded aluminium/
Angolo a 90° esterno in alluminio estruso

Code
0.26604.00


Finishes
12
31




Description
Internal corner piece (90°) in extruded aluminium/
Angolo a 90° interno in alluminio estruso

Code
0.26605.00


Finishes
12
31

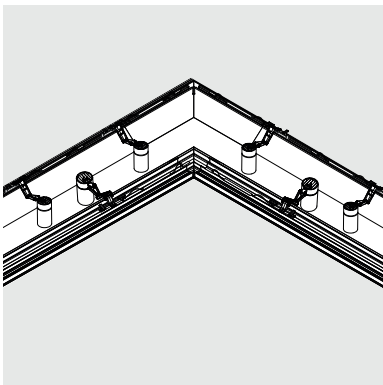

^{EN} Channel 150mm
^{IT} Cove 150mm

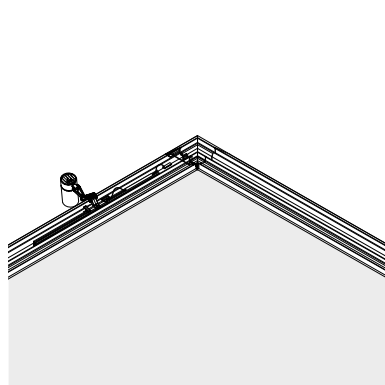

^{EN} Internal perimeter
^{IT} Perimetro interno

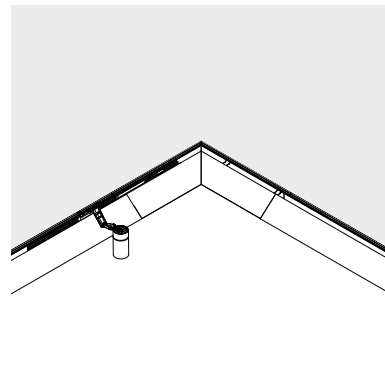

^{EN} External perimeter
^{IT} Perimetro esterno











Accessories

Channel 150mm/
Cove 150mm

			Description Pair of extruded aluminium profiles (1000 mm)/ Coppia di profili in alluminio estruso 1000mm	Code 0.26613.00	Finishes 12 31
			Description Pair of extruded aluminium profiles 2000mm/ Coppia di profili in alluminio estruso 2000mm	Code 0.26614.00	Finishes 12 31
			Description End cap in extruded aluminium/ Testata di chiusura in alluminio estruso	Code 0.26602.00	Finishes 12 31
			Description Corner piece (90°) in extruded aluminium/ Angolo a 90° in alluminio estruso	Code 0.26603.00	Finishes 12 31
			Description T-connector piece in extruded aluminium/ Congiunzione a T in alluminio estruso	Code 0.26606.00	Finishes 12 31
			Description Metal cove cover for aluminium profile 1000 mm. Integrated mounting brackets for Linea Luce Slim Low/ Copertura canale in metallo per profilo in alluminio 1000mm. Staffe di supporto per Linea Luce Slim Low integrate	Code 0.26607.00	Finishes 12 31
			Description Metal cove cover for front end cap. Integrated mounting brackets for Linea Luce Slim Low/ Copertura canale in metallo per testata iniziale. Staffe di supporto per Linea Luce Slim Low integrate	Code 0.26608.00	Finishes 00 31
			Description Metal cove cover for corner piece (90°). Integrated mounting brackets for Linea Luce Slim Low/ Copertura canale in metallo per angolo a 90°. Staffe di supporto per Linea Luce Slim Low integrate	Code 0.26609.00	Finishes 12 31
			Description Metal cove cover for T-connector piece. Integrated mounting brackets for Linea Luce Slim Low/ Copertura canale in metallo congiunzione a T. Staffe di supporto per Linea Luce Slim Low integrate	Code 0.26610.00	Finishes 12 31
			Description Metal cove cover for terminal end cap. Integrated mounting brackets for Linea Luce Slim Low/ Copertura canale in metallo per testata finale. Staffe di supporto per Linea Luce Slim Low integrate	Code 0.26612.00	Finishes 12 31
			Description Pair of mounting brackets for Linea Luce Slim Low. To use if adopting cove with no metal covers./ Coppia di staffe per supporto Linea Luce Slim Low. Da impegnare in caso di utilizzo canale senza coperture in metallo	Code 0.26611.00	Finishes 12 31







Accessories

Track and fitting Components/
Binari e componenti montaggio

		Description Track I. 1000mm/ Binario I. 1000mm	Code 0.02030.00	Finishes 10 21
		Description Track I. 2000mm/ Binario I. 2000mm	Code 0.02031.00	Finishes 10 21
		Description Track I. 3000mm/ Binario I. 3000mm	Code 0.02032.00	Finishes 10 21
		Description Track I. 4000mm/ Binario I. 4000mm	Code 0.02033.00	Finishes 10 21
		Description Left End-feed. Polarity - Left, Earth conductor - Right./ Testata Sinistra. Conduttore terra a destra. Polarità a sinistra.	Code 0.02038.00	Finishes 10 21
		Description Right End-feed. Polarity - Right, Earth conductor - Left./ Testata Destra. Conduttore terra a sinistra. Polarità a destra.	Code 0.02039.00	Finishes 10 21
		Description Straight connector/ Giunto passante	Code 0.02040.00	Finishes 10 21
		Description End cap (dead end) for surface-mounted track with locking screw/ Tappo di chiusura per binario a superficie con vite di blocco	Code 0.02041.00	Finishes 10 21 28

Accessories

Linea Luce Slim/ Linea Luce Slim

		Description Linea luce Slim Low L500 mm, 4,5 W	Code 0.26620	LED K HW 2700 WW 3000 NN 4000	Finishes 00 <input type="checkbox"/>
		Description Linea luce Slim Low L1000 mm, 9 W	Code 0.26621	LED K HW 2700 WW 3000 NN 4000	Finishes 00 <input type="checkbox"/>
		Description Linea luce Slim Low L2000 mm, 18 W	Code 0.26622	LED K HW 2700 WW 3000 NN 4000	Finishes 00 <input type="checkbox"/>

(RGB version available on request/
(Versione RGB disponibile su richiesta)

Code example:

0.26620 . HW 00

Linea Luce Slim Low | Electrical Devices

Drivers

20W LOW POWER LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Max.distance	Cable section
On/Off	0.31566.0000	20		56 mm	220/240 Vac 50/60 Hz 12Vcc	12 Vcc	5 m	1.5 mm ²





Other devices/ Altri dispositivi

Type	Code	
Dimm 1-10V	0.31567.0000	Control device Dimm 1-10V to install between driver and LED 12/24V - max 120W/ Dispositivo di controllo Dimm 1-10V da installare tra driver e LED 12/24V - max 120W
DALI Switch Dim	0.31568.0000	DALI/SWITCH DIM device to install between driver and LED 12/24V - max 120W/ Dispositivo DALI/SWITCH DIM da installare tra driver e LED 12/24V - max 120W





Ø 60 mm | Electrical Devices

Driver with 3-phase track adapter/
Driver con adattatore a binario





9 W POWER LED

Type	Code	W	Size (mm)	Tech. specifications	mA	Cable section
On/Off	0.30359.0000	10		198-264Vac 190-245Vdc / 0.50/60Hz	700	1.5 mm ²
Phase-cut	T.30359.0000	12		220-240Vac / 50/60Hz	700	1.5 mm ²
Dimm 1-10V	V.30359.0000	14		198-264Vac 190-245Vdc / 0.50/60Hz	700	1.5 mm ²
DALI	D.30359.0000	14		198-264Vac 190-245Vdc / 0.50/60Hz	700	1.5 mm ²





9 W COB LED

Type	Code	W	Size (mm)	Tech. specifications	mA	Cable section
On/Off	0.30360.0000	20		198-264Vac 170-280Vdc / 0.50/60Hz	250	1.5 mm ²
Phase-cut	T.30360.0000	10		220-240Vac / 50/60Hz	250	1.5 mm ²
Dimm 1-10V	V.30360.0000	33		120-277Vac / 50/60Hz	250	1.5 mm ²
DALI	D.30360.0000	33		220-240Vac / 50/60Hz	250	1.5 mm ²

12 W COB LED

Type	Code	W	Size (mm)	Tech. specifications	mA	Cable section
On/Off	0.30361.0000	25		220-240Vac / 50/60Hz	350	1.5 mm ²
Phase-cut	T.30361.0000	18		220-240Vac / 50/60Hz	350	1.5 mm ²
Dimm 1-10V	V.30361.0000	33		120-277Vac / 50/60Hz	350	1.5 mm ²
DALI	D.30361.0000	36		198-264Vac 170-280Vdc / 0.50/60Hz	350	1.5 mm ²





17 W COB LED

Type	Code	W	Size (mm)	Tech. specifications	mA	Cable section
On/Off	0.30362.0000	25		220-240Vac / 50/60Hz	500	1.5 mm ²
Phase-cut	T.30362.0000	22		220-240Vac / 50/60Hz	500	1.5 mm ²
Dimm 1-10V	V.30362.0000	33		120-277Vac / 50/60Hz	500	1.5 mm ²
DALI	D.30362.0000	36		198-264Vac 170-280Vdc / 0.50/60Hz	500	1.5 mm ²





Ø 75 mm | Electrical Devices

Driver with 3-phase track adapter/
Driver con adattatore a binario





12 W COB LED

Type	Code	W	Size (mm)	Tech. specifications	mA	Cable section
On/Off	0.30361.0000	25		220-240Vac / 50/60Hz	350	1.5 mm ²
Phase-cut	T.30361.0000	18		220-240Vac / 50/60Hz	350	1.5 mm ²
Dimm 1-10V	V.30361.0000	33		120-277Vac / 50/60Hz	350	1.5 mm ²
DALI	D.30361.0000	36		198-264Vac 170-280Vdc / 0.50/60Hz	350	1.5 mm ²




17 W COB LED

Type	Code	W	Size (mm)	Tech. specifications	mA	Cable section
On/Off	0.30362.0000	25		220-240Vac / 50/60Hz	500	1.5 mm ²
Phase-cut	T.30362.0000	22		220-240Vac / 50/60Hz	500	1.5 mm ²
Dimm 1-10V	V.30362.0000	33		120-277Vac / 50/60Hz	500	1.5 mm ²
DALI	D.30362.0000	36		198-264Vac 170-280Vdc / 0.50/60Hz	500	1.5 mm ²

24 W COB LED

Type	Code	W	Size (mm)	Tech. specifications	mA	Cable section
On/Off	0.30363.0000	35		220-240Vac / 50/60Hz	700	1.5 mm ²
Phase-cut	T.30363.0000	36		220-240Vac / 50/60Hz	700	1.5 mm ²
Dimm 1-10V	V.30363.0000	33		120-277Vac / 50/60Hz	700	1.5 mm ²
DALI	D.30363.0000	36		198-264Vac 170-280Vdc / 0.50/60Hz	700	1.5 mm ²

28 W COB LED

Type	Code	W	Size (mm)	Tech. specifications	mA	Cable section
On/Off	0.30364.0000	35		220-240Vac / 50/60Hz	800	1.5 mm ²
Dimm 1-10V	V.30364.0000	33		120-277Vac / 50/60Hz	800	1.5 mm ²
DALI	D.30364.0000	36		198-264Vac 170-280Vdc / 0.50/60Hz	800	1.5 mm ²