

Yori




Yori range:



Yori Surface/Pendant




861 Yori Wall



805 Yori Linear

719

Track



Yori Evo Ghosttrack
p.397



Yori Evo Box
p.441



Yori Slot
p.461



Yori and Zoom+lighstaper
p.477

Recessed



Yori Recessed
p.485



Yori Semirecessed
p.515

Modular



Yori Channel
p.537





Yori Channel Arm
p.563



Yori Edge
p.577
















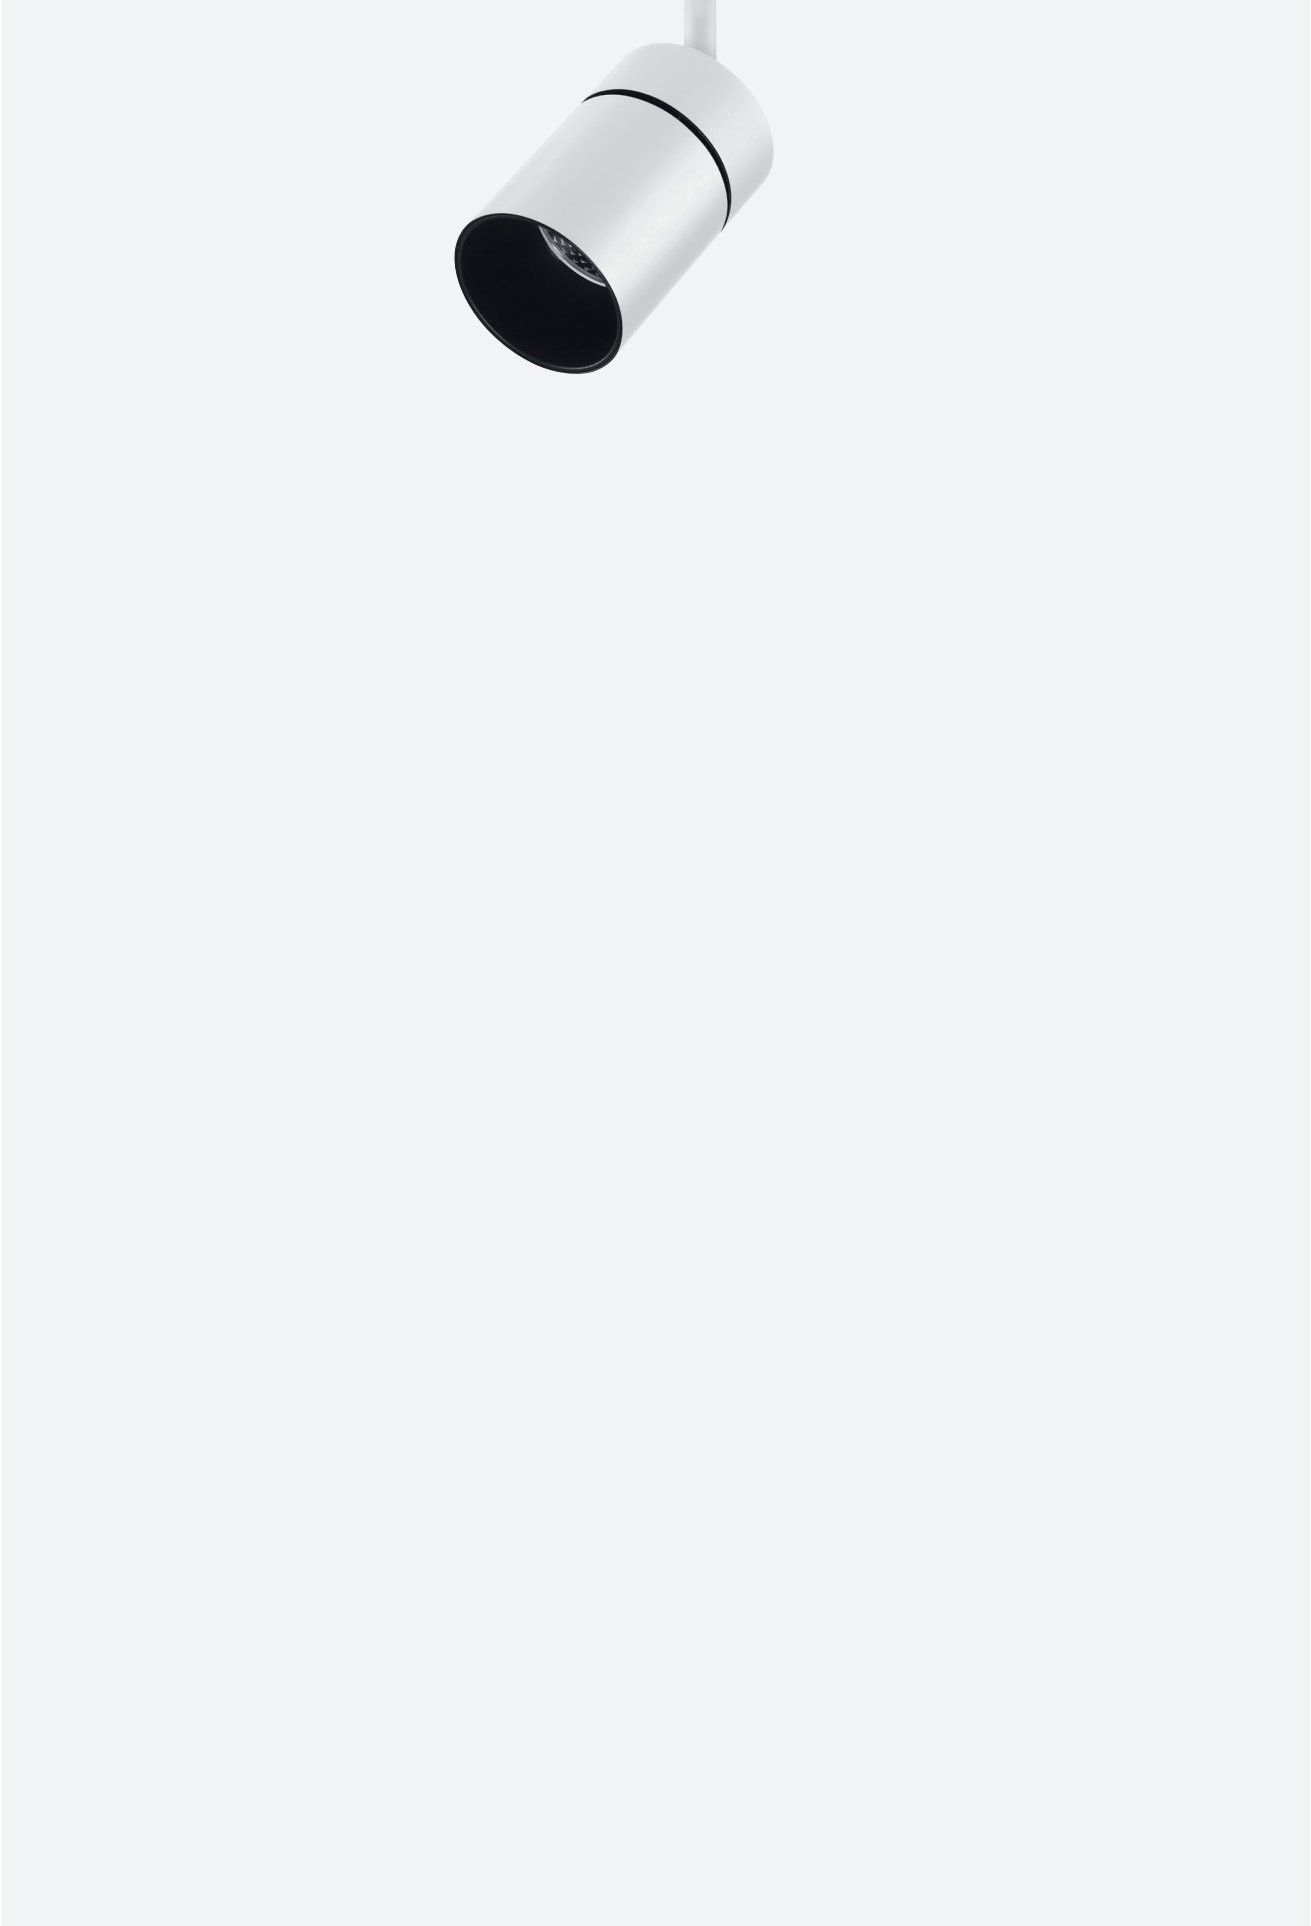
















EN Minimalism and rigour in the service of functionality. Yori is designed for the most innovative LED, and is configured for mounting on tracks, inside channels, recessed, onto surfaces and inside grooves in ceilings. Its versatility and elegant design make Yori the ideal solution for accent lighting in business, residential and exhibition spaces.

IT Minimalismo e rigore al servizio della funzionalità. Yori è progettato per ospitare le più innovative sorgenti luminose a LED ed è predisposto per l'applicazione su binario, all'interno di canaline, a incasso, a superficie e all'interno di gole/velette create nella soffittatura. La sua versatilità e il suo design elegante rendono Yori la soluzione ottimale per l'illuminazione d'accento di superfici commerciali, residenziali ed espositive.













Overview









Application:	Track, Recessed, Modular
Light source:	POWER LED , COB LED
Watt:	2,5 W - 37 W
Kelvin	2700 K, 3000 K, 4000 K
Lumen:	215 lm - 4695 lm
CRI:	>80, >90, >95, >98
SDCM:	<2, <3
IP:	20
Control options:	On/Off, Phase-cut, Dimm 1-10V, DALI
Technologies:	Warm Dimming, Bluetooth



















<p>System/ Sistema</p>										
<p>Track</p>	 <p>Yori Evo Ghosttrack p.397</p>	 <p>Yori Evo Box p.441</p>	 <p>Yori Slot p.461</p>	 <p>Yori and Zoom+lightstaper p.477</p>						
<p>Recessed</p>	 <p>Yori Recessed p.485</p>	 <p>Yori Semi-recessed p.515</p>								
<p>Modular</p>	 <p>Yori Channel p.537</p>	 <p>Yori Channel Arm p.563</p>	 <p>Yori Edge p.577</p>							
<p>Finishes/ Finiture</p> <p>Yori Evo Ghosttrack only</p>	 <p>12 Embossed matt white/ Bianco opaco gofrato</p>	 <p>31 Embossed matt black/ Nero opaco gofrato</p>	 <p>C0 Royal matt white/ Royal bianco opaco</p>	 <p>B0 Royal matt black/ Royal nero opaco</p>	 <p>D0 Brushed brass/ Ottone spazzolato</p>	 <p>E0 Brushed gold/ Oro spazzolato</p>	 <p>O1 Chrome/ Cromato</p>	 <p>M0 Brushed aluminum/ Alluminio spazzolato</p>	 <p>N0 Brushed copper/ Rame spazzolato</p>	 <p>L0 Antiqued brushed bronze/ Bronzo anticato spazzolato</p>
<p>Beams/ Fasci</p>	 <p>Very narrow/ Molto stretto</p>	 <p>Narrow/ Stretto</p>	 <p>Medium/ Medio</p>	 <p>Wide/ Largo</p>						
<p>Adjustability/ Orientabilità</p>	 <p>Vertical axis/ Asse verticale</p>	 <p>Horizontal axis/ Asse orizzontale</p>	<p>Yori Slot p.462 Yori Channel Arm p.564 Yori Edge p.579</p>							











Sizes and tech. specifications/ Misure e info tecniche	Track			
	Mini Ø 43 mm (Cluster only)	Ø 60 mm	Ø 75 mm	Ø 95 mm
Yori Evo Ghostack				
	p.406	p.414	p.424	p.432
2X				
	p.408	p.416	p.426	p.434
3X				
		p.418	p.428	p.436
4X				
		p.419		
Included drivers/ Driver incluso		•	•	•
Beam width/ Apertura cono di luce				
Precision	7°, 10°, 11°, 22°, 23°, 27°, 38°, 40°	12°, 20°, 27°	7°, 12°, 24°, 25°	7°, 12°, 24°, 25°
Performance	6°, 18°, 36°	13, 24°, 40°	12°, 24°, 48°	10°, 20°, 31°
Light source/ Sorgente luminosa	POWER LED 2,5 W, 4 W, 9 W 215 lm-940 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >80, CRI >90 Warm Dimming COB LED 6,5 W 10 lm - 550 lm L70 B50=50,000h 1800 K-2800 K SDCM <4 CRI >95	COB LED 9 W, 12 W, 17 W 960 lm-2400 lm L80 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <2 <3 CRI >80, CRI >90, CRI >98 Warm Dimming COB LED 12 W 100 lm - 1000 lm L70 B50=50,000h 1700 K-3000 K SDCM <4 CRI >95	COB LED 12 W, 17 W, 24 W, 28 W 1323 lm-4054 lm L80 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <2 <3 CRI >80, CRI >90, CRI >98 Warm Dimming COB LED 25 W 100 lm - 2500 lm L70 B50=50,000h 1700 K-3000 K SDCM <4 CRI >95	COB LED 12 W, 17 W, 24 W, 33 W 1323 lm-4695 lm L80 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <2 <3 CRI >80, CRI >90, CRI >98 Warm Dimming COB LED 33 W 100 lm - 3100 lm L70 B50=50,000h 1700 K-3000 K SDCM <4 CRI >95















Sizes and tech. specifications/ Misure e info tecniche	Track			
	Ø 43 mm	Ø 60 mm	Ø 75 mm	Ø 95 mm
Yori Evo Box	 p.444	 p.448	 p.452	 p.456
Yori Slot	 p.464	 p.468	 p.472	
Beam width/ Apertura cono di luce				
Precision	7°, 11°, 23°, 27°, 40°	8°, 12°, 20°, 27°	7°, 12°, 24°	7°, 12°, 24°, 25°
Performance	6°, 18°, 36°	13°, 24°, 40°	12°, 24°, 48°	10°, 20°, 31°
Yori and Zoom+lighstaper				 p.477
Light source/ Sorgente luminosa	POWER LED 4 W, 9 W 410 lm - 940 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >80, CRI >90 Warm Dimming COB LED 6,5 W 10 lm - 550 lm L70 B50=50,000h 1800 K - 2800 K SDCM <4 CRI >95	POWER LED 1x9 W 725 lm - 940 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >80, CRI >90 COB LED 9 W, 12 W, 17 W 960 lm - 2400 lm L80 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <2 <3 CRI >80, CRI >90, CRI >98 Warm Dimming COB LED 12 W 100 lm - 1000 lm L70 B50=50,000h 1700 K - 3000 K SDCM <4 CRI >95	COB LED 12 W, 17 W, 24 W, 28 W 1323 lm - 4054 lm L80 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <2 <3 CRI >80, CRI >90, CRI >98 Warm Dimming COB LED 25 W 100 lm - 2500 lm L70 B50=50,000h 1700 K - 3000 K SDCM <4 CRI >95	COB LED 12 W, 17 W, 24 W, 33 W, 37 W 1323 lm - 5090 lm L80 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <2 <3 CRI >80, CRI >90, CRI >98 Warm Dimming COB LED 33 W 100 lm - 3100 lm L70 B50=50,000h 1700 K - 3000 K SDCM <4 CRI >95

Sizes and tech. specifications/ Misure e info tecniche	Recessed	
	Ø 60 mm	Ø 95 mm
Yori Recessed Round	 <p>Trim p.488 Trimless p.488</p>	 <p>Trim p.492 Trimless p.492</p>
Yori Recessed Square	 <p>Trim p.496 Trimless p.496</p>	 <p>Trim p.500 Trimless p.500</p>
Yori Recessed Square Double	 <p>Trim p.504 Trimless p.504</p>	 <p>Trim p.508 Trimless p.508</p>
Max Internal space/ Ingombro interno massimo	 <p>Ø136 136x136 136x243</p>	 <p>Ø158 158x158 158x292</p>
Beam width/ Apertura cono di luce		
Precision	8°, 12°, 20°, 27°	7°, 12°, 24°, 25°
Performance	13°, 24°, 40°	10°, 20°, 31°
Light source/ Sorgente luminosa	<p>POWER LED 9 W 725 lm-940 lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >80, CRI >90</p> <p>COB LED 9 W, 12 W 960 lm-1775 lm L80 B10=50,000h 2700K, 3000K, 4000K SDCM <2 <3 CRI >80, CRI >90, CRI >98</p> <p>Warm Dimming COB LED 12 W 100 lm - 1000 lm L70 B50=50,000h 1700 K-3000 K SDCM <4 CRI >95</p>	<p>COB LED 12 W, 17 W, 24 W, 33 W 1323 lm-4695 lm L80 B10=50,000h 2700K, 3000K, 4000K SDCM <2 <3 CRI >80, CRI >90, CRI >98</p> <p>Warm Dimming COB LED 33 W 100 lm - 3100 lm L70 B50=50,000h 1700 K-3000 K SDCM <4 CRI >95</p>


Sizes and tech. specifications/ Misure e info tecniche	Semi-recessed			
	Ø 43 mm	Ø 60 mm	Ø 75 mm	Ø 95 mm
Yori Semi-recessed	 p.516	 p.520	 p.524	 p.528
Max Internal space/ Ingombro interno massimo	 Ø43	 Ø55	 Ø55	 Ø55
Beam width/ Apertura cono di luce				
Precision	7°, 11°, 23°, 27°, 40°	8°, 12°, 20°, 27°	7°, 12°, 24°, 25°	7°, 12°, 24°, 25°
Performance	6°, 18°, 36°	13°, 24°, 40°	12°, 24°, 48°	10°, 20°, 31°
Light source/ Sorgente luminosa	POWER LED 4 W, 9 W 410 lm-941 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >80, CRI >90 Warm Dimming COB LED 6,5 W 10 lm - 550 lm L70 B50=50,000h 1800 K-2800 K SDCM <4 CRI >95	POWER LED 9 W 725 lm-940 lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >80, CRI >90 COB LED 9 W, 12 W, 17 W 960 lm-2400 lm L80 B10=50,000h 2700K, 3000K, 4000K SDCM <2 <3 CRI >80, CRI >90, CRI >98 Warm Dimming COB LED 12 W 100 lm - 1000 lm L70 B50=50,000h 1700 K-3000 K SDCM <4 CRI >95	COB LED 12 W, 17 W, 24 W, 28 W 1323 lm-4054 lm L80 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <2 <3 CRI >80, CRI >90, CRI >98 Warm Dimming COB LED 25 W 100 lm - 2500 lm L70 B50=50,000h 1700 K-3000 K SDCM <4 CRI >95	COB LED 12 W, 17 W, 24 W, 33 W, 37 W 1323 lm-5090 lm L80 B10=50,000h 2700K, 3000K, 4000K SDCM <2 <3 CRI >80, CRI >90, CRI >98 Warm Dimming COB LED 33 W 100 lm - 3100 lm L70 B50=50,000h 1700 K-3000 K SDCM <4 CRI >95

Size and tech info/ Misure e info tecniche	Modular			
	Ø 43 mm	Ø 60 mm	Ø 75 mm	Ø 95 mm
Yori Channel	 p.540	 p.544	 p.548	 p.552
Yori Channel Arm		 p.566		 p.570
Yori Edge			 p.584	 p.588
Beam width/ Apertura cono di luce				
Precision	7°, 11°, 23°, 27°, 40°	8°, 12°, 20°, 27°	7°, 12°, 24°, 25°	7°, 12°, 24°, 25°
Performance	6°, 18°, 36°	13°, 24°, 40°	12°, 24°, 48°	10°, 20°, 31°
Light source/ Sorgente luminosa	POWER LED 4 W, 9 W 410lm-940lm L90B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >80, CRI >90 Warm Dimming COB LED 6,5 W 10lm - 550lm L70B50=50,000h 1800K-2800K SDCM <4 CRI >95	POWER LED 9 W 725lm-941lm L90B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >80, CRI >90 COB LED 9 W, 12 W, 17 W 960lm-2400lm L80B10=50,000h 2700K, 3000K, 4000K SDCM <2 <3 CRI >80, CRI >90, CRI >98 Warm Dimming COB LED 12 W 100lm - 1000lm L70B50=50,000h 1700K-3000K SDCM <4 CRI >95	COB LED 12 W, 17 W, 24 W, 28 W 1323lm-4054lm L80B10=50,000h 2700K, 3000K, 4000K SDCM <2 <3 CRI >80, CRI >90, CRI >98 Warm Dimming COB LED 25 W 100lm - 2500lm L70B50=50,000h 1700K-3000K SDCM <4 CRI >95	COB LED 12 W, 17 W, 24 W, 33 W, 37 W 1323lm-5090lm L80B10=50,000h 2700K, 3000K, 4000K SDCM <2 <3 CRI >80, CRI >90, CRI >98 Warm Dimming COB LED 33 W 100lm - 3100lm L70B50=50,000h 1700K-3000K SDCM <4 CRI >95



Accessories/ Accessori				
Optics accessories/ Accessori ottiche	 <p>Glass filter 1 mm/ Filtro vetro 1 mm</p>	 <p>Colored Gel Slides/ Vetrini per gel colorato</p>	 <p>Selective filter/ Filtro selettivo</p>	 <p>Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta</p>
	 <p>Wide texture honeycomb louvre/ Griglia alveolare a maglia larga</p>	 <p>Elliptical beam lens / Lente per fascio ellittico</p>	 <p>Opal lens/ Lente opale</p>	 <p>Spread lens Lente diffondente</p>
	 <p>Cross blade louvre/ Griglia a croce</p>	 <p>Cone 45° wall washer/ Cono 45° wall washer</p>	 <p>Short snoot/ Cilindro corto</p>	 <p>Barn doors/ Alette rompiflusso</p>
	 <p>Framing accessory/ Sagomatore</p>			
Yori Ghostrack only	 <p>Spacers/ Distanziali</p>			

Precision


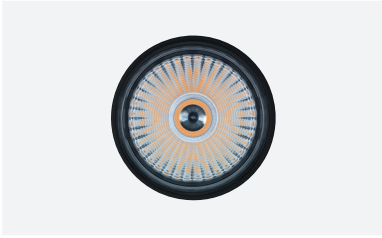


^{EN} System of interchangeable lenses made of temperature-resistant plastic (stabilised up to 140°C), self-extinguishing (V0 rating), with LOR of up to 89%. Very narrow, narrow and medium beams with luminous intensity of up to 60,000 cd.


^{IT} Sistema di lenti intercambiabili in materiale plastico resistente ad alte temperature, stabilizzate fino a 140°, autoestingente V0 con efficienza fino all'89%. Fasci molto stretti, stretti e medi con valori di intensità fino a 60.000cd.




Precision for YORI Ø43
LED: 9W/11°/3000K (HQ)

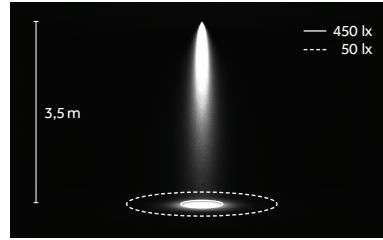


Very narrow/
Molto stretto
A 7°




Narrow/
Stretto
B 11°





Medium/
Medio
E 23°




Wide/
Largo
H 40°




Precision for YORI Ø60
LED: 17W/12°/3000K (HQ)

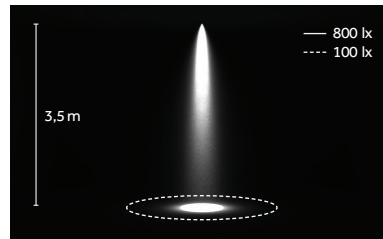


Very narrow/
Molto stretto
A 8°




Narrow/
Stretto
B 12°



Medium/
Medio
E 20°




Precision for YORI Ø75
LED: 28W/12°/3000K (HQ)

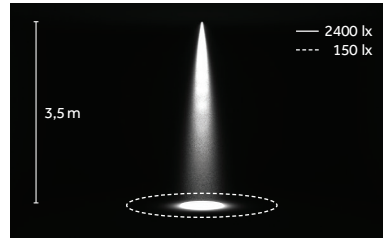


Very narrow/
Molto stretto
A 7°




Narrow/
Stretto
B 12°




Medium/
Medio
E 24°




Precision for YORI Ø95
LED: 37W/12°/3000K (HQ)

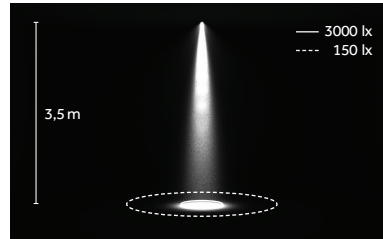

Very narrow/
Molto stretto
A 7°




Narrow/
Stretto
B 12°



Medium/
Medio
E 24°


Performance

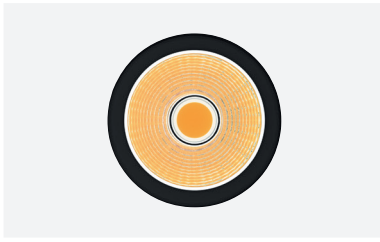



^{EN} System of interchangeable reflectors made of 99% pure aluminium, with surface treatment; LOR of up to 90%, and anti-reflective safety glass with high light transmission (99%).

Narrow, medium and wide beams for luminaire efficacy of up to 120 lm/W.


^{IT} Sistema di riflettori intercambiabili in alluminio puro al 99%, con trattamento superficiale, efficienza fino al 90% e vetro di protezione antiriflesso ad alto indice di trasmissione (99%). Fasci stretti, medi e larghi per efficienze apparecchio fino a 120 lm/W.



Performance for YORI Ø43
LED: 9W/18°/3000K (HQ)

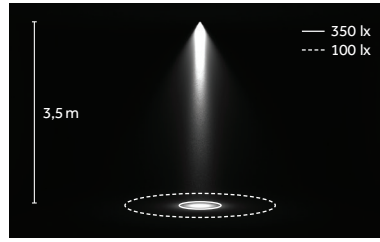


Narrow/
Stretto
B 6°





Medium/
Medio
E 18°




Wide/
Largo
H 36°




Performance for YORI Ø60
LED: 17W/24°/3000K (HQ)

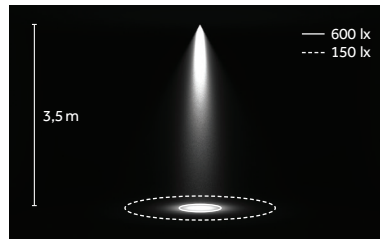


Narrow/
Stretto
B 13°





Medium/
Medio
E 24°




Wide/
Largo
H 40°




Performance for YORI Ø75
LED: 28W/12°/3000K (HQ)

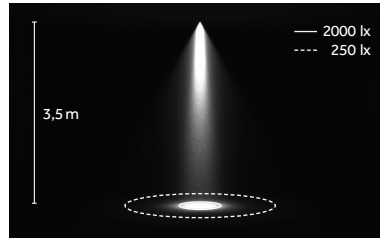


Narrow/
Stretto
B 12°





Medium/
Medio
E 24°




Wide/
Largo
H 48°




Performance for YORI Ø95
LED: 37W/10°/3000K (HQ)

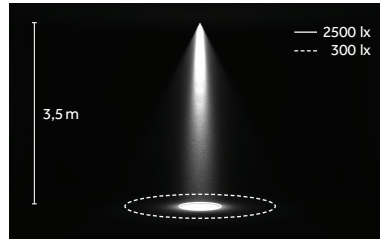

Narrow/
Stretto
B 10°




Medium/
Medio
E 20°



Wide/
Largo
H 31°

COB



2700 K, 3000 K, 4000 K
SDCM <2, <3
CRI>80, CRI > 90, CRI >98

TM 30
Rf: 90, Rg: 100
(3000K, CRI>90)


L80 B10=50,000h
Ta: 25°
Tc: 85°
~9,000 hr
Lm Maintainance: 98%
(Source: LM80 test report)

Note:
Yori Ø 43, Ø 60
(POWER LED)




R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
100	99	97	99	99	99	99	97	93	97	98	87	99	97	98

^{EN} COB LEDs and POWER LED are distinguished by excellent luminous intensity in the smaller sizes now available on the market. This feature means these light sources can be integrated into very compact luminaires with unique performance, very high peak beam intensity (candela) and delivered lumens of 150 lm to 4000 lm. These light sources are characterised by lumen maintenance at high operating temperatures due to improved efficacy at high temperatures and better optical stability over time.

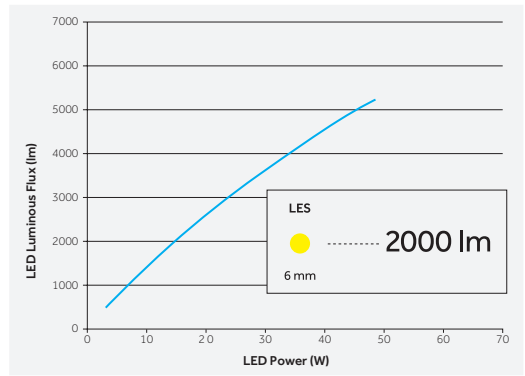


^{IT} I COB LED e POWER LED sono caratterizzati un'eccellente intensità luminosa nelle dimensioni più ridotte ora disponibili sul mercato, questa caratteristica consente l'integrazione di queste sorgenti in prodotti dalle dimensioni molto contenute con performance uniche, picchi di intensità in candele molto elevati e lumen delivered da 150lm fino a 4000lm. Queste sorgenti sono caratterizzate da un mantenimento costante nel tempo del livello di lumen ad alte temperature di utilizzo grazie ad una migliore efficienza ad alte temperature e ad migliore stabilità ottica nel corso del tempo.

Warm Dimming




1700 K-3000 K
SDCM <4
CRI>95

L70 B10=50,000h

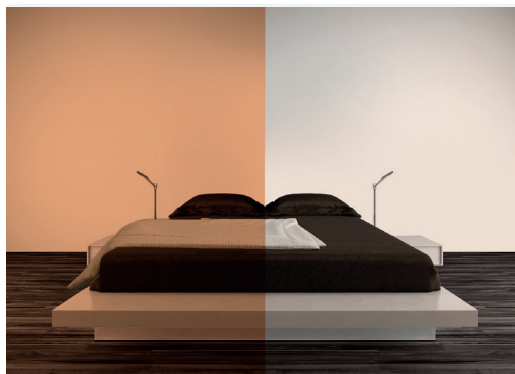

Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	
1700K	94	94	95	97	90	91	88	97	97	94	92	81	78	93	96	98
3000K	97	95	97	97	97	96	95	99	97	94	97	94	86	95	97	95

^{EN} Our solution combines two chips in a single COB LED. With this configuration, only a single driver supplies power and gradually reduces incoming amps to bring it in line with the desired output. By reducing power supply to the chips, the luminous flux is reduced and consequently the colour temperature resulting from the combination of the individually designated colour temperatures is automatically offset. This technology delivers a very wide range of adjustment for luminous intensity, with a very gentle, gradual change in colour temperature (from no more than 3000 K to no less than 1700 K). The CRI and colour rendering is excellent for the whole dimming range, with a CRI of up to 97 and an R9 of 94.

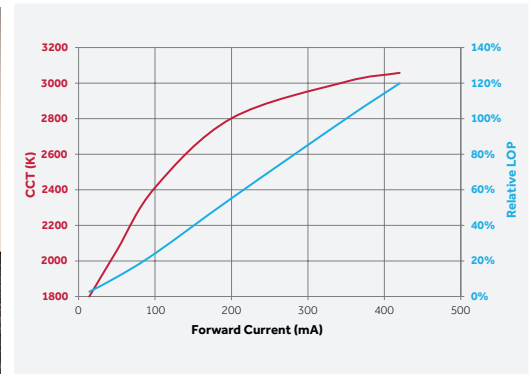

^{IT} La nostra soluzione combina due chip in un solo COB LED; Con questa configurazione, l'alimentazione è un unico driver che riduce gradualmente l'ampereaggio in entrata in funzione del rendimento desiderato. Diminuendo l'alimentazione ai chip, il flusso diminuisce e, la temperatura di colore che risulta dalla combinazione delle singole temperature stabilite, viene bilanciata di conseguenza. Questa tecnologia offre un campo di regolazione della luminosità molto ampio con una variazione della temperatura di colore molto morbida e graduale, da un massimo di 3000K a un minimo di 1700 K. Il CRI e il rendimento dei colori è eccellente per l'intero range di dimmerazione, con valori di CRI fino a 97 e R9 di 94.





EN The retracted optics of Yori Recessed make it a luminaire with excellent visual comfort; the position of the optics also means the projector's cylindrical body can accommodate a wide range of accessories.

IT Grazie alla ottica arretrata Yori Recessed è un apparecchio dall'eccellente comfort visivo; la posizione dell'ottica consente inoltre di alloggiare diverse tipologie di accessori all'interno del corpo cilindrico del proiettore.

EN Die-cast aluminium cooling fins for optimum heat dissipation
IT Dissipatore in pressofusione di alluminio per un'ottimizzazione della dissipazione del calore



EN Built-in antiglare shield, and retracted optics for superior visual comfort
IT Schermo antiabbagliante integrato e ottica arretrata per un migliore comfort visivo

EN Filters and lenses
IT Filtri e lenti



Glass filter 1 mm /
Filtro vetro 1 mm



Colored Gel Slides /
Vetrini per gel colorato



Selective filter /
Filtro selettivo



Elliptical beam lens /
Lente per fascio ellittico



Opal lens /
Lente opale



Spread lens
Lente diffondente



Wide texture honeycomb louvre /
Griglia alveolare a maglia larga



Dense texture honeycomb louvre /
Griglia alveolare a maglia fitta

EN Filters and lenses holders
IT Porta filtri e lenti




Anti-glare accessory /
Antiabbagliante




Cross blade louvre /
Griglia a croce



Cone 45° wall washer /
Cono 45° wall washer



Barn doors /
Alette rompiflusso

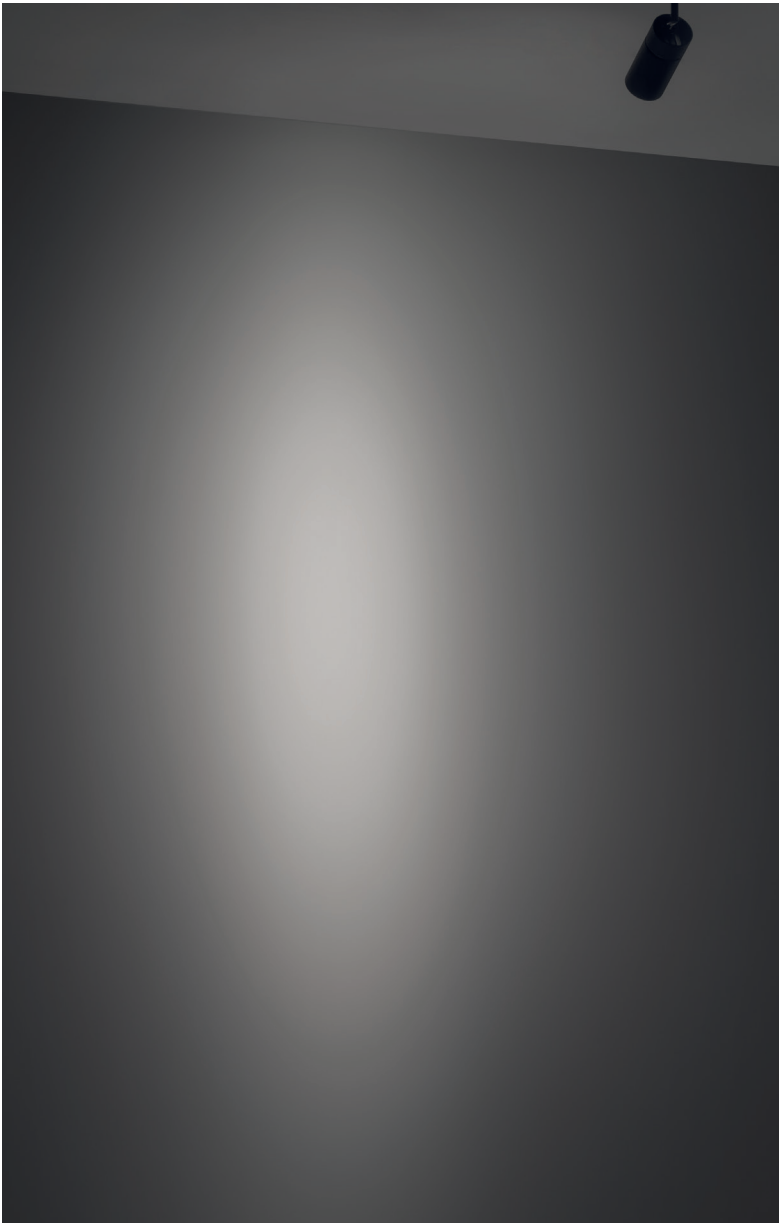

^{EN} Ribbed glass light effect
^{IT} Effetto luce con vetro millerighe



^{EN} All filter/lens holders have double slots so two accessories can be inserted together
^{IT} Tutti i porta filtri/lenti dispongono di due scompartimenti che permettono l'inserimento di due accessori in contemporanea



—

Yori Evo Ghostrack

Yori Evo Ghostrack

EN This game-changing range of track-mounted projectors comes in four sizes, as a single projector or in clusters and features an extensive selection of Precision and Performance lenses or reflectors. The range of optics plus the new, concealed drivers and adapters for standard, 3-circuit tracks can be used to create unique, extremely flexible configurations.


IT Questa nuova rivoluzionaria gamma di proiettori da binario, in 4 dimensioni, è disponibile in versione singola o in cluster e offre un'ampia scelta di lenti o riflettori, Precision e Performance. Le tecnologie ottiche adottate, i nuovi driver e adattatori invisibili per binari standard a 3 accensioni consentono configurazioni uniche ed estremamente flessibili.



EN Yori Ghostrack mounting
IT Montaggio Yori Ghostrack



EN Ghostrack driver mounting
IT Montaggio Ghostrack driver

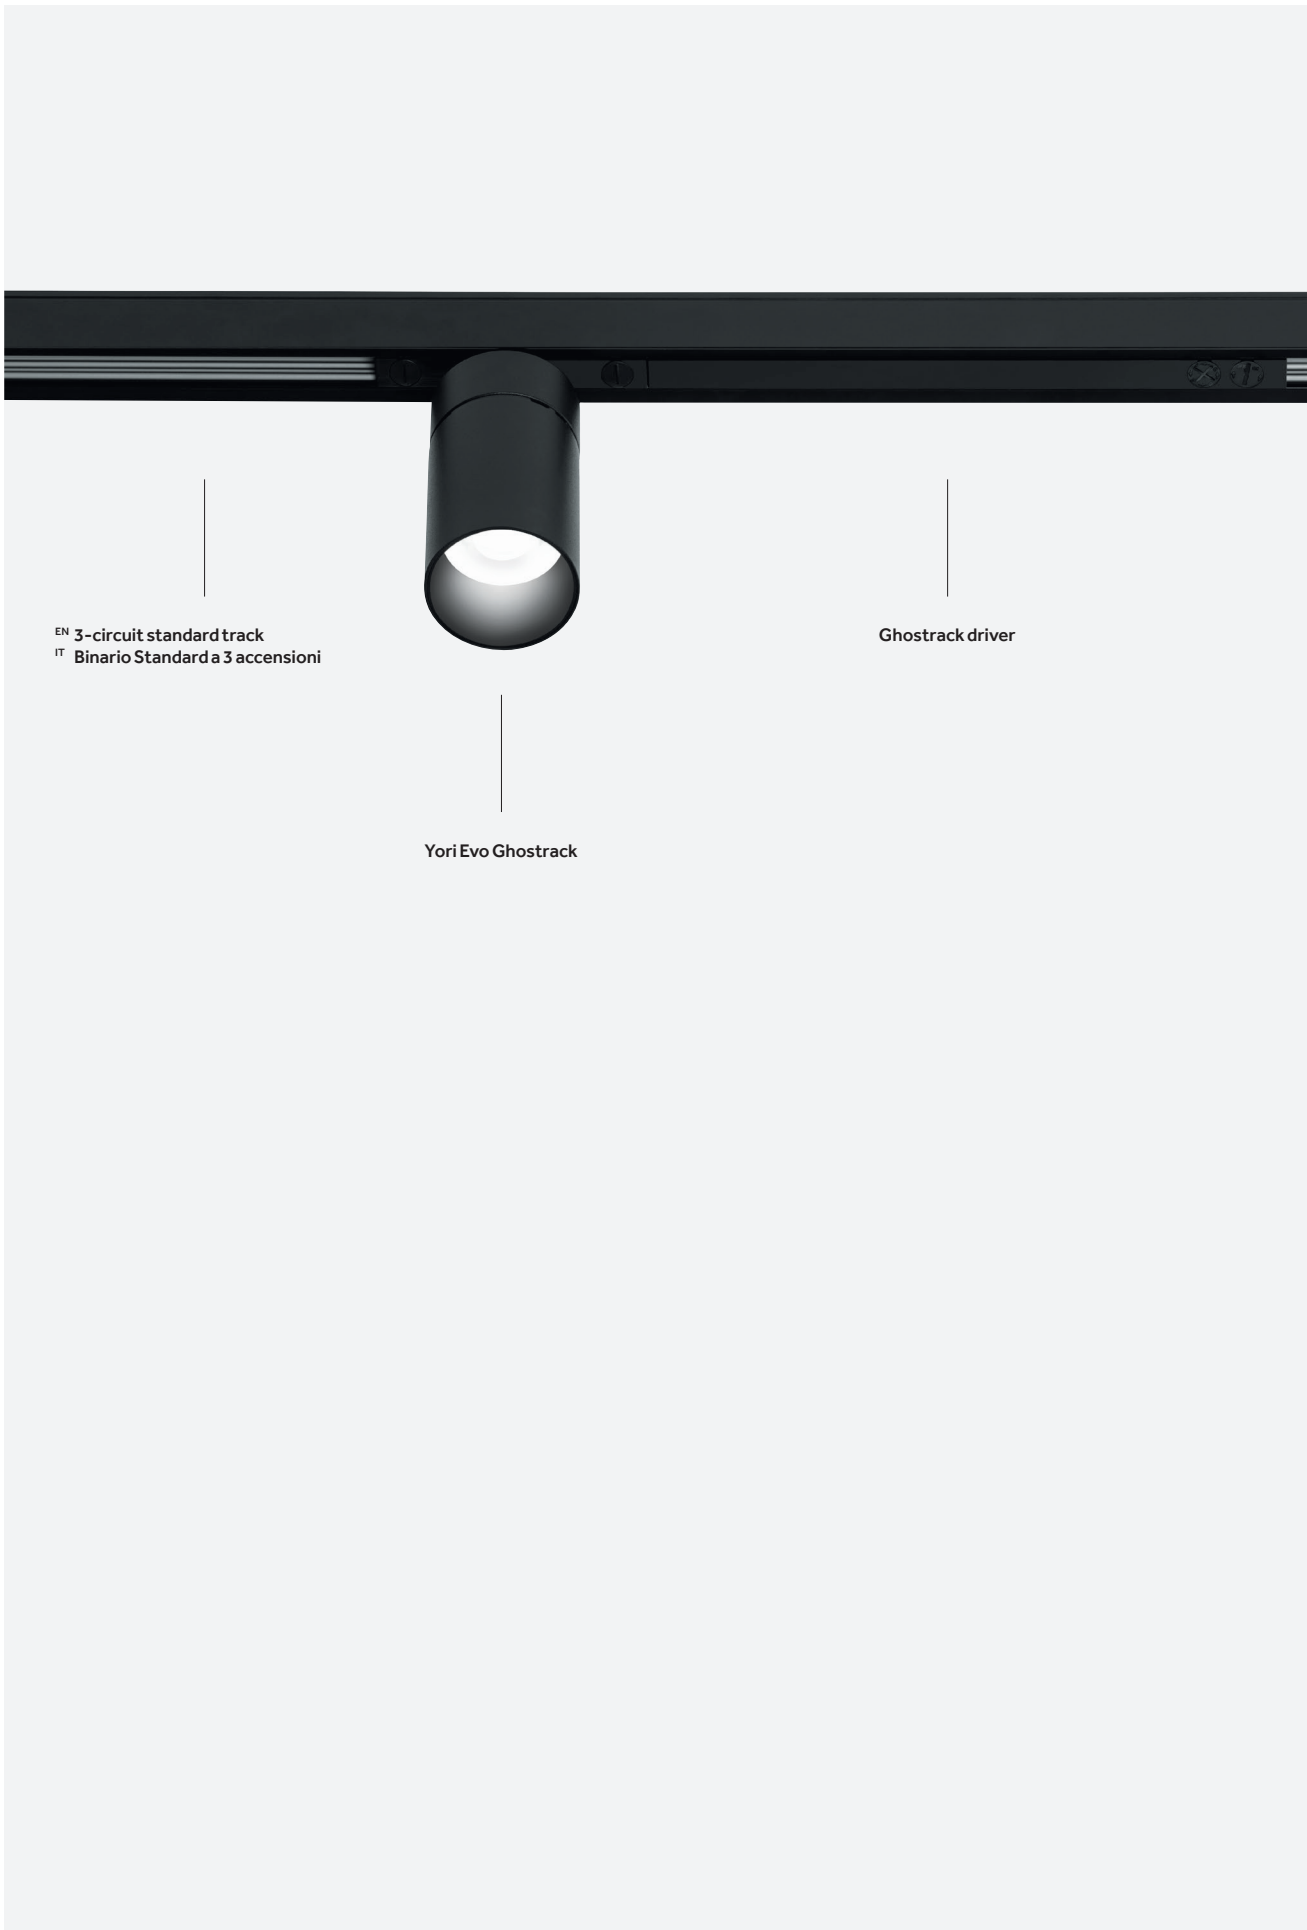

EN 3-circuit standard track
IT Binario Standard a 3 accensioni


Ghostrack driver

Yori Evo Ghostrack

EN Yori Evo Ghostrack can be used to create extraordinary lighting configurations and layouts. The innovative, patented technology means they are fitted with concealed adapters and drivers for individual or cluster installation on standard, 3-circuit tracks.

IT Yori Evo Ghostrack offre la possibilità di creare configurazioni e layout illuminotecnici straordinari. Grazie ad una innovativa tecnologia brevettata, è dotato di adattatore e driver invisibili per un'installazione singola o in cluster su binari standard a 3 accensioni.

Single

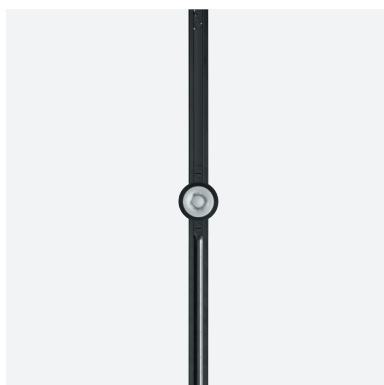

Single
(1 Ghostrack driver + 1 Yori Evo Ghostrack)





Ø 60 mm

Ø 75 mm

Ø 95 mm

Cluster (2X)

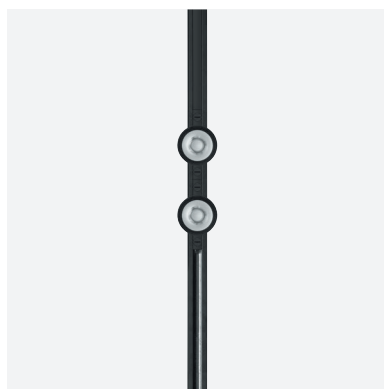

Cluster (2X)
(1 Ghostrack driver + 2 Yori Evo Ghostrack)




Ø 60 mm

Ø 75 mm

Ø 95 mm

Cluster (3X)




Cluster (3X)
(1 Ghostrack driver + 3 Yori Evo Ghostrack)



Ø 60 mm





Ø 75 mm



Ø 95 mm

Cluster (4X)

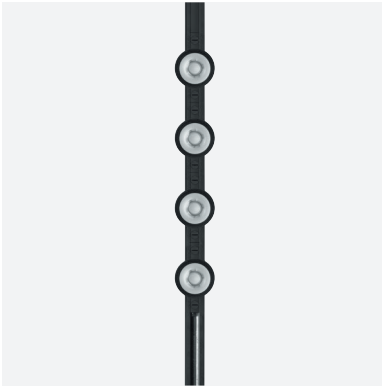


Cluster (4X)
(1 Ghostrack driver + 4 Yori Evo Ghostrack)




Ø 60 mm

Cluster (1 to 14)

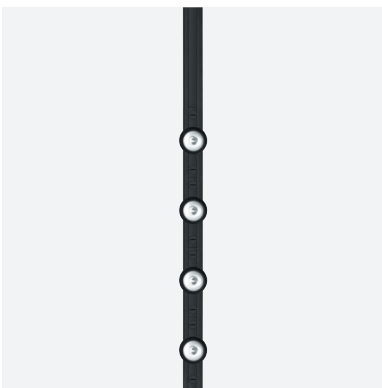

Create your Custom Cluster:
from 1 to 14 Yori Evo Ghostrack Mini (Ø43 mm)



Ghostrack driver

Single Mini Ø43 mm
(1X)

Double Mini Ø 43 mm
(2X)




Mini Ø 43 mm

EN The cluster versions of Yori Evo Ghostrack can be customised with an optional spacer. The spacer comes in a number of lengths and can be used for flexible positioning of the projectors, using the track to create the configuration that best meets the lighting design needs.

IT Le versioni cluster di Yori Evo Ghostrack possono essere personalizzate con uno spacer accessorio. Disponibile in diverse lunghezze lo spacer è un distanziale che permette di posizionare i proiettori con flessibilità realizzando sul binario la configurazione più adatta alle esigenze illuminotecniche del progetto.

Spacer

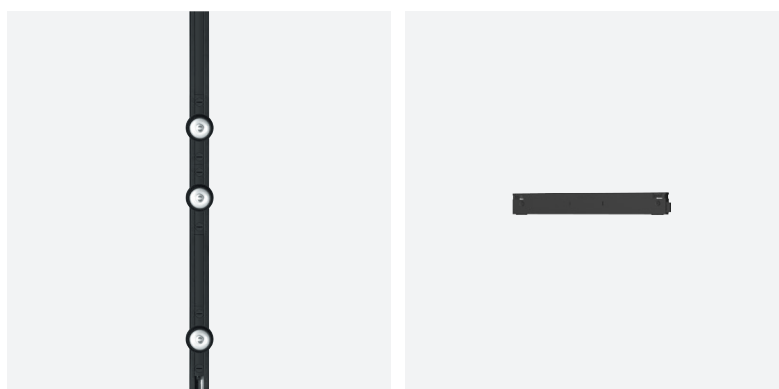

**Lengths/
Lunghezze**

- 110 mm
- 220 mm
- 300 mm
- 400 mm
- 600 mm
- 800 mm
- 1000 mm
- 1200 mm




^{EN} The spacers (between 300 mm and 1200 mm long) can be cut to size to suit the desired distance between luminaires.


^{IT} Gli spacer (dalla lunghezza 300 mm alla lunghezza 1200 mm) possono essere tagliati a misura per differenti esigenze di inter-distanza tra gli apparecchi.

Examples:


Ø75 | Cluster (2X) + 1 Spacer

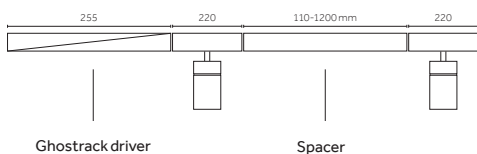

Ø60 | Cluster (4X) + 2 Spacer

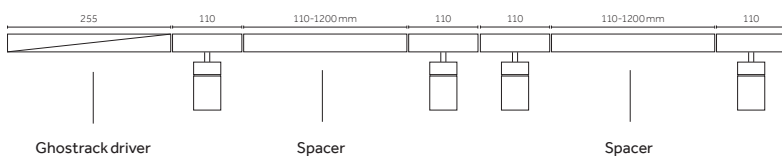

Ø43 | Cluster (1 to 14) + 2 Spacer

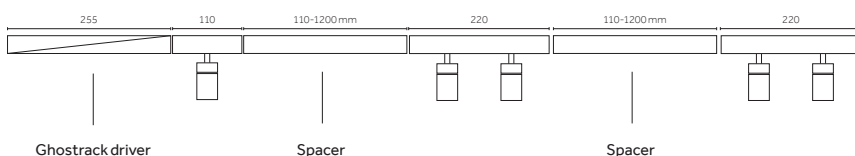



403

EN The wide range of special finishes, available as standard for Yori Evo Ghostrack, and the new accessories make this luminaire extremely versatile and suitable for application in settings with different architectural details and materials.

IT L'ampia selezione di finiture speciali, disponibili come standard per Yori Evo Ghostrack, e di nuovi accessori, permettono una grande flessibilità di utilizzo dell'apparecchio in ambienti di natura differente per dettagli architettonici e materiali.



EN **12** Embossed matt white
IT **12** Bianco opaco gofrato



EN **C0** Royal matt white
IT **C0** Royal bianco opaco



EN **31** Embossed matt black
IT **31** Nero opaco gofrato



EN **B0** Royal matt black
IT **B0** Royal nero opaco



EN **D0** Brushed brass
IT **D0** Ottone spazzolato



EN **E0** Brushed gold
IT **E0** Oro spazzolato



EN **01** Chrome plated
IT **01** Cromo




EN **M0** Brushed aluminium
IT **M0** Alluminio spazzolato





EN **N0** Brushed copper
IT **N0** Rame spazzolato



EN **L0** Antiqued brushed bronze
IT **L0** Bronzo anticato spazzolato

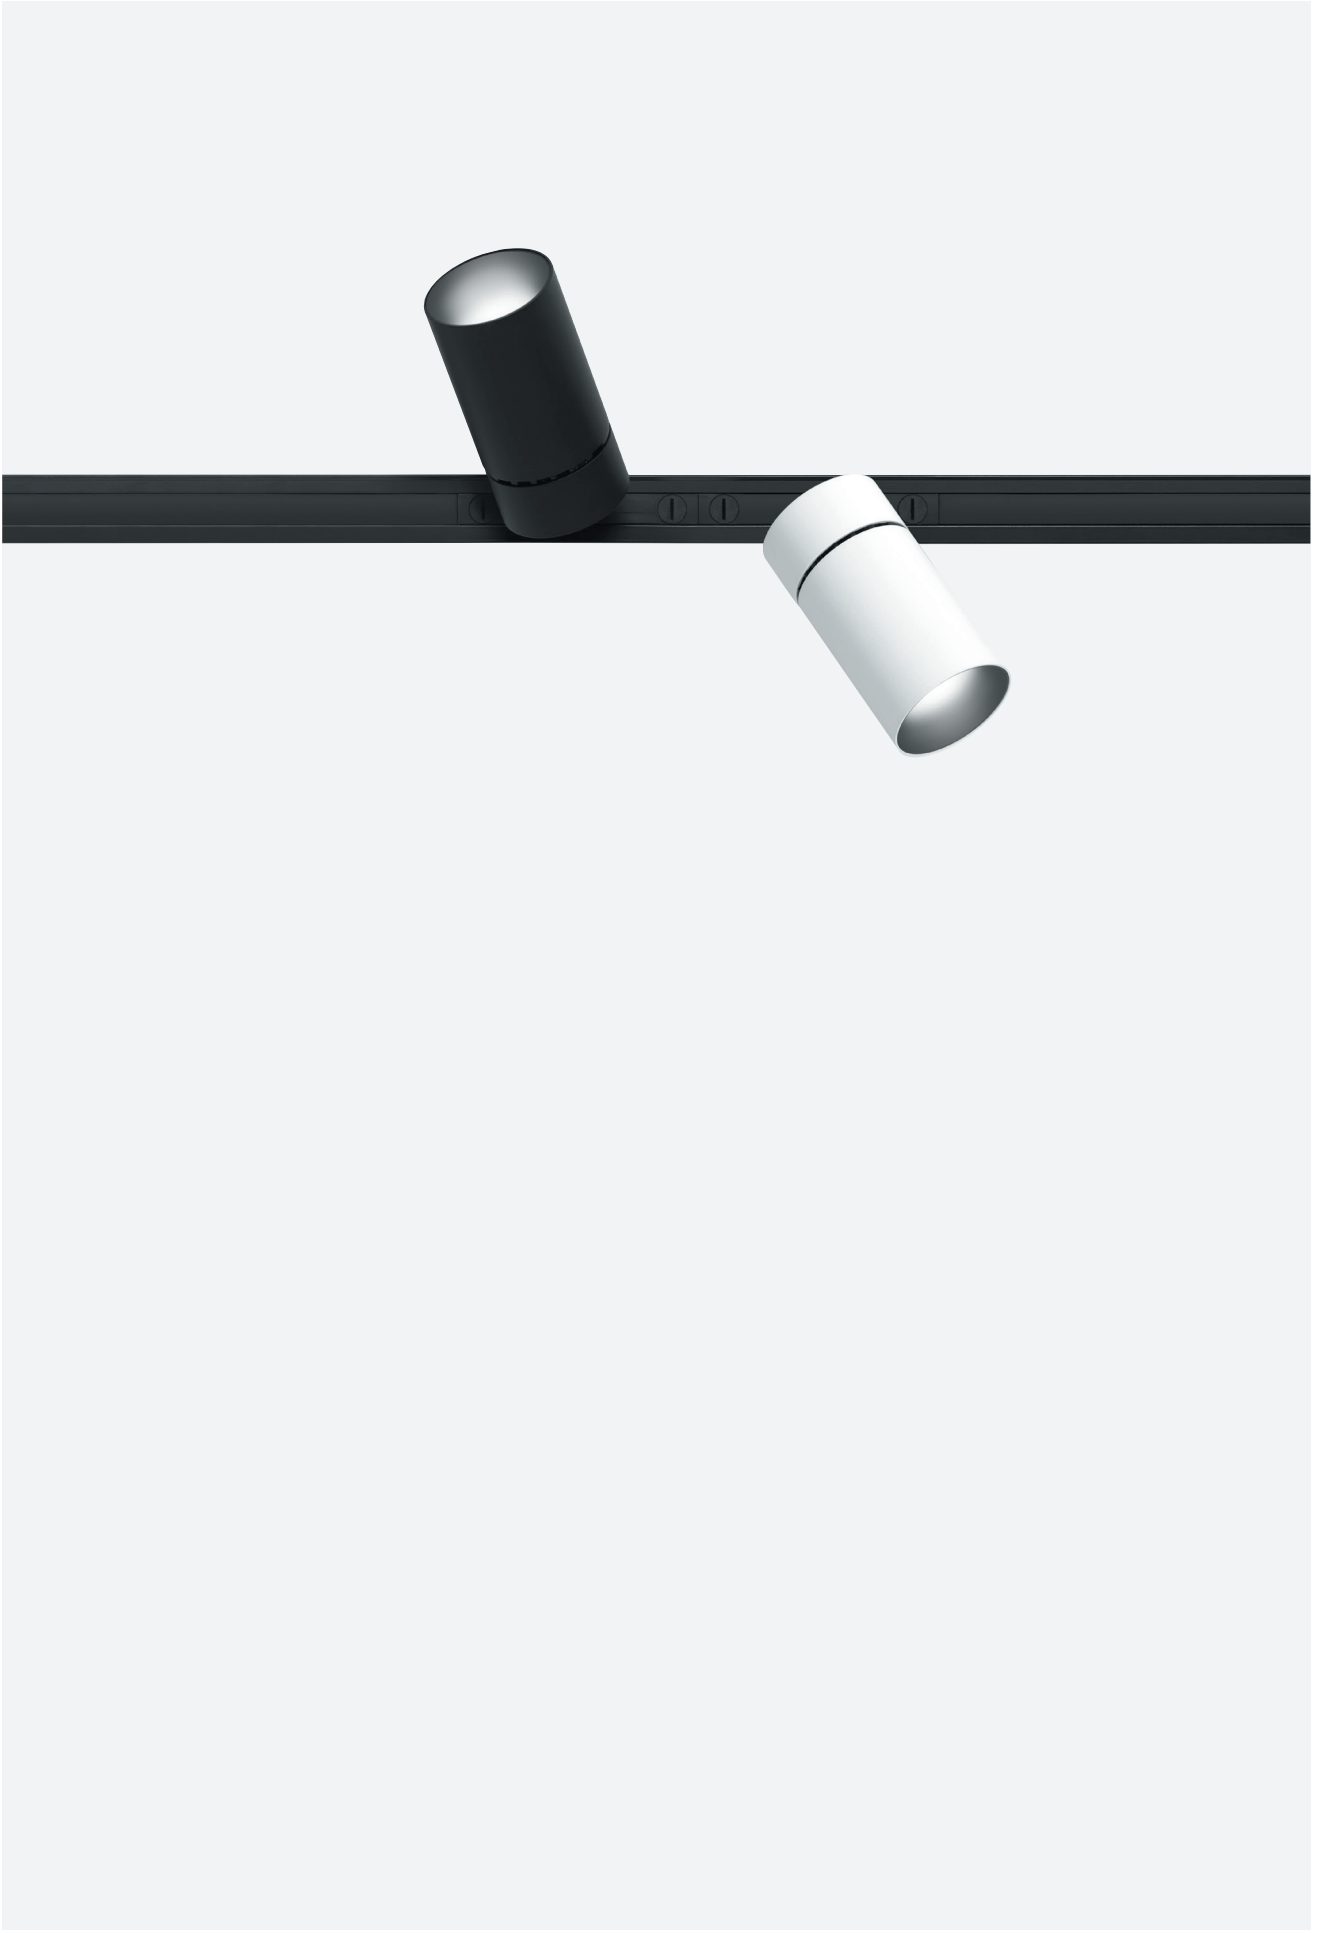

Mini Ø 43 mm | Precision (1X)



Code example:
X . **1X.FH60** **A** . **HW** **12**

Accessories: p.410
 Spacers/Distanziali: p.412
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net
 Ghostrack driver: p.412



2,5 W POWER LED Lumen delivered up to 250lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	1X.FH60 Precision	A 7° Very narrow	HW	2700	>90	215	<3	01
		B 10° Narrow	HQ	3000	>90	220	<3	12
		E 22° Medium	WW	3000	>80	253	<3	31
		H 38° Wide	NN	4000	>80	288	<3	B0
								C0
								D0
								E0
								L0
								M0
								N0

LED nominal lumen

4 W POWER LED Lumen delivered up to 435lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	1X.FH61 Precision	A 7° Very narrow	HW	2700	>90	410	<3	01
		B 11° Narrow	HQ	3000	>90	415	<3	12
		E 23° Medium	WW	3000	>80	485	<3	31
		H 40° Wide	NN	4000	>80	530	<3	B0
								C0
								D0
								E0
								L0
								M0
								N0

LED nominal lumen

9 W POWER LED Lumen delivered up to 750lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	1X.FH62 Precision	A 7° Very narrow	HW	2700	>90	725	<3	01
		B 11° Narrow	HQ	3000	>90	730	<3	12
		E 23° Medium	WW	3000	>80	845	<3	31
		H 40° Wide	NN	4000	>80	940	<3	B0
								C0
								D0
								E0
								L0
								M0
								N0



LED nominal lumen

6,5 W Warm Dimming COB LED Lumen delivered up to 130lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	1X.FH62 Precision	B 27° Medium	DT	1800-2800	>95	10-550	<4	01
								12
								31
								B0
								C0
								D0
								E0
								L0
								M0
								N0

LED nominal lumen


Mini Ø 43 mm | Performance (1X)



Code example:

X . 1X.FH71 B . HW 12

Accessories: p.411
 Spacers/Distanziali: p.412
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net
 Ghosttrack driver: p.412



4W POWERLED


Lumen delivered up to 450 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	1X.FH71 Performance	B 6° Narrow	HW	2700	>90	410	<3	01
		E 18° Medium	HQ	3000	>90	415	<3	12
		H 36° Wide	WW	3000	>80	485	<3	31
			NN	4000	>80	530	<3	B0
			LED nominal lumen					C0
								D0
								E0
								L0
								M0
								NO




9W POWERLED

Lumen delivered up to 780 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	1X.FH72 Performance	B 6° Narrow	HW	2700	>90	725	<3	01
		E 18° Medium	HQ	3000	>90	730	<3	12
		H 36° Wide	WW	3000	>80	845	<3	31
			NN	4000	>80	940	<3	B0
			LED nominal lumen					C0
								D0
								E0
								L0
								M0
								NO

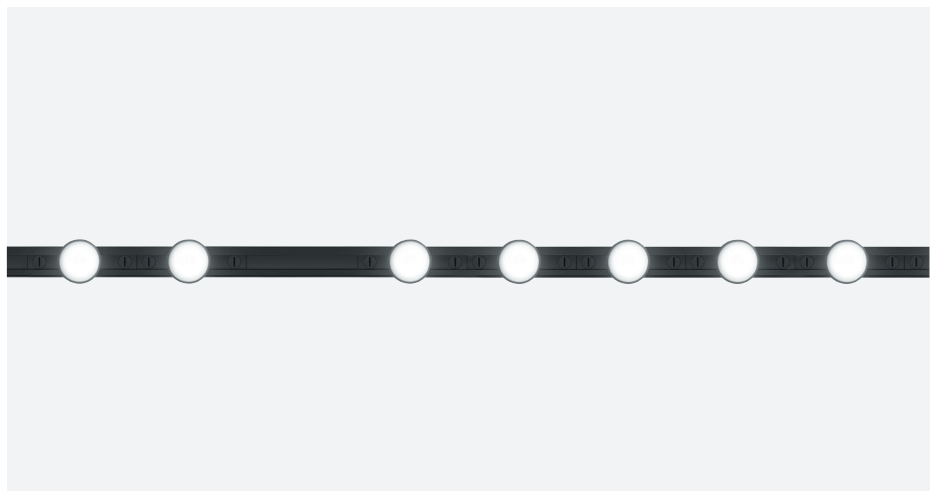


Mini Ø 43 mm | Precision (2X)



Code example:
X . 2X.FH60 A . HW 12

Accessories: p.410
 Spacers/Distanziali: p.412
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net
 Ghostrack driver: p.412



2,5 W POWERLED Lumen delivered up to 2x250lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	2X.FH60 Precision	A 7° Very narrow	HW	2700	>90	2x215	<3	01
		B 10° Narrow	HQ	3000	>90	2x220	<3	12
		E 22° Medium	WW	3000	>80	2x253	<3	31
		H 38° Wide	NN	4000	>80	2x288	<3	B0
LED nominal lumen								
								C0
								D0
								E0
								L0
								M0
								N0

4 W POWERLED Lumen delivered up to 2x435lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	2X.FH61 Precision	A 7° Very narrow	HW	2700	>90	2x410	<3	01
		B 11° Narrow	HQ	3000	>90	2x415	<3	12
		E 23° Medium	WW	3000	>80	2x485	<3	31
		H 40° Wide	NN	4000	>80	2x530	<3	B0
LED nominal lumen								
								C0
								D0
								E0
								L0
								M0
								N0



9 W POWERLED Lumen delivered up to 2x750lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	2X.FH62 Precision	A 7° Very narrow	HW	2700	>90	2x725	<3	01
		B 11° Narrow	HQ	3000	>90	2x730	<3	12
		E 23° Medium	WW	3000	>80	2x845	<3	31
		H 40° Wide	NN	4000	>80	2x940	<3	B0
LED nominal lumen								
								C0
								D0
								E0
								L0
								M0
								N0

6,5 W Warm Dimming COB LED Lumen delivered up to 2x130lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	2X.FH62 Precision	B 27° Medium	DT	1800-2800	>95	2x10-550	<4	01
LED nominal lumen								
								12
								31
								B0
								C0
								D0
								E0
								L0
								M0
								N0

Mini Ø 43 mm | Performance (2X)



Code example:

X . 2X.FH71 B . HW 12

Accessories: p.411
 Spacers/Distanziali: p.412
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net
 Ghosttrack driver: p.412



4W POWERLED

Lumen delivered up to 2x450lm / Lumen maintenance: L90B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	2X.FH71 Performance	B 6° Narrow	HW	2700	>90	2x410	<3	01
		E 18° Medium	HQ	3000	>90	2x415	<3	12
		H 36° Wide	WW	3000	>80	2x485	<3	31
			NN	4000	>80	2x530	<3	B0
			LED nominal lumen					C0
								D0
								E0
								L0
								M0
								NO

9W POWERLED

Lumen delivered up to 2x780lm / Lumen maintenance: L90B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	2X.FH72 Performance	B 6° Narrow	HW	2700	>90	2x725	<3	01
		E 18° Medium	HQ	3000	>90	2x730	<3	12
		H 36° Wide	WW	3000	>80	2x845	<3	31
			NN	4000	>80	2x940	<3	B0
			LED nominal lumen					C0
								D0
								E0
								L0
								M0
								NO

Mini Ø 43 mm | Precision | Accessories

Optics accessories/ Accessori ottiche

	Description	Code	Finishes
	Glass filter 1 mm/ Filtro vetro 1 mm	0.26400.00	4A
			5A
			6A
			7A
			8A
		9A	

	Description	Code
	Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta	0.26440.0000

	Description	Code
	Wide texture honeycomb louvre/ Griglia alveolare a maglia larga	0.26448.0000

	Description	Code
	Colored Gel Slides (2 pieces)/ Vetrini per gel colorato (2 pezzi)	0.26408.0000

	Description	Code
	Elliptical beam lens / Lente per fascio ellittico	0.26456.0000

	Description	Code
	Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K	0.26557.0000

	Description	Code
	Opal lens/ Lente opale	0.26460.0000

	Description	Code
	Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K	0.26416.0000

	Description	Code
	Spread lens Lente diffondente	0.26468.0000

	Description	Code
	Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K	0.26424.0000

	Description	Code
	Cross blade louvre/ Griglia a croce	0.26476.0000

	Description	Code
	Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K	0.26432.0000

	Description	Code
	Barn doors/ Alette rompiflusso	0.26484.0000

	Description	Code
	Selective filter 3000K - 3600K / Filtro selettivo 3000K - 3600K	0.26565.0000

	Description	Code	Finishes
	Cone 45° wall washer/ Cono 45° wall washer	0.26488.00	12 31

























	Description	Code
	Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K	0.26573.0000

	Description	Code	Finishes
	Short snoot/ Cilindro corto	0.26556.00	12 31

	Description	Code
	Ghost lock - max 3,5kg For vertical instalation/ Per installazione verticale	0.26508.00















Mini Ø 43 mm | Performance | Accessories

Optics accessories/ Accessori ottiche

Description		Code	Finishes	
	Glass filter 1 mm/ Filtro vetro 1 mm	<u>0.26401.00</u>	4A 	
			5A 	
			6A 	
			7A 	
			8A 	
			9A 	
	Colored Gel Slides (2 pieces)/ Vetrini per gel colorato (2 pezzi)	<u>0.26409.0000</u>		
	Selective filter 3000K - 2700K/ Filtro selettivo 3000K - 2700K	<u>0.26558.0000</u>		
	Selective filter 2700K - 2500K/ Filtro selettivo 2700K - 2500K	<u>0.26417.0000</u>		
	Selective filter 2700K - 2200K/ Filtro selettivo 2700K - 2200K	<u>0.26425.0000</u>		
	Selective filter 2700K - 2000K/ Filtro selettivo 2700K - 2000K	<u>0.26433.0000</u>		
	Selective filter 3000K - 3600K/ Filtro selettivo 3000K - 3600K	<u>0.26566.0000</u>		
	Ghost lock - max 3,5kg For vertical instalation/ Per installazione verticale	<u>0.26508.00</u>		
	Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K	<u>0.26574.0000</u>		
	Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta	<u>0.26441.0000</u>		
	Wide texture honeycomb louvre/ Griglia alveolare a maglia larga	<u>0.26449.0000</u>		
	Elliptical beam lens / Lente per fascio ellittico	<u>0.26492.0000</u>		
	Opal lens/ Lente opale	<u>0.26461.0000</u>		
	Spread lens Lente diffondente	<u>0.26469.0000</u>		
	Cross blade louvre/ Griglia a croce	<u>0.26480.0000</u>		
	Cone 45° wall washer/ Cono 45° wall washer	<u>0.26496.00</u>	12 	31 

Mini Ø 43 mm | Accessories



Mounting accessories/ Accessori montaggio

	Description Spacer - 110mm/ Distanziale - 110mm	Code 0.26500.0000		Description Spacer - 600mm/ Distanziale - 600mm  p. 402	Code 0.26504.0000
	Description Spacer - 220mm/ Distanziale - 220mm	Code 0.26501.0000		Description Spacer - 800mm/ Distanziale - 800mm  p. 402	Code 0.26505.0000
	Description Spacer - 300mm/ Distanziale - 300mm  p. 402	Code 0.26502.0000		Description Spacer - 1000mm/ Distanziale - 1000mm  p. 402	Code 0.26506.0000
	Description Spacer - 400mm/ Distanziale - 400mm  p. 402	Code 0.26503.0000		Description Spacer - 1200mm/ Distanziale - 1200mm  p. 402	Code 0.26507.0000



Mini Ø 43 mm | Electrical Devices

Ghostrack driver



2,5 W POWER LED

Type	Code	W	Size (mm)	Tech. info	mA	Connectable fixtures
On/Off	0.30456.0000	-		220-240Vac / 50/60Hz	700	Min-Max: 8-14 (1X); 4-7 (2X)
DALI	D.30456.0000	-		120-277Vac / 50/60Hz	700	Min-Max: 4-14 (1X); 2-7 (2X)


4 W POWER LED

Type	Code	W	Size (mm)	Tech. info	mA	Connectable fixtures
On/Off	0.30451.0000	-		220-240Vac / 50/60Hz	350	Min-Max: 3-4 (1X); 2 (2X)
DALI	D.30451.0000	-		120-277Vac / 50/60Hz	350	Min-Max: 1-4 (1X); 1-2 (2X)

9 W POWER LED


Type	Code	W	Size (mm)	Tech. info	mA	Connectable fixtures
On/Off	0.30453.0000	-		220-240Vac / 50/60Hz	700	Min-Max: 3-4 (1X); 2 (2X)
DALI	D.30453.0000	-		120-277Vac / 50/60Hz	700	Min-Max: 1-4 (1X); 1-2 (2X)

6,5 W Warm dimming COBLED

Type	Code	W	Size (mm)	Tech. info	mA	Connectable fixtures
DALI	D.30453.0000	-		120-277Vac / 50/60Hz	700	Min-Max: 2-5 (1X); 1-2 (2X)



Create your Custom Cluster:

from 1 to 14 Yori Evo Ghostrack Mini (Ø43 mm)

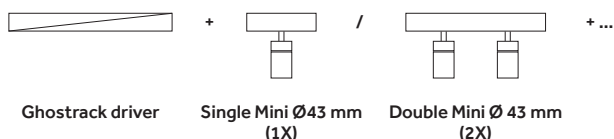



Ø 60 mm | Precision

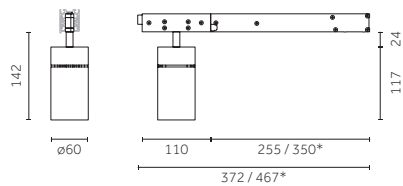

Code example:
0 . 1X.GH62 B . HC 01

Accessories: p.420
 Spacers/Distanziali: p.422
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

9W COB LED Lumen delivered up to 1115 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>1X.GH62</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	960	< 2	<u>01</u>
<u>D</u> *DALI		<u>E</u> 20° Medium	<u>HW</u>	2700	>90	1050	< 2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	1100	< 2	<u>31</u>
			<u>WW</u>	3000	>80	1300	< 3	<u>B0</u>
			<u>NN</u>	4000	>80	1360	< 3	<u>C0</u>
								<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

LED nominal lumen

12W COB LED Lumen delivered up to 1455 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>1X.GH63</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1250	< 2	<u>01</u>
<u>D</u> *DALI		<u>E</u> 20° Medium	<u>HW</u>	2700	>90	1370	< 2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	1420	< 2	<u>31</u>
			<u>WW</u>	3000	>80	1700	< 3	<u>B0</u>
			<u>NN</u>	4000	>80	1775	< 3	<u>C0</u>
								<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

LED nominal lumen

17W COB LED Lumen delivered up to 1970 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>1X.GH64</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1700	< 2	<u>01</u>
<u>D</u> *DALI		<u>E</u> 20° Medium	<u>HW</u>	2700	>90	1870	< 2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	1920	< 2	<u>31</u>
			<u>WW</u>	3000	>80	2320	< 3	<u>B0</u>
			<u>NN</u>	4000	>80	2400	< 3	<u>C0</u>
								<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>



LED nominal lumen

12W Warm Dimming COB LED Lumen delivered up to 690 lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>D</u> *DALI	<u>1X.GH63</u> Precision	<u>B</u> 27° Medium	<u>DT</u>	1700-3000	>95	100-1000	< 4	<u>01</u>
								<u>12</u>
								<u>31</u>
								<u>B0</u>
								<u>C0</u>
								<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

LED nominal lumen

Ø 60 mm | Performance

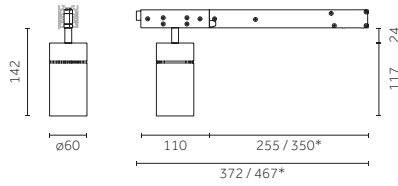

Code example:
0 . 1X.GH72 B . HC 01



Accessories: p.421
 Spacers/Distanziali: p.422
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
www.reggiani.net

9W COB LED		Lumen delivered up to 1200 lm / Lumen maintenance: L80 B10=50,000h							Finishes
Driver	Version	Optics	LED	K	CRI	lm	SDCM		
0 On-Off	1X.GH72 Performance	B 13° Narrow	HC	3000	>98	960	<2	01	
D *DALI		E 24° Medium	HW	2700	>90	1050	<2	12	
		H 40° Wide	HQ	3000	>90	1100	<2	31	
		K - Without optics	WW	3000	>80	1300	<3	B0	
			NN	4000	>80	1360	<3	C0	
			LED nominal lumen					D0	
								E0	
								L0	
								M0	
								N0	

12W COB LED		Lumen delivered up to 1560 lm / Lumen maintenance: L80 B10=50,000h							Finishes
Driver	Version	Optics	LED	K	CRI	lm	SDCM		
0 On-Off	1X.GH73 Performance	B 13° Narrow	HC	3000	>98	1250	<2	01	
D *DALI		E 24° Medium	HW	2700	>90	1370	<2	12	
		H 40° Wide	HQ	3000	>90	1420	<2	31	
		K - Without optics	WW	3000	>80	1700	<3	B0	
			NN	4000	>80	1775	<3	C0	
			LED nominal lumen					D0	
								E0	
								L0	
								M0	
								N0	

17W COB LED		Lumen delivered up to 2110 lm / Lumen maintenance: L80 B10=50,000h							Finishes
Driver	Version	Optics	LED	K	CRI	lm	SDCM		
0 On-Off	1X.GH74 Performance	B 13° Narrow	HC	3000	>98	1700	<2	01	
D *DALI		E 24° Medium	HW	2700	>90	1870	<2	12	
		H 40° Wide	HQ	3000	>90	1920	<2	31	
		K - Without optics	WW	3000	>80	2320	<3	B0	
			NN	4000	>80	2400	<3	C0	
			LED nominal lumen					D0	
								E0	
								L0	
								M0	
								N0	

Ø 60 mm | Precision (2X)

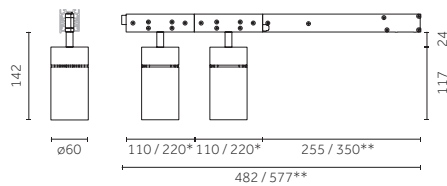

Code example:
0 . 2X.GH62 B . HC 01

Accessories: p.420
 Spacers/Distanziali: p.422
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net



Notes:
 *220 mm adapter available/
 *Disponibile con adattatore da
 220 mm

9W COB LED		Lumen delivered up to 2x1115 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>2X.GH62</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	2x960	<2	<u>01</u>
<u>D</u> **DALI		<u>E</u> 20° Medium	<u>HW</u>	2700	>90	2x1050	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	2x1100	<2	<u>31</u>
			<u>WW</u>	3000	>80	2x1300	<3	<u>B0</u>
			<u>NN</u>	4000	>80	2x1360	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

12W COB LED		Lumen delivered up to 2x1455 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>2X.GH63</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	2x1250	<2	<u>01</u>
<u>D</u> **DALI		<u>E</u> 20° Medium	<u>HW</u>	2700	>90	2x1370	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	2x1420	<2	<u>31</u>
			<u>WW</u>	3000	>80	2x1700	<3	<u>B0</u>
			<u>NN</u>	4000	>80	2x1775	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

17W COB LED		Lumen delivered up to 2x1970 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>2X.GH64</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	2x1700	<2	<u>01</u>
<u>D</u> **DALI		<u>E</u> 20° Medium	<u>HW</u>	2700	>90	2x1870	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	2x1920	<2	<u>31</u>
			<u>WW</u>	3000	>80	2x2320	<3	<u>B0</u>
			<u>NN</u>	4000	>80	2x2400	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

Ø 60 mm | Performance (2X)

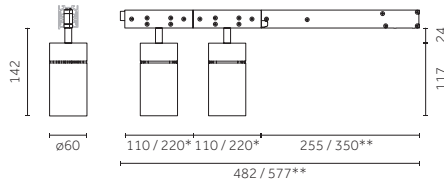

Code example:
0 . **2X.GH72** **B** . **HC** **01**

Accessories: p.421
 Spacers/Distanziali: p.422
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
www.reggiani.net




Notes:
 *220 mm adapter available/
 *Disponibile con adattatore da 220 mm

9W COB LED		Lumen delivered up to 2x1200 lm / Lumen maintenance: L80 B10=50,000h							Finishes
Driver	Version	Optics	LED	K	CRI	lm	SDCM		
0 On-Off	2X.GH72 Performance	B 13° Narrow	HC	3000	>98	2x960	<2	01	
D **DALI		E 24° Medium	HW	2700	>90	2x1050	<2	12	
		H 40° Wide	HQ	3000	>90	2x1100	<2	31	
		K - Without optics	WW	3000	>80	2x1300	<3	B0	
			NN	4000	>80	2x1360	<3	C0	
			LED nominal lumen					D0	
								E0	
								L0	
								M0	
								N0	

12W COB LED		Lumen delivered up to 2x1560 lm / Lumen maintenance: L80 B10=50,000h							Finishes
Driver	Version	Optics	LED	K	CRI	lm	SDCM		
0 On-Off	2X.GH73 Performance	B 13° Narrow	HC	3000	>98	2x1250	<2	01	
D **DALI		E 24° Medium	HW	2700	>90	2x1370	<2	12	
		H 40° Wide	HQ	3000	>90	2x1420	<2	31	
		K - Without optics	WW	3000	>80	2x1700	<3	B0	
			NN	4000	>80	2x1775	<3	C0	
			LED nominal lumen					D0	
								E0	
								L0	
								M0	
								N0	

17W COB LED		Lumen delivered up to 2x2110 lm / Lumen maintenance: L80 B10=50,000h							Finishes
Driver	Version	Optics	LED	K	CRI	lm	SDCM		
0 On-Off	2X.GH74 Performance	B 13° Narrow	HC	3000	>98	2x1700	<2	01	
D **DALI		E 24° Medium	HW	2700	>90	2x1870	<2	12	
		H 40° Wide	HQ	3000	>90	2x1920	<2	31	
		K - Without optics	WW	3000	>80	2x2320	<3	B0	
			NN	4000	>80	2x2400	<3	C0	
			LED nominal lumen					D0	
								E0	
								L0	
								M0	
								N0	

Ø 60 mm | Precision (3X)

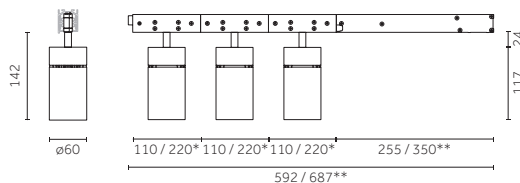

Code example:
0 . 3X.GH62 B . HC . 01



Accessories: p.420
 Spacers/Distanziali: p.422
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

Notes:
 *220 mm adapter available/
 *Disponibile con adattatore da 220 mm

9W COB LED		Lumen delivered up to 3x1115 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	3X.GH62 Precision	B 12° Narrow	HC	3000	>98	3x960	<2	01
D **DALI		E 20° Medium	HW	2700	>90	3x1050	<2	12
		K - Without optics	HQ	3000	>90	3x1100	<2	31
			WW	3000	>80	3x1300	<3	B0
			NN	4000	>80	3x1360	<3	C0
			LED nominal lumen					D0
								E0
								L0
								M0
								N0

12W COB LED		Lumen delivered up to 2x1455 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	3X.GH63 Precision	B 12° Narrow	HC	3000	>98	3x1250	<2	01
D **DALI		E 20° Medium	HW	2700	>90	3x1370	<2	12
		K - Without optics	HQ	3000	>90	3x1420	<2	31
			WW	3000	>80	3x1700	<3	B0
			NN	4000	>80	3x1775	<3	C0
			LED nominal lumen					D0
								E0
								L0
								M0
								N0

Ø 60 mm | Performance (3X)

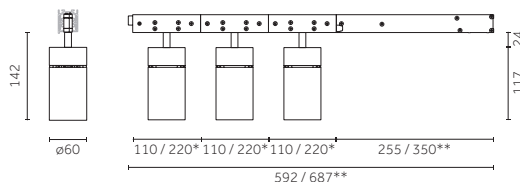

Code example:
0 . 3X.GH72 B . HC . 01



Accessories: p.421
 Spacers/Distanziali: p.422
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

Notes:
 *220 mm adapter available/
 *Disponibile con adattatore da 220 mm

9W COB LED		Lumen delivered up to 3x1200 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	3X.GH72 Performance	B 13° Narrow	HC	3000	>98	3x960	<2	01
D **DALI		E 24° Medium	HW	2700	>90	3x1050	<2	12
		H 40° Wide	HQ	3000	>90	3x1100	<2	31
		K - Without optics	WW	3000	>80	3x1300	<3	B0
			NN	4000	>80	3x1360	<3	C0
			LED nominal lumen					D0
								E0
								L0
								M0
								N0

12W COB LED		Lumen delivered up to 2x1560 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	3X.GH73 Performance	B 13° Narrow	HC	3000	>98	3x1250	<2	01
D **DALI		E 24° Medium	HW	2700	>90	3x1370	<2	12
		H 40° Wide	HQ	3000	>90	3x1420	<2	31
		K - Without optics	WW	3000	>80	3x1700	<3	B0
			NN	4000	>80	3x1775	<3	C0
			LED nominal lumen					D0
								E0
								L0
								M0
								N0

Ø 60 mm | Precision (4X)

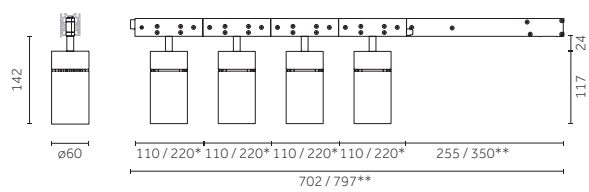


Code example:
0 . 4X.GH62 B . HC 01

Accessories: p.420
 Spacers/Distanziali: p.422
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

Notes:
 *220 mm adapter available/
 *Disponibile con adattatore da 220 mm

9W COBLED		Lumen delivered up to 4x1115 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	4X.GH62 Precision	B 12° Narrow	HC	3000	>98	4x960	<2	01
D **DALI		E 40° Medium	HW	2700	>90	4x1050	<2	12
		K - Without optics	HQ	3000	>90	4x1100	<2	31
			WW	3000	>80	4x1300	<3	B0
			NN	4000	>80	4x1360	<3	C0
			LED nominal lumen					D0
								E0
								L0
								M0
								N0

Ø 60 mm | Performance (4X)

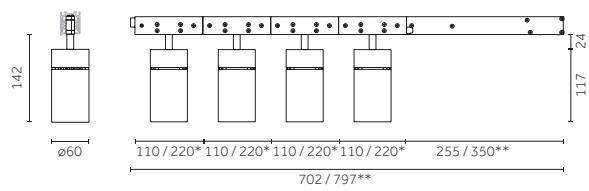

Code example:
0 . 4X.GH72 B . HC 01


Accessories: p.421
 Spacers/Distanziali: p.422
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

Notes:
 *220 mm adapter available/
 *Disponibile con adattatore da 220 mm

9W COBLED		Lumen delivered up to 3x1200 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	4X.GH72 Performance	B 13° Narrow	HC	3000	>98	4x960	<2	01
D **DALI		E 24° Medium	HW	2700	>90	4x1050	<2	12
		H 40° Wide	HQ	3000	>90	4x1100	<2	31
		K - Without optics	WW	3000	>80	4x1300	<3	B0
			NN	4000	>80	4x1360	<3	C0
			LED nominal lumen					D0
								E0
								L0
								M0
								N0



Ø 60 mm | Precision | Accessories

Interchangeable IOS optics/ Ottiche intercambiabili IOS



Description
Precision - Narrow beam/
Precision - Fascio stretto
(12°-9W, 12W, 17W)

Code
0.35125.0000



Description
Precision - Medium beam/
Precision - Fascio medio
(20°-9W, 12W, 17W)

Code
0.35126.0000

Not for codes/Non per codici: **1X.GH63B.DT**

Not for codes/Non per codici: **1X.GH63B.DT**


Optics accessories/ Accessori ottiche



Description
Glass filter 1 mm/
Filtro vetro 1 mm


Code
0.26402.00

Finishes
4A
5A
6A
7A
8A
9A



Description
Dense texture honeycomb louvre/
Griglia alveolare a maglia fitta

Code
0.26442.0000



Description
Wide texture honeycomb louvre/
Griglia alveolare a maglia larga

Code
0.26450.0000



Description
Colored Gel Slides (2 pieces)/
Vetrini per gel colorato (2 pezzi/)

Code
0.26410.0000



Description
Elliptical beam lens /
Lente per fascio ellittico

Code
0.26457.0000



Description
Selective filter 3000K - 2700K /
Filtro selettivo 3000K - 2700K

Code
0.26559.0000




Description
Opal lens/
Lente opale

Code
0.26462.0000




Description
Selective filter 2700K - 2500K /
Filtro selettivo 2700K - 2500K

Code
0.26418.0000



Description
Spread lens
Lente diffondente

Code
0.26470.0000




Description
Selective filter 2700K - 2200K /
Filtro selettivo 2700K - 2200K

Code
0.26426.0000




Description
Cross blade louvre/
Griglia a croce

Code
0.26477.0000



Description
Selective filter 2700K - 2000K /
Filtro selettivo 2700K - 2000K

Code
0.26434.0000




Description
Barn doors/
Alette rompiflusso

Code
0.26485.0000



Description
Selective filter 3000K - 3600K /
Filtro selettivo 3000K - 3600K

Code
0.26567.0000



Description
Cone 45° wall washer/
Cono 45° wall washer


Code
0.26489.00

Finishes
12
31



Description
Selective filter 3000K - 4000K /
Filtro selettivo 3000K - 4000K


Code
0.26575.0000



Description
Ghost lock - max 3,5kg
For vertical installation/
Per installazione verticale

Code
0.26508.00


Framing accessory/ Sagomatore



Description
Framing accessory, light shape - square/
Sagomatore, forma di luce - quadrata

Code
0.26651.00

Finishes
21









Description
Framing accessory, light shape - round/
Sagomatore, forma di luce - tonda

Code
0.26650.00

























Finishes
21

Ø 60 mm | Performance | Accessories







Interchangeable IOS optics/ Ottiche intercambiabili IOS

		Description Performance - Narrow beam/ Performance - Fascio stretto (13°-9W, 12W, 17W)	Code 0.35145.0000			Description Performance - Wide beam/ Performance - Fascio largo (40°-9W, 12W, 17W)	Code 0.35147.0000
		Description Performance - Medium beam/ Performance - Fascio medio (24°-9W, 12W, 17W)	Code 0.35146.0000				

Optics accessories/ Accessori ottiche

	Description Glass filter 1 mm/ Filtro vetro 1 mm	Code 0.26403.00	Finishes 4A  5A  6A  7A  8A  9A 		Description Selective filter 3000K - 4000K/ Filtro selettivo 3000K - 4000K	Code 0.26576.0000	
	Description Colored Gel Slides (2 pieces)/ Vetrini per gel colorato (2 pezzi)	Code 0.26411.0000			Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta	Code 0.26443.0000	
	Description Selective filter 3000K - 2700K/ Filtro selettivo 3000K - 2700K	Code 0.26560.0000			Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga	Code 0.26451.0000	
	Description Selective filter 2700K - 2500K/ Filtro selettivo 2700K - 2500K	Code 0.26419.0000			Description Elliptical beam lens / Lente per fascio ellittico	Code 0.26493.0000	
	Description Selective filter 2700K - 2200K/ Filtro selettivo 2700K - 2200K	Code 0.26427.0000			Description Opal lens/ Lente opale	Code 0.26463.0000	
	Description Selective filter 2700K - 2000K/ Filtro selettivo 2700K - 2000K	Code 0.26435.0000			Description Spread lens Lente diffondente	Code 0.26471.0000	
	Description Selective filter 3000K - 3600K/ Filtro selettivo 3000K - 3600K	Code 0.26568.0000			Description Cross blade louvre/ Griglia a croce	Code 0.26481.0000	
	Description Ghost lock - max 3.5kg For vertical instalation/ Per installazione verticale	Code 0.26508.00			Description Cone 45° wall washer/ Cono 45° wall washer	Code 0.26497.00	Finishes 12  31 

Framing accessory/ Sagomatore

		Description Framing accessory, light shape - square/ Sagomatore, forma di luce - quadrata	Code 0.26651.00	Finishes 21 
		Description Framing accessory, light shape - round/ Sagomatore, forma di luce - tonda	Code 0.26650.00	Finishes 21 

Ø 60 mm | Accessories

Mounting accessories/ Accessori montaggio



Description
Spacer - 110mm/
Distanziale - 110mm

Code
0.26500.0000



Description
Spacer - 600mm/
Distanziale - 600mm

Code
0.26504.0000

p. 402



Description
Spacer - 220mm/
Distanziale - 220mm

Code
0.26501.0000



Description
Spacer - 800mm/
Distanziale - 800mm

Code
0.26505.0000

p. 402



Description
Spacer - 300mm/
Distanziale - 300mm

Code
0.26502.0000

p. 402



Description
Spacer - 1000mm/
Distanziale - 1000mm

Code
0.26506.0000

p. 402



Description
Spacer - 400mm/
Distanziale - 400mm

Code
0.26503.0000

p. 402





Description
Spacer - 1200mm/
Distanziale - 1200mm

Code
0.26507.0000

p. 402



Ø 75 mm | Precision

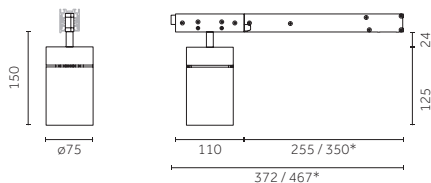

Code example:
0 . 1X.LH63 B . HC 01

Accessories: p.429
 Spacers/Distanziali: p.431
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

12 W COB LED Lumen delivered up to 1575 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>1X.LH63</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1323	<2	<u>01</u>
<u>D</u> *DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	1491	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	1533	<2	<u>31</u>
			<u>WW</u>	3000	>80	1859	<3	<u>B0</u>
			<u>NN</u>	4000	>80	1920	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

17 W COB LED Lumen delivered up to 2190 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>1X.LH64</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1834	<2	<u>01</u>
<u>D</u> *DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	2067	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	2122	<2	<u>31</u>
			<u>WW</u>	3000	>80	2582	<3	<u>B0</u>
			<u>NN</u>	4000	>80	2665	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

17 W COB LED Lumen delivered up to 1465 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>1X.NH64</u> Precision	<u>A</u> 7° Very narrow	<u>HC</u>	3000	>98	1700	<2	<u>01</u>
<u>D</u> *DALI			<u>HW</u>	2700	>90	1870	<2	<u>12</u>
			<u>HQ</u>	3000	>90	1920	<2	<u>31</u>
			<u>WW</u>	3000	>80	2320	<3	<u>B0</u>
			<u>NN</u>	4000	>80	2400	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

24 W COB LED Lumen delivered up to 2955 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>1X.LH66</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	2476	<2	<u>01</u>
<u>D</u> *DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	2792	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	2860	<2	<u>31</u>
			<u>WW</u>	3000	>80	3487	<3	<u>B0</u>
			<u>NN</u>	4000	>80	3602	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

28 W COB LED Lumen delivered up to 3325 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>1X.LH67</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	2777	<2	<u>01</u>
<u>D</u> *DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	3137	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	3207	<2	<u>31</u>
			<u>WW</u>	3000	>80	3898	<3	<u>B0</u>
			<u>NN</u>	4000	>80	4054	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>



Code example:

0 . 1X.LH66 B . DT 01

Accessories: p.429
 Spacers/Distanziali: p.431
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net



25 W Warm Dimming COBLED

Lumen delivered up to 1100lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
D *DALI	1X.LH66 Precision	B 25° Medium	DT	1700-3000	>95	100-2500	<4	01 12 31 B0 C0 D0 E0 L0 M0 N0

LED nominal lumen

Ø 75 mm | Performance

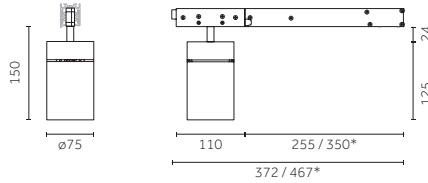

Code example:

0 . 1X.LH73 B . HW 12

Accessories: p.430
 Spacers/Distanziali: p.431
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

12 W COBLED

Lumen delivered up to 1800lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	1X.LH73 Performance	B 12° Narrow	HC	3000	>98	1323	<2	01 12 31 B0 C0 D0 E0 L0 M0 N0
D *DALI		E 24° Medium	HW	2700	>90	1491	<2	
		H 48° Wide	HQ	3000	>90	1533	<2	
		K - Without optics	WW	3000	>80	1859	<3	
			NN	4000	>80	1920	<3	

LED nominal lumen

17 W COBLED

Lumen delivered up to 2480lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	1X.LH74 Performance	B 12° Narrow	HC	3000	>98	1834	<2	01 12 31 B0 C0 D0 E0 L0 M0 N0
D *DALI		E 24° Medium	HW	2700	>90	2067	<2	
		H 48° Wide	HQ	3000	>90	2122	<2	
		K - Without optics	WW	3000	>80	2582	<3	
			NN	4000	>80	2665	<3	

LED nominal lumen

24 W COBLED

Lumen delivered up to 3350lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	1X.LH76 Performance	B 12° Narrow	HC	3000	>98	2476	<2	01 12 31 B0 C0 D0 E0 L0 M0 N0
D *DALI		E 24° Medium	HW	2700	>90	2792	<2	
		H 48° Wide	HQ	3000	>90	2860	<2	
		K - Without optics	WW	3000	>80	3487	<3	
			NN	4000	>80	3602	<3	

LED nominal lumen




28 W COBLED

Lumen delivered up to 3770lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	1X.LH77 Performance	B 12° Narrow	HC	3000	>98	2777	<2	01 12 31 B0 C0 D0 E0 L0 M0 N0
D *DALI		E 24° Medium	HW	2700	>90	3137	<2	
		H 48° Wide	HQ	3000	>90	3207	<2	
		K - Without optics	WW	3000	>80	3898	<3	
			NN	4000	>80	4054	<3	

LED nominal lumen

Ø 75 mm | Precision (2X)

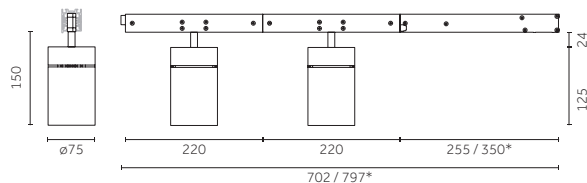

Code example:
0 . 2X.LH62 B . HW 01

Accessories: p.429
 Spacers/Distanziali: p.431
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
www.reggiani.net

9W COB LED Lumen delivered up to 2x 1450 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>2X.LH62</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1215	<2	<u>01</u>
<u>D</u> *DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	1370	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	1410	<2	<u>31</u>
			<u>WW</u>	3000	>80	1710	<3	<u>B0</u>
			<u>NN</u>	4000	>80	1765	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

12W COB LED Lumen delivered up to 2x1575 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>2X.LH63</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1323	<2	<u>01</u>
<u>D</u> *DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	1491	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	1533	<2	<u>31</u>
			<u>WW</u>	3000	>80	1859	<3	<u>B0</u>
			<u>NN</u>	4000	>80	1920	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>



17W COB LED Lumen delivered up to 2x1465 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>2X.NH64</u> Precision	<u>A</u> 7° Very narrow	<u>HC</u>	3000	>98	1700	<2	<u>01</u>
<u>D</u> *DALI			<u>HW</u>	2700	>90	1870	<2	<u>12</u>
			<u>HQ</u>	3000	>90	1920	<2	<u>31</u>
			<u>WW</u>	3000	>80	2320	<3	<u>B0</u>
			<u>NN</u>	4000	>80	2400	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

17W COB LED Lumen delivered up to 2x2190 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>2X.LH64</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1834	<2	<u>01</u>
<u>D</u> *DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	2067	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	2122	<2	<u>31</u>
			<u>WW</u>	3000	>80	2582	<3	<u>B0</u>
			<u>NN</u>	4000	>80	2665	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

Ø 75 mm | Performance (2X)

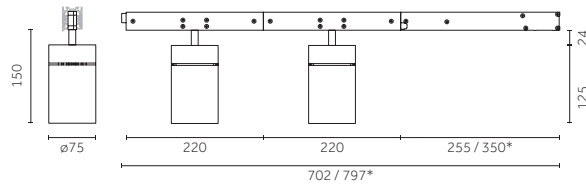

Code example:

0 . 2X.LH72 B . HW 12



Accessories: p.430
 Spacers/Distanziali: p.431
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
www.reggiani.net

9W COBLED		Lumen delivered up to 2x1650lm / Lumen maintenance: L80B10=50,000h							Finishes
Driver	Version	Optics	LED	K	CRI	lm	SDCM		
0 On-Off	2X.LH72 Performance	B 12° Narrow	HC	3000	>98	1215	<2	01	
D *DALI		E 24° Medium	HW	2700	>90	1370	<2	12	
		H 48° Wide	HQ	3000	>90	1410	<2	31	
		K - Without optics	WW	3000	>80	1710	<3	B0	
			NN	4000	>80	1765	<3	C0	
			LED nominal lumen					D0	
								E0	
								L0	
								M0	
								N0	

12W COBLED		Lumen delivered up to 2x1800lm / Lumen maintenance: L80B10=50,000h							Finishes
Driver	Version	Optics	LED	K	CRI	lm	SDCM		
0 On-Off	2X.LH73 Performance	B 12° Narrow	HC	3000	>98	1323	<2	01	
D *DALI		E 24° Medium	HW	2700	>90	1491	<2	12	
		H 48° Wide	HQ	3000	>90	1533	<2	31	
		K - Without optics	WW	3000	>80	1859	<3	B0	
			NN	4000	>80	1920	<3	C0	
			LED nominal lumen					D0	
								E0	
								L0	
								M0	
								N0	

17W COBLED		Lumen delivered up to 2x2480lm / Lumen maintenance: L80B10=50,000h							Finishes
Driver	Version	Optics	LED	K	CRI	lm	SDCM		
0 On-Off	2X.LH74 Performance	B 12° Narrow	HC	3000	>98	1834	<2	01	
D *DALI		E 24° Medium	HW	2700	>90	2067	<2	12	
		H 48° Wide	HQ	3000	>90	2122	<2	31	
		K - Without optics	WW	3000	>80	2582	<3	B0	
			NN	4000	>80	2665	<3	C0	
			LED nominal lumen					D0	
								E0	
								L0	
								M0	
								N0	

Ø 75 mm | Precision (3X)

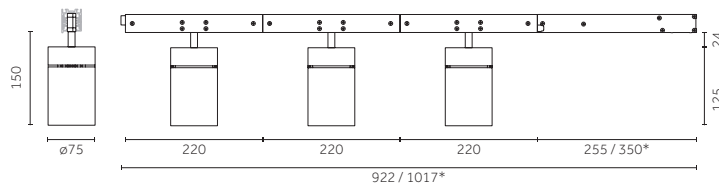



Code example:
0 . 3X.LH62 B . HW 01

Accessories: p.429
 Spacers/Distanziali: p.431
 Track/Binario: p.707
 Photometric data:
 www.reggiani.net

9W COB LED		Lumen delivered up to 3x1450lm / Lumen maintenance: L80 B10=50,000h								
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
<u>0</u> On-Off	<u>3X.LH62</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1215	<2	<u>01</u>		
<u>D</u> *DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	1370	<2	<u>12</u>		
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	1410	<2	<u>31</u>		
			<u>WW</u>	3000	>80	1710	<3	<u>B0</u>		
			<u>NN</u>	4000	>80	1765	<3	<u>C0</u>		
			LED nominal lumen						<u>D0</u>	
								<u>E0</u>		
								<u>L0</u>		
								<u>M0</u>		
								<u>N0</u>		

12W COB LED		Lumen delivered up to 3x1575lm / Lumen maintenance: L80 B10=50,000h								
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
<u>0</u> On-Off	<u>3X.LH63</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1323	<2	<u>01</u>		
<u>D</u> *DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	1491	<2	<u>12</u>		
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	1533	<2	<u>31</u>		
			<u>WW</u>	3000	>80	1859	<3	<u>B0</u>		
			<u>NN</u>	4000	>80	1920	<3	<u>C0</u>		
			LED nominal lumen						<u>D0</u>	
								<u>E0</u>		
								<u>L0</u>		
								<u>M0</u>		
								<u>N0</u>		

Ø 75 mm | Performance (3X)

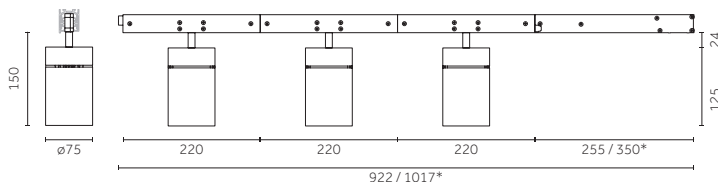

Code example:
0 . 3X.LH72 B . HW 01

Accessories: p.430
 Spacers/Distanziali: p.431
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

9W COB LED		Lumen delivered up to 3x1650lm / Lumen maintenance: L80 B10=50,000h								
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
<u>0</u> On-Off	<u>3X.LH72</u> Performance	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1215	<2	<u>01</u>		
<u>D</u> *DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	1370	<2	<u>12</u>		
		<u>H</u> 48° Wide	<u>HQ</u>	3000	>90	1410	<2	<u>31</u>		
		<u>K</u> - Without optics	<u>WW</u>	3000	>80	1710	<3	<u>B0</u>		
			<u>NN</u>	4000	>80	1765	<3	<u>C0</u>		
			LED nominal lumen						<u>D0</u>	
								<u>E0</u>		
								<u>L0</u>		
								<u>M0</u>		
								<u>N0</u>		

12W COB LED		Lumen delivered up to 3x1800lm / Lumen maintenance: L80 B10=50,000h								
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
<u>0</u> On-Off	<u>3X.LH73</u> Performance	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1323	<2	<u>01</u>		
<u>D</u> *DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	1491	<2	<u>12</u>		
		<u>H</u> 48° Wide	<u>HQ</u>	3000	>90	1533	<2	<u>31</u>		
		<u>K</u> - Without optics	<u>WW</u>	3000	>80	1859	<3	<u>B0</u>		
			<u>NN</u>	4000	>80	1920	<3	<u>C0</u>		
			LED nominal lumen						<u>D0</u>	
								<u>E0</u>		
								<u>L0</u>		
								<u>M0</u>		
								<u>N0</u>		


Ø 75 mm | Precision | Accessories

Interchangeable IOS optics/ Ottiche intercambiabili IOS



Description
Precision - Narrow beam/
Precision - Fascio stretto
(12°-12W, 17W, 24W, 28W)

Code
0.35130.0000



Description
Precision - Medium beam/
Precision - Fascio medio
(24°-12W, 17W, 24W, 28W)

Code
0.35131.0000

Not for codes/Non per codici: **1X.NH64A / 2X.NH64A / 1X.LH66B.DT**

Not for codes/Non per codici: **1X.NH64A / 2X.NH64A / 1X.LH66B.DT**


Optics accessories/ Accessori ottiche



Description
Glass filter 1 mm/
Filtro vetro 1 mm


Code
0.26404.00

Finishes



Description
Dense texture honeycomb louvre/
Griglia alveolare a maglia fitta

Code
0.26444.0000



Description
Wide texture honeycomb louvre/
Griglia alveolare a maglia larga

Code
0.26452.0000



Description
Colored Gel Slides (2 pieces)/
Vetrini per gel colorato (2 pezzi)

Code
0.26412.0000



Description
Elliptical beam lens /
Lente per fascio ellittico

Code
0.26458.0000



Description
Selective filter 3000K - 2700K /
Filtro selettivo 3000K - 2700K

Code
0.26561.0000




Description
Opal lens/
Lente opale

Code
0.26464.0000




Description
Selective filter 2700K - 2500K /
Filtro selettivo 2700K - 2500K

Code
0.26420.0000



Description
Spread lens
Lente diffondente

Code
0.26472.0000



Description
Selective filter 2700K - 2200K /
Filtro selettivo 2700K - 2200K

Code
0.26428.0000




Description
Cross blade louvre/
Griglia a croce

Code
0.26478.0000



Description
Selective filter 2700K - 2000K /
Filtro selettivo 2700K - 2000K

Code
0.26436.0000



Description
Barn doors/
Alette rompiflusso

Code
0.26486.0000



Description
Selective filter 3000K - 3600K /
Filtro selettivo 3000K - 3600K

Code
0.26569.0000



Description
Cone 45° wall washer/
Cono 45° wall washer


Code
0.26490.00

Finishes
12
31



Description
Selective filter 3000K - 4000K /
Filtro selettivo 3000K - 4000K

Code
0.26577.0000









Description
Ghost lock - max 3,5kg
For vertical installation/
Per installazione verticale

Code
0.26508.00








Ø 75 mm | Performance | Accessories


Interchangeable IOS optics/ Ottiche intercambiabili IOS


		Description Performance - Narrow beam/ Performance - Fascio stretto (12°-12W, 17W, 24W, 28W)	Code <u>0.35150.0000</u>
		Description Performance - Medium beam/ Performance - Fascio medio (24°-12W, 17W, 24W, 28W)	Code <u>0.35151.0000</u>


		Description Performance - Wide beam/ Performance - Fascio largo (48°-12W, 17W, 24W, 28W)	Code <u>0.35152.0000</u>
---	--	--	------------------------------------


Optics accessories/ Accessori ottiche


	Description Glass filter 1 mm/ Filtro vetro 1 mm	Code <u>0.26405.00</u>	Finishes 4A  5A  6A  7A  8A  9A 
---	---	----------------------------------	---


	Description Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K	Code <u>0.26578.0000</u>
---	--	------------------------------------


	Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta	Code <u>0.26445.0000</u>
---	---	------------------------------------

	Description Colored Gel Slides (2 pieces)/ Vetrini per gel colorato (2 pezzi)	Code <u>0.26413.0000</u>
--	--	------------------------------------


	Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga	Code <u>0.26453.0000</u>
--	--	------------------------------------


	Description Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K	Code <u>0.26562.0000</u>
---	--	------------------------------------


	Description Elliptical beam lens / Lente per fascio ellittico	Code <u>0.26494.0000</u>
---	--	------------------------------------

	Description Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K	Code <u>0.26421.0000</u>
---	--	------------------------------------

	Description Opal lens/ Lente opale	Code <u>0.26465.0000</u>
---	---	------------------------------------


	Description Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K	Code <u>0.26429.0000</u>
---	--	------------------------------------

	Description Spread lens Lente diffondente	Code <u>0.26473.0000</u>
---	--	------------------------------------

	Description Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K	Code <u>0.26437.0000</u>
---	--	------------------------------------

	Description Cross blade louvre/ Griglia a croce	Code <u>0.26482.0000</u>
---	--	------------------------------------


	Description Selective filter 3000K - 3600K / Filtro selettivo 3000K - 3600K	Code <u>0.26570.0000</u>
---	--	------------------------------------


	Description Cone 45° wall washer/ Cono 45° wall washer	Code <u>0.26498.00</u>	Finishes 12  31 
---	---	----------------------------------	---



		Description Ghost lock - max 3,5kg For vertical installation/ Per installazione verticale	Code <u>0.26508.00</u>
---	---	---	----------------------------------



Ø 75 mm | Accessories



Mounting accessories/ Accessori montaggio



	Description Spacer - 110mm/ Distanziale - 110mm	Code <u>0.26500.0000</u>
---	--	------------------------------------



	Description Spacer - 220mm/ Distanziale - 220mm	Code <u>0.26501.0000</u>
---	--	------------------------------------



	Description Spacer - 300mm/ Distanziale - 300mm	Code <u>0.26502.0000</u>
	 p.00	

	Description Spacer - 400mm/ Distanziale - 400mm	Code <u>0.26503.0000</u>
	 p.00	

	Description Spacer - 600mm/ Distanziale - 600mm	Code <u>0.26504.0000</u>
	 p.00	



	Description Spacer - 800mm/ Distanziale - 800mm	Code <u>0.26505.0000</u>
	 p.00	

	Description Spacer - 1000mm/ Distanziale - 1000mm	Code <u>0.26506.0000</u>
	 p.00	

	Description Spacer - 1200mm/ Distanziale - 1200mm	Code <u>0.26507.0000</u>
	 p.00	



Ø 95 mm | Precision

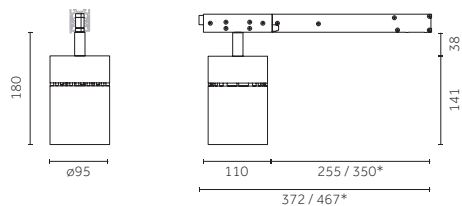

Code example:
0 . 1X.MH63 B . HC 01

Accessories: p.437
 Spacers/Distanziali: p.439
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
www.reggiani.net

12 W COB LED Lumen delivered up to 1690 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>1X.MH63</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1323	<2	<u>01</u>
<u>D</u> *DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	1491	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	1533	<2	<u>31</u>
			<u>WW</u>	3000	>80	1859	<3	<u>B0</u>
			<u>NN</u>	4000	>80	1920	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

17 W COB LED Lumen delivered up to 1510 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>1X.PH64</u> Precision	<u>A</u> 7° Verynarrow	<u>HC</u>	3000	>98	1700	<2	<u>01</u>
<u>D</u> *DALI			<u>HW</u>	2700	>90	1870	<2	<u>12</u>
			<u>HQ</u>	3000	>90	1920	<2	<u>31</u>
			<u>WW</u>	3000	>80	2320	<3	<u>B0</u>
			<u>NN</u>	4000	>80	2400	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

17 W COB LED Lumen delivered up to 2350 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>1X.MH64</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1834	<2	<u>01</u>
<u>D</u> *DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	2067	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	2122	<2	<u>31</u>
			<u>WW</u>	3000	>80	2582	<3	<u>B0</u>
			<u>NN</u>	4000	>80	2665	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

24 W COB LED Lumen delivered up to 3170 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>1X.MH66</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	2476	<2	<u>01</u>
<u>D</u> *DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	2792	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	2860	<2	<u>31</u>
			<u>WW</u>	3000	>80	3487	<3	<u>B0</u>
			<u>NN</u>	4000	>80	3602	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

33 W COB LED Lumen delivered up to 4130 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>1X.MH68</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	3142	<2	<u>01</u>
<u>D</u> *DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	3635	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	3735	<2	<u>31</u>
			<u>WW</u>	3000	>80	4510	<3	<u>B0</u>
			<u>NN</u>	4000	>80	4695	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>





Code example:
0 . **1X.MH68** **B** . **DT** **01**

Accessories: p.437
 Spacers/Distanziali: p.439
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

33 W Warm Dimming COBLED				Lumen delivered up to 1520lm / Lumen maintenance: L70 B50=50,000h				
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	1X.MH68 Precision	B 25° Medium	DT	1700-3000	>95	100-3100	<4	01
LED nominal lumen								12
								31
								B0
								CO
								DO
								EO
								LO
								MO
								NO

Ø 95 mm | Performance

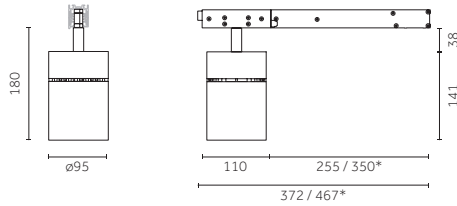

Code example:
0 . **1X.MH73** **B** . **HW** **12**

Accessories: p.438
 Spacers/Distanziali: p.439
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net



12 W COBLED				Lumen delivered up to 1800lm / Lumen maintenance: L80 B10=50,000h				
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	1X.MH73 Performance	B 10° Narrow	HC	3000	>98	1323	<2	01
D *DALI		E 20° Medium	HW	2700	>90	1491	<2	12
								31
								B0
								CO
								DO
								EO
								LO
								MO
								NO

17 W COBLED				Lumen delivered up to 2500lm / Lumen maintenance: L80 B10=50,000h				
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	1X.MH74 Performance	B 10° Narrow	HC	3000	>98	1834	<2	01
D *DALI		E 20° Medium	HW	2700	>90	2067	<2	12
								31
								B0
								CO
								DO
								EO
								LO
								MO
								NO

24 W COBLED				Lumen delivered up to 3300lm / Lumen maintenance: L80 B10=50,000h				
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	1X.MH76 Performance	B 10° Narrow	HC	3000	>98	2476	<2	01
D *DALI		E 20° Medium	HW	2700	>90	2792	<2	12
								31
								B0
								CO
								DO
								EO
								LO
								MO
								NO

33 W COBLED				Lumen delivered up to 4110lm / Lumen maintenance: L80 B10=50,000h				
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	1X.MH78 Performance	B 10° Narrow	HC	3000	>98	3142	<2	01
D *DALI		E 20° Medium	HW	2700	>90	3635	<2	12
								31
								B0
								CO
								DO
								EO
								LO
								MO
								NO

Ø 95 mm | Precision (2X)

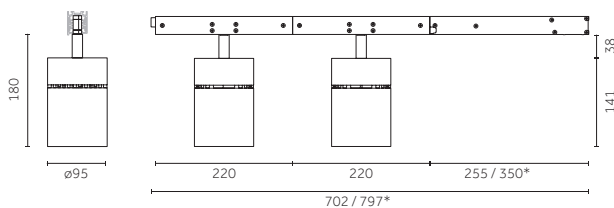

Code example:
0 . 2X.MH63 B . HC 01

Accessories: p.437
 Spacers/Distanziali: p.439
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
www.reggiani.net

12 W COB LED Lumen delivered up to 2x1690lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	2X.MH63 Precision	B 12° Narrow	HC	3000	>98	1323	<2	01
D *DALI		E 24° Medium	HW	2700	>90	1491	<2	12
		K - Without optics	HQ	3000	>90	1533	<2	31
			WW	3000	>80	1859	<3	B0
			NN	4000	>80	1920	<3	C0
			LED nominal lumen					D0
								E0
								L0
								M0
								NO


17 W COB LED Lumen delivered up to 2x1510lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	2X.PH64 Precision	A 7° Verynarrow	HC	3000	>98	1700	<2	01
D *DALI			HW	2700	>90	1870	<2	12
			HQ	3000	>90	1920	<2	31
			WW	3000	>80	2320	<3	B0
			NN	4000	>80	2400	<3	C0
			LED nominal lumen					D0
								E0
								L0
								M0
								NO

17 W COB LED Lumen delivered up to 2x2350lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	2X.MH64 Precision	B 12° Narrow	HC	3000	>98	1834	<2	01
D *DALI		E 24° Medium	HW	2700	>90	2067	<2	12
		K - Without optics	HQ	3000	>90	2122	<2	31
			WW	3000	>80	2582	<3	B0
			NN	4000	>80	2665	<3	C0
			LED nominal lumen					D0
								E0
								L0
								M0
								NO

Ø 95 mm | Performance (2X)

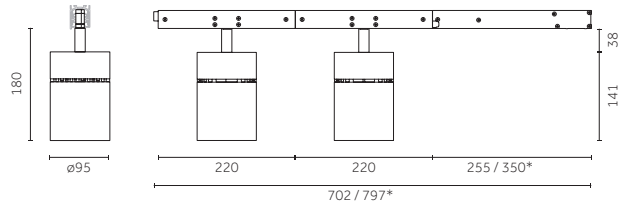

Code example:
0 . 2X.MH73 B . HC 01

Accessories: p.438
 Spacers/Distanziali: p.439
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
www.reggiani.net



12 W COB LED Lumen delivered up to 2x1800 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	2X.MH73 Performance	B 10° Narrow	HC	3000	>98	1323	<2	01
D *DALI		E 20° Medium	HW	2700	>90	1491	<2	12
		H 31° Wide	HQ	3000	>90	1533	<2	31
		K - Without optics	WW	3000	>80	1859	<3	B0
			NN	4000	>80	1920	<3	C0
LED nominal lumen								D0
								E0
								L0
								M0
								N0

17 W COB LED Lumen delivered up to 2x2500 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	2X.MH74 Performance	B 10° Narrow	HC	3000	>98	1834	<2	01
D *DALI		E 20° Medium	HW	2700	>90	2067	<2	12
		H 31° Wide	HQ	3000	>90	2122	<2	31
		K - Without optics	WW	3000	>80	2582	<3	B0
			NN	4000	>80	2665	<3	C0
LED nominal lumen								D0
								E0
								L0
								M0
								N0

Ø 95 mm | Precision (3X)

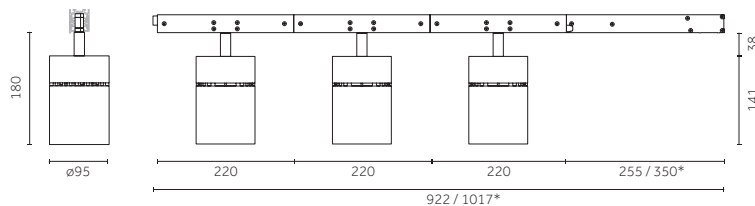



Code example:
0 . 3X.MH63 B . HC 01

Accessories: p.437
 Spacers/Distanziali: p.439
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

12 W COB LED Lumen delivered up to 3x1690lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	3X.MH63 Precision	B 12° Narrow	HC	3000	>98	1323	<2	01
D *DALI		E 24° Medium	HW	2700	>90	1491	<2	12
		K - Without optics	HQ	3000	>90	1533	<2	31
			WW	3000	>80	1859	<3	B0
			NN	4000	>80	1920	<3	C0
			LED nominal lumen					D0
								E0
								L0
								M0
								N0

Ø 95 mm | Performance (3X)

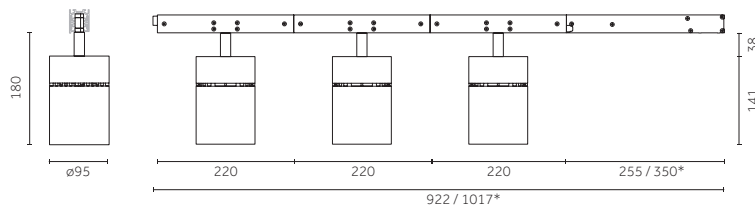

Code example:
0 . 3X.MH73 B . HC 01

Accessories: p.438
 Spacers/Distanziali: p.439
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

12 W COB LED Lumen delivered up to 3x1800lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	3X.MH73 Performance	B 10° Narrow	HC	3000	>98	1323	<3	01
D *DALI		E 20° Medium	HW	2700	>90	1491	<3	12
		H 31° Wide	HQ	3000	>90	1533	<3	31
		K - Without optics	WW	3000	>80	1859	<3	B0
			NN	4000	>80	1920	<3	C0
			LED nominal lumen					D0
								E0
								L0
								M0
								N0

Ø 95 mm | Precision | Accessories

Interchangeable IOS optics/
Ottiche intercambiabili IOS




Description

Precision - Narrow beam/
Precision - Fascio stretto
(12°-12W, 17W, 24W, 33W)

Code

0.35135.0000



Description

Precision - Medium beam/
Precision - Fascio medio
(24°-12W, 17W, 24W, 33W)

Code

0.35136.0000

Not for codes/Non per codici: 1X.PH64A / 2X.PH64A / 1X.MH68B.DT

Not for codes/Non per codici: 1X.PH64A / 2X.PH64A / 1X.MH68B.DT

Optics accessories/
Accessori ottiche



Description
Glass filter 1 mm/
Filtro vetro 1 mm

Code

0.26406.00

Finishes


- 4A ■
- 5A ■
- 6A ■
- 7A ■
- 8A ■
- 9A ■



Description
Dense texture honeycomb louvre/
Griglia alveolare a maglia fitta

Code

0.26446.0000



Description
Wide texture honeycomb louvre/
Griglia alveolare a maglia larga

Code

0.26454.0000



Description
Colored Gel Slides (2 pieces)/
Vetrini per gel colorato (2 pezzi)

Code

0.26414.0000



Description
Elliptical beam lens /
Lente per fascio ellittico

Code

0.26459.0000



Description
Selective filter 3000K - 2700K /
Filtro selettivo 3000K - 2700K

Code

0.26563.0000



Description
Opal lens/
Lente opale

Code


0.26466.0000



Description
Selective filter 2700K - 2500K /
Filtro selettivo 2700K - 2500K

Code


0.26422.0000



Description
Spread lens
Lente diffondente

Code

0.26474.0000



Description
Selective filter 2700K - 2200K /
Filtro selettivo 2700K - 2200K

Code


0.26430.0000



Description
Cross blade louvre/
Griglia a croce

Code


0.26479.0000



Description
Selective filter 2700K - 2000K /
Filtro selettivo 2700K - 2000K

Code

0.26438.0000



Description
Barn doors/
Alette rompiflusso

Code

0.26487.0000



Description
Selective filter 3000K - 3600K /
Filtro selettivo 3000K - 3600K

Code

0.26571.0000



Description
Cone 45° wall washer/
Cono 45° wall washer

Code

0.26491.00

Finishes


- 12 ■
- 31 ■



Description
Selective filter 3000K - 4000K /
Filtro selettivo 3000K - 4000K

Code

0.26579.0000



Description


Ghost lock - max 3,5kg
For vertical instalation/
Per installazione verticale

Code

0.26508.00



Ø 95 mm | Performance | Accessories

Interchangeable IOS optics/ Ottiche intercambiabili IOS




Description
Performance - Narrow beam/
Performance - Fascio stretto
(10°-12W, 17W, 24W, 33W)

Code
0.35155.0000



Description
Performance - Wide beam/
Performance - Fascio largo
(31°-12W, 17W, 24W, 33W)

Code
0.35157.0000



Description
Performance - Medium beam/
Performance - Fascio medio
(20°-12W, 17W, 24W, 33W)

Code
0.35156.0000

Optics accessories/ Accessori ottiche



Description
Glass filter 1 mm/
Filtro vetro 1 mm

Code
0.26407.00

Finishes

4A	Red
5A	Green
6A	Blue
7A	Pink
8A	Yellow
9A	Orange



Description
Selective filter 3000K - 4000K /
Filtro selettivo 3000K - 4000K

Code
0.26580.0000




Description
Dense texture honeycomb louvre/
Griglia alveolare a maglia fitta

Code
0.26447.0000



Description
Colored Gel Slides (2 pieces)/
Vetrini per gel colorato (2 pezzi)

Code
0.26415.0000



Description
Wide texture honeycomb louvre/
Griglia alveolare a maglia larga

Code
0.26455.0000



Description
Selective filter 3000K - 2700K /
Filtro selettivo 3000K - 2700K

Code
0.26564.0000



Description
Elliptical beam lens /
Lente per fascio ellittico

Code
0.26495.0000



Description
Selective filter 2700K - 2500K /
Filtro selettivo 2700K - 2500K

Code
0.26423.0000




Description
Opal lens/
Lente opale

Code
0.26467.0000



Description
Selective filter 2700K - 2200K /
Filtro selettivo 2700K - 2200K

Code
0.26431.0000



Description
Spread lens
Lente diffondente

Code
0.26475.0000



Description
Selective filter 2700K - 2000K /
Filtro selettivo 2700K - 2000K

Code
0.26439.0000



Description
Cross blade louvre/
Griglia a croce

Code
0.26483.0000



Description
Selective filter 3000K - 3600K /
Filtro selettivo 3000K - 3600K

Code
0.26572.0000




Description
Cone 45° wall washer/
Cono 45° wall washer

Code
0.26499.00

Finishes

12	White
31	Black

















Description
Ghost lock - max 3,5kg
For vertical installation/
Per installazione verticale

Code
0.26508.00

Ø 95 mm | Accessories

Mounting accessories/ Accessori montaggio

	Description Spacer - 110mm/ Distanziale - 110mm	Code <u>0.26500.0000</u>		Description Spacer - 600mm/ Distanziale - 600mm  p. 402	Code <u>0.26504.0000</u>
	Description Spacer - 220mm/ Distanziale - 220mm	Code <u>0.26501.0000</u>		Description Spacer - 800mm/ Distanziale - 800mm  p. 402	Code <u>0.26505.0000</u>
	Description Spacer - 300mm/ Distanziale - 300mm  p. 402	Code <u>0.26502.0000</u>		Description Spacer - 1000mm/ Distanziale - 1000mm  p. 402	Code <u>0.26506.0000</u>
	Description Spacer - 400mm/ Distanziale - 400mm  p. 402	Code <u>0.26503.0000</u>		Description Spacer - 1200mm/ Distanziale - 1200mm  p. 402	Code <u>0.26507.0000</u>




— Yori Evo Box

— Yori Evo Box



EN The Yori Track projector has been developed and advanced to create Yori Evo Box, which extends the specific features of the Yori range to a new, flexible luminaire with a simple, elegant design. It comes in four sizes and features the new Precision and Performance optics with different light output, beam widths and intensity. The accessories that complete this family make it even more versatile.

IT Dallo sviluppo e evoluzione del proiettore a binario Yori Track, Yori Evo Box amplia le specifiche peculiarità della gamma Yori in un nuovo apparecchio flessibile e dal design semplice e elegante. Disponibile in quattro dimensioni è dotato delle nuove ottiche Precision e Performance caratterizzate da molteplici rendimenti, aperture del fascio e intensità. Gli accessori che completano la famiglia rendono questo prodotto ancora più versatile.




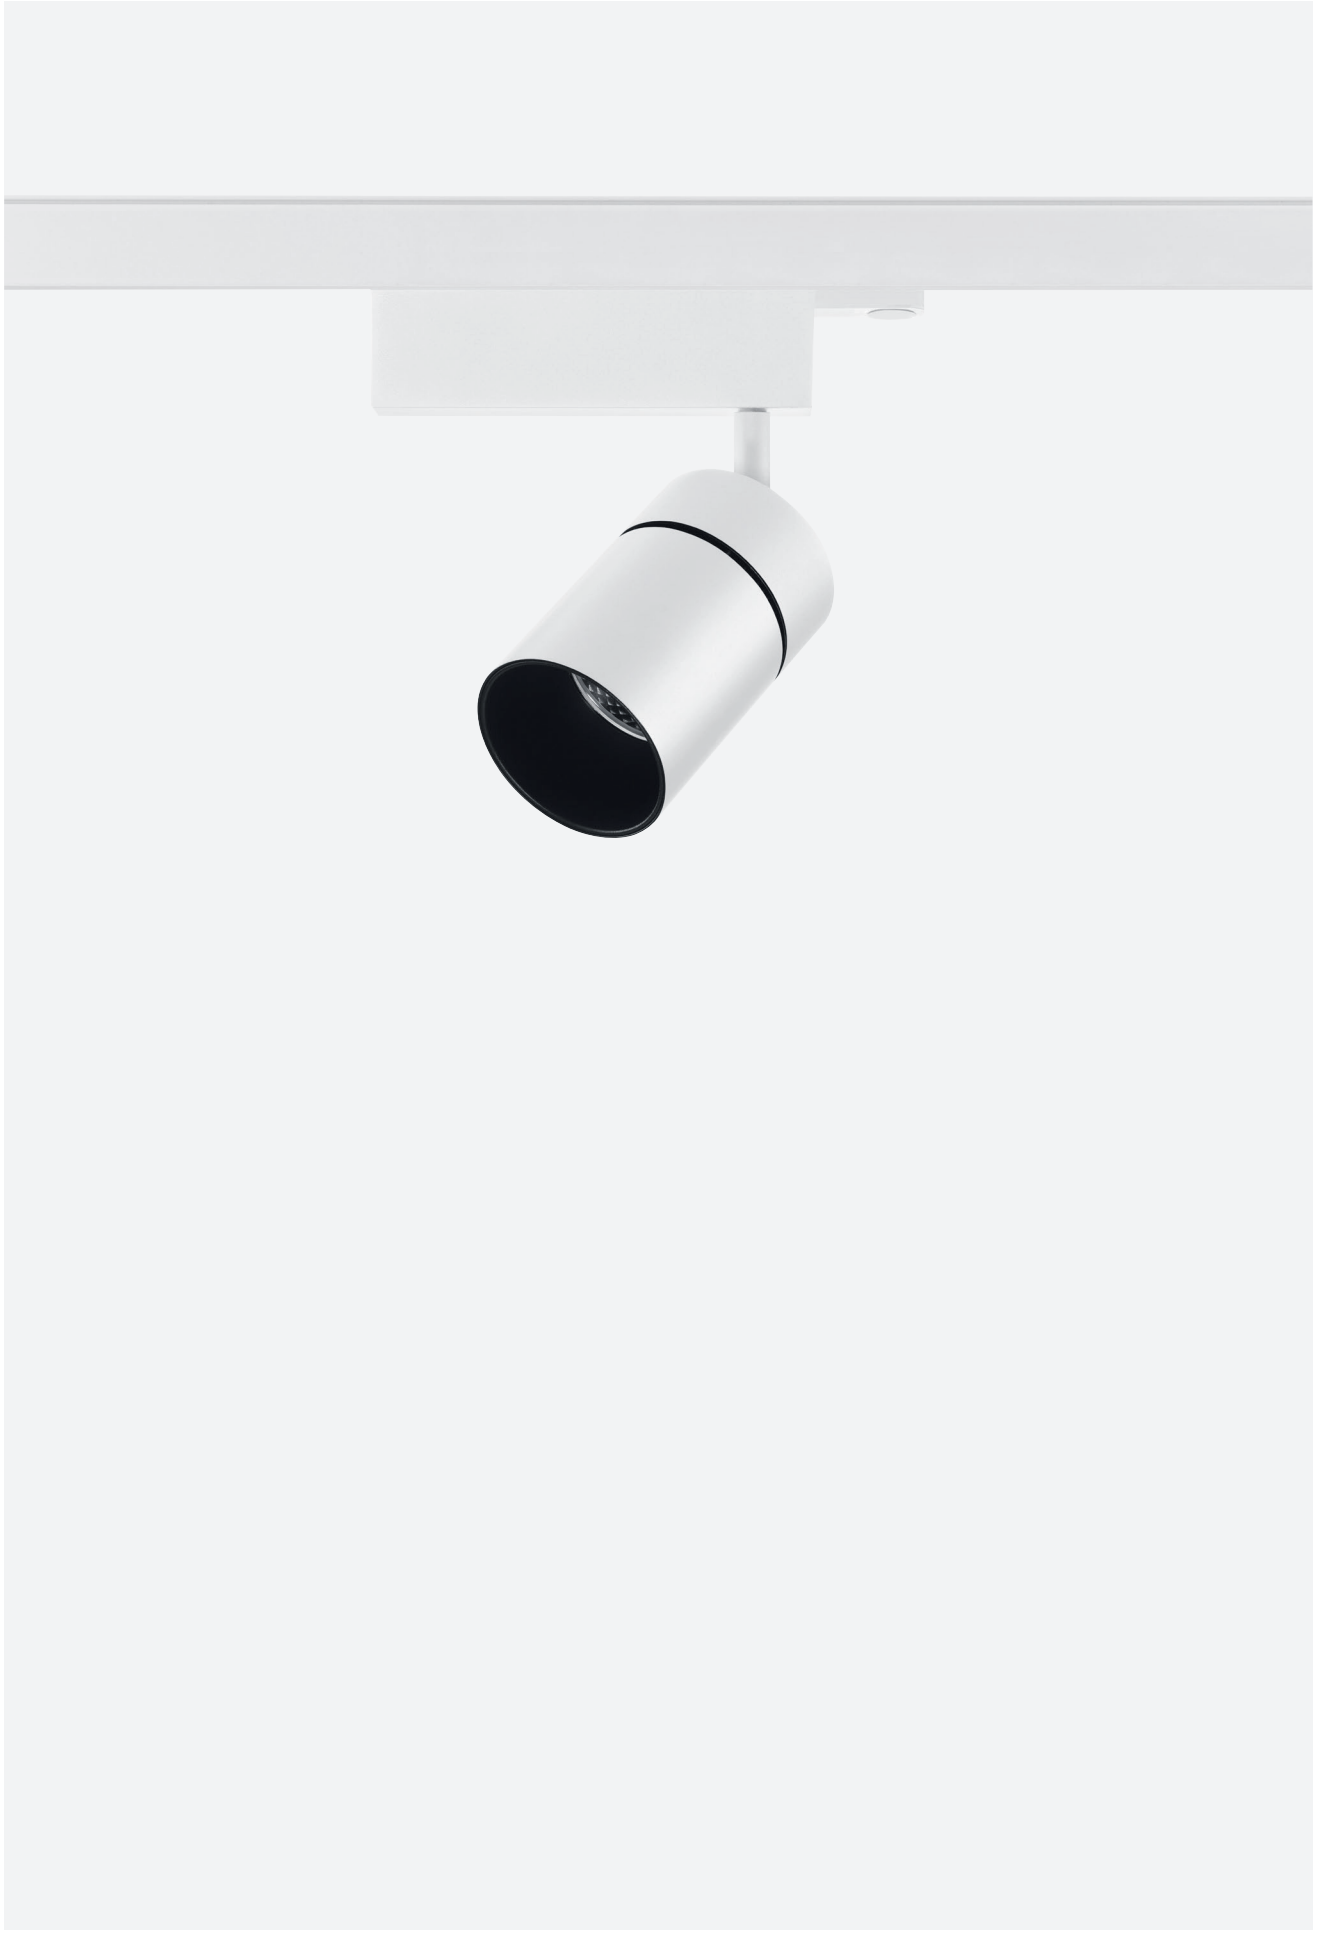

Ø 43 mm | Precision



Phase-cut / Dali / Dimmer on board / Bluetooth



Code example:
0 . FH81 A . HW 12

Accessories: p.446
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

4 W POWERLED Lumen delivered up to 435 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>FH81</u> Precision	<u>A</u> 7° Very narrow	<u>HW</u>	2700	>90	410	<3	<u>12</u> <input type="checkbox"/>
<u>T</u> Phase-cut		<u>B</u> 11° Narrow	<u>HQ</u>	3000	>90	415	<3	<u>31</u> <input checked="" type="checkbox"/>
<u>D</u> DALI		<u>E</u> 23° Medium	<u>WW</u>	3000	>80	485	<3	
<u>P</u> Dimmer on board		<u>H</u> 40° Wide	<u>NN</u>	4000	>80	530	<3	
<u>H</u> Bluetooth								

LED nominal lumen

9 W POWERLED Lumen delivered up to 750 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>FH82</u> Precision	<u>A</u> 7° Very narrow	<u>HW</u>	2700	>90	725	<3	<u>12</u> <input type="checkbox"/>
<u>T</u> Phase-cut		<u>B</u> 11° Narrow	<u>HQ</u>	3000	>90	730	<3	<u>31</u> <input checked="" type="checkbox"/>
<u>D</u> DALI		<u>E</u> 23° Medium	<u>WW</u>	3000	>80	845	<3	
<u>P</u> Dimmer on board		<u>H</u> 40° Wide	<u>NN</u>	4000	>80	940	<3	
<u>H</u> Bluetooth								



LED nominal lumen

6,5 W Warm Dimming COB LED Lumen delivered up to 130 lm / Lumen maintenance: L70 B50=50,000h


Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>D</u> DALI	<u>FH82</u> Precision	<u>B</u> 27° Medium	<u>DT</u>	1800-2800	>95	10-550	<4	<u>12</u> <input type="checkbox"/>
<u>P</u> Dimmer on board								<u>31</u> <input checked="" type="checkbox"/>
<u>H</u> Bluetooth								

LED nominal lumen

Ø 43 mm | Performance



Phase-cut / Dali / Dimmer on board / Bluetooth



Code example:

0 . FH91 B . HW 12

Accessories: p.447
Track/Binario: p.707
Finishes: p.380
Photometric data:
www.reggiani.net

4W POWER LED		Lumen delivered up to 450lm / Lumen maintenance: L90B10=50,000h							
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
O On-Off	FH91 Performance	B 6° Narrow	HW	2700	>90	410	< 3	12	
T Phase-cut		E 18° Medium	HQ	3000	>90	415	< 3	31	
D DALI		H 36° Wide	WW	3000	>80	485	< 3		
P Dimmer on board			NN	4000	>80	530	< 3		
H Bluetooth				LED nominal lumen					

9W POWER LED		Lumen delivered up to 780lm / Lumen maintenance: L90B10=50,000h							
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
O On-Off	FH92 Performance	B 6° Narrow	HW	2700	>90	725	< 3	12	
T Phase-cut		E 18° Medium	HQ	3000	>90	730	< 3	31	
D DALI		H 36° Wide	WW	3000	>80	845	< 3		
P Dimmer on board			NN	4000	>80	940	< 3		
H Bluetooth				LED nominal lumen					



Ø 43 mm | Precision | Accessories

Optics accessories/
Accessori ottiche




Image	Description	Code	Finishes		Image	Description	Code	Finishes	
			4A	5A				6A	7A
	Glass filter 1 mm/ Filtro vetro 1 mm	<u>0.26400.00</u>	4A	5A		Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta	<u>0.26440.0000</u>		
			6A	7A		Wide texture honeycomb louvre/ Griglia alveolare a maglia larga	<u>0.26448.0000</u>		
			8A	9A					
	Colored Gel Slides (2 pieces)/ Vetrini per gel colorato (2 pezzi)/	<u>0.26408.0000</u>				Elliptical beam lens / Lente per fascio ellittico	<u>0.26456.0000</u>		
	Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K	<u>0.26557.0000</u>				Opal lens/ Lente opale	<u>0.26460.0000</u>		
	Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K	<u>0.26416.0000</u>				Spread lens Lente diffondente	<u>0.26468.0000</u>		
	Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K	<u>0.26424.0000</u>				Cross blade louvre/ Griglia a croce	<u>0.26476.0000</u>		
	Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K	<u>0.26432.0000</u>				Barn doors/ Alette rompiflusso	<u>0.26484.0000</u>		
	Selective filter 3000K - 3600K / Filtro selettivo 3000K - 3600K	<u>0.26565.0000</u>				Cone 45° wall washer/ Cono 45° wall washer	<u>0.26488.00</u>	12	31
	Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K	<u>0.26573.0000</u>				Short snoot/ Cilindro corto	<u>0.26556.0000</u>	12	31

Ø 43 mm | Performance | Accessories

Optics accessories/ Accessori ottiche

Image	Description	Code	Finishes	Image	Description	Code	Finishes												
	Glass filter 1 mm/ Filtro vetro 1 mm	<u>0.26401.00</u>	<table border="1"> <tr><td>4A</td><td>Red</td></tr> <tr><td>5A</td><td>Green</td></tr> <tr><td>6A</td><td>Blue</td></tr> <tr><td>7A</td><td>Pink</td></tr> <tr><td>8A</td><td>Yellow</td></tr> <tr><td>9A</td><td>Orange</td></tr> </table>	4A	Red	5A	Green	6A	Blue	7A	Pink	8A	Yellow	9A	Orange		Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K	<u>0.26574.0000</u>	
4A	Red																		
5A	Green																		
6A	Blue																		
7A	Pink																		
8A	Yellow																		
9A	Orange																		
	Colored Gel Slides (2 pieces)/ Vetrini per gel colorato (2 pezzi)	<u>0.26409.0000</u>			Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta	<u>0.26441.0000</u>													
	Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K	<u>0.26558.0000</u>			Wide texture honeycomb louvre/ Griglia alveolare a maglia larga	<u>0.26449.0000</u>													
	Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K	<u>0.26417.0000</u>			Elliptical beam lens / Lente per fascio ellittico	<u>0.26492.0000</u>													
	Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K	<u>0.26425.0000</u>			Opal lens/ Lente opale	<u>0.26461.0000</u>													
	Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K	<u>0.26433.0000</u>			Spread lens Lente diffondente	<u>0.26469.0000</u>													
	Selective filter 3000K - 3600K / Filtro selettivo 3000K - 3600K	<u>0.26566.0000</u>			Cross blade louvre/ Griglia a croce	<u>0.26480.0000</u>													
					Cone 45° wall washer/ Cono 45° wall washer	<u>0.26496.00</u>	<table border="1"> <tr><td>12</td><td>White</td></tr> <tr><td>31</td><td>Black</td></tr> </table>	12	White	31	Black								
12	White																		
31	Black																		

Ø 60 mm | Precision



Code example:
0 . RH82 A . HW 12

Accessories: p.450
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

9W POWERLED Lumen delivered up to 772 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>RH82</u> Precision	<u>A</u> 8° Very narrow	<u>HW</u>	2700	>90	725	<3	<u>12</u> <input type="checkbox"/>
<u>T</u> Phase-cut			<u>HQ</u>	3000	>90	730	<3	<u>31</u> <input type="checkbox"/>
<u>D</u> DALI			<u>WW</u>	3000	>80	844	<3	
<u>P</u> Dimmer on board			<u>NN</u>	4000	>80	941	<3	
<u>H</u> Bluetooth			LED nominal lumen					

9W COBLED Lumen delivered up to 1115 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>GH82</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	960	<2	<u>12</u> <input type="checkbox"/>
<u>T</u> Phase-cut		<u>E</u> 20° Medium	<u>HW</u>	2700	>90	1050	<2	<u>31</u> <input type="checkbox"/>
<u>D</u> DALI		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	1100	<2	
<u>P</u> Dimmer on board			<u>WW</u>	3000	>80	1300	<3	
<u>H</u> Bluetooth			<u>NN</u>	4000	>80	1360	<3	
			LED nominal lumen					

12W COBLED Lumen delivered up to 1455 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>GH83</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1250	<2	<u>12</u> <input type="checkbox"/>
<u>T</u> Phase-cut		<u>E</u> 20° Medium	<u>HW</u>	2700	>90	1370	<2	<u>31</u> <input type="checkbox"/>
<u>D</u> DALI		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	1420	<2	
<u>P</u> Dimmer on board			<u>WW</u>	3000	>80	1700	<3	
<u>H</u> Bluetooth			<u>NN</u>	4000	>80	1775	<3	
			LED nominal lumen					


17W COBLED Lumen delivered up to 1970 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>GH84</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1700	<2	<u>12</u> <input type="checkbox"/>
<u>T</u> Phase-cut		<u>E</u> 20° Medium	<u>HW</u>	2700	>90	1870	<2	<u>31</u> <input type="checkbox"/>
<u>D</u> DALI		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	1920	<2	
<u>P</u> Dimmer on board			<u>WW</u>	3000	>80	2320	<3	
<u>H</u> Bluetooth			<u>NN</u>	4000	>80	2400	<3	
			LED nominal lumen					

12W Warm Dimming COBLED Lumen delivered up to 690 lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>D</u> DALI	<u>GH83</u> Precision	<u>B</u> 27° Narrow	<u>DT</u>	1700-3000	>95	100-1000	<4	<u>12</u> <input type="checkbox"/>
<u>P</u> Dimmer on board			LED nominal lumen					
<u>H</u> Bluetooth								<u>31</u> <input type="checkbox"/>

Ø 60 mm | Performance



Code example:

O . **GH92** **B** . **HW** **12**

Accessories: p.451
Track/Binario: p.707
Finishes: p.380
Photometric data:
www.reggiani.net

9W COBLED Lumen delivered up to 1200lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	GH92 Performance	B 13° Narrow	HC	3000	>98	960	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	1050	<2	31
D DALI		H 40° Wide	HQ	3000	>90	1100	<2	
P Dimmer on board		K - Without optics	WW	3000	>80	1300	<3	
H Bluetooth			NN	4000	>80	1360	<3	

LED nominal lumen

12W COBLED Lumen delivered up to 1560lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	GH93 Performance	B 13° Narrow	HC	3000	>98	1250	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	1370	<2	31
D DALI		H 40° Wide	HQ	3000	>90	1420	<2	
P Dimmer on board		K - Without optics	WW	3000	>80	1700	<3	
H Bluetooth			NN	4000	>80	1775	<3	

LED nominal lumen

17W COBLED Lumen delivered up to 2110lm / Lumen maintenance: L80B10=50,000h


Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	GH94 Performance	B 13° Narrow	HC	3000	>98	1700	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	1870	<2	31
D DALI		H 40° Wide	HQ	3000	>90	1920	<2	
P Dimmer on board		K - Without optics	WW	3000	>80	2320	<3	
H Bluetooth			NN	4000	>80	2400	<3	

LED nominal lumen




Ø 60 mm | Precision | Accessories

Interchangeable IOS optics/ Ottiche intercambiabili IOS



Description
Precision - Narrow beam/
Precision - Fascio stretto
(12°-9W, 12W, 17W)

Code
0.35125.0000



Description
Precision - Medium beam/
Precision - Fascio medio
(20°-9W, 12W, 17W)

Code
0.35126.0000

Not for codes/Non per codici: **GH83B / GH83B.DT**

Not for codes/Non per codici: **GH83B / GH83B.DT**



Optics accessories/ Accessori ottiche



Description
Glass filter 1 mm/
Filtro vetro 1 mm


Code
0.26402.00

Finishes



Description
Dense texture honeycomb louvre/
Griglia alveolare a maglia fitta

Code
0.26442.0000



Description
Wide texture honeycomb louvre/
Griglia alveolare a maglia larga

Code
0.26450.0000



Description
Colored Gel Slides (2 pieces)/
Vetринi per gel colorato (2 pezzi/)

Code
0.26410.0000



Description
Elliptical beam lens /
Lente per fascio ellittico

Code
0.26457.0000



Description
Selective filter 3000K - 2700K /
Filtro selettivo 3000K - 2700K

Code
0.26559.0000




Description
Opal lens/
Lente opale

Code
0.26462.0000




Description
Selective filter 2700K - 2500K /
Filtro selettivo 2700K - 2500K

Code
0.26418.0000



Description
Spread lens
Lente diffondente

Code
0.26470.0000



Description
Selective filter 2700K - 2200K /
Filtro selettivo 2700K - 2200K

Code
0.26426.0000




Description
Cross blade louvre/
Griglia a croce

Code
0.26477.0000



Description
Selective filter 2700K - 2000K /
Filtro selettivo 2700K - 2000K

Code
0.26434.0000



Description
Barn doors/
Alette rompiflusso

Code
0.26485.0000



Description
Selective filter 3000K - 3600K /
Filtro selettivo 3000K - 3600K

Code
0.26567.0000



Description
Cone 45° wall washer/
Cono 45° wall washer

Code
0.26489.00

Finishes

12


31



Description
Selective filter 3000K - 4000K /
Filtro selettivo 3000K - 4000K

Code
0.26575.0000

Framing accessory/ Sagomatore




Description
Framing accessory, light shape - square/
Sagomatore, forma di luce - quadrata

Code
0.26651.00

Finishes

21



Description
Framing accessory, light shape - round/
Sagomatore, forma di luce - tonda







Code
0.26650.00

Finishes
























21

Ø 60 mm | Performance | Accessories







Interchangeable IOS optics/ Ottiche intercambiabili IOS

		Description Performance - Narrow beam/ Performance - Fascio stretto (13°-9W, 12W, 17W)	Code <u>0.35145.0000</u>			Description Performance - Wide beam/ Performance - Fascio largo (40°-9W, 12W, 17W)	Code <u>0.35147.0000</u>
		Description Performance - Medium beam/ Performance - Fascio medio (24°-9W, 12W, 17W)	Code <u>0.35146.0000</u>				



Optics accessories/ Accessori ottiche

	Description Glass filter 1 mm/ Filtro vetro 1 mm	Code <u>0.26403.00</u>	Finishes 4A  5A  6A  7A  8A  9A 		Description Selective filter 3000K - 4000K/ Filtro selettivo 3000K - 4000K	Code <u>0.26576.0000</u>	
	Description Colored Gel Slides (2 pieces)/ Vetri per gel colorato (2 pezzi)	Code <u>0.26411.0000</u>			Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta	Code <u>0.26443.0000</u>	
	Description Selective filter 3000K - 2700K/ Filtro selettivo 3000K - 2700K	Code <u>0.26560.0000</u>			Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga	Code <u>0.26451.0000</u>	
	Description Selective filter 2700K - 2500K/ Filtro selettivo 2700K - 2500K	Code <u>0.26419.0000</u>			Description Elliptical beam lens / Lente per fascio ellittico	Code <u>0.26493.0000</u>	
	Description Selective filter 2700K - 2200K/ Filtro selettivo 2700K - 2200K	Code <u>0.26427.0000</u>			Description Opal lens/ Lente opale	Code <u>0.26463.0000</u>	
	Description Selective filter 2700K - 2000K/ Filtro selettivo 2700K - 2000K	Code <u>0.26435.0000</u>			Description Spread lens Lente diffondente	Code <u>0.26471.0000</u>	
	Description Selective filter 3000K - 3600K/ Filtro selettivo 3000K - 3600K	Code <u>0.26568.0000</u>			Description Cross blade louvre/ Griglia a croce	Code <u>0.26481.0000</u>	
					Description Cone 45° wall washer/ Cono 45° wall washer	Code <u>0.26497.00</u>	Finishes 12  31 

Framing accessory/ Sagomatore

		Description Framing accessory, light shape - square/ Sagomatore, forma di luce - quadrata	Code <u>0.26651.00</u>	Finishes 21 
		Description Framing accessory, light shape - round/ Sagomatore, forma di luce - tonda	Code <u>0.26650.00</u>	Finishes 21 

Ø 75 mm | Precision



Code example:
0 . **LH83** **B** . **HC** **12**

Accessories: p.454
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

12 W COB LED Lumen delivered up to 1575 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LH83 Precision	B 12° Narrow	HC	3000	>98	1323	<2	12 <input type="checkbox"/>
T Phase-cut		E 24° Medium	HW	2700	>90	1491	<2	31 <input type="checkbox"/>
D DALI		K - Without optics	HQ	3000	>90	1533	<2	
P Dimmer on board			WW	3000	>80	1859	<3	
H Bluetooth			NN	4000	>80	1920	<3	

LED nominal lumen

17 W COB LED Lumen delivered up to 1465 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	NH84 Precision	A 7° Very narrow	HC	3000	>98	1700	<2	12 <input type="checkbox"/>
T Phase-cut			HW	2700	>90	1870	<2	31 <input type="checkbox"/>
D DALI			HQ	3000	>90	1920	<2	
P Dimmer on board			WW	3000	>80	2320	<3	
H Bluetooth			NN	4000	>80	2400	<3	

LED nominal lumen

17 W COB LED Lumen delivered up to 2190 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LH84 Precision	B 12° Narrow	HC	3000	>98	1834	<2	12 <input type="checkbox"/>
T Phase-cut		E 24° Medium	HW	2700	>90	2067	<2	31 <input type="checkbox"/>
D DALI		K - Without optics	HQ	3000	>90	2122	<2	
P Dimmer on board			WW	3000	>80	2582	<3	
H Bluetooth			NN	4000	>80	2665	<3	

LED nominal lumen

24 W COB LED Lumen delivered up to 2955 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LH86 Precision	B 12° Narrow	HC	3000	>98	2476	<3	12 <input type="checkbox"/>
T Phase-cut		E 24° Medium	HW	2700	>90	2792	<3	31 <input type="checkbox"/>
D DALI		K - Without optics	HQ	3000	>90	2860	<3	
P Dimmer on board			WW	3000	>80	3487	<3	
H Bluetooth			NN	4000	>80	3602	<3	

LED nominal lumen

28 W COB LED Lumen delivered up to 3325 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LH87 Precision	B 12° Narrow	HC	3000	>98	2777	<3	12 <input type="checkbox"/>
T Phase-cut		E 24° Medium	HW	2700	>90	3137	<3	31 <input type="checkbox"/>
D DALI		K - Without optics	HQ	3000	>90	3207	<3	
P Dimmer on board			WW	3000	>80	3898	<3	
H Bluetooth			NN	4000	>80	4054	<3	


LED nominal lumen

25 W Warm Dimming COB LED Lumen delivered up to 1100 lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
D DALI	LH86 Precision	B 25° Narrow	DT	1700-3000	>95	100-2500	<4	12 <input type="checkbox"/>
P Dimmer on board								31 <input type="checkbox"/>
H Bluetooth								

LED nominal lumen

Ø 75 mm | Performance



Code example:

0 . **LH93** **B** . **HC** **12**

Accessories: p.455
Track/Binario: p.707
Finishes: p.380
Photometric data:
www.reggiani.net

12 W COBLED Lumen delivered up to 1800 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LH93 Performance	B 12° Narrow	HC	3000	>98	1323	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	1491	<2	31
D DALI		H 48° Wide	HQ	3000	>90	1533	<2	
P Dimmer on board		K - Without optics	WW	3000	>80	1859	<3	
H Bluetooth			NN	4000	>80	1920	<3	

LED nominal lumen

17 W COBLED Lumen delivered up to 2480 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LH94 Performance	B 12° Narrow	HC	3000	>98	1834	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	2067	<2	31
D DALI		H 48° Wide	HQ	3000	>90	2122	<2	
P Dimmer on board		K - Without optics	WW	3000	>80	2582	<3	
H Bluetooth			NN	4000	>80	2665	<3	

LED nominal lumen

24 W COBLED Lumen delivered up to 3550 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LH96 Performance	B 12° Narrow	HC	3000	>98	2476	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	2792	<2	31
D DALI		H 48° Wide	HQ	3000	>90	2860	<2	
P Dimmer on board		K - Without optics	WW	3000	>80	3487	<3	
H Bluetooth			NN	4000	>80	3602	<3	

LED nominal lumen

28 W COBLED Lumen delivered up to 3770 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LH97 Performance	B 12° Narrow	HC	3000	>98	2777	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	3137	<2	31
D DALI		H 48° Wide	HQ	3000	>90	3207	<2	
P Dimmer on board		K - Without optics	WW	3000	>80	3898	<3	
H Bluetooth			NN	4000	>80	4054	<3	

LED nominal lumen


Ø 75 mm | Precision | Accessories

Interchangeable IOS optics/ Ottiche intercambiabili IOS



Description
Precision - Narrow beam/
Precision - Fascio stretto
(12°-12W, 17W, 24W, 28W)

Code
0.35130.0000



Description
Precision - Medium beam/
Precision - Fascio medio
(24°-12W, 17W, 24W, 28W)

Code
0.35131.0000

Not for codes/Non per codici: **NH84A / LH86B.DT**

Not for codes/Non per codici: **NH84A / LH86B.DT**

Optics accessories/ Accessori ottiche



Description
Glass filter 1 mm/
Filtro vetro 1 mm


Code
0.26404.00

Finishes
4A
5A
6A
7A
8A
9A



Description
Dense texture honeycomb louvre/
Griglia alveolare a maglia fitta

Code
0.26444.0000



Description
Wide texture honeycomb louvre/
Griglia alveolare a maglia larga

Code
0.26452.0000



Description
Colored Gel Slides (2 pieces)/
Vetринi per gel colorato (2 pezzi/)

Code
0.26412.0000



Description
Elliptical beam lens /
Lente per fascio ellittico

Code
0.26458.0000



Description
Selective filter 3000K - 2700K /
Filtro selettivo 3000K - 2700K

Code
0.26561.0000




Description
Opal lens/
Lente opale

Code
0.26464.0000




Description
Selective filter 2700K - 2500K /
Filtro selettivo 2700K - 2500K

Code
0.26420.0000



Description
Spread lens
Lente diffondente

Code
0.26472.0000




Description
Selective filter 2700K - 2200K /
Filtro selettivo 2700K - 2200K

Code
0.26428.0000




Description
Cross blade louvre/
Griglia a croce

Code
0.26478.0000



Description
Selective filter 2700K - 2000K /
Filtro selettivo 2700K - 2000K

Code
0.26436.0000




Description
Barn doors/
Alette rompiflusso

Code
0.26486.0000



Description
Selective filter 3000K - 3600K /
Filtro selettivo 3000K - 3600K

Code
0.26569.0000



Description
Cone 45° wall washer/
Cono 45° wall washer

Code
0.26490.00

Finishes
12
31









Description
Selective filter 3000K - 4000K /
Filtro selettivo 3000K - 4000K
























Code
0.26577.0000

Ø 75 mm | Performance | Accessories

Interchangeable IOS optics/
Ottiche intercambiabili IOS



		Description Performance - Narrow beam/ Performance - Fascio stretto (12°-12W, 17W, 24W, 28W)	Code <u>0.35150.0000</u>			Description Performance - Wide beam/ Performance - Fascio largo (48°-12W, 17W, 24W, 28W)	Code <u>0.35152.0000</u>
		Description Performance - Medium beam/ Performance - Fascio medio (24°-12W, 17W, 24W, 28W)	Code <u>0.35151.0000</u>				

Optics accessories/
Accessori ottiche

	Description Glass filter 1 mm/ Filtro vetro 1 mm	Code <u>0.26405.00</u>	Finishes 4A  5A  6A  7A  8A  9A 		Description Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K	Code <u>0.26578.0000</u>	
	Description Colored Gel Slides (2 pieces) / Vetri per gel colorato (2 pezzi)	Code <u>0.26413.0000</u>			Description Dense texture honeycomb louvre / Griglia alveolare a maglia fitta	Code <u>0.26445.0000</u>	
	Description Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K	Code <u>0.26562.0000</u>			Description Wide texture honeycomb louvre / Griglia alveolare a maglia larga	Code <u>0.26453.0000</u>	
	Description Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K	Code <u>0.26421.0000</u>			Description Elliptical beam lens / Lente per fascio ellittico	Code <u>0.26494.0000</u>	
	Description Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K	Code <u>0.26429.0000</u>			Description Opal lens / Lente opale	Code <u>0.26465.0000</u>	
	Description Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K	Code <u>0.26437.0000</u>			Description Spread lens Lente diffondente	Code <u>0.26473.0000</u>	
	Description Selective filter 3000K - 3600K / Filtro selettivo 3000K - 3600K	Code <u>0.26570.0000</u>			Description Cross blade louvre / Griglia a croce	Code <u>0.26482.0000</u>	
					Description Cone 45° wall washer / Cono 45° wall washer	Code <u>0.26498.00</u>	Finishes 12  31 

Ø 95 mm | Precision

Risk 1 1.30 IP20 850° CE CB EAC



Code example:

0 . MH83 B . HC 12

Accessories: p.458
Track/Binario: p.707
Finishes: p.380
Photometric data:
www.reggiani.net

12 W COB LED		Lumen delivered up to 1690lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	MH83 Precision	B 12° Narrow	HC	3000	>98	1323	<3	12 <input type="checkbox"/>
T Phase-cut		E 24° Medium	HW	2700	>90	1491	<3	31 <input type="checkbox"/>
D DALI		K - Without optics	HQ	3000	>90	1533	<3	
P Dimmer on board			WW	3000	>80	1859	<3	
H Bluetooth			NN	4000	>80	1920	<3	

LED nominal lumen

17 W COB LED		Lumen delivered up to 1510lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	PH84 Precision	A 7° Very narrow	HC	3000	>98	1700	<2	12 <input type="checkbox"/>
T Phase-cut			HW	2700	>90	1870	<2	31 <input type="checkbox"/>
D DALI			HQ	3000	>90	1920	<2	
P Dimmer on board			WW	3000	>80	2320	<3	
H Bluetooth			NN	4000	>80	2400	<3	

LED nominal lumen

17 W COB LED		Lumen delivered up to 2350lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	MH84 Precision	B 12° Narrow	HC	3000	>98	1834	<3	12 <input type="checkbox"/>
T Phase-cut		E 24° Medium	HW	2700	>90	2067	<3	31 <input type="checkbox"/>
D DALI		K - Without optics	HQ	3000	>90	2122	<3	
P Dimmer on board			WW	3000	>80	2582	<3	
H Bluetooth			NN	4000	>80	2665	<3	

LED nominal lumen

24 W COB LED		Lumen delivered up to 3170lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	MH86 Precision	B 12° Narrow	HC	3000	>98	2476	<3	12 <input type="checkbox"/>
T Phase-cut		E 24° Medium	HW	2700	>90	2792	<3	31 <input type="checkbox"/>
D DALI		K - Without optics	HQ	3000	>90	2860	<3	
P Dimmer on board			WW	3000	>80	3487	<3	
H Bluetooth			NN	4000	>80	3602	<3	

LED nominal lumen

33 W COB LED		Lumen delivered up to 4130lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	MH88 Precision	B 12° Narrow	HC	3000	>98	3142	<3	12 <input type="checkbox"/>
D DALI		E 24° Medium	HW	2700	>90	3635	<3	31 <input type="checkbox"/>
P Dimmer on board		K - Without optics	HQ	3000	>90	3735	<3	
H Bluetooth			WW	3000	>80	4510	<3	
			NN	4000	>80	4695	<3	

LED nominal lumen


37 W COB LED		Lumen delivered up to 4476lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	MH89 Precision	B 12° Narrow	HC	3000	>98	3473	<3	12 <input type="checkbox"/>
D DALI		E 24° Medium	HW	2700	>90	3940	<3	31 <input type="checkbox"/>
P Dimmer on board		K - Without optics	HQ	3000	>90	4000	<3	
H Bluetooth			WW	3000	>80	4880	<3	
			NN	4000	>80	5090	<3	

LED nominal lumen

33 W Warm Dimming COB LED		Lumen delivered up to 1520lm / Lumen maintenance: L70 B50=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
D DALI	MH88 Precision	B 25° Narrow	DT	1700-3000	>95	100-3100	<4	12 <input type="checkbox"/>
P Dimmer on board								31 <input type="checkbox"/>
H Bluetooth								

LED nominal lumen

Ø 95 mm | Performance



Code example:

0 . **MH93** **B** . **HC** **12**

Accessories: p.459
Track/Binario: p.707
Finishes: p.380
Photometric data:
www.reggiani.net

12 W COB LED		Lumen delivered up to 1800 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	MH93 Performance	B 10° Narrow	HC	3000	>98	1323	<3	12
T Phase-cut		E 20° Medium	HW	2700	>90	1491	<3	31
D DALI		H 31° Wide	HQ	3000	>90	1533	<3	
P Dimmer on board		K - Without optics	WW	3000	>80	1859	<3	
H Bluetooth			NN	4000	>80	1920	<3	
LED nominal lumen								

17 W COB LED		Lumen delivered up to 2500 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	MH94 Performance	B 10° Narrow	HC	3000	>98	1834	<3	12
T Phase-cut		E 20° Medium	HW	2700	>90	2067	<3	31
D DALI		H 31° Wide	HQ	3000	>90	2122	<3	
P Dimmer on board		K - Without optics	WW	3000	>80	2582	<3	
H Bluetooth			NN	4000	>80	2665	<3	
LED nominal lumen								


24 W COB LED		Lumen delivered up to 3300 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	MH96 Performance	B 10° Narrow	HC	3000	>98	2476	<3	12
T Phase-cut		E 20° Medium	HW	2700	>90	2792	<3	31
D DALI		H 31° Wide	HQ	3000	>90	2860	<3	
P Dimmer on board		K - Without optics	WW	3000	>80	3487	<3	
H Bluetooth			NN	4000	>80	3602	<3	
LED nominal lumen								

33 W COB LED		Lumen delivered up to 4110 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	MH98 Performance	B 10° Narrow	HC	3000	>98	3142	<3	12
D DALI		E 20° Medium	HW	2700	>90	3635	<3	31
P Dimmer on board		H 31° Wide	HQ	3000	>90	3735	<3	
H Bluetooth		K - Without optics	WW	3000	>80	4510	<3	
			NN	4000	>80	4695	<3	
LED nominal lumen								

37 W COB LED		Lumen delivered up to 4530 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	MH99 Performance	B 10° Narrow	HC	3000	>98	3473	<3	12
D DALI		E 20° Medium	HW	2700	>90	3940	<3	31
P Dimmer on board		H 31° Wide	HQ	3000	>90	4000	<3	
H Bluetooth		K - Without optics	WW	3000	>80	4880	<3	
			NN	4000	>80	5090	<3	
LED nominal lumen								


Ø 95 mm | Accessories

Interchangeable IOS optics/ Ottiche intercambiabili IOS



Description
Precision - Narrow beam /
Precision - Fascio stretto
(12°-12W, 17W, 24W, 33W, 37W)

Code
0.35135.0000



Description
Precision - Medium beam /
Precision - Fascio medio
(24°-12W, 17W, 24W, 33W, 37W)

Code
0.35136.0000

Not for codes/Non per codici: **PH84A / MH88B.DT**

Not for codes/Non per codici: **PH84A / MH88B.DT**

Optics accessories/ Accessori ottiche



Description
Glass filter 1 mm /
Filtro vetro 1 mm

Code
0.26406.00


Finishes

4A	Red
5A	Green
6A	Blue
7A	Pink
8A	Yellow
9A	Orange



Description
Dense texture honeycomb louvre /
Griglia alveolare a maglia fitta

Code
0.26446.0000



Description
Wide texture honeycomb louvre /
Griglia alveolare a maglia larga

Code
0.26454.0000



Description
Colored Gel Slides (2 pieces) /
Vetrini per gel colorato (2 pezzi)

Code
0.26414.0000



Description
Elliptical beam lens /
Lente per fascio ellittico

Code
0.26459.0000



Description
Selective filter 3000K - 2700K /
Filtro selettivo 3000K - 2700K

Code
0.26563.0000



Description
Opal lens /
Lente opale

Code
0.26466.0000




Description
Selective filter 2700K - 2500K /
Filtro selettivo 2700K - 2500K

Code
0.26422.0000



Description
Spread lens
Lente diffondente

Code
0.26474.0000




Description
Selective filter 2700K - 2200K /
Filtro selettivo 2700K - 2200K

Code
0.26430.0000



Description
Cross blade louvre /
Griglia a croce

Code
0.26479.0000



Description
Selective filter 2700K - 2000K /
Filtro selettivo 2700K - 2000K

Code
0.26438.0000




Description
Barn doors /
Alette rompiflusso

Code
0.26487.0000



Description
Selective filter 3000K - 3600K /
Filtro selettivo 3000K - 3600K

Code
0.26571.0000



Description
Cone 45° wall washer /
Cono 45° wall washer

Code
0.26491.00

Finishes

12	White
31	Black









Description
Selective filter 3000K - 4000K /
Filtro selettivo 3000K - 4000K
























Code
0.26579.0000


Ø 95 mm | Performance | Accessories

Interchangeable IOS optics/
Ottiche intercambiabili IOS

		Description Performance - Narrow beam / Performance - Fascio stretto (10°-12W, 17W, 24W, 33W, 37W)	Code <u>0.35155.0000</u>			Description Performance - Wide beam/ Performance - Fascio largo (31°-12W, 17W, 24W, 33W, 37W)	Code <u>0.35157.0000</u>
		Description Performance - Medium beam/ Performance - Fascio medio (20°-12W, 17W, 24W, 33W, 37W)	Code <u>0.35156.0000</u>				

Optics accessories/
Accessori ottiche

	Description Glass filter 1 mm / Filtro vetro 1 mm	Code <u>0.26407.00</u>	Finishes 4A  5A  6A  7A  8A  9A 		Description Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K	Code <u>0.26580.0000</u>	
	Description Colored Gel Slides (2 pieces) / Vetri per gel colorato (2 pezzi)	Code <u>0.26415.0000</u>			Description Dense texture honeycomb louvre / Griglia alveolare a maglia fitta	Code <u>0.26447.0000</u>	
	Description Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K	Code <u>0.26564.0000</u>			Description Wide texture honeycomb louvre / Griglia alveolare a maglia larga	Code <u>0.26455.0000</u>	
	Description Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K	Code <u>0.26423.0000</u>			Description Elliptical beam lens / Lente per fascio ellittico	Code <u>0.26495.0000</u>	
	Description Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K	Code <u>0.26431.0000</u>			Description Opal lens / Lente opale	Code <u>0.26467.0000</u>	
	Description Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K	Code <u>0.26439.0000</u>			Description Spread lens Lente diffondente	Code <u>0.26475.0000</u>	
	Description Selective filter 3000K - 3600K / Filtro selettivo 3000K - 3600K	Code <u>0.26572.0000</u>			Description Cross blade louvre / Griglia a croce	Code <u>0.26483.0000</u>	
					Description Cone 45° wall washer / Cono 45° wall washer	Code <u>0.26491.00</u>	Finishes 12  31 

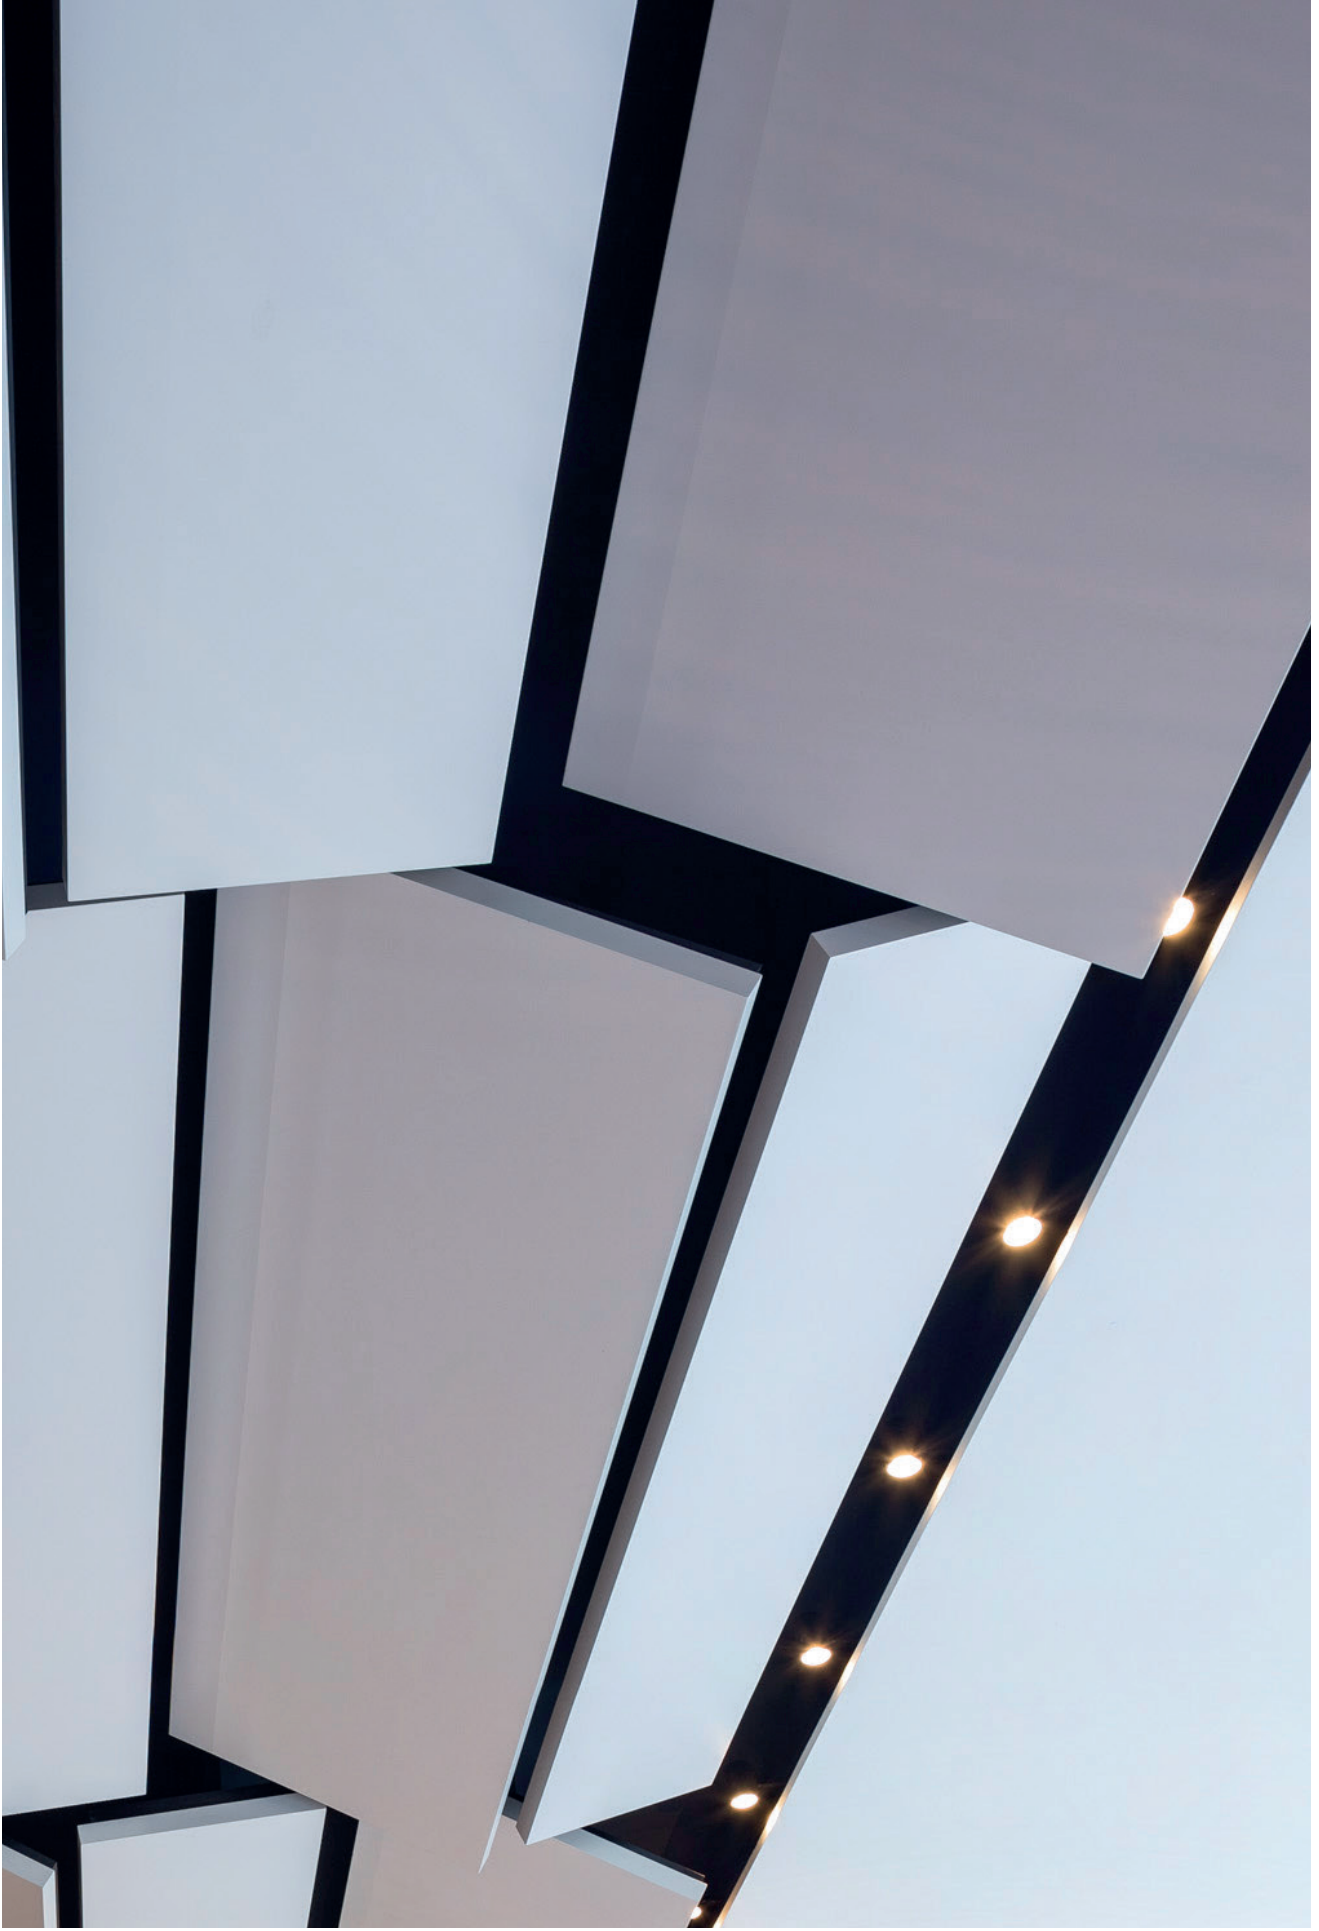


—

Yori Slot


— Yori Slot

EN Yori Slot was designed to meet specific needs where flexible luminaire use is taken to new heights. The projector incorporates a supplementary adjustable arm that connects the top of the luminaire with the rest of the lighting body. For concealed installation in coves and architectural details, the arm can be used to adjust the projector in opposite directions, with the visible parts of the lighting body remaining in line.

IT Yori Slot nasce da specifiche esigenze progettuali in cui la flessibilità di utilizzo dell'apparecchio viene portata all'estremo. Il proiettore presenta un braccetto orientabile supplementare che collega la testa dell'apparecchio con il resto del corpo illuminante. Per installazioni in gole e dettagli architettonici a scomparsa molto ristretti, il braccetto consente di orientare il proiettore in direzioni opposte pur mantenendo le porzioni visibili del corpo apparecchio allineate.

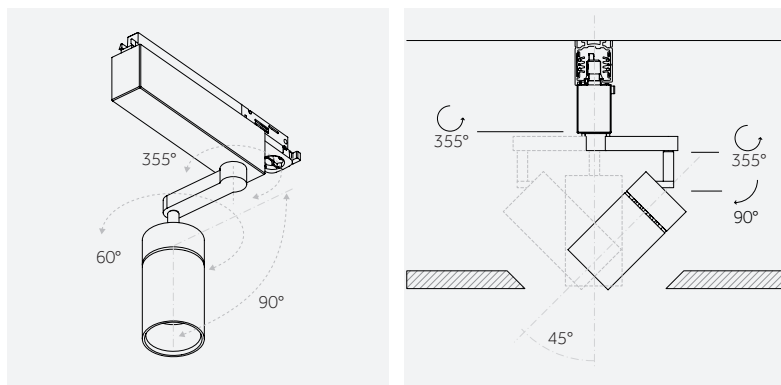



EN Yori Slot Adjustability
IT Orientabilità Yori Slot

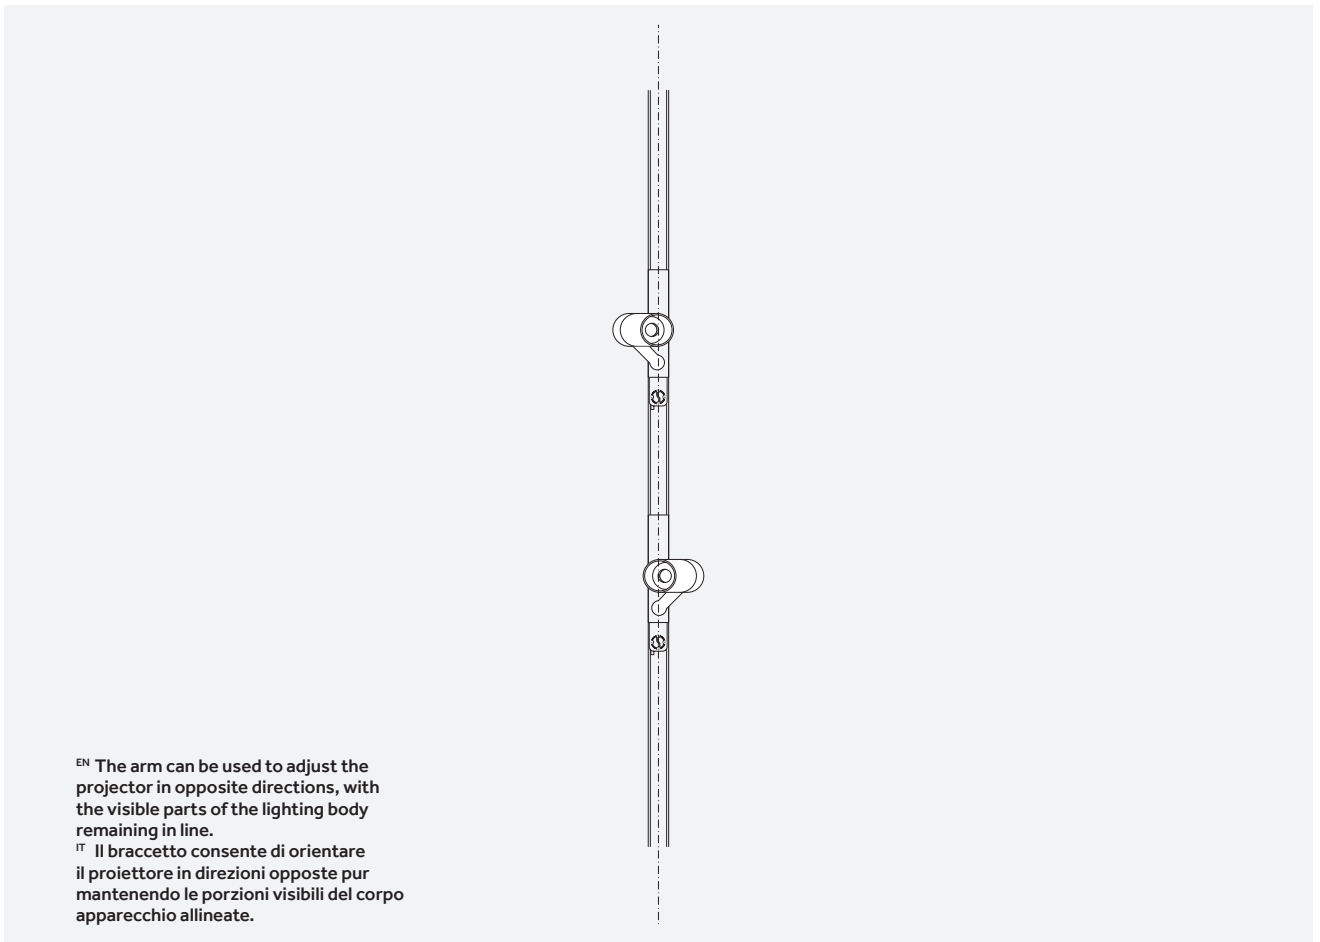


^{EN} The arm can be used to adjust the projector in opposite directions, with the visible parts of the lighting body remaining in line.

^{IT} Il braccetto consente di orientare il proiettore in direzioni opposte pur mantenendo le porzioni visibili del corpo apparecchio allineate.

Ø 43 mm | Precision



Phase-cut / Dali / Dimmer on board



Code example:
0 . FL71 . A . HW 31

Accessories: p.466
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

4W POWERLED Lumen delivered up to 435 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	FL71 Precision	A 7° Verynarrow	HW	2700	>90	410	<3	31
T Phase-cut		B 11° Narrow	HQ	3000	>90	415	<3	
D DALI		E 23° Medium	WW	3000	>80	485	<3	
P Dimmer on board		H 40° Wide	NN	4000	>80	530	<3	


LED nominal lumen

9W POWERLED Lumen delivered up to 750 lm / Lumen maintenance: L90 B10=50,000h




Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	FL72 Precision	A 7° Verynarrow	HW	2700	>90	725	<3	31
T Phase-cut		B 11° Narrow	HQ	3000	>90	730	<3	
D DALI		E 23° Medium	WW	3000	>80	845	<3	
P Dimmer on board		H 40° Wide	NN	4000	>80	940	<3	

LED nominal lumen

Ø 43 mm | Performance



Phase-cut / Dali / Dimmer on board

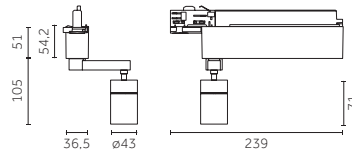

Code example:

O . **FL81** **B** . **HW** **31**

Accessories: p.467
Track/Binario: p.707
Finishes: p.380
Photometric data:
www.reggiani.net

4W POWER LED

Lumen delivered up to 450 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	FL81 Performance	B 6° Narrow	HW	2700	>90	410	<3	31
T Phase-cut		E 18° Medium	HQ	3000	>90	415	<3	
D DALI		H 36° Wide	WW	3000	>80	485	<3	
P Dimmer on board			NN	4000	>80	530	<3	

LED nominal lumen

9W POWER LED

Lumen delivered up to 780 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	FL82 Performance	B 6° Narrow	HW	2700	>90	725	<3	31
T Phase-cut		E 18° Medium	HQ	3000	>90	730	<3	
D DALI		H 36° Wide	WW	3000	>80	845	<3	
P Dimmer on board			NN	4000	>80	940	<3	

LED nominal lumen


























Ø 43 mm | Precision | Accessories

Optics accessories/
Accessori ottiche



Image	Description	Code	Finishes	Image	Description	Code	Finishes
	Glass filter 1 mm/ Filtro vetro 1 mm	<u>0.26400.00</u>	4A 5A 6A 7A 8A 9A		Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta	<u>0.26440.0000</u>	
	Colored Gel Slides (2 pieces)/ Vetrini per gel colorato (2 pezzi)/	<u>0.26408.0000</u>			Wide texture honeycomb louvre/ Griglia alveolare a maglia larga	<u>0.26448.0000</u>	
	Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K	<u>0.26557.0000</u>			Elliptical beam lens / Lente per fascio ellittico	<u>0.26456.0000</u>	
	Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K	<u>0.26416.0000</u>			Opal lens/ Lente opale	<u>0.26460.0000</u>	
	Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K	<u>0.26424.0000</u>			Spread lens Lente diffondente	<u>0.26468.0000</u>	
	Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K	<u>0.26432.0000</u>			Cross blade louvre/ Griglia a croce	<u>0.26476.0000</u>	
	Selective filter 3000K - 3600K / Filtro selettivo 3000K - 3600K	<u>0.26565.0000</u>			Barn doors/ Alette rompiflusso	<u>0.26484.0000</u>	
	Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K	<u>0.26573.0000</u>			Cone 45° wall washer/ Cono 45° wall washer	<u>0.26488.00</u>	12 31
					Short snoot/ Cilindro corto	<u>0.26556.00</u>	12 31

Ø 43 mm | Performance | Accessories

Optics accessories/ Accessori ottiche

		Finishes					
	Description Glass filter 1 mm/ Filtro vetro 1 mm	Code <u>0.26401.00</u>	4A 		Description Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K	Code <u>0.26574.0000</u>	
			5A 		Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta	Code <u>0.26441.0000</u>	
			6A 		Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga	Code <u>0.26449.0000</u>	
			7A 		Description Elliptical beam lens / Lente per fascio ellittico	Code <u>0.26492.0000</u>	
			8A 		Description Opal lens/ Lente opale	Code <u>0.26461.0000</u>	
			9A 		Description Spread lens Lente diffondente	Code <u>0.26469.0000</u>	
	Description Colored Gel Slides (2 pieces)/ Vetrini per gel colorato (2 pezzi)	Code <u>0.26409.0000</u>			Description Cross blade louvre/ Griglia a croce	Code <u>0.26480.0000</u>	
	Description Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K	Code <u>0.26558.0000</u>			Description Cone 45° wall washer/ Cono 45° wall washer	Code <u>0.26496.00</u>	Finishes 12  31 
	Description Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K	Code <u>0.26417.0000</u>					
	Description Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K	Code <u>0.26425.0000</u>					
	Description Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K	Code <u>0.26433.0000</u>					
	Description Selective filter 3000K - 3600K / Filtro selettivo 3000K - 3600K	Code <u>0.26566.0000</u>					

Ø 60 mm | Precision



Code example:
0 . ML72 B . HC 31

Accessories: p.470
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

9 W POWERLED Lumen delivered up to 770 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	ML72 Precision	A 8° Very narrow	HW	2700	>90	725	<3	31
T Phase-cut			HQ	3000	>90	730	<3	
D DALI			WW	3000	>80	845	<3	
P Dimmer on board			NN	4000	>80	940	<3	

LED nominal lumen

9 W COBLED Lumen delivered up to 1115 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	GL72 Precision	B 12° Narrow	HC	3000	>98	960	<2	31
T Phase-cut		E 20° Medium	HW	2700	>90	1050	<2	
D DALI		K - Without optics	HQ	3000	>90	1100	<2	
P Dimmer on board			WW	3000	>80	1300	<3	
			NN	4000	>80	1360	<3	

LED nominal lumen

12 W COBLED Lumen delivered up to 1455 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	GL73 Precision	B 12° Narrow	HC	3000	>98	1250	<2	31
T Phase-cut		E 20° Medium	HW	2700	>90	1370	<2	
D DALI		K - Without optics	HQ	3000	>90	1420	<2	
P Dimmer on board			WW	3000	>80	1700	<3	
			NN	4000	>80	1775	<3	




LED nominal lumen

17 W COBLED Lumen delivered up to 1970 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	GL74 Precision	B 12° Narrow	HC	3000	>98	1700	<3	31
T Phase-cut		E 20° Medium	HW	2700	>90	1870	<3	
D DALI		K - Without optics	HQ	3000	>90	1920	<3	
P Dimmer on board			WW	3000	>80	2320	<3	
			NN	4000	>80	2400	<3	

LED nominal lumen

Ø 60 mm | Performance



Code example:

O . **GL82** **B** . **HC** **31**

Accessories: p.471
Track/Binario: p.707
Finishes: p.380
Photometric data:
www.reggiani.net

9W COBLED Lumen delivered up to 1200lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	GL82 Performance	B 13° Narrow	HC	3000	>98	960	<2	31
T Phase-cut		E 24° Medium	HW	2700	>90	1050	<2	
D DALI		H 40° Wide	HQ	3000	>90	1100	<2	
P Dimmer on board		K - Without optics	WW	3000	>80	1300	<3	
			NN	4000	>80	1360	<3	

LED nominal lumen

12W COBLED Lumen delivered up to 1560lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	GL83 Performance	B 13° Narrow	HC	3000	>98	1250	<2	31
T Phase-cut		E 24° Medium	HW	2700	>90	1370	<2	
D DALI		H 40° Wide	HQ	3000	>90	1420	<2	
P Dimmer on board		K - Without optics	WW	3000	>80	1700	<3	
			NN	4000	>80	1775	<3	

LED nominal lumen


17W COBLED Lumen delivered up to 2110lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	GL84 Performance	B 13° Narrow	HC	3000	>98	1700	<2	31
T Phase-cut		E 24° Medium	HW	2700	>90	1870	<2	
D DALI		H 40° Wide	HQ	3000	>90	1920	<2	
P Dimmer on board		K - Without optics	WW	3000	>80	2320	<3	
			NN	4000	>80	2400	<3	

LED nominal lumen


Ø 60 mm | Precision | Accessories

Interchangeable IOS optics/ Ottiche intercambiabili IOS



Description
Precision - Narrow beam/
Precision - Fascio stretto
(12°-9W, 12W, 17W)

Code
0.35125.0000



Description
Precision - Medium beam/
Precision - Fascio medio
(20°-9W, 12W, 17W)

Code
0.35126.0000

Not for codes/Non per codici: **ML72A**

Not for codes/Non per codici: **ML72A**



Optics accessories/ Accessori ottiche



Description
Glass filter 1 mm/
Filtro vetro 1 mm


Code
0.26402.00

Finishes



Description
Dense texture honeycomb louvre/
Griglia alveolare a maglia fitta

Code
0.26442.0000



Description
Wide texture honeycomb louvre/
Griglia alveolare a maglia larga

Code
0.26450.0000



Description
Colored Gel Slides (2 pieces)/
Vetrini per gel colorato (2 pezzi/)

Code
0.26410.0000



Description
Elliptical beam lens /
Lente per fascio ellittico

Code
0.26457.0000



Description
Selective filter 3000K - 2700K /
Filtro selettivo 3000K - 2700K

Code
0.26559.0000




Description
Opal lens/
Lente opale

Code
0.26462.0000




Description
Selective filter 2700K - 2500K /
Filtro selettivo 2700K - 2500K

Code
0.26418.0000



Description
Spread lens
Lente diffondente

Code
0.26470.0000



Description
Selective filter 2700K - 2200K /
Filtro selettivo 2700K - 2200K

Code
0.26426.0000




Description
Cross blade louvre/
Griglia a croce

Code
0.26477.0000



Description
Selective filter 2700K - 2000K /
Filtro selettivo 2700K - 2000K

Code
0.26434.0000




Description
Barn doors/
Alette rompiflusso

Code
0.26485.0000



Description
Selective filter 3000K - 3600K /
Filtro selettivo 3000K - 3600K

Code
0.26567.0000



Description
Cone 45° wall washer/
Cono 45° wall washer

Code
0.26489.00

Finishes

12


31



Description
Selective filter 3000K - 4000K /
Filtro selettivo 3000K - 4000K

Code
0.26575.0000

Framing accessory/ Sagomatore




Description
Framing accessory, light shape - square/
Sagomatore, forma di luce - quadrata

Code
0.26651.00

Finishes

21



Description
Framing accessory, light shape - round/
Sagomatore, forma di luce - tonda







Code
0.26650.00

Finishes
























21

Ø 60 mm | Performance | Accessories







Interchangeable IOS optics/ Ottiche intercambiabili IOS

		Description Performance - Narrow beam/ Performance - Fascio stretto (13°-9W, 12W, 17W)	Code 0.35145.0000			Description Performance - Wide beam/ Performance - Fascio largo (40°-9W, 12W, 17W)	Code 0.35147.0000
		Description Performance - Medium beam/ Performance - Fascio medio (24°-9W, 12W, 17W)	Code 0.35146.0000				

Optics accessories/ Accessori ottiche



	Description Glass filter 1 mm/ Filtro vetro 1 mm	Code 0.26403.00	Finishes 4A  5A  6A  7A  8A  9A 		Description Selective filter 3000K - 4000K/ Filtro selettivo 3000K - 4000K	Code 0.26576.0000	
	Description Colored Gel Slides (2 pieces)/ Vetri per gel colorato (2 pezzi)	Code 0.26411.0000			Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta	Code 0.26443.0000	
	Description Selective filter 3000K - 2700K/ Filtro selettivo 3000K - 2700K	Code 0.26560.0000			Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga	Code 0.26451.0000	
	Description Selective filter 2700K - 2500K/ Filtro selettivo 2700K - 2500K	Code 0.26419.0000			Description Elliptical beam lens / Lente per fascio ellittico	Code 0.26493.0000	
	Description Selective filter 2700K - 2200K/ Filtro selettivo 2700K - 2200K	Code 0.26427.0000			Description Opal lens/ Lente opale	Code 0.26463.0000	
	Description Selective filter 2700K - 2000K/ Filtro selettivo 2700K - 2000K	Code 0.26435.0000			Description Spread lens Lente diffondente	Code 0.26471.0000	
	Description Selective filter 3000K - 3600K/ Filtro selettivo 3000K - 3600K	Code 0.26568.0000			Description Cross blade louvre/ Griglia a croce	Code 0.26481.0000	
					Description Cone 45° wall washer/ Cono 45° wall washer	Code 0.26497.00	Finishes 12  31 

Framing accessory/ Sagomatore

		Description Framing accessory, light shape - square/ Sagomatore, forma di luce - quadrata	Code 0.26651.00	Finishes 21 
		Description Framing accessory, light shape - round/ Sagomatore, forma di luce - tonda	Code 0.26650.00	Finishes 21 

Ø 75 mm | Precision

Risk 1 1.05 IP20 850° CE CB EAC



Code example:

0 . LL73 B . HC 31

Accessories: p.474
Track/Binario: p.707
Finishes: p.380
Photometric data:
www.reggiani.net

12 W COB LED Lumen delivered up to 1575 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	LL73 Precision	B 12° Narrow	HC	3000	>98	1323	<2	31
T Phase-cut		E 24° Medium	HW	2700	>90	1491	<2	
D DALI		K - Without optics	HQ	3000	>90	1533	<2	
P Dimmer on board			WW	3000	>80	1859	<3	
			NN	4000	>80	1920	<3	

LED nominal lumen

17 W COB LED Lumen delivered up to 1465 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	NL74 Precision	A 7° Verynarrow	HC	3000	>98	1700	<2	31
T Phase-cut			HW	2700	>90	1870	<2	
D DALI			HQ	3000	>90	1920	<2	
P Dimmer on board			WW	3000	>80	2320	<3	
			NN	4000	>80	2400	<3	

LED nominal lumen

17 W COB LED Lumen delivered up to 2190 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	LL74 Precision	B 12° Narrow	HC	3000	>98	1834	<2	31
T Phase-cut		E 24° Medium	HW	2700	>90	2067	<2	
D DALI		K - Without optics	HQ	3000	>90	2122	<2	
P Dimmer on board			WW	3000	>80	2582	<3	
			NN	4000	>80	2665	<3	

LED nominal lumen

24 W COB LED Lumen delivered up to 2955 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	LL76 Precision	B 12° Narrow	HC	3000	>98	2476	<3	31
T Phase-cut		E 24° Medium	HW	2700	>90	2792	<3	
D DALI		K - Without optics	HQ	3000	>90	2860	<3	
P Dimmer on board			WW	3000	>80	3487	<3	
			NN	4000	>80	3602	<3	




LED nominal lumen

28 W COB LED Lumen delivered up to 3325 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	LL77 Precision	B 12° Narrow	HC	3000	>98	2777	<3	31
T Phase-cut		E 24° Medium	HW	2700	>90	3137	<3	
D DALI		K - Without optics	HQ	3000	>90	3207	<3	
P Dimmer on board			WW	3000	>80	3898	<3	
			NN	4000	>80	4054	<3	

LED nominal lumen

Ø 75 mm | Performance



Code example:

0 . **LL83** **B** . **HC** **31**

Accessories: p.475
Track/Binario: p.707
Finishes: p.380
Photometric data:
www.reggiani.net

12 W COBLED Lumen delivered up to 1800 lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LL83 Performance	B 12° Narrow	HC	3000	>98	1323	<3	31
T Phase-cut		E 24° Medium	HW	2700	>90	1491	<3	
D DALI		H 48° Wide	HQ	3000	>90	1533	<3	
P Dimmer on board		K - Without optics	WW	3000	>80	1859	<3	
			NN	4000	>80	1920	<3	

LED nominal lumen

17 W COBLED Lumen delivered up to 2480 lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LL84 Performance	B 12° Narrow	HC	3000	>98	1834	<3	31
T Phase-cut		E 24° Medium	HW	2700	>90	2067	<3	
D DALI		H 48° Wide	HQ	3000	>90	2122	<3	
P Dimmer on board		K - Without optics	WW	3000	>80	2582	<3	
			NN	4000	>80	2665	<3	

LED nominal lumen

24 W COBLED Lumen delivered up to 3550 lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LL86 Performance	B 12° Narrow	HC	3000	>98	2476	<3	31
T Phase-cut		E 24° Medium	HW	2700	>90	2792	<3	
D DALI		H 48° Wide	HQ	3000	>90	2860	<3	
P Dimmer on board		K - Without optics	WW	3000	>80	3487	<3	
			NN	4000	>80	3602	<3	

LED nominal lumen

28 W COBLED Lumen delivered up to 3770 lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LL87 Performance	B 12° Narrow	HC	3000	>98	2777	<3	31
D DALI		E 24° Medium	HW	2700	>90	3137	<3	
P Dimmer on board		H 48° Wide	HQ	3000	>90	3207	<3	
		K - Without optics	WW	3000	>80	3898	<3	
			NN	4000	>80	4054	<3	

LED nominal lumen


Ø 75 mm | Precision | Accessories

Interchangeable IOS optics/ Ottiche intercambiabili IOS



Description
Precision - Narrow beam/
Precision - Fascio stretto
(12°-12W, 17W, 24W, 28W)

Code
0.35130.0000



Description
Precision - Medium beam/
Precision - Fascio medio
(24°-12W, 17W, 24W, 28W)

Code
0.35131.0000

Not for codes/Non per codici: **NL74A**

Not for codes/Non per codici: **NL74A**


Optics accessories/ Accessori ottiche



Description
Glass filter 1 mm/
Filtro vetro 1 mm


Code
0.26404.00

Finishes



Description
Dense texture honeycomb louvre/
Griglia alveolare a maglia fitta

Code
0.26444.0000



Description
Wide texture honeycomb louvre/
Griglia alveolare a maglia larga

Code
0.26452.0000



Description
Colored Gel Slides (2 pieces)/
Vetrini per gel colorato (2 pezzi/)

Code
0.26412.0000



Description
Elliptical beam lens /
Lente per fascio ellittico

Code
0.26458.0000



Description
Selective filter 3000K - 2700K /
Filtro selettivo 3000K - 2700K

Code
0.26561.0000




Description
Opal lens/
Lente opale

Code
0.26464.0000




Description
Selective filter 2700K - 2500K /
Filtro selettivo 2700K - 2500K

Code
0.26420.0000



Description
Spread lens
Lente diffondente

Code
0.26472.0000



Description
Selective filter 2700K - 2200K /
Filtro selettivo 2700K - 2200K

Code
0.26428.0000




Description
Cross blade louvre/
Griglia a croce

Code
0.26478.0000



Description
Selective filter 2700K - 2000K /
Filtro selettivo 2700K - 2000K

Code
0.26436.0000



Description
Barn doors/
Alette rompiflusso

Code
0.26486.0000



Description
Selective filter 3000K - 3600K /
Filtro selettivo 3000K - 3600K

Code
0.26569.0000



Description
Cone 45° wall washer/
Cono 45° wall washer

Code
0.26490.00

Finishes

12

31









Description
Selective filter 3000K - 4000K /
Filtro selettivo 3000K - 4000K
























Code
0.26577.0000

Ø 75 mm | Performance | Accessories

Interchangeable IOS optics/ Ottiche intercambiabili IOS

		Description Performance - Narrow beam/ Performance - Fascio stretto (12°-12W, 17W, 24W, 28W)	Code 0.35150.0000			Description Performance - Wide beam/ Performance - Fascio largo (48°-12W, 17W, 24W, 28W)	Code 0.35152.0000
		Description Performance - Medium beam/ Performance - Fascio medio (24°-12W, 17W, 24W, 28W)	Code 0.35151.0000				

Optics accessories/ Accessori ottiche

	Description Glass filter 1 mm/ Filtro vetro 1 mm	Code 0.26405.00	Finishes 4A  5A  6A  7A  8A  9A 		Description Selective filter 3000K - 4000K/ Filtro selettivo 3000K - 4000K	Code 0.26578.0000	
	Description Colored Gel Slides (2 pieces)/ Vetri per gel colorato (2 pezzi)	Code 0.26413.0000			Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta	Code 0.26445.0000	
	Description Selective filter 3000K - 2700K/ Filtro selettivo 3000K - 2700K	Code 0.26562.0000			Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga	Code 0.26453.0000	
	Description Selective filter 2700K - 2500K/ Filtro selettivo 2700K - 2500K	Code 0.26421.0000			Description Elliptical beam lens / Lente per fascio ellittico	Code 0.26494.0000	
	Description Selective filter 2700K - 2200K/ Filtro selettivo 2700K - 2200K	Code 0.26429.0000			Description Opal lens/ Lente opale	Code 0.26465.0000	
	Description Selective filter 2700K - 2000K/ Filtro selettivo 2700K - 2000K	Code 0.26437.0000			Description Spread lens Lente diffondente	Code 0.26473.0000	
	Description Selective filter 3000K - 3600K/ Filtro selettivo 3000K - 3600K	Code 0.26570.0000			Description Cross blade louvre/ Griglia a croce	Code 0.26482.0000	
					Description Cone 45° wall washer/ Cono 45° wall washer	Code 0.26498.00	Finishes 12  31 



—

Yori

Zoom+

Lightshaper

— Yori Zoom+Lightshaper

EN Yori Zoom+Lightshaper is an extraordinary advance in lighting, featuring high performance and flexibility in a single luminaire. The five lenses inside the aluminium body facilitate adjustment of the light beam (Zoom), the size of the shapes (Diaphragm) and their sharpness (Focus). It integrates perfectly with the Yori projector and offers both square and round light frames. Zoom+Lightshaper is also available as an accessory.

IT Una soluzione illuminotecnica straordinaria, Yori Zoom+Lightshaper riunisce in un unico apparecchio elevate prestazioni e flessibilità. Grazie alle cinque lenti all'interno del corpo in alluminio, è possibile regolare con facilità il fascio luminoso (Zoom), la dimensione delle sagome (Diaframma) e la loro definizione (Focus). Integrato perfettamente con il proiettore Yori, è disponibile per sagome di luce quadrate e tonde. Zoom+Lightshaper è disponibile anche come accessorio.

EN Zoom
IT Zoom


EN Focus
IT Focus

EN Diaphragm
IT Diaframma




EN Yori Zoom+Lightshaper can be used to shape both round and square light frames, as required.

IT Yori Zoom+Lightshaper permette di definire sagome di luce sia tonde che quadrate a seconda dell'esigenza.

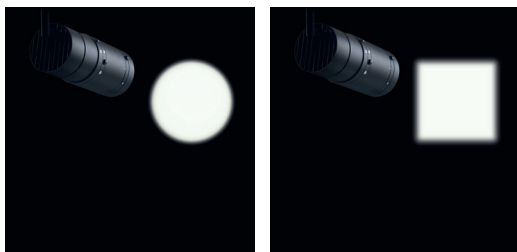


EN Round frame
IT Sagoma tonda


EN Square frame
IT Sagoma quadrata

33W 3000K CRI > 80		○		○		○		○		○		○	
	Dist. (m)	Ø (m)	E _m (lux)	Ø (m)	E _m (lux)	Ø (m)	E _m (lux)	Ø (m)	E _m (lux)	Ø (m)	E _m (lux)	Ø (m)	E _m (lux)
	1	0,08	15377	0,13	14751	0,19	12391	0,23	5758	0,28	3847	0,34	1567
	2	0,17	3844	0,27	3688	0,38	3098	0,46	1439	0,56	962	0,68	392
	3	0,25	1709	0,40	1639	0,57	1377	0,69	640	0,84	427	1,01	174
	4	0,33	961	0,54	922	0,75	774	0,92	360	1,12	240	1,35	98
	5	0,42	615	0,67	590	0,94	496	1,15	230	1,40	154	1,69	63

EN Round frame
IT Sagoma tonda


33W 3000K CRI > 80		□		□		□	
	Dist. (m)	m	E _m (lux)	m	E _m (lux)	m	E _m (lux)
	1	0,08	4819	0,20	4059	0,32	1670
	2	0,16	1205	0,40	1015	0,63	418
	3	0,24	535	0,61	451	0,95	186
	4	0,32	301	0,81	254	1,26	104
	5	0,40	193	1,01	162	1,58	67

EN Square frame
IT Sagoma quadrata

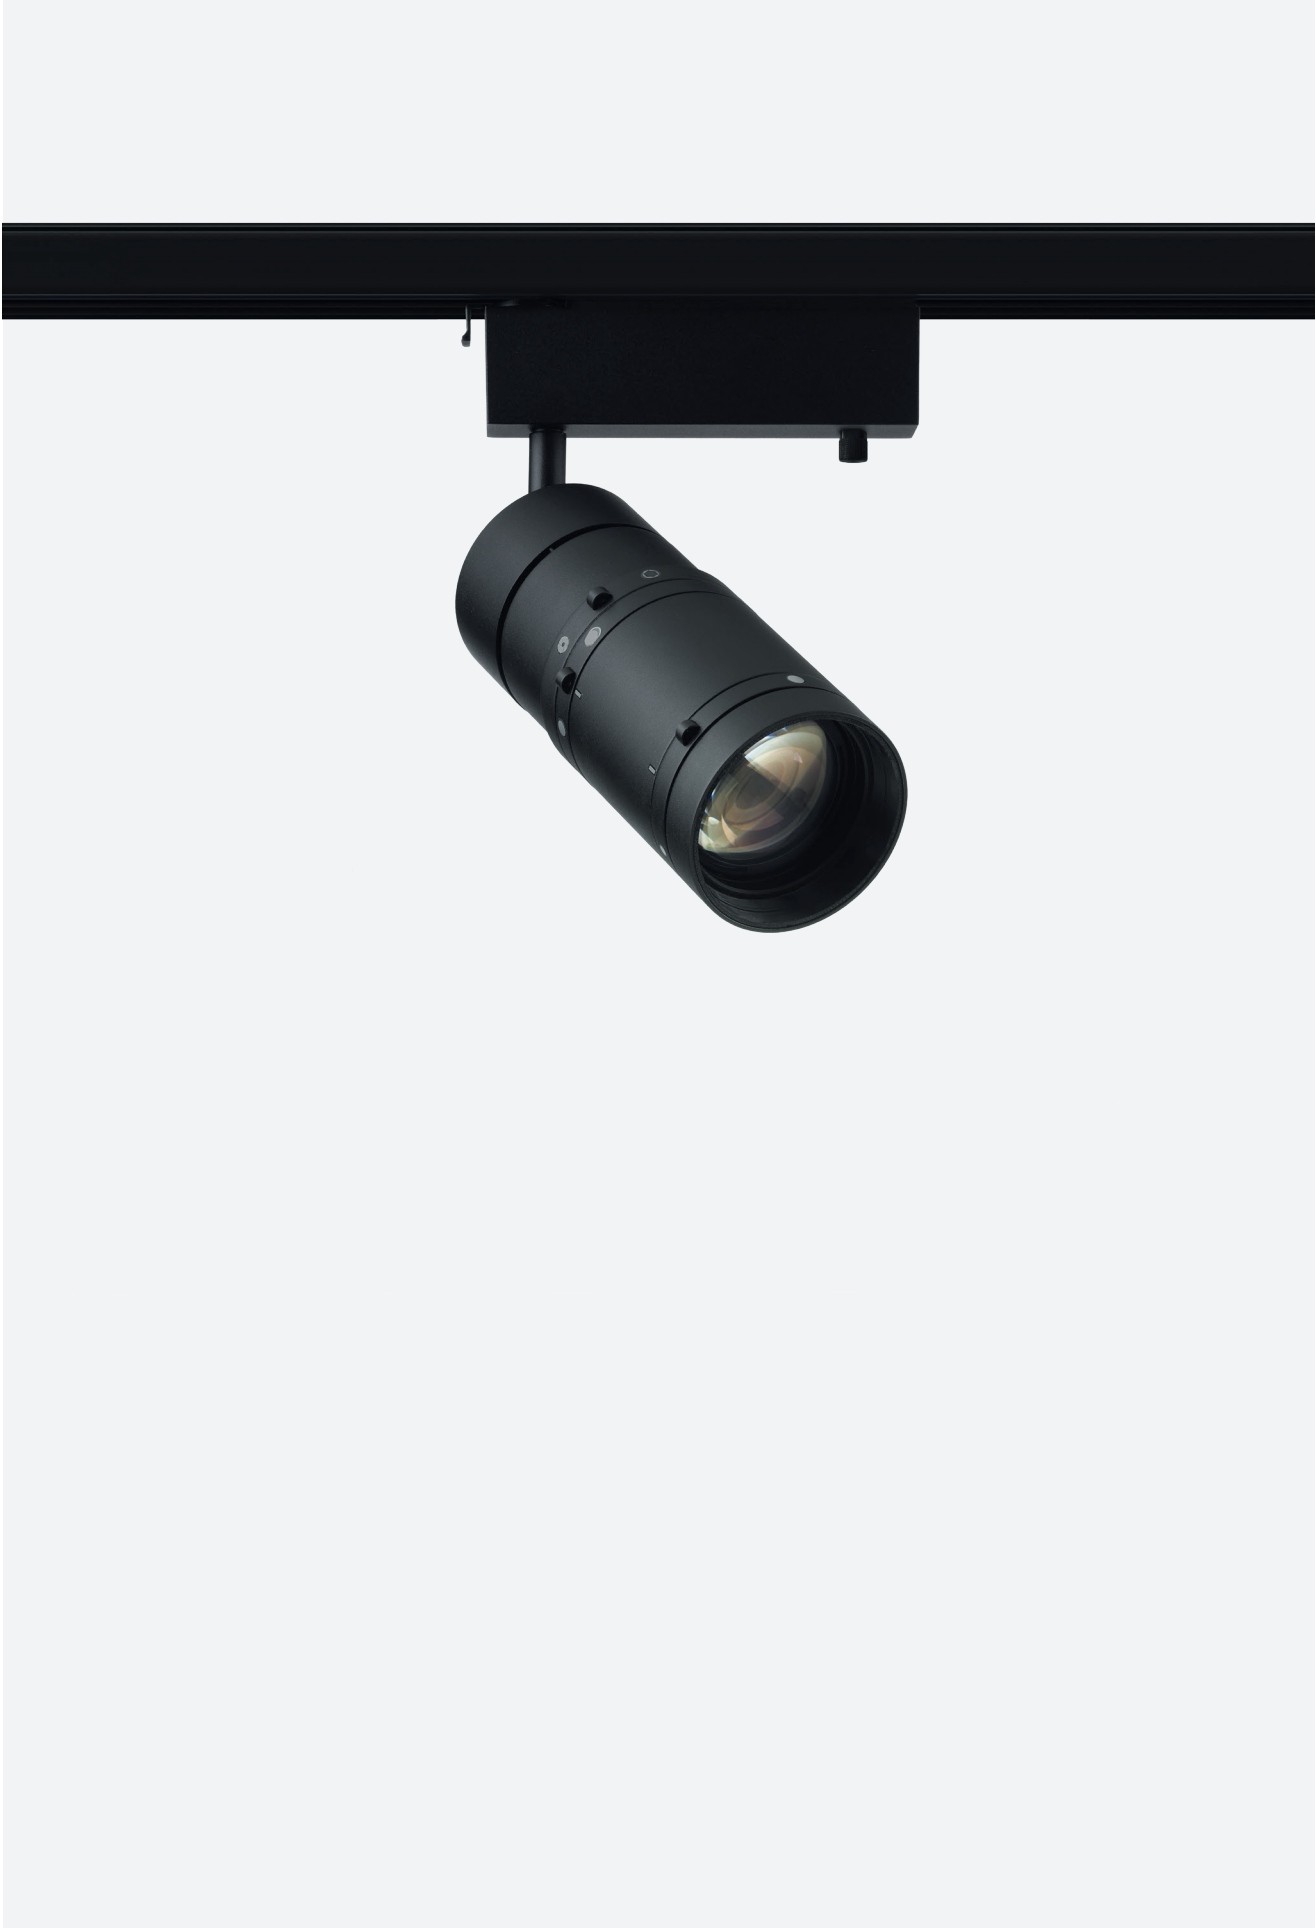

481

Round/Tonda




Code example:
P . DF98 0 . HW 12

Accessories: p.483
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

33 W COB LED		Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
P Dimmer on board	DF98 Light shape - round	0 Without optics	HC	3000	>98	3142	<3	12
			HW	2700	>90	3635	<3	31
			HQ	3000	>90	3735	<3	
			WW	3000	>80	4510	<3	
			NN	4000	>80	4695	<3	
LED nominal lumen								

37 W COB LED		Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
P Dimmer on board	DF99 Light shape - round	0 Without optics	HC	3000	>98	3473	<3	12
			HW	2700	>90	3940	<3	31
			HQ	3000	>90	4000	<3	
			WW	3000	>80	4880	<3	
			NN	4000	>80	5090	<3	
LED nominal lumen								

Square/Quadrata



Code example:
P . FF98 0 . HW 12


Accessories: p.483
 Track/Binario: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

33 W COB LED		Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
P Dimmer on board	FF98 Light shape - square	0 Without optics	HC	3000	>98	3142	<3	12
			HW	2700	>90	3635	<3	31
			HQ	3000	>90	3735	<3	
			WW	3000	>80	4510	<3	
			NN	4000	>80	4695	<3	
LED nominal lumen								

37 W COB LED		Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
P Dimmer on board	FF99 Light shape - square	0 Without optics	HC	3000	>98	3473	<3	12
			HW	2700	>90	3940	<3	31
			HQ	3000	>90	4000	<3	
			WW	3000	>80	4880	<3	
			NN	4000	>80	5090	<3	
LED nominal lumen								

Accessories

Optics accessories/ Accessori ottiche


Description

Adjustable zoom (7° - 20°), light shape - round/
Zoom regolabile da (7° a 20°), forma di luce - tonda


Code

0.25455.00

Finishes

12

31


Description

Adjustable zoom (7° - 20°), light shape - square/
Zoom regolabile da (7° a 20°), forma di luce - quadrata


Code

0.25456.00

Finishes

12

31


Description

Holder for colored and selective filters/
Supporto per filtri colorati e selettivi

Code

0.25457.0000


Description

Elliptical lens/
Lente ellittica

Code

0.25458.0000