

Yori Surface/Pendant

[www.reggiani.net](http://www.reggiani.net)

#theilluminationcollective



860

# Yori Surface/ Pendant

Yori Surface/Pendant

[www.reggiani.net](http://www.reggiani.net)

#theilluminationcollective





# Yori Surface/ Pendant

**EN** A new line of extremely versatile luminaires inspired by the streamlined design of the Yori projector system. Simplicity and excellent lighting performance extend across a wide range of wattages, finishes, sizes and accessories for utmost versatility in creating bespoke lighting designs.


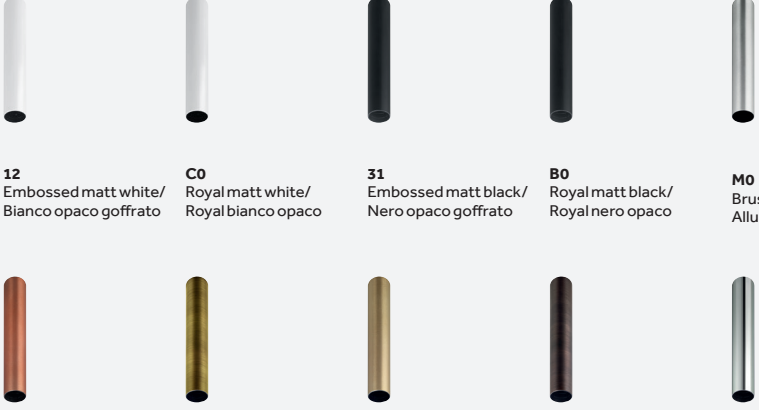

**IT** Una nuova linea di apparecchi di illuminazione estremamente versatile, ispirata al design essenziale del sistema di proiettori Yori. Semplicità e prestazioni illuminotecniche eccellenti si estendono su un'ampia gamma di potenze, finiture, dimensioni e accessori, per consentire la massima versatilità nella creazione di soluzioni illuminotecniche uniche.


## Overview

Application:	Surface, Pendant
Light source:	Power LED , COB LED
Watt:	2 W - 24 W
Kelvin	2700 K, 3000 K, 4000 K
Lumen:	137 lm - 3602 lm
CRI:	>80, >90, >95
SDCM:	<2, <3
IP:	20
Control options:	On/Off, Phase-cut, Dimm 1-10V, DALI
Technologies:	Bluetooth, Warm Dimming







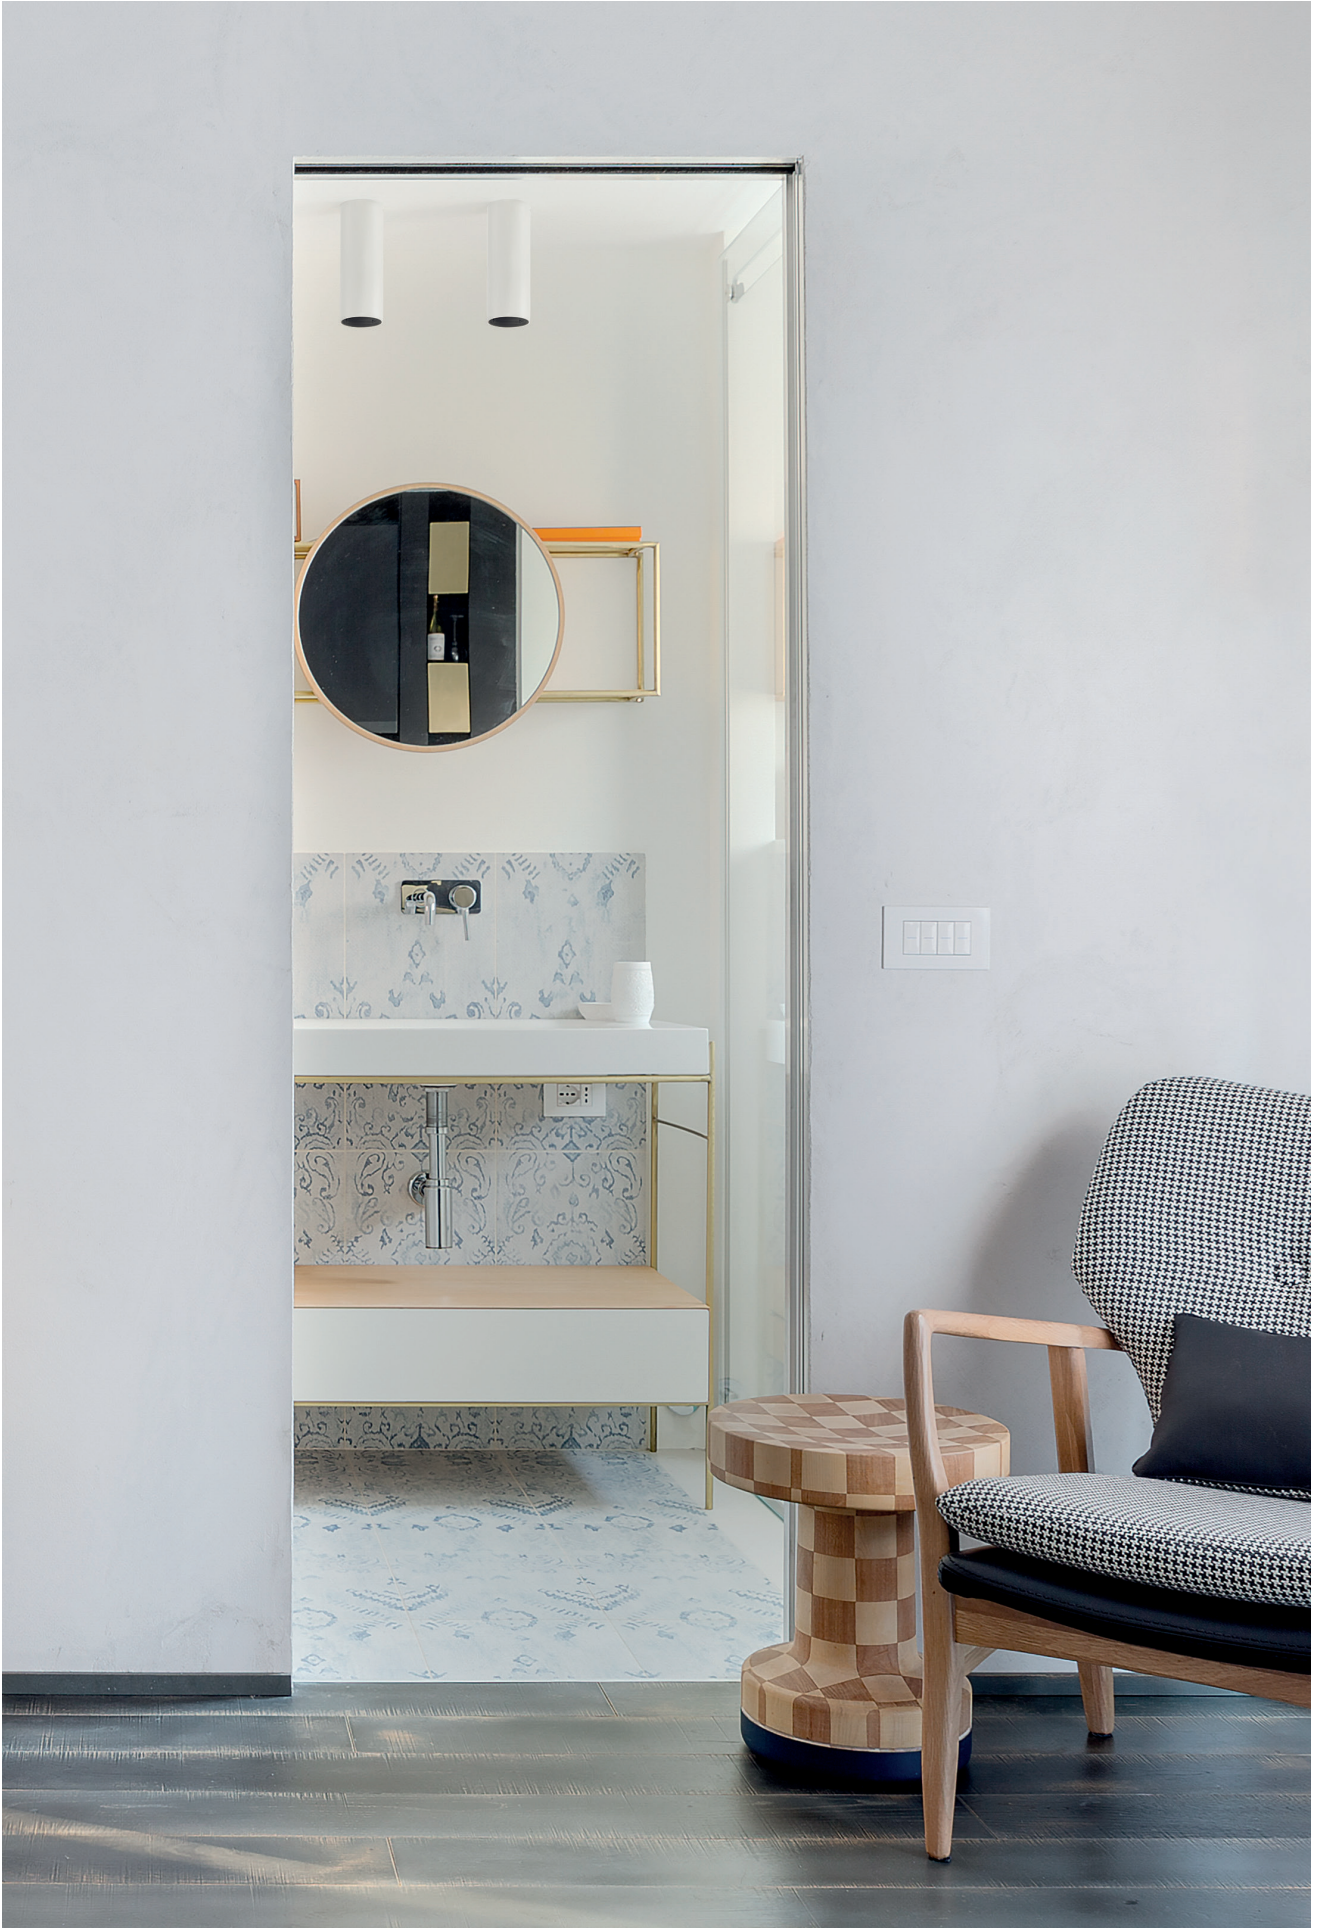









865
















<p><b>Versions/ Versioni</b></p>	 <p><b>Yori Surface</b>      <b>Yori Pendant</b></p>				
<p><b>Finishes/ Finiture</b></p>	 <p><b>12</b> Embossed matt white/ Bianco opaco gofrato</p> <p><b>C0</b> Royal matt white/ Royal bianco opaco</p> <p><b>31</b> Embossed matt black/ Nero opaco gofrato</p> <p><b>B0</b> Royal matt black/ Royal nero opaco</p> <p><b>M0</b> Brushed aluminum/ Alluminio spazzolato</p> <p><b>N0</b> Brushed copper/ Rame spazzolato</p> <p><b>D0</b> Brushed brass/ Ottone spazzolato</p> <p><b>E0</b> Brushed gold/ Oro spazzolato</p> <p><b>L0</b> Antiqued brushed bronze/ Bronzo antico spazzolato</p> <p><b>01</b> Chrome/ Cromato</p>				
<p><b>Beams/ Fasci</b></p>	 <p><b>Very narrow/ Molto stretto</b>      <b>Narrow/ Stretto</b>      <b>Medium/ Medio</b>      <b>Wide/ Largo</b>      <b>Very wide/ Molto largo</b></p>				






Sizes and tech. specifications/ Misure e info tecniche				
	Ø 22 mm	Ø 35 mm	Ø 60 mm	Ø 95 mm
Yori Surface p.879				
	H: 150mm p.880	H: 150mm p.882	H: 205mm p.883	H: 255mm p.885
				
			H: 255mm p.883	H: 325mm p.885
				
	H: 800mm p.880		H: 395mm p.886	
				
	H: 1600mm p.880			
Max Internal space/ Ingombro interno massimo				
Beam width/ Apertura cono di luce	9°, 24°, 32°	8°, 22°, 28°	12°, 20°, 27°	12°, 24°, 25°
Light source/ Sorgente luminosa	<b>POWER LED</b> 2 W 140lm - 200lm L90B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >80, CRI >90	<b>POWER LED</b> 3,5 W 310lm - 415lm L90B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >80, CRI >90	<b>COB LED</b> 5 W, 9 W 633lm - 1360lm L80B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >85, CRI >90  <b>Warm Dimming COB LED</b> 6 W 100lm - 550lm L70B50=50,000h 1700K-3000K SDCM <4 CRI >95	<b>COB LED</b> 12 W, 17 W, 24 W 1491lm - 3602lm L80B10=50,000h 2700K, 3000K, 4000K SDCM < 2, <3 CRI >80, CRI >90  <b>Warm Dimming COB LED</b> 25 W 100lm - 2500lm L70B50=50,000h 1700K-3000K SDCM <4 CRI >95

Sizes and tech. specifications/ Misure e info tecniche				
	Ø 22 mm	Ø 35 mm	Ø 60 mm	Ø 95 mm
Yori Pendant p.889				
		H: 150mm p.894	H: 205mm p.896	H: 255mm p.900
				
	H: 400mm p.892		H: 255mm p.896	H: 325mm p.900
				
H: 800mm p.892	H: 400mm p.894		H: 395mm p.901	
				
H: 1600mm p.892	H: 800mm p.894	H: 600mm p.897	H: 800mm p.901	
Beam width/ Apertura cono di luce	9°, 24°, 32°	8°, 22°, 28°	12°, 20°, 27°	12°, 24°, 25°
Light source/ Sorgente luminosa	POWER LED 2W 140lm - 200lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >80, CRI >90	POWER LED 3,5W 310lm - 415lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >80, CRI >90	COB LED 5W, 9W, 12W 633lm - 1775lm L80 B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >85, CRI >90  Warm Dimming COB LED 6W, 12W 100lm - 1000lm L70 B50=50,000h 1700K-3000K SDCM <4 CRI >95	COB LED 12W, 17W, 24W 1491lm - 3602lm L80 B10=50,000h 2700K, 3000K, 4000K SDCM <2, <3 CRI >80, CRI >90  Warm Dimming COB LED 25W 100lm - 2500lm L70 B50=50,000h 1700K-3000K SDCM <4 CRI >95

<p><b>Accessories/ Accessori</b></p> <hr/> <p><b>Decorative accessories/ Accessori decorativi</b></p> <hr/> <p><b>Optical accessories/ Accessori ottiche</b></p> <hr/> <p><b>Mounting accessories/ Accessori montaggio</b></p>	<div style="display: flex; justify-content: space-around;">   </div> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <p>Cylinder, solid version/ Cilindro, versione piena</p> <p>Cylinder, hollow version/ Cilindro versione cava</p> </div> <hr/> <div style="display: grid; grid-template-columns: repeat(4, 1fr); gap: 10px;"> <div style="text-align: center;">  <p>Glass filter 1 mm/ Filtro vetro 1 mm</p> </div> <div style="text-align: center;">  <p>Colored Gel Slides/ Vetrini per gel colorato</p> </div> <div style="text-align: center;">  <p>Selective filter/ Filtro selettivo</p> </div> <div style="text-align: center;">  <p>Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta</p> </div> <div style="text-align: center;">  <p>Wide texture honeycomb louvre/ Griglia alveolare a maglia larga</p> </div> <div style="text-align: center;">  <p>Elliptical beam lens/ Lente per fascio ellittico</p> </div> <div style="text-align: center;">  <p>Opal lens/ Lente opale</p> </div> <div style="text-align: center;">  <p>Spread lens/ Lente diffondente</p> </div> <div style="text-align: center;">  <p>Cross blade louvre/ Griglia a croce</p> </div> <div style="text-align: center;">  <p>Barn doors/ Alette rompiflusso</p> </div> </div> <hr/> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  <p>Trimless installation/ Installazione trimless</p> <p>12 31</p> </div> <div style="text-align: center;">  <p>Semi-recessed installation/ Installazione a semincasso</p> <p>12 31</p> </div> <div style="text-align: center;">  <p>Track mounted installation/ Installazione a binario</p> <p>12 31</p> </div> </div>
--	--


# Optics

## Precision


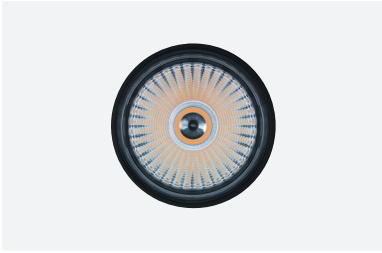


<sup>EN</sup> System of interchangeable lenses made of temperature-resistant plastic (stabilised up to 140°C), self-extinguishing (V0 rating), with LOR of up to 89%. Very narrow, narrow and medium beams with luminous intensity of up to 60,000cd.

<sup>IT</sup> Sistema di lenti intercambiabili in materiale plastico resistente ad alte temperature, stabilizzate fino a 140°, autoestinguente V0 con efficienza fino all'89%. Fasci molto stretti, stretti e medi con valori di intensità fino a 60.000cd.



Precision  
for Yori Surface/Pendant Ø22  
LED: 2W/25°/3000K (HQ)

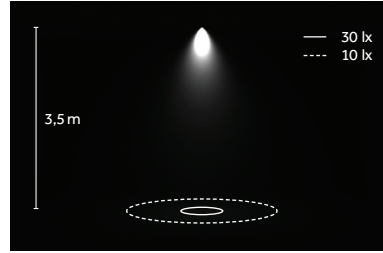

Narrow/  
Stretto  
B 9°





Medium/  
Medio  
E 24°




Wide/  
Largo  
H 32°



Precision  
for Yori Surface/Pendant Ø22  
LED: 2W/10°/3000K (HQ)

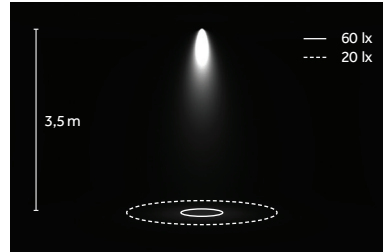

Very narrow/  
Molto stretto  
B 8°






Medium/  
Medio  
E 22°



Large/  
Largo  
H 28°

# Optics


## Precision

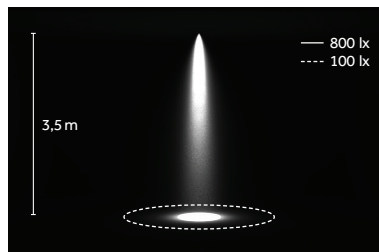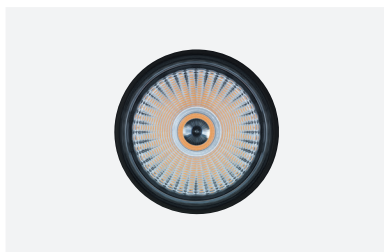


<sup>EN</sup> System of interchangeable lenses made of temperature-resistant plastic (stabilised up to 140°C), self-extinguishing (V0 rating), with LOR of up to 89%. Very narrow, narrow and medium beams with luminous intensity of up to 60,000 cd.

<sup>IT</sup> Sistema di lenti intercambiabili in materiale plastico resistente ad alte temperature, stabilizzate fino a 140°, autoestinguento V0 con efficienza fino all'89%. Fasci molto stretti, stretti e medi con valori di intensità fino a 60.000cd.



**Precision**  
for Yori Surface/Pendant Ø60  
LED: 9W/12°/3000K (HQ)




Narrow/  
Stretto  
B 12°




Medium/  
Medio  
E 20°

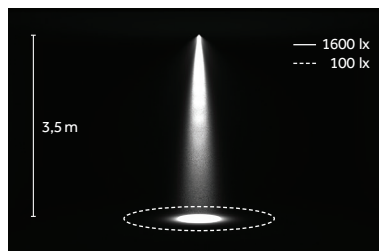

**Precision**  
for Yori Surface/Pendant Ø95  
LED: 17W/12°/3000K (HQ)




Narrow/  
Stretto  
B 12°



Medium/  
Medio  
E 24°

# LED

## COB




2700 K, 3000 K, 4000 K  
SDCM <2, <3  
CRI>80, CRI > 90


TM 30  
Rf: 90, Rg: 100  
(3000K, CRI>90)

L80 B10=50,000h  
Ta: 25°  
Tc: 85°  
~9.000 hr  
Lm Maintenance: 98%  
(Source: LM80 test report)

Note:  
Yori Surface/Pendant  
Ø 22 mm, Ø 35 mm  
(POWER LED)

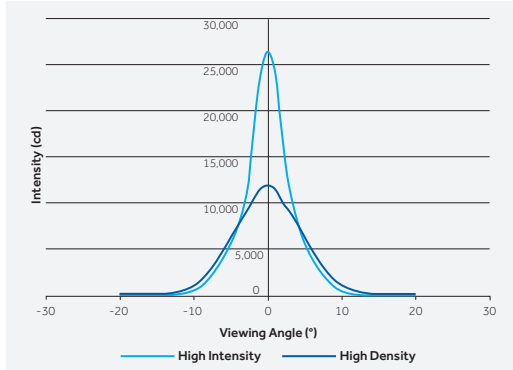


<sup>EN</sup> COB LEDs and POWER LED are distinguished by excellent luminous intensity in the smaller sizes now available on the market. This feature means these light sources can be integrated into very compact luminaires with unique performance, very high peak beam intensity (candela) and delivered lumens of 150 lm to 4000 lm. These light sources are characterised by lumen maintenance at high operating temperatures due to improved efficacy at high temperatures and better optical stability over time.

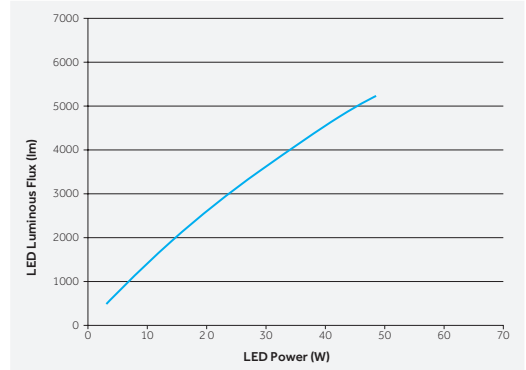



<sup>IT</sup> I COB LED e POWER LED sono caratterizzati un'eccellente intensità luminosa nelle dimensioni più ridotte ora disponibili sul mercato, questa caratteristica consente l'integrazione di queste sorgenti in prodotti dalle dimensioni molto contenute con performance uniche, picchi di intensità in candele molto elevati e lumen delivered da 150 lm fino a 4000 lm. Queste sorgenti sono caratterizzate da un mantenimento costante nel tempo del livello di lumen ad alte temperature di utilizzo grazie ad una migliore efficienza ad alte temperature e ad migliore stabilità ottica nel corso del tempo.

## Warm Dimming



1700K-3000K  
SDCM <4  
CRI>95

L70 B50=50,000h

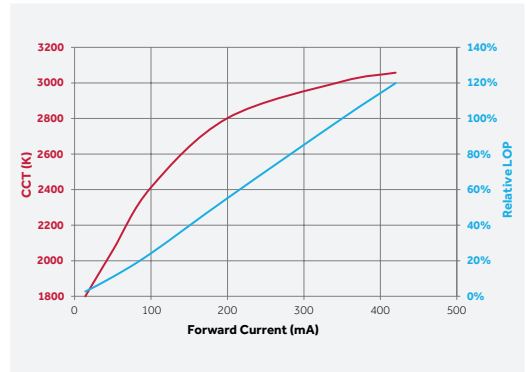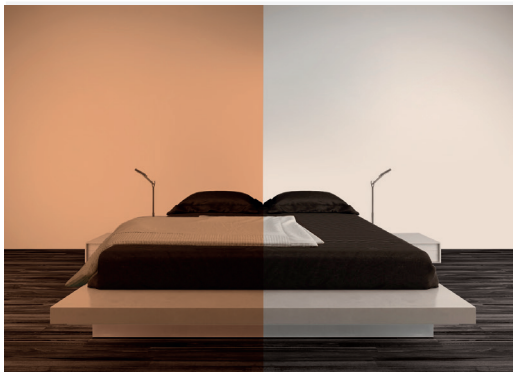

Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
1700K	94	95	97	90	91	88	97	97	94	92	81	78	93	96	98
3000K	97	95	97	97	96	95	99	97	94	97	94	86	95	97	95

<sup>EN</sup> Our solution combines two chips in a single COB LED. With this configuration, only a single driver supplies power and gradually reduces incoming amps to bring it in line with the desired output. By reducing power supply to the chips, the luminous flux is reduced and consequently the colour temperature resulting from the combination of the individually designated colour temperatures is automatically offset. This technology delivers a very wide range of adjustment for luminous intensity, with a very gentle, gradual change in colour temperature (from no more than 3000 K to no less than 1700 K). The CRI and colour rendering is excellent for the whole dimming range, with a CRI of up to 97 and an R9 of 94.

<sup>IT</sup> La nostra soluzione combina due chip in un solo COB LED; Con questa configurazione, l'alimentazione è un unico driver che riduce gradualmente l'ampereaggio in entrata in funzione del rendimento desiderato. Diminuendo l'alimentazione ai chip, diminuisce il flusso e la temperatura di colore che risulta dalla combinazione delle singole temperature di colore stabilite viene bilanciata automaticamente di conseguenza. Questa tecnologia offre un campo di regolazione della luminosità molto ampio con una variazione della temperatura di colore molto morbida e graduale, da un massimo di 3000K a un minimo di 1700 K. Il CRI e il rendimento dei colori è eccellente per l'intero range di dimmerazione, con valori di CRI fino a 97 e R9 di 94.

EN The wide range of special finishes, available as standard for Yori Surface/Pendant, makes this luminaire extremely versatile and suitable for application in settings with different styles.

IT L'ampia selezione di finiture speciali, disponibili come standard per Yori Surface/Pendant, permette una grande flessibilità di utilizzo dell'apparecchio in ambienti caratterizzati da stili differenti.




EN Embossed matt white  
IT Bianco opaco gofrato




EN Royal matt white  
IT Royal bianco opaco



EN Embossed matt black  
IT Nero opaco gofrato




EN Royal matt black  
IT Royal nero opaco



EN Chrome  
IT Cromato




EN Brushed aluminum  
IT Alluminio spazzolato

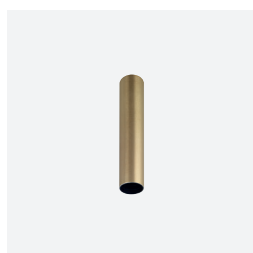

EN Brushed gold  
IT Oro spazzolato




EN Brushed brass  
IT Ottone spazzolato



EN Brushed copper  
IT Rame spazzolato



EN Brushed bronze  
IT Bronzo spazzolato

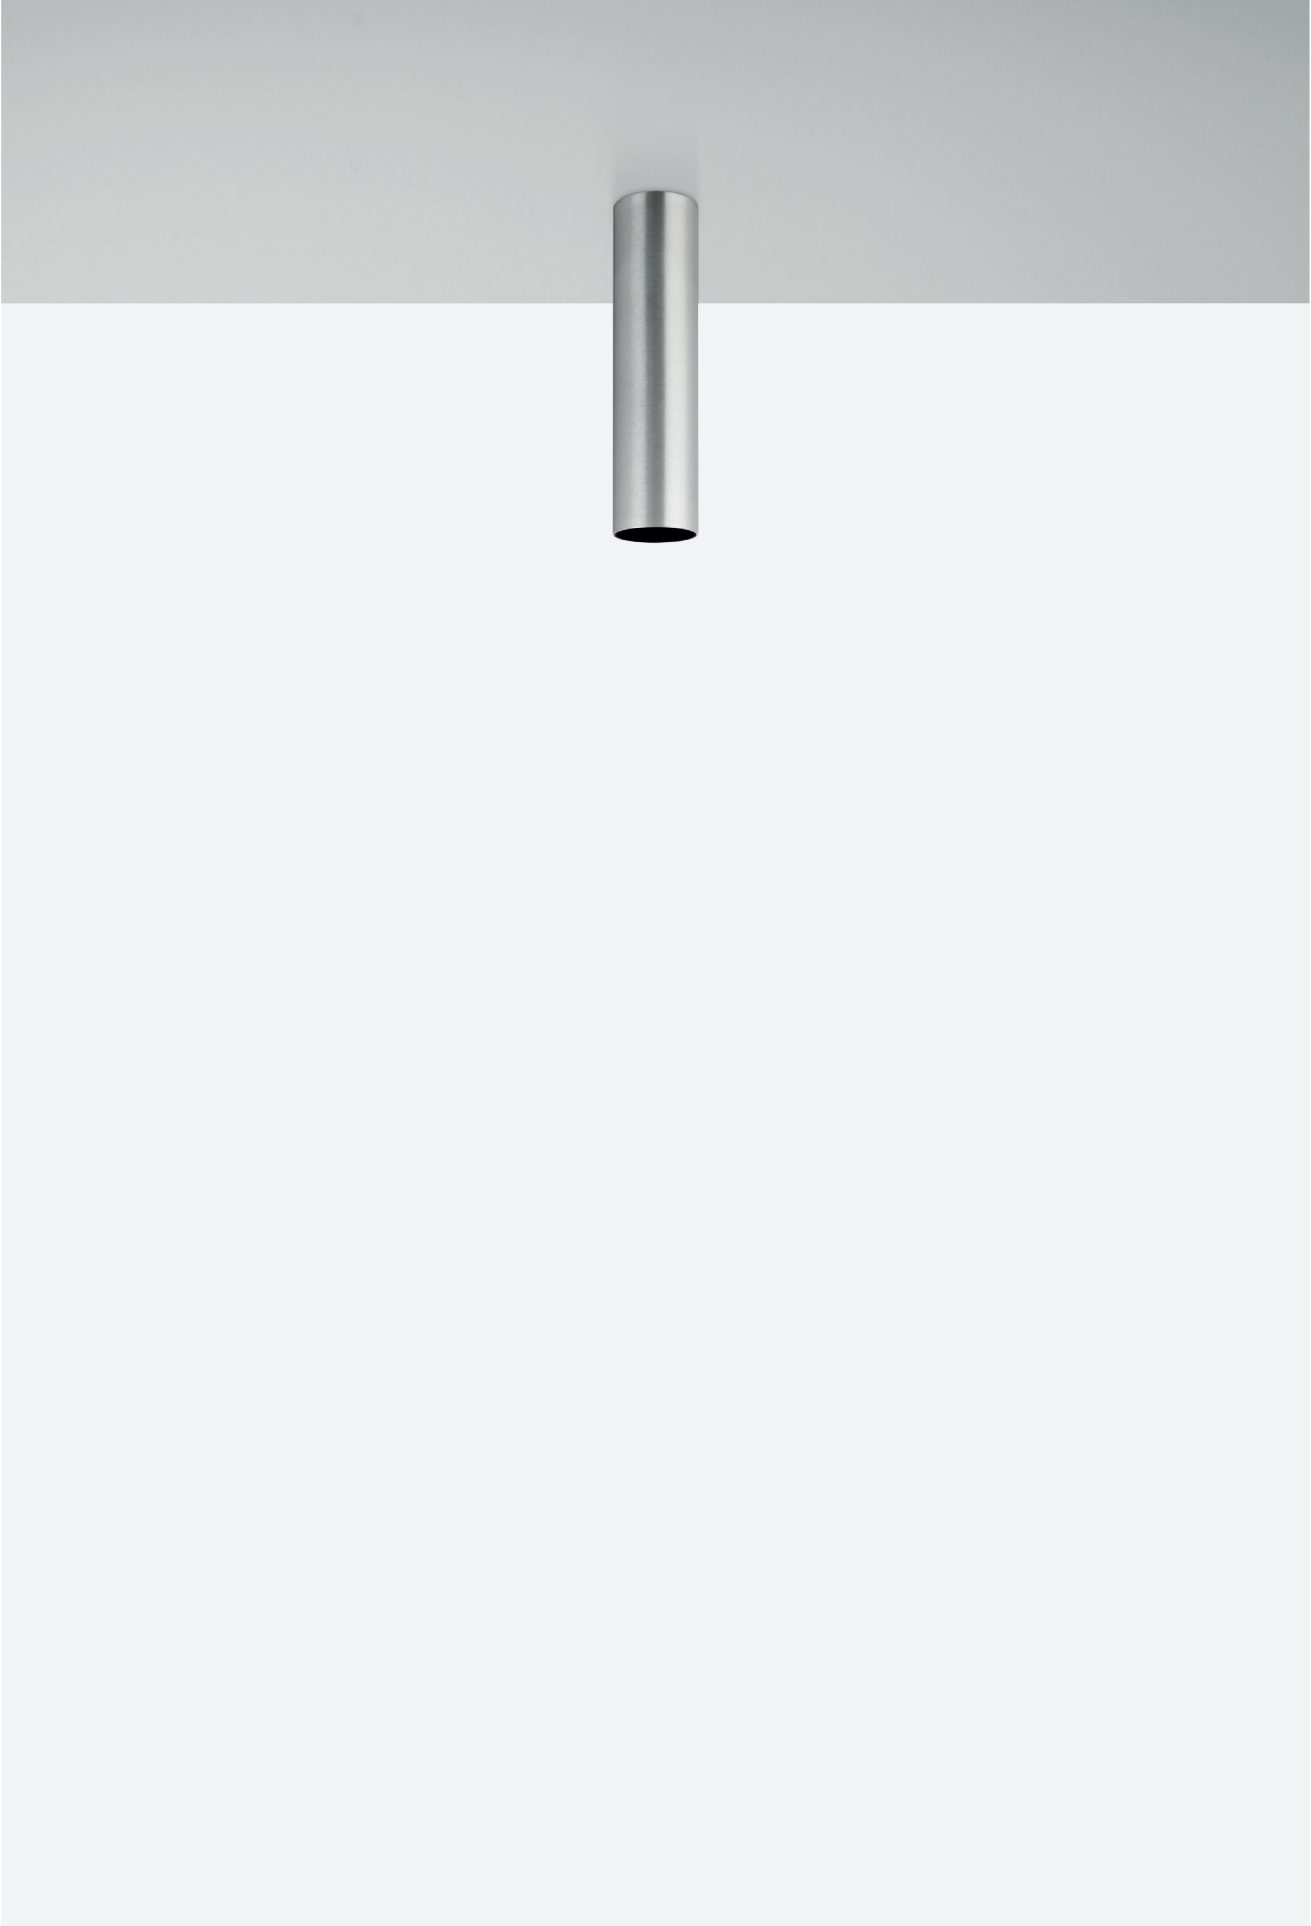

875



EN The optional solid and hollow decorative cylinders come in different sizes and guarantee soft, diffused lighting to enable suggestive, elegant applications.

IT I cilindri decorativi pieni e vuoti, di diverse dimensioni e disponibili come accessori, garantiscono un effetto luminoso morbido e diffuso, realizzando suggestivi scenari luminosi.



EN Hollow opal cylinder  
IT Cilindro opale cavo

EN Solid opal cylinder  
IT Cilindro opale pieno

Diameter/ Diámetro	Length/ Lunghezza	
	Hollow opal cylinder/ Cilindro opale cavo	Solid opal cylinder/ Cilindro opale pieno
Ø 22 mm		
Ø 35 mm		
Ø 60 mm		
Ø 95 mm		





—

# Yori Surface

Ø 22 mm | H 150 mm

Risk 1 0.10 IP20 IP20 850° CE CB EAC



Code example:

X . BH50 B . HW 12

Accessories: p.881  
Drivers: p.881  
Finishes: p.866  
Photometric data:  
www.reggiani.net

**2W POWERLED**

Lumen delivered up to 110lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	BH50	B 9° Narrow	HW	2700	>90	140	<3	12
		E 24° Medium	HQ	3000	>90	145	<3	C0
		H 32° Wide	WW	3000	>80	190	<3	31
			NN	4000	>80	200	<3	B0
			LED nominal lumen					N0
								D0
								E0
								O1
								M0
								LO

Ø 22 mm | H 800 mm

Risk 1 0.60 IP20 IP20 850° CE CB EAC



Code example:

X . CH50 B . HW 12

Accessories: p.881  
Drivers: p.881  
Finishes: p.866  
Photometric data:  
www.reggiani.net


**2W POWERLED**

Lumen delivered up to 110lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	CH50	B 9° Narrow	HW	2700	>90	140	<3	12
		E 24° Medium	HQ	3000	>90	145	<3	C0
		H 32° Wide	WW	3000	>80	190	<3	31
			NN	4000	>80	200	<3	B0
			LED nominal lumen					N0
								D0
								E0
								O1
								M0
								LO

Ø 22 mm | H 1600 mm

Risk 1 1.20 IP20 IP20 850° CE CB EAC



Code example:

X . DH50 B . HW 12

Accessories: p.881  
Drivers: p.881  
Finishes: p.866  
Photometric data:  
www.reggiani.net


**2W POWERLED**

Lumen delivered up to 110lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	DH50	B 9° Narrow	HW	2700	>90	140	<3	12
		E 24° Medium	HQ	3000	>90	145	<3	C0
		H 32° Wide	WW	3000	>80	190	<3	31
			NN	4000	>80	200	<3	B0
			LED nominal lumen					N0
								D0
								E0
								O1
								M0
								LO


## Ø 22 mm | Accessories

### Decorative accessories/ Accessori decorativi



**Description**  
Cylinder, solid version (Ø 22 mm, h 22 mm)/  
Cilindro versione piena (Ø 22 mm, h 22 mm)

**Code**  
**0.26040.00**











**Description**  
Cylinder, solid version (Ø 22 mm, h 80 mm)/  
Cilindro versione piena (Ø 22 mm, h 80 mm)

**Code**  
**0.26041.00**



## Ø 22 mm | Electrical Devices

### Driver/ Alimentazioni

**2,5 W COB LED**

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30420.0000</b>	20		56 mm	198-264Vac 170-280Vdc / 0,50/60Hz	700	Max: 1	20 m	1.5 mm <sup>2</sup>
On/Off	<b>0.30041.0000</b>	40		57 mm	100-240Vac / 50/60Hz	700	Min: 1 - Max: 4	20 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30420.0000</b>	12		45 mm	230-240Vac / 50/60Hz	700	Max: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30421.0000</b>	32		57 mm	198-264Vac 176-264Vdc / 0,50/60Hz	700	Min: 1 - Max: 3	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30420.0000</b>	20		56 mm	99-264Vac 170-280Vdc / 0,50/60Hz	700	Max: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30421.0000</b>	40		79 mm	99-264Vac 170-280Vdc / 0,50/60Hz	700	Min: 1 - Max: 4	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30420.0000</b>	20		56 mm	99-264Vac 176-264Vdc / 0,50/60Hz	700	Max: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30421.0000</b>	50		82 mm	120-277Vac 120-250Vdc / 0,50/60Hz	700	Min: 1 - Max: 4	20 m	1.5 mm <sup>2</sup>

### Other devices/ Altri dispositivi

Type	Code	Size (mm)	Cut-out	Tech. specifications	Connectable fixtures	Max.distance	Cable section
 Wireless bluetooth control device/ Dispositivo di controllo wireless bluetooth	<b>0.26101.0000</b>		45 mm	220-240V, 50-60Hz 0,6A for DALI drivers	Max: 1	-	1.5 mm <sup>2</sup>

Ø 35 mm | H 150 mm



Code example:

0 . FH51 A . HW 12

Accessories: p.882

Finishes: p.866

Photometric data:





www.reggiani.net

**3,5W POWERLED**

Lumen delivered up to 290lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	FH51	B 8° Verynarrow	HW	2700	>90	310	<3	12
<b>Onrequest (remote)</b>								
T Phase-cut		E 22° Medium	HQ	3000	>90	315	<3	C0
V Dimm 1-10V		H 28° Wide	WW	3000	>80	380	<3	31
D DALI			NN	4000	>80	415	<3	B0
H Bluetooth			LED nominal lumen					N0
								D0
								E0
								O1
								M0
								LO

## Ø 35 mm | Accessories

Decorative accessories/  
Accessori decorativi**Description**Cylinder, solid version (Ø 35 mm, h 35 mm)/  
Cilindro versione piena (Ø 35 mm, h 35 mm)**Code****0.26042.00****Description**Cylinder, solid version (Ø 35 mm, h 70 mm)/  
Cilindro versione piena (Ø 35 mm, h 70 mm)**Code****0.26043.00****Description**Cylinder, hollow version (Ø 35 mm, h 35 mm)/  
Cilindro versione cava (Ø 35 mm, h 35 mm)**Code****0.26044.00****Description**Cylinder, hollow version (Ø 35 mm, h 70 mm)/  
Cilindro versione cava (Ø 35 mm, h 70 mm)**Code****0.26045.00**

Ø 60 mm | H 205 mm



Code example:

0 . GH51 B . HW 12

Accessories: p.884

Finishes: p.866

Photometric data:

www.reggiani.net

**5W COBLED**

Lumen delivered up to 650lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>GH51</u>	<u>B</u> 12° Narrow	<u>HW</u>	2700	>90	633	<2	<u>12</u>
<u>Onrequest (remote)</u>		<u>E</u> 20° Medium	<u>HQ</u>	3000	>90	688	<2	<u>CO</u>
<u>T</u> Phase-cut		<u>K</u> - Without optics	<u>WW</u>	3000	>80	810	<3	<u>31</u>
<u>V</u> Dimm 1-10V			<u>NN</u>	4000	>80	900	<3	<u>BO</u>
<u>D</u> DALI			LED nominal lumen					<u>NO</u>
<u>H</u> Bluetooth								<u>DO</u>
								<u>EO</u>
								<u>01</u>
								<u>MO</u>
								<u>LO</u>

Ø 60 mm | H 255 mm



Code example:

0 . GH52 B . HW 12

Accessories: p.884

Finishes: p.866

Photometric data:

www.reggiani.net

**9W COBLED**

Lumen delivered up to 1000lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>GH52</u>	<u>B</u> 12° Narrow	<u>HW</u>	2700	>90	1050	<2	<u>12</u>
<u>V</u> Dimm 1-10V		<u>E</u> 20° Medium	<u>HQ</u>	3000	>90	1100	<2	<u>CO</u>
<u>D</u> DALI		<u>K</u> - Without optics	<u>WW</u>	3000	>80	1300	<3	<u>31</u>
<u>Onrequest</u>			<u>NN</u>	4000	>80	1360	<3	<u>BO</u>
<u>H</u> Bluetooth			LED nominal lumen					<u>NO</u>
<u>T</u> Phase-cut								<u>DO</u>
								<u>EO</u>
								<u>01</u>
								<u>MO</u>
								<u>LO</u>

**6W Warm Dimming COBLED**


Lumen delivered up to 390lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>V</u> Dimm 1-10V	<u>GH52</u>	<u>B</u> 27° Medium	<u>DT</u>	1700-3000	>95	100-550	<4	<u>12</u>
<u>D</u> DALI			LED nominal lumen					<u>CO</u>
<u>Onrequest</u>								<u>31</u>
<u>T</u> Phase-cut								<u>BO</u>
<u>H</u> Bluetooth								<u>NO</u>
								<u>DO</u>
								<u>EO</u>
								<u>01</u>
								<u>MO</u>
								<u>LO</u>




## Ø 60 mm | Accessories

### Interchangeable IOS optics/ Ottiche intercambiabili IOS



**Description**  
Precision - Narrow beam/  
Precision - Fascio stretto  
(12°-5W, 9W)


**Code**  
0.35125.0000



**Description**  
Precision - Medium beam/  
Precision - Fascio medio  
(20°-5W, 9W)

**Code**  
0.35126.0000

### Decorative accessories/ Accessori decorativi



**Description**  
Cylinder hollow version (Ø 60 mm, h 40 mm)/  
Cilindro versione cava (Ø 60 mm, h 40 mm)

**Code**  
0.26046.0000

### Optical accessories/ Accessori ottiche



**Description**  
Glass filter 1 mm/  
Filtro vetro 1 mm


**Code**  
0.26402.00

**Finishes**



**Description**  
Selective filter 3000K - 4000K/  
Filtro selettivo 3000K - 4000K

**Code**  
0.26575.0000




**Description**  
Dense texture honeycomb louvre/  
Griglia alveolare a maglia fitta

**Code**  
0.26442.0000



**Description**  
Colored Gel Slides (2 pieces)/  
Vetrini per gel colorato (2 pezzi)/

**Code**  
0.26410.0000



**Description**  
Wide texture honeycomb louvre/  
Griglia alveolare a maglia larga

**Code**  
0.26450.0000



**Description**  
Selective filter 3000K - 2700K/  
Filtro selettivo 3000K - 2700K

**Code**  
0.26559.0000



**Description**  
Elliptical beam lens/  
Lente per fascio ellittico

**Code**  
0.26457.0000




**Description**  
Selective filter 2700K - 2500K/  
Filtro selettivo 2700K - 2500K

**Code**  
0.26418.0000




**Description**  
Opal lens/  
Lente opale

**Code**  
0.26462.0000




**Description**  
Selective filter 2700K - 2200K/  
Filtro selettivo 2700K - 2200K

**Code**  
0.26426.0000



**Description**  
Spread lens/  
Lente diffondente

**Code**  
0.26470.0000



**Description**  
Selective filter 2700K - 2000K/  
Filtro selettivo 2700K - 2000K

**Code**  
0.26434.0000



**Description**  
Cross blade louvre/  
Griglia a croce

**Code**  
0.26477.0000



**Description**  
Selective filter 3000K - 3600K/  
Filtro selettivo 3000K - 3600K

**Code**  
0.26567.0000



**Description**  
Barn doors/  
Alette rompiflusso

**Code**  
0.26485.0000

Ø 95 mm | H255 mm



Code example:

0 . **HH53** . **B** . **HW** **12**

Accessories: p.887

Finishes: p.866

Photometric data:


www.reggiani.net

**12 W** COB LED

Lumen delivered up to 1400 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<b>0</b> On-Off	<b>HH53</b>	<b>B</b> 12° Narrow	<b>HW</b>	2700	>90	1491	<2	<b>12</b>
<b>V</b> Dimm 1-10V		<b>E</b> 24° Medium	<b>HQ</b>	3000	>90	1533	<2	<b>CO</b>
<b>D</b> DALI		<b>K</b> - Without optics	<b>WW</b>	3000	>80	1859	<3	<b>31</b>
<b>Onrequest</b>			<b>NN</b>	4000	>80	1920	<3	<b>B0</b>
<b>T</b> Phase-cut			LED nominal lumen					<b>N0</b>
<b>H</b> Bluetooth								<b>DO</b>
								<b>E0</b>
								<b>01</b>
								<b>M0</b>
								<b>L0</b>

Ø 95 mm | H325 mm



Code example:

0 . **HH54** . **B** . **HW** **12**

Accessories: p.887

Finishes: p.866

Photometric data:

www.reggiani.net

**17 W** COB LED

Lumen delivered up to 2000 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<b>0</b> On-Off	<b>HH54</b>	<b>B</b> 12° Narrow	<b>HW</b>	2700	>90	2067	<2	<b>12</b>
<b>V</b> Dimm 1-10V		<b>E</b> 24° Medium	<b>HQ</b>	3000	>90	2122	<2	<b>CO</b>
<b>D</b> DALI		<b>K</b> - Without optics	<b>WW</b>	3000	>80	2582	<3	<b>31</b>
<b>Onrequest</b>			<b>NN</b>	4000	>80	2665	<3	<b>B0</b>
<b>T</b> Phase-cut			LED nominal lumen					<b>N0</b>
<b>H</b> Bluetooth								<b>DO</b>
								<b>E0</b>
								<b>01</b>
								<b>M0</b>
								<b>L0</b>

Ø 95 mm | H395 mm



Code example:  
0 . HH56 B . HW 12

Accessories: p.887  
 Finishes: p.866  
 Photometric data:  
 www.reggiani.net

**24 W COB LED** Lumen delivered up to 2880lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>HH56</u>	<u>B</u> 12° Narrow	<u>HW</u>	2700	>90	2792	<2	<u>12</u>
<u>V</u> Dimm 1-10V		<u>E</u> 24° Medium	<u>HQ</u>	3000	>90	2860	<2	<u>C0</u>
<u>D</u> DALI		<u>K</u> - Without optics	<u>WW</u>	3000	>80	3487	<3	<u>31</u>
<u>On request</u>			<u>NN</u>	4000	>80	3602	<3	<u>B0</u>
<u>H</u> Bluetooth			LED nominal lumen					<u>N0</u>
								<u>D0</u>
								<u>E0</u>
								<u>01</u>
								<u>M0</u>
								<u>L0</u>

**25 W Warm Dimming COB LED** Lumen delivered up to 1200lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>V</u> Dimm 1-10V	<u>HH56</u>	<u>B</u> 23° Medium	<u>DT</u>	1700-3000	>95	100-2500	<4	<u>12</u>
<u>D</u> DALI		<u>K</u> - Without optics	LED nominal lumen					<u>C0</u>
<u>On request</u>								<u>31</u>
<u>H</u> Bluetooth								<u>B0</u>
								<u>N0</u>
								<u>D0</u>
								<u>E0</u>
								<u>01</u>
								<u>M0</u>
								<u>L0</u>


## Ø 95 mm | Accessories

### Interchangeable IOS optics/ Ottiche intercambiabili IOS



**Description**  
Precision - Narrow beam/  
Precision - Fascio stretto  
(12°-12W, 17W, 24 W)


**Code**  
**0.35135.0000**



**Description**  
Precision - Medium beam/  
Precision - Fascio medio  
(24°-12W, 17W, 24 W)

**Code**  
**0.35136.0000**

### Decorative accessories/ Accessori decorativi



**Description**  
Cylinder, hollow version (Ø 95 mm, h 60 mm)/  
Cilindro versione cava (Ø 95 mm, h 60 mm)

**Code**  
**0.26047.0000**

### Optical accessories/ Accessori ottiche



**Description**  
Glass filter 1 mm/  
Filtro vetro 1 mm

**Code**  
**0.26406.00**


#### Finishes

4A	
5A	
6A	
7A	
8A	
9A	



**Description**  
Selective filter 3000K - 4000K/  
Filtro selettivo 3000K - 4000K

**Code**  
**0.26579.0000**




**Description**  
Dense texture honeycomb louvre/  
Griglia alveolare a maglia fitta

**Code**  
**0.26446.0000**



**Description**  
Colored Gel Slides (2 pieces)/  
Vetrini per gel colorato (2 pezzi)/

**Code**  
**0.26414.0000**




**Description**  
Wide texture honeycomb louvre/  
Griglia alveolare a maglia larga

**Code**  
**0.26454.0000**



**Description**  
Selective filter 3000K - 2700K/  
Filtro selettivo 3000K - 2700K

**Code**  
**0.26563.0000**



**Description**  
Elliptical beam lens/  
Lente per fascio ellittico

**Code**  
**0.26459.0000**




**Description**  
Selective filter 2700K - 2500K/  
Filtro selettivo 2700K - 2500K

**Code**  
**0.26422.0000**




**Description**  
Opal lens/  
Lente opale

**Code**  
**0.26466.0000**




**Description**  
Selective filter 2700K - 2200K/  
Filtro selettivo 2700K - 2200K

**Code**  
**0.26430.0000**



**Description**  
Spread lens/  
Lente diffondente

**Code**  
**0.26474.0000**



**Description**  
Selective filter 2700K - 2000K/  
Filtro selettivo 2700K - 2000K

**Code**  
**0.26438.0000**




**Description**  
Cross blade louvre/  
Griglia a croce

**Code**  
**0.26479.0000**



**Description**  
Selective filter 3000K - 3600K/  
Filtro selettivo 3000K - 3600K

**Code**  
**0.26571.0000**



**Description**  
Barn doors/  
Alette rompiflusso

**Code**  
**0.26487.0000**




—

# Yori Pendant


# Yori Pendant

EN Yori Pendant features a number of pendant options: the standard surface-mounting base can be replaced with semi-recessed, trimless and track adapter base plates. In addition, the pendant cable can be customised with coloured fabric cables.


IT Yori Pendant presenta diverse opzioni per la sospensione: la basetta standard a superficie può essere sostituita con gli accessori a semi incasso, trimless e con adattatore a binario. In aggiunta, il cavo di sospensione può essere personalizzato su richiesta con cavi colorati in tessuto.

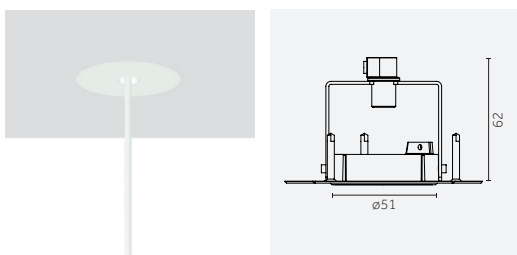

EN Trimless base  
IT Basetta senza flangia

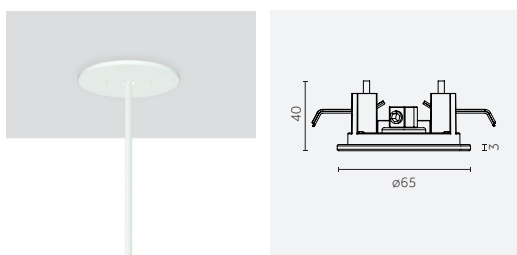

EN Semirecessed base  
IT Basetta a semi incasso

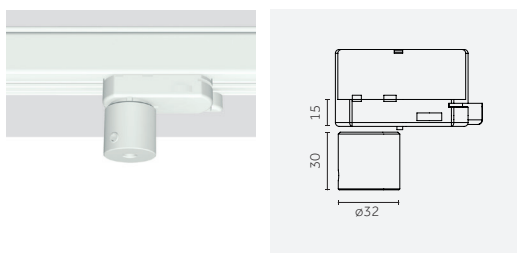

EN Track adapter base  
IT Basetta con adattatore a binario



<sup>EN</sup> Black cable for black and special finishes,  
white cable for white finish.  
Coloured cables on request.

<sup>IT</sup> Cavo nero per prodotti neri e per le finiture  
speciali, cavo bianco per i prodotti bianchi.  
Cavi colorati su richiesta.



Ø 22 mm | H 400 mm



Code example:  
**X . LH50 B . HW 12**

Accessories: p.893  
 Drivers: p.893  
 Finishes: p.866  
 Photometric data:  
 www.reggiani.net

2W POWERLED		Lumen delivered up to 110lm / Lumen maintenance: L90 B10=50,000h							Finishes	
Driver	Version	Optics	LED	K	CRI	lm	SDCM			
X Notincluded	LH50	B 9° Narrow	HW	2700	>90	140	<3	12		
		E 24° Medium	HQ	3000	>90	145	<3	C0		
		H 32° Wide	WW	3000	>80	190	<3	31		
			NN	4000	>80	200	<3	B0		
			LED nominal lumen					N0		
								D0		
								E0		
								O1		
								M0		
								LO		

Ø 22 mm | H 800 mm




Code example:  
**X . MH50 B . HW 12**

Accessories: p.893  
 Drivers: p.893  
 Finishes: p.866  
 Photometric data:  
 www.reggiani.net

2W POWERLED		Lumen delivered up to 110lm / Lumen maintenance: L90 B10=50,000h							Finishes	
Driver	Version	Optics	LED	K	CRI	lm	SDCM			
X Notincluded	MH50	B 9° Narrow	HW	2700	>90	140	<3	12		
		E 24° Medium	HQ	3000	>90	145	<3	C0		
		H 32° Wide	WW	3000	>80	190	<3	31		
			NN	4000	>80	200	<3	B0		
			LED nominal lumen					N0		
								D0		
								E0		
								O1		
								M0		
								LO		

Ø 22 mm | H 1600 mm




Code example:  
**X . NH50 B . HW 12**

Accessories: p.893  
 Drivers: p.893  
 Finishes: p.866  
 Photometric data:  
 www.reggiani.net

2W POWERLED		Lumen delivered up to 110lm / Lumen maintenance: L90 B10=50,000h							Finishes	
Driver	Version	Optics	LED	K	CRI	lm	SDCM			
X Notincluded	NH50	B 9° Narrow	HW	2700	>90	140	<3	12		
		E 24° Medium	HQ	3000	>90	145	<3	C0		
		H 32° Wide	WW	3000	>80	190	<3	31		
			NN	4000	>80	200	<3	B0		
			LED nominal lumen					N0		
								D0		
								E0		
								O1		
								M0		
								LO		


## Ø 22 mm | Accessories

### Decorative accessories/ Accessori decorativi



**Description**  
Cylinder, solid version (Ø 22 mm, h 22 mm)/  
Cilindro versione piena (Ø 22 mm, h 22 mm)


**Code**  
**0.26040.00**



**Description**  
Cylinder, solid version (Ø 22 mm, h 80 mm)/  
Cilindro versione piena (Ø 22 mm, h 80 mm)



**Code**  
**0.26041.00**


### Mounting accessories/ Accessori montaggio



**Description**  
Semi-recessed installation/  
Installazione a semincasso



**Code**  
**0.25470.00**



**Finishes**  
12   
31 



**Description**  
Track mounted installation/  
Installazione a binario



**Code**  
**0.25471.00**

**Finishes**  
12   
31 



**Description**  
Trimless installation/  
Installazione trimless









**Code**  
**0.25473.00**

**Finishes**  
12   
31 



## Ø 22 mm | Electrical Devices

### Driver/ Alimentazioni

2 W COBLED


Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30420.0000	20		56 mm	198-264Vac 170-280Vdc / 0,50/60Hz	700	Max: 1	20 m	1.5 mm <sup>2</sup>
On/Off	0.30041.0000	40		57 mm	100-240Vac / 50/60Hz	700	Min: 1 - Max: 4	20 m	1.5 mm <sup>2</sup>
Phase-cut	T.30420.0000	12		45 mm	230-240Vac / 50/60Hz	700	Max: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	T.30421.0000	32		57 mm	198-264Vac 176-264Vdc / 0,50/60Hz	700	Min: 1 - Max: 3	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	V.30420.0000	20		56 mm	99-264Vac 170-280Vdc / 0,50/60Hz	700	Max: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	V.30421.0000	40		79 mm	99-264Vac 170-280Vdc / 0,50/60Hz	700	Min: 1 - Max: 4	20 m	1.5 mm <sup>2</sup>
DALI	D.30420.0000	20		56 mm	99-264Vac 176-264Vdc / 0,50/60Hz	700	Max: 1	20 m	1.5 mm <sup>2</sup>
DALI	D.30421.0000	50		82 mm	120-277Vac 120-250Vdc / 0,50/60Hz	700	Min: 1 - Max: 4	20 m	1.5 mm <sup>2</sup>

### Other devices/ Altri dispositivi

Type	Code	Size (mm)	Cut-out	Tech. specifications	Connectable fixtures	Max.distance	Cable section
 Wireless bluetooth control device/ Dispositivo di controllo wireless bluetooth	0.26101.0000		45 mm	220-240V, 50-60Hz 0,6A for DALI drivers	Max: 1	-	1.5 mm <sup>2</sup>

Ø 35 mm | H 150 mm

Risk 1 0.16 IP20 850° CE CB EAC



Code example:

0 . PH51 . A . HW 12

Accessories: p.895  
 Finishes: p.866  
 Photometric data:  
 www.reggiani.net

**3,5W POWERLED**

Lumen delivered up to 290lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<b>0</b> On-Off	<b>PH51</b>	<b>B</b> 8° Verynarrow	<b>HW</b>	2700	>90	310	<3	<b>12</b>
<b>Onrequest (remote)</b>		<b>E</b> 22° Narrow	<b>HQ</b>	3000	>90	315	<3	<b>C0</b>
<b>T</b> Phase-cut		<b>H</b> 28° Medium	<b>WW</b>	3000	>80	380	<3	<b>31</b>
<b>V</b> Dimm 1-10V			<b>NN</b>	4000	>80	415	<3	<b>B0</b>
<b>D</b> DALI			LED nominal lumen					<b>N0</b>
<b>H</b> Bluetooth								<b>D0</b>
								<b>E0</b>
								<b>O1</b>
								<b>M0</b>
								<b>L0</b>

Ø 35 mm | H 400 mm

Risk 1 0.50 IP20 850° CE CB EAC



Code example:

0 . QH51 . A . HW 12

Accessories: p.895  
 Finishes: p.866  
 Photometric data:  
 www.reggiani.net

**3,5W POWERLED**

Lumen delivered up to 290lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<b>0</b> On-Off	<b>QH51</b>	<b>B</b> 8° Verynarrow	<b>HW</b>	2700	>90	310	<3	<b>12</b>
<b>Onrequest (remote)</b>		<b>E</b> 22° Narrow	<b>HQ</b>	3000	>90	315	<3	<b>C0</b>
<b>T</b> Phase-cut		<b>H</b> 28° Medium	<b>WW</b>	3000	>80	380	<3	<b>31</b>
<b>V</b> Dimm 1-10V			<b>NN</b>	4000	>80	415	<3	<b>B0</b>
<b>D</b> DALI			LED nominal lumen					<b>N0</b>
<b>H</b> Bluetooth								<b>D0</b>
								<b>E0</b>
								<b>O1</b>
								<b>M0</b>
								<b>L0</b>

Ø 35 mm | H 800 mm

Risk 1 0.16 IP20 850° CE CB EAC



Code example:

0 . TH51 . A . HW 12

Accessories: p.895  
 Finishes: p.866  
 Photometric data:  
 www.reggiani.net









**3,5W POWERLED**

Lumen delivered up to 290lm / Lumen maintenance: L90 B10=50,000h








Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<b>0</b> On-Off	<b>TH51</b>	<b>B</b> 8° Verynarrow	<b>HW</b>	2700	>90	310	<3	<b>12</b>
<b>Onrequest (remote)</b>		<b>E</b> 22° Narrow	<b>HQ</b>	3000	>90	315	<3	<b>C0</b>
<b>T</b> Phase-cut		<b>H</b> 28° Medium	<b>WW</b>	3000	>80	380	<3	<b>31</b>
<b>V</b> Dimm 1-10V			<b>NN</b>	4000	>80	415	<3	<b>B0</b>
<b>D</b> DALI			LED nominal lumen					<b>N0</b>
<b>H</b> Bluetooth								<b>D0</b>
								<b>E0</b>
								<b>O1</b>
								<b>M0</b>
								<b>L0</b>

## Ø 35 mm | Accessories

### Decorative accessories/ Accessori decorativi

		<b>Description</b> Cylinder, solid version (Ø 35 mm, h 35 mm)/ Cilindro versione piena (Ø 35 mm, h 35 mm)	<b>Code</b> <b>0.26042.00</b>
		<b>Description</b> Cylinder, solid version (Ø 35 mm, h 70 mm)/ Cilindro versione piena (Ø 35 mm, h 70 mm)	<b>Code</b> <b>0.26043.00</b>
		<b>Description</b> Cylinder, hollow version (Ø 35 mm, h 35 mm)/ Cilindro versione cava (Ø 35 mm, h 35 mm)	<b>Code</b> <b>0.26044.00</b>
		<b>Description</b> Cylinder, hollow version (Ø 35 mm, h 70 mm)/ Cilindro versione cava (Ø 35 mm, h 70 mm)	<b>Code</b> <b>0.26045.00</b>

### Mounting accessories/ Accessori montaggio

		<b>Description</b> Semi-recessed installation/ Installazione a semincasso	<b>Code</b> <b>0.25470.00</b>	<b>Finishes</b> 12  31 
		<b>Description</b> Track mounted installation/ Installazione a binario	<b>Code</b> <b>0.25471.00</b>	<b>Finishes</b> 12  31 
		<b>Description</b> Trimless installation/ Installazione trimless	<b>Code</b> <b>0.25473.00</b>	<b>Finishes</b> 12  31 

Ø 60 mm | H 205 mm

Risk 1 0.55 IP20 850° CE CB EAC



Code example:

0 . RH51 B . HW 12

Accessories: p.898-899

Finishes: p.866

Photometric data:

www.reggiani.net


**5W COB LED**

Lumen delivered up to 650lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	RH51	B 12° Narrow	HW	2700	>90	633	<2	12
<b>Onrequest (remote)</b>		E 20° Medium	HQ	3000	>90	688	<2	C0
T Phase-cut		K - Without optics	WW	3000	>80	810	<3	31
V Dimm 1-10V			NN	4000	>80	900	<3	B0
D DALI			LED nominal lumen					N0
H Bluetooth								D0
								E0
								O1
								M0
								L0

Ø 60 mm | H 255 mm

Risk 1 0.68 IP20 850° CE CB EAC



Code example:

0 . RH52 B . HW 12

Accessories: p.898-899

Finishes: p.866

Photometric data:

www.reggiani.net

**9W COB LED**

Lumen delivered up to 1000lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	RH52	B 12° Narrow	HW	2700	>90	1050	<2	12
T Phase-cut		E 20° Medium	HQ	3000	>90	1100	<2	C0
V Dimm 1-10V		K - Without optics	WW	3000	>80	1300	<3	31
D DALI			NN	4000	>80	1360	<3	B0
<b>Onrequest</b>			LED nominal lumen					N0
H Bluetooth								D0
								E0
								O1
								M0
								L0

**6W Warm Dimming COB LED**

Lumen delivered up to 390lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
V Dimm 1-10V	RH52	B 27° Medium	DT	1700-3000	>95	100-550	<4	12
<b>Onrequest</b>			LED nominal lumen					C0
T Phase-cut								31
H Bluetooth								B0
								N0
								D0
								E0
								O1
								M0
								L0

Ø 60 mm | H 600 mm



Code example:

**O** . **RH53** **B** . **HW** **12**

Accessories: p.898-899

Finishes: p.866

Photometric data:  
www.reggiani.net

**12 W COB LED** Lumen delivered up to 1400 lm / Lumen maintenance: L80 B10=50,000h



Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<b>O</b> On-Off	<b>RH53</b>	<b>B</b> 12° Narrow	<b>HW</b>	2700	>90	1370	< 2	<b>12</b>
<b>V</b> Dimm 1-10V		<b>E</b> 20° Medium	<b>HQ</b>	3000	>90	1420	< 2	<b>CO</b>
<b>D</b> DALI		<b>K</b> - Without optics	<b>WW</b>	3000	>80	1700	<3	<b>31</b>
<b>On request</b>			<b>NN</b>	4000	>80	1775	<3	<b>BO</b>
<b>H</b> Bluetooth			LED nominal lumen					<b>NO</b>
<b>T</b> Phase-cut								<b>DO</b>
								<b>EO</b>
								<b>O1</b>
								<b>M0</b>
								<b>L0</b>

**12 W Warm Dimming COB LED** Lumen delivered up to 690 lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<b>V</b> Dimm 1-10V	<b>RH53</b>	<b>B</b> 27° Medium	<b>DT</b>	1700-3000	>95	100-1000	<4	<b>12</b>
<b>D</b> DALI			LED nominal lumen					<b>CO</b>
<b>On request</b>								<b>31</b>
<b>T</b> Phase-cut								<b>BO</b>
<b>H</b> Bluetooth								<b>NO</b>
								<b>DO</b>
								<b>EO</b>
								<b>O1</b>
								<b>M0</b>
								<b>L0</b>



## Ø 60 mm | Accessories

### Interchangeable IOS optics/ Ottiche intercambiabili IOS



**Description**  
Precision - Narrow beam (12°)/  
Precision - Fascio stretto (12°)  
(12°-5W, 9W)


**Code**  
0.35125.0000



**Description**  
Precision - Medium beam (20°)/  
Precision - Fascio medio (20°)  
(20°-5W, 9W)

**Code**  
0.35126.0000

### Decorative accessories/ Accessori decorativi



**Description**  
Cylinder, hollow version (Ø 60 mm, h 40 mm)/  
Cilindro versione cava (Ø 60 mm, h 40 mm)

**Code**  
0.26046.0000

### Optical accessories/ Accessori ottiche



**Description**  
Glass filter 1 mm/  
Filtro vetro 1 mm


**Code**  
0.26402.00

**Finishes**



**Description**  
Selective filter 3000K - 4000K/  
Filtro selettivo 3000K - 4000K

**Code**  
0.26575.0000




**Description**  
Dense texture honeycomb louvre/  
Griglia alveolare a maglia fitta

**Code**  
0.26442.0000



**Description**  
Colored Gel Slides (2 pieces)/  
Vetrini per gel colorato (2 pezzi)/

**Code**  
0.26410.0000



**Description**  
Wide texture honeycomb louvre/  
Griglia alveolare a maglia larga

**Code**  
0.26450.0000



**Description**  
Selective filter 3000K - 2700K/  
Filtro selettivo 3000K - 2700K

**Code**  
0.26559.0000



**Description**  
Elliptical beam lens/  
Lente per fascio ellittico

**Code**  
0.26457.0000




**Description**  
Selective filter 2700K - 2500K/  
Filtro selettivo 2700K - 2500K

**Code**  
0.26418.0000




**Description**  
Opal lens/  
Lente opale

**Code**  
0.26462.0000




**Description**  
Selective filter 2700K - 2200K/  
Filtro selettivo 2700K - 2200K

**Code**  
0.26426.0000



**Description**  
Spread lens/  
Lente diffondente

**Code**  
0.26470.0000



**Description**  
Selective filter 2700K - 2000K/  
Filtro selettivo 2700K - 2000K

**Code**  
0.26434.0000



**Description**  
Cross blade louvre/  
Griglia a croce

**Code**  
0.26477.0000



**Description**  
Selective filter 3000K - 3600K/  
Filtro selettivo 3000K - 3600K

**Code**  
0.26567.0000



**Description**  
Barn doors/  
Alette rompiflusso

**Code**  
0.26485.0000

Mounting accessories/  
Accessori montaggio





**Description**


Semi-recessed installation/  
Installazione a semincasso

**Code**

0.25470.00

**Finishes**

12   
31 





**Description**


Track mounted installation/  
Installazione a binario

**Code**

0.25471.00

**Finishes**

12   
31 





**Description**

Trimless installation/  
Installazione trimless

**Code**

0.25473.00


**Finishes**

12   
31 





Ø 95 mm | H255 mm



Code example:  
**0 . VH53 B . HW 12**  
 Accessories: p.902-903  
 Finishes: p.866  
 Photometric data:  
 www.reggiani.net

12 W COB LED		Lumen delivered up to 1500lm / Lumen maintenance: L80 B10=50,000h							Finishes	
Driver	Version	Optics	LED	K	CRI	lm	SDCM			
<b>0</b> On-Off	<b>VH53</b>	<b>B</b> 12° Narrow	<b>HW</b>	2700	>90	1491	<2	<b>12</b>		
<b>V</b> Dimm 1-10V		<b>E</b> 24° Medium	<b>HQ</b>	3000	>90	1533	<2	<b>C0</b>		
<b>D</b> DALI		<b>K</b> - Without optics	<b>WW</b>	3000	>80	1859	<3	<b>31</b>		
<b>Onrequest</b>			<b>NN</b>	4000	>80	1920	<3	<b>B0</b>		
<b>T</b> Phase-cut			LED nominal lumen					<b>N0</b>		
<b>H</b> Bluetooth								<b>D0</b>		
								<b>E0</b>		
								<b>01</b>		
								<b>M0</b>		
								<b>LO</b>		

Ø 95 mm | H325 mm



Code example:  
**0 . VH54 B . HW 12**  
 Accessories: p.902-903  
 Finishes: p.866  
 Photometric data:  
 www.reggiani.net

17 W COB LED		Lumen delivered up to 2100lm / Lumen maintenance: L80 B10=50,000h							Finishes	
Driver	Version	Optics	LED	K	CRI	lm	SDCM			
<b>0</b> On-Off	<b>VH54</b>	<b>B</b> 12° Narrow	<b>HW</b>	2700	>90	2067	<2	<b>12</b>		
<b>V</b> Dimm 1-10V		<b>E</b> 24° Medium	<b>HQ</b>	3000	>90	2122	<2	<b>C0</b>		
<b>D</b> DALI		<b>K</b> - Without optics	<b>WW</b>	3000	>80	2582	<3	<b>31</b>		
<b>Onrequest</b>			<b>NN</b>	4000	>80	2665	<3	<b>B0</b>		
<b>T</b> Phase-cut			LED nominal lumen					<b>N0</b>		
<b>H</b> Bluetooth								<b>D0</b>		
								<b>E0</b>		
								<b>01</b>		
								<b>M0</b>		
								<b>LO</b>		

Ø 95 mm | H395 mm



Code example:

0 . VH56 B . HW 12

Accessories: p.902-903

Finishes: p.866



Photometric data:

www.reggiani.net

24 W COBLED		Lumen delivered up to 2800 lm / Lumen maintenance: L80 B10=50,000h							Finishes
Driver	Version	Optics	LED	K	CRI	lm	SDCM		
<u>0</u> On-Off	<u>VH56</u>	<u>B</u> 12° Narrow	<u>HW</u>	2700	>90	2792	<2	<u>12</u>	
<u>V</u> Dimm 1-10V		<u>E</u> 24° Medium	<u>HQ</u>	3000	>90	2860	<2	<u>CO</u>	
<u>D</u> DALI		<u>K</u> - Without optics	<u>WW</u>	3000	>80	3487	<3	<u>31</u>	
<b>On request</b>			<u>NN</u>	4000	>80	3602	<3	<u>BO</u>	
<u>H</u> Bluetooth			LED nominal lumen					<u>NO</u>	
<u>T</u> Phase-cut								<u>DO</u>	
								<u>EO</u>	
								<u>01</u>	
								<u>MO</u>	
								<u>LO</u>	

25 W Warm Dimming COBLED		Lumen delivered up to 1200 lm / L70/B50=50,000h							Finishes
Driver	Version	Optics	LED	K	CRI	lm	SDCM		
<u>V</u> Dimm 1-10V	<u>VH56</u>	<u>B</u> 25° Medium	<u>DT</u>	1700-3000	>95	100-2500	<4	<u>12</u>	
<u>D</u> DALI			LED nominal lumen					<u>CO</u>	
<b>On request</b>								<u>31</u>	
<u>H</u> Bluetooth								<u>BO</u>	
								<u>NO</u>	
								<u>DO</u>	
								<u>EO</u>	
								<u>01</u>	
								<u>MO</u>	
								<u>LO</u>	

Ø 95 mm | H800 mm



Code example:

0 . ZH56 B . HW 12

Accessories: p.902-903

Finishes: p.866

Photometric data:


www.reggiani.net

24 W COBLED		Lumen delivered up to 2800 lm / Lumen maintenance: L80 B10=50,000h							Finishes
Driver	Version	Optics	LED	K	CRI	lm	SDCM		
<u>0</u> On-Off	<u>ZH56</u>	<u>B</u> 12° Narrow	<u>HW</u>	2700	>90	2792	<2	<u>12</u>	
<u>V</u> Dimm 1-10V		<u>E</u> 24° Medium	<u>HQ</u>	3000	>90	2860	<2	<u>CO</u>	
<u>D</u> DALI		<u>K</u> - Without optics	<u>WW</u>	3000	>80	3487	<3	<u>31</u>	
<b>On request</b>			<u>NN</u>	4000	>80	3602	<3	<u>BO</u>	
<u>H</u> Bluetooth			LED nominal lumen					<u>NO</u>	
<u>T</u> Phase-cut								<u>DO</u>	
								<u>EO</u>	
								<u>01</u>	
								<u>MO</u>	
								<u>LO</u>	

25 W Warm Dimming COBLED		Lumen delivered up to 1200 lm / Lumen maintenance: L70 B50=50,000h							Finishes
Driver	Version	Optics	LED	K	CRI	lm	SDCM		
<u>V</u> Dimm 1-10V	<u>ZH56</u>	<u>B</u> 25° Medium	<u>DT</u>	1700-3000	>95	100-2500	<4	<u>12</u>	
<u>D</u> DALI			LED nominal lumen					<u>CO</u>	
<b>On request</b>								<u>31</u>	
<u>H</u> Bluetooth								<u>BO</u>	
								<u>NO</u>	
								<u>DO</u>	
								<u>EO</u>	
								<u>01</u>	
								<u>MO</u>	
								<u>LO</u>	


## Ø 95 mm | Accessories

### Interchangeable IOS optics/ Ottiche intercambiabili IOS



**Description**  
Precision - Narrow beam/  
Precision - Fascio stretto  
(12°-12W, 17W, 24 W)


**Code**  
**0.35135.0000**



**Description**  
Precision - Medium beam/  
Precision - Fascio medio  
(24°-12W, 17W, 24W)

**Code**  
**0.35136.0000**

### Decorative accessories/ Accessori decorativi



**Description**  
Cylinder, hollow version (Ø 95 mm, h 60 mm)/  
Cilindro versione cava (Ø 95 mm, h 60 mm)

**Code**  
**0.26047.0000**

### Optical accessories/ Accessori ottiche



**Description**  
Glass filter 1 mm/  
Filtro vetro 1 mm


**Code**  
**0.26406.00**

**Finishes**



**Description**  
Selective filter 3000K - 4000K/  
Filtro selettivo 3000K - 4000K

**Code**  
**0.26579.0000**




**Description**  
Dense texture honeycomb louvre/  
Griglia alveolare a maglia fitta

**Code**  
**0.26446.0000**



**Description**  
Colored Gel Slides (2 pieces)/  
Vetrini per gel colorato (2 pezzi)/

**Code**  
**0.26414.0000**



**Description**  
Wide texture honeycomb louvre/  
Griglia alveolare a maglia larga

**Code**  
**0.26454.0000**



**Description**  
Selective filter 3000K - 2700K/  
Filtro selettivo 3000K - 2700K

**Code**  
**0.26563.0000**



**Description**  
Elliptical beam lens/  
Lente per fascio ellittico

**Code**  
**0.26459.0000**




**Description**  
Selective filter 2700K - 2500K/  
Filtro selettivo 2700K - 2500K

**Code**  
**0.26422.0000**




**Description**  
Opal lens/  
Lente opale

**Code**  
**0.26466.0000**




**Description**  
Selective filter 2700K - 2200K/  
Filtro selettivo 2700K - 2200K

**Code**  
**0.26430.0000**



**Description**  
Spread lens/  
Lente diffondente

**Code**  
**0.26474.0000**



**Description**  
Selective filter 2700K - 2000K/  
Filtro selettivo 2700K - 2000K

**Code**  
**0.26438.0000**



**Description**  
Cross blade louvre/  
Griglia a croce

**Code**  
**0.26479.0000**



**Description**  
Selective filter 3000K - 3600K/  
Filtro selettivo 3000K - 3600K

**Code**  
**0.26571.0000**



**Description**  
Barn doors/  
Alette rompiflusso

**Code**  
**0.26487.0000**

**Mounting accessories/  
Accessori montaggio**




**Description**

Semi-recessed installation/  
Installazione a semincasso

**Code**  
**0.25470.00**

**Finishes**  
**12**   
**31**




**Description**

Track mounted installation/  
Installazione a binario

**Code**  
**0.25471.00**

**Finishes**  
**12**   
**31**



**Description**

Trimless installation/  
Installazione trimless

**Code**  
**0.25473.00**

**Finishes**  
**12**   
**31**

