



Varios


Design by LAPD Consultants





Varios

Design by LAPD Consultants



FR Fruit de la collaboration avec le cabinet LAPD Consultants de Londres, Varios est un projecteur orientable sur rail et à encastrer extractible. Appareil tout particulièrement indiqué pour des projets qui requièrent flexibilité et performance, Varios est la solution idéale dans les espaces commerciaux, les lieux d'exposition et de vente pour l'éclairage général de grands espaces et pour l'éclairage d'accent des espaces de vente et d'exposition.

ES Varios nace de la colaboración con el estudio LAPD Consultants de Londres. Es un proyector orientable para carril, de superficie y de empotrar extraíble. Varios es adecuado especialmente para proyectos que requieren flexibilidad y rendimiento y es la solución ideal en entornos comerciales, expositivos y lugares de ventas para la iluminación general de grandes espacios y de relieve para detalles y zonas expositivas.

www.reggiani.net

Overview















Application:	Recessed, Track
Light source:	COB LED
Watt:	17 W - 42 W
Kelvin:	2700 K, 3000 K, 4000 K
Lumen:	2330 lm - 6440 lm
CRI:	>80, >90
SDCM:	<3
IP:	20
Control options:	On/Off, Phase-cut, Dimm 1-10V, DALI

#theilluminationcollective










Disponibile pour l'Amérique du Nord: rendez-vous sur www.reggianiusa.com/
 Disponible para América del Norte: consulte la página www.reggianiusa.com

645




<p>Versions/ Modelos</p>				
<p>Recessed</p>	 <p>Varios Recessed</p>			
<p>Track</p>	 <p>Varios Track Flat</p>		 <p>Varios Track Vertical</p>	
<p>Finitions/ Acabados</p>	 <p>10 Blanc/ Blanco</p>		 <p>28 Gris métallisé/ Gris metalizado</p>	
<p>Varios Track only</p>	 <p>21 Noir/ Negro</p>			
<p>Faisceaux/ Haces de luz</p>	 <p>Étroit/ Estrecho</p>	 <p>Moyen/ Medio</p>	 <p>Large/ Ancho</p>	 <p>Très large/ Muy ancho</p>
<p>Orientation/ Orientabilidad</p>	 <p>Axe vertical/ Eje vertical</p>	 <p>Axe horizontal/ Eje horizontal</p>	 <p>Axe vertical/ Eje vertical</p>	 <p>Axe horizontal/ Eje horizontal</p>


Dimensions et données techniques/ Dimensiones e información técnica	<p>Ø 195 mm Flat Vertical</p>		
	<p>Varios Recessed p.651</p>  <p>Ø 212 mm p.652</p>		
<p>Varios Track p.656</p>	 <p>Ø 137 mm x h 135 mm p.656</p>		 <p>Ø 137 mm x h 234 mm p.657</p>
<p>Encombrement intérieur max/ Dimensiones interiores máximas</p>	 <p>185 Ø195</p>		
<p>Ouverture du faisceau lumineux/ Amplitud del haz de luz</p>	<p>20°, 27°, 38°</p>	<p>17 W, 25 W 17°, 25°, 38°, 53° 30 W, 42 W 20°, 27°, 38°</p>	<p>17 W, 25 W 17°, 25°, 38°, 53° 30 W, 42 W 20°, 27°, 38°</p>
<p>Source lumineuse/ Fuente luminosa</p>	<p>COB LED 30 W, 38 W, 42 W 3930lm - 6440lm L80B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >80, CRI >90</p>	<p>COB LED 17 W, 25 W, 30 W, 42 W 2330lm - 6440lm L80B10=50,000h 3000K, 4000K SDCM <3 CRI >80, CRI >90</p>	<p>COB LED 17 W, 25 W, 30 W, 42 W 2330lm - 6440lm L80B10=50,000h 3000K, 4000K SDCM <3 CRI >80, CRI >90</p>

<p>Accessoires/ Accesorios</p>					
<p>Accessoires pour optique/ Accesorios de las ópticas</p>	<div style="text-align: center;">  </div> <p>Anti-glare louvre/ Griglia antiabbagliante</p> <p>■ 21</p>				
<p>Accessoires/ Accesorios</p>	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>Support du phare / Soporte para foco</p> <p>■ 10</p> </div> <div style="text-align: center;">  <p>Fraise pour trous / Fresas para agujeros</p> </div> <div style="text-align: center;">  <p>Poignée pour fraises / Manilla para fresas</p> </div> <div style="text-align: center;">  <p>Groupe de secours / Equipo de emergencia</p> </div> <div style="text-align: center;">  <p>Rallonge / Cable de prolongación</p> </div> </div>				
<p>Accessoires de montage/ Accesorios de montaje</p>	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;">  <p>Rail/ Carril p.707</p> <p>■ 10 ■ 21 ■ 28</p> </div> <div style="text-align: center;">  <p>Patère rail pour la fixation au plafond du projecteur / Base para la fijación de techo del proyector</p> <p>■ 10 ■ 21 ■ 28</p> </div> <div style="text-align: center;">  <p>Adaptateur pour la fixation à encastrer de la patère rail / Adaptador para la instalación de empotrar de la base</p> <p>■ 10 ■ 21 ■ 28</p> </div> </div>				


LL7 Premium




LL7 Premium Ø80

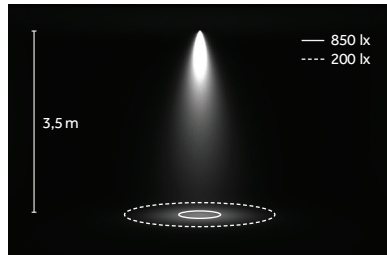


LED: 42 W/27°/3000 K (HQ)



Étroit/
Estrecho
B 17°/20°



Moyen/
Medio
E 25°/27°




Large/
Ancho
H 38°



Très large/
Muy ancho
M 53°

LED

COB



2700 K, 3000 K, 4000 K
SDCM<3
CRI>80, CRI > 90

TM 30

Rf: 92, Rg: 102
(3000 K, CRI>90)

L80 B10=50,000h


Ta: 25°

Tc: 85°

~10,000 hr

Lm Maintenance: 96%

(Source: LM80 test report)

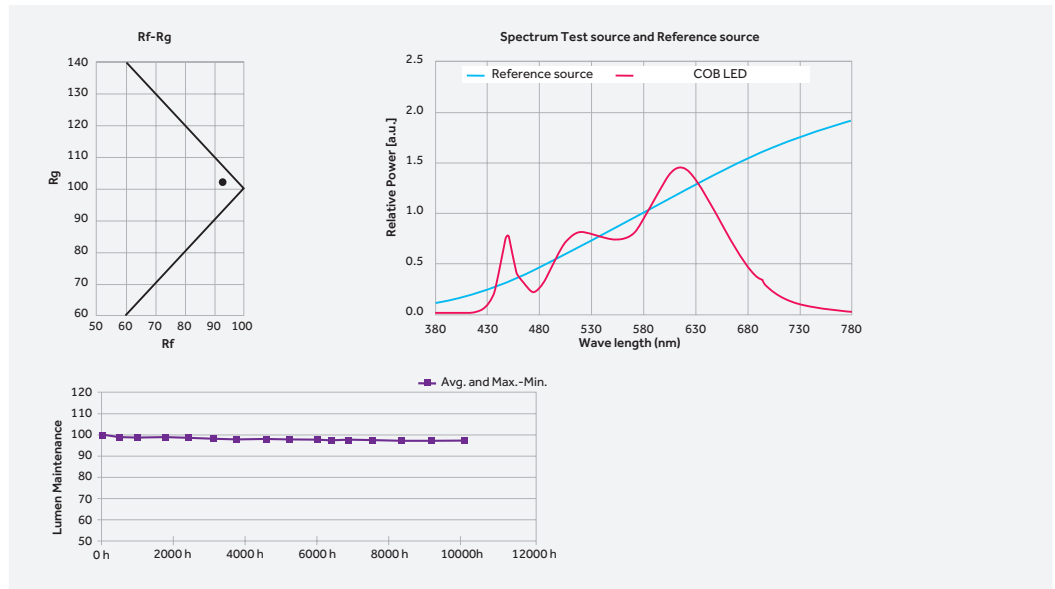

FR COB LED offrant un rendement excellent et des performances exceptionnelles (jusqu'à 150 lm/W). Dimensions réduites par rapport aux solutions similaires et avec des valeurs de flux identiques. La gamme complète comprend le COB avec surface de sortie de la lumière (LES) de 6 mm à 14 mm et flux nominaux de 600 lm (5 W) à 5 500 lm (38 W). Fiabilité hors pair à haute température grâce aux matériaux utilisés et excellente stabilité du flux lumineux dans le temps.
Matériaux du boîtier : céramique
Résine d'encapsulation : résine silicone
Matériaux des électrodes : or



ES EILED COB se distingue por su excelente eficiencia y el elevado rendimiento (hasta 150lm/W). Es más compacto respecto a otras soluciones similares aún garantizando los mismos valores de flujo luminoso. La línea completa incluye COB con superficie emisora de luz (LES) de 6 mm a 14 mm y flujo nominal de 600 lm (5 W) a 5500 lm (38 W). Es extremadamente confiable a altas temperaturas gracias a los materiales utilizados y a la excelente estabilidad del flujo luminoso en el tiempo.
Material del paquete: cerámica
Resina encapsulante: resina de silicona
Material de los electrodos: oro



—

Varios Recessed

Ø 195 mm

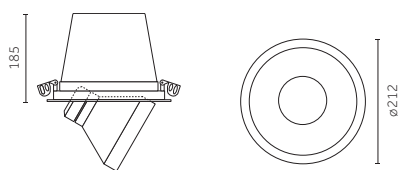

Code example:
X . **1A47** **B** . **HW** **10**

Accessories: p.652
 Drivers: p.653
 Finishes: p.646
 Photometric data:
 www.reggiani.net

30 W COB LED		Lumen delivered up to 3600lm / Lumen maintenance: L80 B10=50,000h							
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
X Notincluded	1A47	B 20° Narrow	HW	2700	>90	3930	<3	10	<input type="checkbox"/>
		E 27° Medium	HQ	3000	>90	4140	<3	28	<input type="checkbox"/>
		H 38° Wide	WW	3000	>80	4745	<3		
		K - Without optics	NN	4000	>80	5000	<3		

LED nominal lumen

38 W COB LED		Lumen delivered up to 4300lm / Lumen maintenance: L80 B10=50,000h							
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
X Notincluded	1A48	B 20° Narrow	HW	2700	>90	4670	<3	10	<input type="checkbox"/>
		E 27° Medium	HQ	3000	>90	4900	<3	28	<input type="checkbox"/>
		H 38° Wide	WW	3000	>80	5665	<3		
		K - Without optics	NN	4000	>80	5970	<3		

LED nominal lumen

42 W COB LED		Lumen delivered up to 4640lm / Lumen maintenance: L80 B10=50,000h							
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
X Notincluded	1A49	B 20° Narrow	HW	2700	>90	5035	<3	10	<input type="checkbox"/>
		E 27° Medium	HQ	3000	>90	5330	<3	28	<input type="checkbox"/>
		H 38° Wide	WW	3000	>80	6110	<3		
		K - Without optics	NN	4000	>80	6440	<3		

LED nominal lumen

Ø 195 mm | Accessories

Optiques interchangeables IOS/
 Ópticas intercambiables IOS

	Accessory LL7 - Faisceau étroit/ LL7 - Haz de luz estrecho (20°-30W, 38W, 42W)	Code <u>0.35035.0000</u>
--	--	------------------------------------

	Accessory LL7 - Faisceau large/ LL7 - Haz de luz ancho (38°-30W, 38W, 42W)	Code <u>0.35037.0000</u>
--	--	------------------------------------

	Accessory LL7 - Faisceau moyen/ LL7 - Haz de luz medio (27°-30W, 38W, 42W)	Code <u>0.35036.0000</u>
--	--	------------------------------------

Accessoires/
 Accesorios

	Accessory Support du phare Ø 195 mm/ Soporte para foco de Ø 195 mm	Code <u>0.10003.00</u>	Finishes 10 <input type="checkbox"/>
--	---	----------------------------------	--

	Accessory Grille anti-éblouissement Rejilla antideslumbrante	Code <u>0.23990.00</u>	Finishes 21 <input type="checkbox"/>
--	---	----------------------------------	--

	Accessory Support du phare Ø 195 mm/ Fresas para agujeros de Ø 195 mm	Code <u>0.11345.0000</u>
--	--	------------------------------------

	Accessory Groupe de secours/ Equipo de emergencia	Code <u>0.35081.0000</u>
	Groupe de secours avec batteries Ni/Cd, autonomie 1h/ Equipo de emergencia con baterías Ni/Cd y autonomía de 1h	

	Accessory Poignée pour fraises/ Manilla para fresas	Code <u>0.10099.0000</u>
--	--	------------------------------------





	Description Groupe de secours/ Equipo de emergencia	Code <u>0.35081.UK00</u>
	Groupe de secours avec batteries Ni/Cd, autonomie 3h/ Equipo de emergencia con baterías Ni/Cd y autonomía de 3h	

	Accessory Rallonge/ Cable de prolongación	Code <u>0.35100.0000</u>
	Câble bipolaire de 3 m muni d'une fiche et d'une prise à branchement rapide/ Cable bipolar de 3 m con enchufe y tomacorriente de conexión rápida	





Electrical Devices

Platines d'alimentation/ Drivers




30 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30441.0000	40		52 mm	220-240Vac / 50/60Hz	850	Max: 1	20m	1.5 mm ²
Phase-cut	T.30441.0000	45		57 mm	220-240Vac / 50/60Hz	850	Max: 1	20m	1.5 mm ²
Dimm 1-10V	V.30441.0000	40		82 mm	99-264Vac 170-280Vdc / 0,50/60Hz	850	Max: 1	20m	1.5 mm ²
DALI	D.30441.0000	40		82 mm	99-264Vac 170-280Vdc / 0,50/60Hz	850	Max: 1	20m	1.5 mm ²

38 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30442.0000	40		52 mm	220-240Vac / 50/60Hz	1050	Max: 1	20m	1.5 mm ²
Phase-cut	T.30409.0000	40		68 mm	220-240Vac / 50/60Hz	1050	Max: 1	20m	1.5 mm ²
Dimm 1-10V	V.30409.0000	40		82 mm	99-264Vac 170-280Vdc / 0,50/60Hz	1050	Max: 1	20m	1.5 mm ²
DALI	D.30409.0000	40		82 mm	99-264Vac 170-280Vdc / 0,50/60Hz	1050	Max: 1	20m	1.5 mm ²

42 W COB LED


Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30443.0000	50		74 mm	220-240Vac / 50/60Hz	1150	Max: 1	20m	1.5 mm ²
Dimm 1-10V	V.30443.0000	50		90 mm	99-264Vac 170-280Vdc / 0,50/60Hz	1150	Max: 1	20m	1.5 mm ²
DALI	D.30443.0000	50		90 mm	99-264Vac 170-280Vdc / 0,50/60Hz	1150	Max: 1	20m	1.5 mm ²



—

Varios Track

Flat

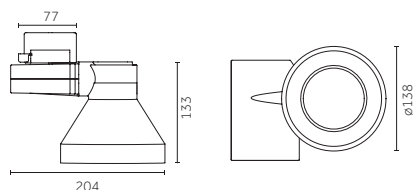

Code example:
0 . 2A44 B . HQ 10

Accessories: p.656
 Rail/Carril: p.707
 Finishes: p.646
 Photometric data:
 www.reggiani.net

17 W COB LED		Lumen delivered up to 2300lm / Lumen maintenance: L80 B10=50,000h							
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
0 On-Off	2A44	B 17° Narrow	HQ	3000	>90	2410	<3	10	<input type="checkbox"/>
D DALI		E 25° Medium	WW	3000	>80	2755	<3	21	<input type="checkbox"/>
		H 38° Wide	NN	4000	>80	3025	<3	28	<input type="checkbox"/>
		M 53° Verywide	LED nominal lumen						
		K - Without optics							

25 W COB LED		Lumen delivered up to 3000lm / Lumen maintenance: L80 B10=50,000h							
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
0 On-Off	2A46	B 17° Narrow	HQ	3000	>90	3360	<3	10	<input type="checkbox"/>
D DALI		E 25° Medium	WW	3000	>80	3865	<3	21	<input type="checkbox"/>
		H 38° Wide	NN	4000	>80	4250	<3	28	<input type="checkbox"/>
		M 53° Verywide	LED nominal lumen						
		K - Without optics							

30 W COB LED		Lumen delivered up to 3600lm / Lumen maintenance: L80 B10=50,000h							
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
0 On-Off	2A47	B 20° Narrow	HQ	3000	>90	4140	<3	10	<input type="checkbox"/>
D DALI		E 27° Medium	WW	3000	>80	4745	<3	21	<input type="checkbox"/>
		H 38° Wide	NN	4000	>80	5000	<3	28	<input type="checkbox"/>
		K - Without optics	LED nominal lumen						

42 W COB LED		Lumen delivered up to 4640lm / Lumen maintenance: L80 B10=50,000h							
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
0 On-Off	2A49	B 20° Narrow	HQ	3000	>90	5330	<3	10	<input type="checkbox"/>
D DALI		E 27° Medium	WW	3000	>80	6110	<3	21	<input type="checkbox"/>
		H 38° Wide	NN	4000	>80	6440	<3	28	<input type="checkbox"/>
		K - Without optics	LED nominal lumen						

Flat | Accessories

Optiques interchangeables IOS/
 Ópticas intercambiables IOS

	Accessory LL7 - Faisceau étroit/ LL7 - Haz de luz estrech (17°-17W, 25W/20°-30W, 42W)	Code <u>0.35035.0000</u>
--	---	------------------------------------

	Accessory LL7 - Faisceau large/ LL7 - Haz de luz ancho (38°-17W, 25W/38°-30W, 42W)	Code <u>0.35037.0000</u>
--	--	------------------------------------

	Accessory LL7 - Faisceau moyen/ LL7 - Haz de luz medio (25°-17W, 25W/27°-30W, 42W)	Code <u>0.35036.0000</u>
--	--	------------------------------------

	Accessory LL7 - Faisceau très large/ LL7 - Haz de luz muy ancho (53°-17W, 25W) Not for 2A47, 2A49	Code <u>0.35038.0000</u>
--	---	------------------------------------

Accessoires/
 Accesorios

	Accessory Grille anti-éblouissement Rejilla antideslumbrante	Code <u>0.23990.00</u>	Finishes 21 <input type="checkbox"/>
--	---	----------------------------------	---


Accessoires de montage/
 Accesorios de montaje

	Description Patère rail pour la fixation au plafond du projecteur/ Base para la fijación de techo del proyector	Code <u>0.02062.00</u>	Finishes 10 <input type="checkbox"/> 21 <input type="checkbox"/> 28 <input type="checkbox"/>
--	--	----------------------------------	---

	Description Adaptateur pour la fixation à encasturer de la patère rail réf. 0.02062.00/ Adaptador para la instalación de empotrar de la base código. 0.02062.00	Code <u>0.02063.00</u>	Finishes 10 <input type="checkbox"/> 21 <input type="checkbox"/> 28 <input type="checkbox"/>
--	--	----------------------------------	---

Vertical

Risk 1 0.97 IP20 850° CE CB ENEC

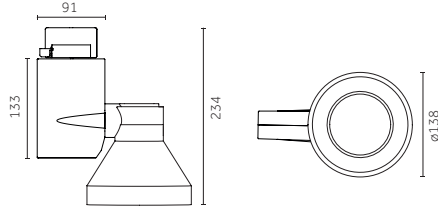

Code example:

O . **3A44** **B** . **HQ** **10**

Accessories: p.657
Rail/Carril: p.707
Finishes: p.646
Photometric data:
www.reggiani.net

17 W COB LED		Lumen delivered up to 2300 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	3A44	B 17° Narrow	HQ	3000	>90	2410	<3	10
D DALI		E 25° Medium	WW	3000	>80	2755	<3	21
		H 38° Wide	NN	4000	>80	3025	<3	28
		M 53° Very wide	LED nominal lumen					
		K - Without optics	LED nominal lumen					


25 W COB LED		Lumen delivered up to 3000 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	3A46	B 17° Narrow	HQ	3000	>90	3360	<3	10
D DALI		E 25° Medium	WW	3000	>80	3865	<3	21
		H 38° Wide	NN	4000	>80	4250	<3	28
		M 53° Very wide	LED nominal lumen					
		K - Without optics	LED nominal lumen					

30 W COB LED		Lumen delivered up to 3600 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	3A47	B 20° Narrow	HQ	3000	>90	4140	<3	10
D DALI		E 27° Medium	WW	3000	>80	4745	<3	21
		H 38° Wide	NN	4000	>80	5000	<3	28
		K - Without optics	LED nominal lumen					

42 W COB LED		Lumen delivered up to 4640 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	3A49	B 20° Narrow	HQ	3000	>90	5330	<3	10
D DALI		E 27° Medium	WW	3000	>80	6110	<3	21
		H 38° Wide	NN	4000	>80	6440	<3	28
		K - Without optics	LED nominal lumen					


Vertical | Accessories

Interchangeable IOS optics/ Ottiche intercambiabili IOS




Accessory
LL7 - Faisceau étroit/
LL7 - Haz de luz estrecho
(17°-17W, 25W/20°-30W, 42W)

Code
0.35035.0000



Accessory
LL7 - Faisceau large/
LL7 - Haz de luz ancho
(38°-17W, 25W/38°-30W, 42W)

Code
0.35037.0000



Accessory
LL7 - Faisceau moyen/
LL7 - Haz de luz medio
(25°-17W, 25W/27°-30W, 42W)


Code
0.35036.0000



Accessory
LL7 - Faisceau très large/
LL7 - Haz de luz muy ancho
(53°-17W, 25W)
Not for **3A47, 3A49**

Code
0.35038.0000

Accessoires/ Accesorios



Accessory
Grille anti-éblouissement
Rejilla antideslumbrante

Code
0.23990.00

Finishes
21

Accessoires de montage/ Accesorios de montaje



Description
Patère rail pour la fixation au
plafond du projecteur/
Base para la fijación de techo
del proyector

Code
0.02062.00

Finishes
10
21
28



Description
Adaptateur pour la fixation à encastrer
de la patère rail réf. 0.02062.00/
Adaptador para la instalación de
empotrar de la base código. 0.02062.00

Code
0.02063.00

Finishes
10
21
28