



—


Yori

Recessed

# Yori Recessed

FR Yori Recessed est disponible dans les versions à encastrer, à module simple et double, avec collerette apparente et invisible ; le corps du projecteur présente deux dimensions et différentes options de puissance et de faisceau lumineux. Le système mécanique d'extraction et d'orientation de l'optique permet un pointage flexible et précis en mesure de répondre aux exigences d'éclairage de différents espaces.


ES Yori Recessed se encuentra disponible en los modelos de empotrar simples y dobles con aro visible e invisible. El cuerpo del proyector se suministra en dos dimensiones y con diferentes opciones de potencia y haz de luz. El mecanismo de extracción y orientación de la óptica facilita un enfoque flexible y preciso capaz de satisfacer los requisitos de iluminación de diferentes entorno.

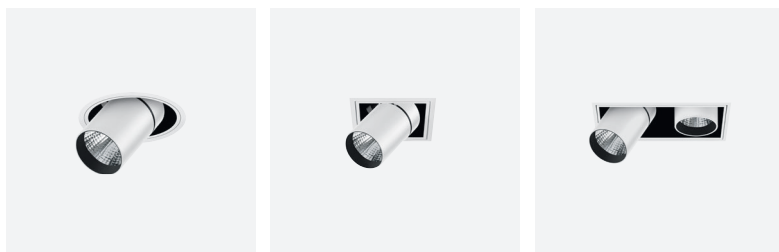

FR Rond  
ES Redondo

FR Carré  
ES Cuadrado

FR Carré, double  
ES Cuadrado doble

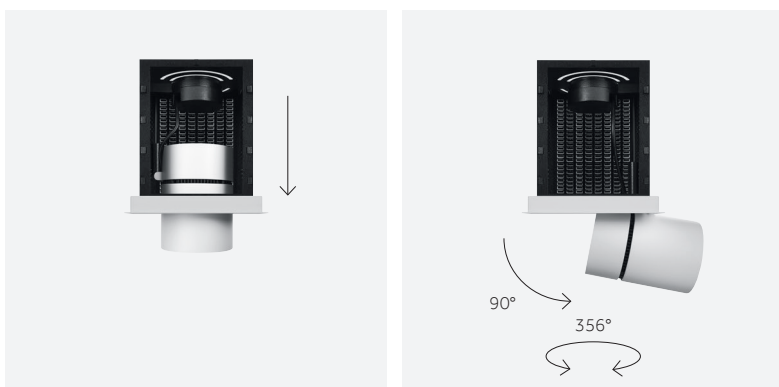


FR Coulissement vertical pour déplacer le projecteur vers l'extérieur.  
ES Corredera vertical para el deslizamiento del proyector hacia el exterior.


FR Orientation jusqu'à 356° et inclinaison jusqu'à 90°, avec système de blocage.  
ES Orientación hasta 356° y inclinación hasta 90°, con mecanismo de bloqueo.




Ø 60 mm | Precision



Collerette apparente/  
Con aro visibile

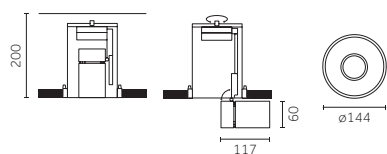

Collerette apparente/  
Con aro visibile

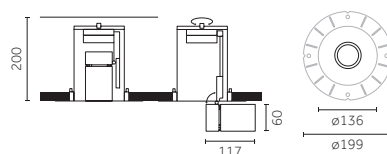

Code example:  
X . **TM52** . **A** . **HW** **12**

Accessories: p.490  
Finishes: p.380  
Drivers: p.512-513  
Photometric data:  
www.reggiani.net


9W POWERLED		Lumen delivered up to 770lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>TM52</b> Visible trim	<b>A</b> 8° Very narrow	<b>HW</b>	2700	>90	725	<3	<b>12</b>
	<b>UM52</b> Trimless		<b>HQ</b>	3000	>90	730	<3	<b>31</b>
			<b>WW</b>	3000	>80	845	<3	
			<b>NN</b>	4000	>80	940	<3	
LED nominal lumen								

9W COBLED		Lumen delivered up to 1115lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>BM52</b> Visible trim	<b>B</b> 12° Narrow	<b>HC</b>	3000	>98	960	<2	<b>12</b>
	<b>CM52</b> Trimless	<b>E</b> 20° Medium	<b>HW</b>	2700	>90	1050	<2	<b>31</b>
		<b>K</b> - Without optics	<b>HQ</b>	3000	>90	1100	<2	
			<b>WW</b>	3000	>80	1300	<3	
			<b>NN</b>	4000	>80	1360	<3	
LED nominal lumen								


12W COBLED		Lumen delivered up to 1455lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>BM53</b> Visible trim	<b>B</b> 12° Narrow	<b>HC</b>	3000	>98	1250	<2	<b>12</b>
	<b>CM53</b> Trimless	<b>E</b> 20° Medium	<b>HW</b>	2700	>90	1370	<2	<b>31</b>
		<b>K</b> - Without optics	<b>HQ</b>	3000	>90	1420	<2	
			<b>WW</b>	3000	>80	1700	<3	
			<b>NN</b>	4000	>80	1775	<3	
LED nominal lumen								

12W Warm Dimming COBLED		Lumen delivered up to 690lm / Lumen maintenance: L70 B50=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>BM53</b> Visible trim	<b>B</b> 27° Medium	<b>DT</b>	1700-3000	>95	100-1000	<4	<b>12</b>
	<b>CM53</b> Trimless							<b>31</b>
LED nominal lumen								


# Ø 60 mm | Performance



Collettere apparente/  
Conaro visibile

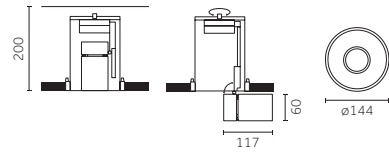

Collettere apparente/  
Conaro visibile

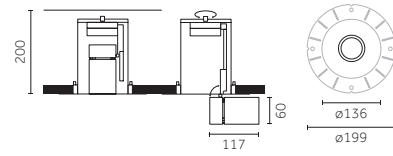

Code example:

X . **BM62** . B . **HW** . **12**

Accessories: p.491  
Finishes: p.380  
Drivers: p.512-513  
Photometric data:  
www.reggiani.net

## 9W COBLED

Lumen delivered up to 1200 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>BM62</b> Visible trim	<b>B</b> 13° Narrow	<b>HC</b>	3000	>98	960	<2	<b>12</b>
	<b>CM62</b> Trimless	<b>E</b> 24° Medium	<b>HW</b>	2700	>90	1050	<2	<b>31</b>
		<b>H</b> 40° Wide	<b>HQ</b>	3000	>90	1100	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	1300	<3	
			<b>NN</b>	4000	>80	1360	<3	

LED nominal lumen

## 12W COBLED

Lumen delivered up to 1560 lm / Lumen maintenance: L80 B10=50,000h


Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>BM63</b> Visible trim	<b>B</b> 13° Narrow	<b>HC</b>	3000	>98	1250	<2	<b>12</b>
	<b>CM63</b> Trimless	<b>E</b> 24° Medium	<b>HW</b>	2700	>90	1370	<2	<b>31</b>
		<b>H</b> 40° Wide	<b>HQ</b>	3000	>90	1420	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	1700	<3	
			<b>NN</b>	4000	>80	1775	<3	

LED nominal lumen




## Ø 60 mm | Precision | Accessories

### Optiques interchangeables IOS/ Ópticas intercambiables IOS



**Description**  
Precision - Faisceau étroit/  
Precision - Haz de luz estrecho  
(12°-9W, 12W)

**Code**  
**0.35125.0000**



**Description**  
Precision - Faisceau moyen/  
Precision - Haz de luz medio  
(20°-9W, 12W)

**Code**  
**0.35126.0000**

Non applicable aux références/No para códigos: **TM52A / UM52A / BM53B.DT / CM53B.DT**

Non applicable aux références/No para códigos: **TM52A / UM52A / BM53B.DT / CM53B.DT**

### Accessoires pour optique/ Accesorios de las ópticas



**Description**  
Filtres en verre 1 mm/  
Filtro en cristal de 1 mm


**Code**  
**0.26402.00**

**Finishes**  
4A  
5A  
6A  
7A  
8A  
9A



**Description**  
Grille en nid d'abeilles, maille fine/  
Rejilla alveolar de textura tupida

**Code**  
**0.26442.0000**



**Description**  
Grille en nid d'abeilles, maille large/  
Rejilla alveolar de textura ancha

**Code**  
**0.26450.0000**



**Description**  
Lames pour gel coloré (2 pièces)/  
Plaquetas de cristal para gel colorado  
(2 piezas)

**Code**  
**0.26410.0000**



**Description**  
Lentille pour faisceau elliptique/  
Lente para haz de luz elliptico

**Code**  
**0.26457.0000**



**Description**  
Filtre sélectif 3000K - 2700K /  
Filtro selector 3000K - 2700K

**Code**  
**0.26559.0000**




**Description**  
Lentille opale/  
Lente opalescente

**Code**  
**0.26462.0000**



**Description**  
Filtre sélectif 2700K - 2500K /  
Filtro selector 2700K - 2500K

**Code**  
**0.26418.0000**



**Description**  
Lentille diffusante/  
Lente difusora

**Code**  
**0.26470.0000**




**Description**  
Filtre sélectif 2700K - 2200K /  
Filtro selector 2700K - 2200K

**Code**  
**0.26426.0000**




**Description**  
Grille en croix/  
Rejilla cruciforme

**Code**  
**0.26477.0000**



**Description**  
Filtre sélectif 2700K - 2000K /  
Filtro selector 2700K - 2000K

**Code**  
**0.26434.0000**



**Description**  
Volets coupe-flux/  
Aletas antideslumbrantes

**Code**  
**0.26485.0000**



**Description**  
Filtre sélectif 3000K - 3600K /  
Filtro selector 3000K - 3600K

**Code**  
**0.26567.0000**



**Description**  
Cône 45° wall washer/  
Cono 45° wall washer

**Code**  
**0.26489.00**

**Finishes**  
12  
31









**Description**  
Filtre sélectif 3000K - 4000K /  
Filtro selector 3000K - 4000K
























**Code**  
**0.26575.0000**

## Ø 60 mm | Performance | Accessories

### Optiques interchangeables IOS/ Ópticas intercambiables IOS


		<b>Description</b> Performance - Faisceau étroit/ Performance - Haz de luz estrecho (13°-9W, 12W)	<b>Code</b> <b>0.35145.0000</b>			<b>Description</b> Performance - Faisceau large/ Performance - Haz de luz ancho (40°-9W, 12W)	<b>Code</b> <b>0.35147.0000</b>
		<b>Description</b> Performance - Faisceau moyen/ Performance - Haz de luz medio (24°-9W, 12W)	<b>Code</b> <b>0.35146.0000</b>				

### Accessoires pour optique/ Accesorios de las ópticas


	<b>Description</b> Filtres en verre 1 mm/ Filtro en cristal de 1 mm	<b>Code</b> <b>0.26403.00</b>	<b>Finishes</b> 4A  5A  6A  7A  8A  9A 		<b>Description</b> Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	<b>Code</b> <b>0.26576.0000</b>	
	<b>Description</b> Lames pour gel coloré (2 piezas)/ Plaquetas de cristal para gel colorado (2 piezas)	<b>Code</b> <b>0.26411.0000</b>			<b>Description</b> Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida	<b>Code</b> <b>0.26443.0000</b>	
	<b>Description</b> Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	<b>Code</b> <b>0.26560.0000</b>			<b>Description</b> Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha	<b>Code</b> <b>0.26451.0000</b>	
	<b>Description</b> Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	<b>Code</b> <b>0.26419.0000</b>			<b>Description</b> Lentille pour faisceau elliptique/ Lente para haz de luz elíptico	<b>Code</b> <b>0.26493.0000</b>	
	<b>Description</b> Filtre sélectif 2700K - 2200K / Filtro selector 2700K - 2200K	<b>Code</b> <b>0.26427.0000</b>			<b>Description</b> Lentille opale/ Lente opalescente	<b>Code</b> <b>0.26463.0000</b>	
	<b>Description</b> Filtre sélectif 2700K - 2000K / Filtro selector 2700K - 2000K	<b>Code</b> <b>0.26435.0000</b>			<b>Description</b> Lentille diffusante/ Lente difusora	<b>Code</b> <b>0.26471.0000</b>	
	<b>Description</b> Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	<b>Code</b> <b>0.26568.0000</b>			<b>Description</b> Grille en croix / Rejilla cruciforme	<b>Code</b> <b>0.26481.0000</b>	
					<b>Description</b> Cône 45° wall washer/ Cono 45° wall washer	<b>Code</b> <b>0.26497.00</b>	<b>Finishes</b> 12  31 




Ø 95 mm | Precision



Collerette apparente/  
Con aro visibile

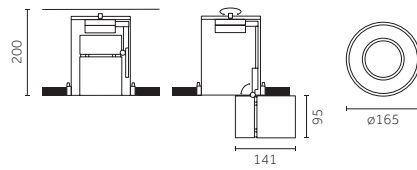

Collerette apparente/  
Con aro visibile

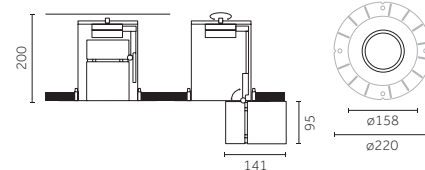

Code example:  
X . **DM53** B . **HC** **12**

Accessories: p.494  
Finishes: p.380  
Drivers: p.512-513  
Photometric data:  
www.reggiani.net

**12 W COB LED** Lumen delivered up to 1690lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>DM53</b> Visible trim	<b>B</b> 12° Narrow	<b>HC</b>	3000	>98	1323	<2	<b>12</b>
	<b>FM53</b> Trimless	<b>E</b> 24° Medium	<b>HW</b>	2700	>90	1491	<2	<b>31</b>
		<b>K</b> - Without optics	<b>HQ</b>	3000	>90	1533	<2	
			<b>WW</b>	3000	>80	1859	<3	
			<b>NN</b>	4000	>80	1920	<3	

LED nominal lumen

**17 W COB LED** Lumen delivered up to 1510lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>VM54</b> Visible trim	<b>A</b> 7° Very narrow	<b>HC</b>	3000	>98	1700	<2	<b>12</b>
	<b>ZM54</b> Trimless		<b>HW</b>	2700	>90	1870	<2	<b>31</b>
			<b>HQ</b>	3000	>90	1920	<2	
			<b>WW</b>	3000	>80	2320	<3	
			<b>NN</b>	4000	>80	2400	<3	

LED nominal lumen

**17 W COB LED** Lumen delivered up to 2350lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>DM54</b> Visible trim	<b>B</b> 12° Narrow	<b>HC</b>	3000	>98	1834	<2	<b>12</b>
	<b>FM54</b> Trimless	<b>E</b> 24° Medium	<b>HW</b>	2700	>90	2067	<2	<b>31</b>
		<b>K</b> - Without optics	<b>HQ</b>	3000	>90	2122	<2	
			<b>WW</b>	3000	>80	2582	<3	
			<b>NN</b>	4000	>80	2665	<3	

LED nominal lumen

**24 W COB LED** Lumen delivered up to 3170lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>DM56</b> Visible trim	<b>B</b> 12° Narrow	<b>HC</b>	3000	>98	2476	<2	<b>12</b>
	<b>FM56</b> Trimless	<b>E</b> 24° Medium	<b>HW</b>	2700	>90	2792	<2	<b>31</b>
		<b>K</b> - Without optics	<b>HQ</b>	3000	>90	2860	<2	
			<b>WW</b>	3000	>80	3487	<3	
			<b>NN</b>	4000	>80	3602	<3	

LED nominal lumen

**33 W COB LED** Lumen delivered up to 4080lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>DM58</b> Visible trim	<b>B</b> 12° Narrow	<b>HC</b>	3000	>98	3142	<2	<b>12</b>
	<b>FM58</b> Trimless	<b>E</b> 24° Medium	<b>HW</b>	2700	>90	3635	<2	<b>31</b>
		<b>K</b> - Without optics	<b>HQ</b>	3000	>90	3735	<2	
			<b>WW</b>	3000	>80	4510	<3	
			<b>NN</b>	4000	>80	4695	<3	

LED nominal lumen

**33 W Warm Dimming COB LED** Lumen delivered up to 1520lm / Lumen maintenance: L70 B50=50,000h


Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>DM58</b> Visible trim	<b>B</b> 25° Medium	<b>DT</b>	1700-3000	>95	100-3100	<4	<b>12</b>
	<b>FM58</b> Trimless							<b>31</b>

LED nominal lumen



# Ø 95 mm | Performance



Collettere apparente/  
Conaro visibile

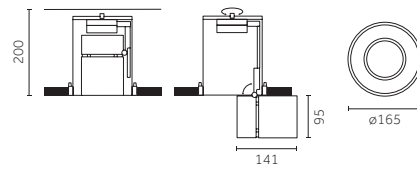

Collettere apparente/  
Conaro visibile

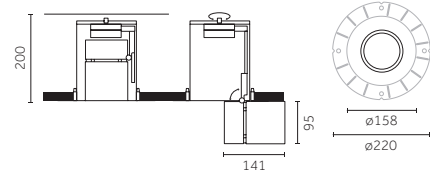

Code example:

X . **DM63** . B . **HC** . **12**

Accessories: p.495  
Finishes: p.380  
Drivers: p.512-513  
Photometric data:  
www.reggiani.net

## 12 W COBLED

Lumen delivered up to 1800 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>DM63</b> Visible trim	<b>B</b> 10° Narrow	<b>HC</b>	3000	>98	1323	<2	<b>12</b>
	<b>FM63</b> Trimless	<b>E</b> 20° Medium	<b>HW</b>	2700	>90	1491	<2	<b>31</b>
		<b>H</b> 31° Wide	<b>HQ</b>	3000	>90	1533	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	1859	<3	
			<b>NN</b>	4000	>80	1920	<3	

LED nominal lumen

## 17 W COBLED

Lumen delivered up to 2500 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>DM64</b> Visible trim	<b>B</b> 10° Narrow	<b>HC</b>	3000	>98	1834	<2	<b>12</b>
	<b>FM64</b> Trimless	<b>E</b> 20° Medium	<b>HW</b>	2700	>90	2067	<2	<b>31</b>
		<b>H</b> 31° Wide	<b>HQ</b>	3000	>90	2122	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	2582	<3	
			<b>NN</b>	4000	>80	2665	<3	

LED nominal lumen

## 24 W COBLED

Lumen delivered up to 3300 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>DM66</b> Visible trim	<b>B</b> 10° Narrow	<b>HC</b>	3000	>98	2476	<2	<b>12</b>
	<b>FM66</b> Trimless	<b>E</b> 20° Medium	<b>HW</b>	2700	>90	2792	<2	<b>31</b>
		<b>H</b> 31° Wide	<b>HQ</b>	3000	>90	2860	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	3487	<3	
			<b>NN</b>	4000	>80	3602	<3	

LED nominal lumen

## 33 W COBLED



Lumen delivered up to 4130 lm / Lumen maintenance: L80 B10=50,000h



Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>DM68</b> Visible trim	<b>B</b> 10° Narrow	<b>HC</b>	3000	>98	3142	<2	<b>12</b>
	<b>FM68</b> Trimless	<b>E</b> 20° Medium	<b>HW</b>	2700	>90	3635	<2	<b>31</b>
		<b>H</b> 31° Wide	<b>HQ</b>	3000	>90	3735	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	4510	<3	
			<b>NN</b>	4000	>80	4695	<3	

LED nominal lumen

Ø 95 mm | Precision | Accessories

Optiques interchangeables IOS/  
Ópticas intercambiables IOS








		<b>Description</b> Precision - Faisceau étroit / Precision - Haz de luz estrecho (12°-12W, 17W, 24W, 33W)	<b>Code</b> <u>0.35135.0000</u>
---	---	--	------------------------------------


		<b>Description</b> Precision - Faisceau moyen / Precision - Haz de luz medio (24°-12W, 17W, 24W, 33W)	<b>Code</b> <u>0.35136.0000</u>
---	--	--	------------------------------------


Non applicable aux références/No para códigos:VM54A / ZM54A / DM58B.DT / FM58B.DT


Non applicable aux références/No para códigos:VM54A / ZM54A / DM58B.DT / FM58B.DT


Accessoires pour optique/  
Accesorios de las ópticas


	<b>Description</b> Filtres en verre 1 mm / Filtro en cristal de 1 mm	<b>Code</b> <u>0.26406.00</u>	<b>Finishes</b> 4A  5A  6A  7A  8A  9A 
---	--	----------------------------------	---


	<b>Description</b> Grille en nid d'abeilles, maille fine / Rejilla alveolar de textura tupida	<b>Code</b> <u>0.26446.0000</u>
---	---	------------------------------------


	<b>Description</b> Grille en nid d'abeilles, maille large / Rejilla alveolar de textura ancha	<b>Code</b> <u>0.26454.0000</u>
---	---	------------------------------------

	<b>Description</b> Lames pour gel coloré (2 pièces) / Plaquetas de cristal para gel colorado (2 piezas)	<b>Code</b> <u>0.26414.0000</u>
---	--	------------------------------------


	<b>Description</b> Lentille pour faisceau elliptique / Lente para haz de luz elliptico	<b>Code</b> <u>0.26459.0000</u>
---	--	------------------------------------

	<b>Description</b> Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	<b>Code</b> <u>0.26563.0000</u>
--	--	------------------------------------


	<b>Description</b> Lentille opale / Lente opalescente	<b>Code</b> <u>0.26466.0000</u>
--	---	------------------------------------


	<b>Description</b> Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	<b>Code</b> <u>0.26422.0000</u>
---	--	------------------------------------


	<b>Description</b> Lentille diffusante / Lente difusora	<b>Code</b> <u>0.26474.0000</u>
---	---	------------------------------------




	<b>Description</b> Filtre sélectif 2700K - 2200K / Filtro selector 2700K - 2200K	<b>Code</b> <u>0.26430.0000</u>
---	--	------------------------------------


	<b>Description</b> Grille en croix / Rejilla cruciforme	<b>Code</b> <u>0.26479.0000</u>
---	---	------------------------------------

	<b>Description</b> Filtre sélectif 2700K - 2000K / Filtro selector 2700K - 2000K	<b>Code</b> <u>0.26438.0000</u>
---	--	------------------------------------

	<b>Description</b> Volets coupe-flux / Aletas antideslumbrantes	<b>Code</b> <u>0.26487.0000</u>
---	---	------------------------------------







	<b>Description</b> Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	<b>Code</b> <u>0.26571.0000</u>
---	--	------------------------------------

	<b>Description</b> Cône 45° wall washer / Cono 45° wall washer	<b>Code</b> <u>0.26491.00</u>	<b>Finishes</b> 12  31 
---	--	----------------------------------	---
























	<b>Description</b> Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	<b>Code</b> <u>0.26579.0000</u>
---	--	------------------------------------

Ø 95 mm | Performance | Accessories


Optiques interchangeables IOS/  
Ópticas intercambiables IOS

		<b>Description</b> Performance - Faisceau étroit/ Performance - Haz de luz estrecho (10°-12W, 17W, 24W, 33W)	<b>Code</b> <b>0.35155.0000</b>			<b>Description</b> Performance - Faisceau large/ Performance - Haz de luz ancho (31°-12W, 17W, 24W, 33W)	<b>Code</b> <b>0.35157.0000</b>
		<b>Description</b> Performance - Faisceau moyen/ Performance - Haz de luz medio (20°-12W, 17W, 24W, 33W)	<b>Code</b> <b>0.35156.0000</b>				


Accessoires pour optique/  
Accesorios de las ópticas

	<b>Description</b> Filtres en verre 1 mm/ Filtro en cristal de 1 mm	<b>Code</b> <b>0.26407.00</b>	<b>Finishes</b> 4A  5A  6A  7A  8A  9A 		<b>Description</b> Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	<b>Code</b> <b>0.26580.0000</b>	
	<b>Description</b> Lames pour gel coloré (2 piezas)/ Plaquetas de cristal para gel colorado (2 piezas)	<b>Code</b> <b>0.26415.0000</b>			<b>Description</b> Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida	<b>Code</b> <b>0.26447.0000</b>	
	<b>Description</b> Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	<b>Code</b> <b>0.26564.0000</b>			<b>Description</b> Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha	<b>Code</b> <b>0.26455.0000</b>	
	<b>Description</b> Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	<b>Code</b> <b>0.26423.0000</b>			<b>Description</b> Lentille pour faisceau elliptique/ Lente para haz de luz elíptico	<b>Code</b> <b>0.26495.0000</b>	
	<b>Description</b> Filtre sélectif 2700K - 2200K / Filtro selector 2700K - 2200K	<b>Code</b> <b>0.26431.0000</b>			<b>Description</b> Lentille opale/ Lente opalescente	<b>Code</b> <b>0.26467.0000</b>	
	<b>Description</b> Filtre sélectif 2700K - 2000K / Filtro selector 2700K - 2000K	<b>Code</b> <b>0.26439.0000</b>			<b>Description</b> Lentille diffusante/ Lente difusora	<b>Code</b> <b>0.26475.0000</b>	
	<b>Description</b> Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	<b>Code</b> <b>0.26572.0000</b>			<b>Description</b> Grille en croix / Rejilla cruciforme	<b>Code</b> <b>0.26483.0000</b>	
					<b>Description</b> Cône 45° wall washer/ Cono 45° wall washer	<b>Code</b> <b>0.26499.00</b>	<b>Finishes</b> 12  31 



Ø 60 mm | Precision



Collerette apparente/  
Con aro visibile

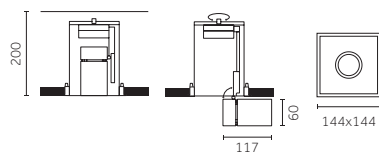

Collerette apparente/  
Con aro visibile

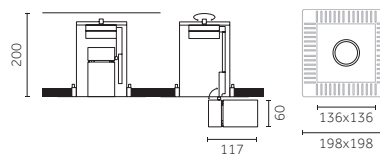

Code example:  
X . **KM52** . A . **HW** **12**

Accessories: p.498  
Finishes: p.380  
Drivers: p.512-513  
Photometric data:  
www.reggiani.net

9W POWERLED		Lumen delivered up to 770lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes	
X Not included	<b>KM52</b> Visible trim	<b>A</b> 8° Very narrow	<b>HW</b> 2700	>90	725	<3	<b>12</b>	
	<b>XM52</b> Trimless		<b>HQ</b> 3000	>90	730	<3	<b>31</b>	
			<b>WW</b> 3000	>80	845	<3		
			<b>NN</b> 4000	>80	940	<3		

LED nominal lumen

9W COBLED		Lumen delivered up to 1115lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes	
X Not included	<b>GM52</b> Visible trim	<b>B</b> 12° Narrow	<b>HC</b> 3000	>98	960	<2	<b>12</b>	
	<b>HM52</b> Trimless		<b>HW</b> 2700	>90	1050	<2	<b>31</b>	
		<b>K</b> - Without optics	<b>HQ</b> 3000	>90	1100	<2		
			<b>WW</b> 3000	>80	1300	<3		
			<b>NN</b> 4000	>80	1360	<3		

LED nominal lumen


12W COBLED		Lumen delivered up to 1455lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes	
X Not included	<b>GM53</b> Visible trim	<b>B</b> 12° Narrow	<b>HC</b> 3000	>98	1250	<2	<b>12</b>	
	<b>HM53</b> Trimless		<b>HW</b> 2700	>90	1370	<2	<b>31</b>	
		<b>K</b> - Without optics	<b>HQ</b> 3000	>90	1420	<2		
			<b>WW</b> 3000	>80	1700	<3		
			<b>NN</b> 4000	>80	1775	<3		

LED nominal lumen


12W Warm Dimming COBLED		Lumen delivered up to 690lm / Lumen maintenance: L70 B50=50,000h						
Driver	Version	Optics	LED K	CRI	lm	SDCM	Finishes	
X Not included	<b>GM53</b> Visible trim	<b>B</b> 27° Medium	<b>DT</b> 1700-3000	>95	100-1000	<4	<b>12</b>	
	<b>HM53</b> Trimless					<b>31</b>		

LED nominal lumen



# Ø 60 mm | Performance



Collettere apparente/  
Conaro visibile

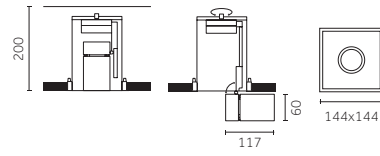

Collettere invisibile/  
Conaro invisibile

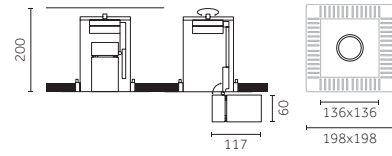

Code example:

X . **GM62** . B . **HC** . **12**

Accessories: p.499  
 Finishes: p.380  
 Drivers: p.512-513  
 Photometric data:  
 www.reggiani.net

## 9W COBLED

Lumen delivered up to 1200 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GM62 Visible trim	B 13° Narrow	HC	3000	>98	960	<2	12
		E 24° Medium	HW	2700	>90	1050	<2	31
	H 40° Wide	HQ	3000	>90	1100	<2		
	K - Without optics	WW	3000	>80	1300	<3		
	NN	4000	>80	1360	<3			

LED nominal lumen

## 12W COBLED


Lumen delivered up to 4560 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GM63 Visible trim	B 13° Narrow	HC	3000	>98	1250	<2	12
		E 24° Medium	HW	2700	>90	1370	<2	31
	H 40° Wide	HQ	3000	>90	1420	<2		
	K - Without optics	WW	3000	>80	1700	<3		
	NN	4000	>80	1775	<3			

LED nominal lumen




## Ø 60 mm | Precision | Accessories

Optiques interchangeables IOS/  
Ópticas intercambiables IOS

**Description**  
Precision - Faisceau étroit/  
Precision - Haz de luz estrecho  
(12°-9W, 12W)

**Code**  
**0.35125.0000**



**Description**  
Precision - Faisceau moyen/  
Precision - Haz de luz medio  
(20°-9W, 12W)

**Code**  
**0.35126.0000**

Non applicable aux références/No para códigos:KM52A / XM52A / GM53B.DT / HM53B.DT


Non applicable aux références/No para códigos:KM52A / XM52A / GM53B.DT / HM53B.DT

Accessoires pour optique/  
Accesorios de las ópticas

**Description**  
Filtres en verre 1 mm/  
Filtro en cristal de 1 mm


**Code**  
**0.26402.00**

**Finishes**



**Description**  
Grille en nid d'abeilles, maille fine/  
Rejilla alveolar de textura tupida

**Code**  
**0.26442.0000**



**Description**  
Grille en nid d'abeilles, maille large/  
Rejilla alveolar de textura ancha

**Code**  
**0.26450.0000**



**Description**  
Lames pour gel coloré (2 pièces)/  
Plaquetas de cristal para gel colorado  
(2 piezas)

**Code**  
**0.26410.0000**



**Description**  
Lentille pour faisceau elliptique/  
Lente para haz de luz elliptico

**Code**  
**0.26457.0000**



**Description**  
Filtre sélectif 3000K - 2700K /  
Filtro selector 3000K - 2700K

**Code**  
**0.26559.0000**




**Description**  
Lentille opale/  
Lente opalescente

**Code**  
**0.26462.0000**



**Description**  
Filtre sélectif 2700K - 2500K /  
Filtro selector 2700K - 2500K

**Code**  
**0.26418.0000**



**Description**  
Lentille diffusante/  
Lente difusora

**Code**  
**0.26470.0000**




**Description**  
Filtre sélectif 2700K - 2200K /  
Filtro selector 2700K - 2200K

**Code**  
**0.26426.0000**




**Description**  
Grille en croix/  
Rejilla cruciforme

**Code**  
**0.26477.0000**



**Description**  
Filtre sélectif 2700K - 2000K /  
Filtro selector 2700K - 2000K

**Code**  
**0.26434.0000**



**Description**  
Volets coupe-flux/  
Aletas antideslumbrantes

**Code**  
**0.26485.0000**



**Description**  
Filtre sélectif 3000K - 3600K /  
Filtro selector 3000K - 3600K

**Code**  
**0.26567.0000**



**Description**  
Cône 45° wall washer/  
Cono 45° wall washer

**Code**  
**0.26489.00**

**Finishes**

**12**  
**31**









**Description**  
Filtre sélectif 3000K - 4000K /  
Filtro selector 3000K - 4000K
























**Code**  
**0.26575.0000**

## Ø 60 mm | Performance | Accessories

### Optiques interchangeables IOS/ Ópticas intercambiables IOS


		<b>Description</b> Performance - Faisceau étroit/ Performance - Haz de luz estrecho (13°-9W, 12W)	<b>Code</b> <b>0.35145.0000</b>			<b>Description</b> Performance - Faisceau large/ Performance - Haz de luz ancho (40°-9W, 12W)	<b>Code</b> <b>0.35147.0000</b>
		<b>Description</b> Performance - Faisceau moyen/ Performance - Haz de luz medio (24°-9W, 12W)	<b>Code</b> <b>0.35146.0000</b>				

### Accessoires pour optique/ Accesorios de las ópticas


	<b>Description</b> Filtres en verre 1 mm/ Filtro en cristal de 1 mm	<b>Code</b> <b>0.26403.00</b>	<b>Finishes</b> 4A  5A  6A  7A  8A  9A 		<b>Description</b> Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	<b>Code</b> <b>0.26576.0000</b>	
	<b>Description</b> Lames pour gel coloré (2 piezas)/ Plaquetas de cristal para gel colorado (2 piezas)	<b>Code</b> <b>0.26411.0000</b>			<b>Description</b> Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida	<b>Code</b> <b>0.26443.0000</b>	
	<b>Description</b> Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	<b>Code</b> <b>0.26560.0000</b>			<b>Description</b> Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha	<b>Code</b> <b>0.26451.0000</b>	
	<b>Description</b> Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	<b>Code</b> <b>0.26419.0000</b>			<b>Description</b> Lentille pour faisceau elliptique/ Lente para haz de luz elíptico	<b>Code</b> <b>0.26493.0000</b>	
	<b>Description</b> Filtre sélectif 2700K - 2200K / Filtro selector 2700K - 2200K	<b>Code</b> <b>0.26427.0000</b>			<b>Description</b> Lentille opale/ Lente opalescente	<b>Code</b> <b>0.26463.0000</b>	
	<b>Description</b> Filtre sélectif 2700K - 2000K / Filtro selector 2700K - 2000K	<b>Code</b> <b>0.26435.0000</b>			<b>Description</b> Lentille diffusante/ Lente difusora	<b>Code</b> <b>0.26471.0000</b>	
	<b>Description</b> Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	<b>Code</b> <b>0.26568.0000</b>			<b>Description</b> Grille en croix / Rejilla cruciforme	<b>Code</b> <b>0.26481.0000</b>	
					<b>Description</b> Cône 45° wall washer/ Cono 45° wall washer	<b>Code</b> <b>0.26497.00</b>	<b>Finishes</b> 12  31 





Ø 95 mm | Precision



Collerette apparente/  
Con aro visibile

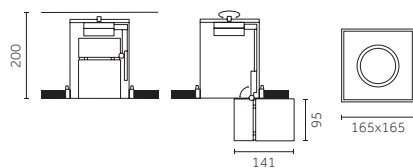

Collerette apparente/  
Con aro visibile

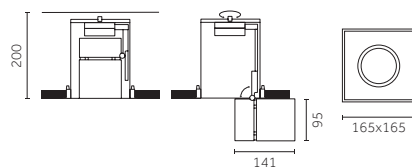

Code example:  
X . LM53 B . HC 12

Accessories: p.502  
Finishes: p.380  
Drivers: p.512-513  
Photometric data:  
www.reggiani.net

**12 W COB LED** Lumen delivered up to 1690 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LM53 Visible trim	B 12° Narrow	HC	3000	>98	1323	<2	12
	MM53 Trimless	E 24° Medium	HW	2700	>90	1491	<2	31
		K - Without optics	HQ	3000	>90	1533	<2	
			WW	3000	>80	1859	<3	
			NN	4000	>80	1920	<3	

LED nominal lumen

**17 W COB LED** Lumen delivered up to 1510 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	WM54 Visible trim	A 7° Very narrow	HC	3000	>98	1700	<2	12
	YM54 Trimless		HW	2700	>90	1870	<2	31
			HQ	3000	>90	1920	<2	
			WW	3000	>80	2320	<3	
			NN	4000	>80	2400	<3	

LED nominal lumen

**17 W COB LED** Lumen delivered up to 2350 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LM54 Visible trim	B 12° Narrow	HC	3000	>98	1834	<2	12
	MM54 Trimless	E 24° Medium	HW	2700	>90	2067	<2	31
		K - Without optics	HQ	3000	>90	2122	<2	
			WW	3000	>80	2582	<3	
			NN	4000	>80	2665	<3	

LED nominal lumen

**24 W COB LED** Lumen delivered up to 3170 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LM56 Visible trim	B 12° Narrow	HC	3000	>98	2476	<2	12
	MM56 Trimless	E 24° Medium	HW	2700	>90	2792	<2	31
		K - Without optics	HQ	3000	>90	2860	<2	
			WW	3000	>80	3487	<3	
			NN	4000	>80	3602	<3	

LED nominal lumen

**33 W COB LED** Lumen delivered up to 4080 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LM58 Visible trim	B 12° Narrow	HC	3000	>98	3142	<2	12
	MM58 Trimless	E 24° Medium	HW	2700	>90	3635	<2	31
		K - Without optics	HQ	3000	>90	3735	<2	
			WW	3000	>80	4510	<3	
			NN	4000	>80	4695	<3	


LED nominal lumen

**33 W Warm Dimming COB LED** Lumen delivered up to 1520 lm / Lumen maintenance: L70 B50=50,000h


Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LM58 Visible trim	B 25° Medium	DT	1700-3000	>95	100-3100	<4	12
	MM58 Trimless							31

LED nominal lumen



# Ø 95 mm | Performance



Collerette apparente/  
Conaro visibile

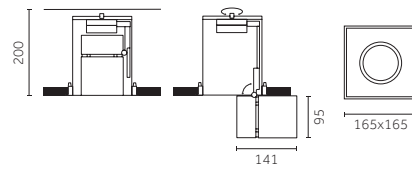

Collerette apparente/  
Conaro visibile

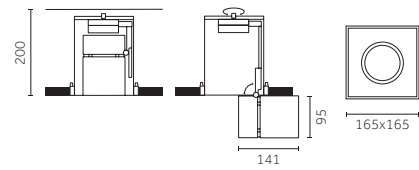

Code example:

X . **LM63** . B . **HC** . **12**

Accessories: p.503  
Finishes: p.380  
Drivers: p.512-513  
Photometric data:  
www.reggiani.net

## 12 W COBLED Lumen delivered up to 1800 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>LM63</b> Visible trim	B 10° Narrow	<b>HC</b>	3000	>98	1323	<2	<b>12</b>
		E 20° Medium	<b>HW</b>	2700	>90	1491	<2	<b>31</b>
	H 31° Wide	<b>HQ</b>	3000	>90	1533	<2		
	K - Without optics	<b>WW</b>	3000	>80	1859	<3		
		<b>NN</b>	4000	>80	1920	<3		

LED nominal lumen

## 17 W COBLED Lumen delivered up to 2500 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>LM64</b> Visible trim	B 10° Narrow	<b>HC</b>	3000	>98	1834	<2	<b>12</b>
		E 20° Medium	<b>HW</b>	2700	>90	2067	<2	<b>31</b>
	H 31° Wide	<b>HQ</b>	3000	>90	2122	<2		
	K - Without optics	<b>WW</b>	3000	>80	2582	<3		
		<b>NN</b>	4000	>80	2665	<3		

LED nominal lumen

## 24 W COBLED Lumen delivered up to 3300 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>LM66</b> Visible trim	B 10° Narrow	<b>HC</b>	3000	>98	2476	<2	<b>12</b>
		E 20° Medium	<b>HW</b>	2700	>90	2792	<2	<b>31</b>
	H 31° Wide	<b>HQ</b>	3000	>90	2860	<2		
	K - Without optics	<b>WW</b>	3000	>80	3487	<3		
		<b>NN</b>	4000	>80	3602	<3		


LED nominal lumen

## 33 W COBLED Lumen delivered up to 4130 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>LM68</b> Visible trim	B 10° Narrow	<b>HC</b>	3000	>98	3142	<2	<b>12</b>
		E 20° Medium	<b>HW</b>	2700	>90	3635	<2	<b>31</b>
	H 31° Wide	<b>HQ</b>	3000	>90	3735	<2		
	K - Without optics	<b>WW</b>	3000	>80	4510	<3		
		<b>NN</b>	4000	>80	4695	<3		


LED nominal lumen

## Ø 95 mm | Precision | Accessories

Optiques interchangeables IOS/  
Ópticas intercambiables IOS

**Description**  
Precision - Faisceau étroit /  
Precision - Haz de luz estrecho  
(12°-12W, 17W, 24W, 33W)

**Code**  
**0.35135.0000**



**Description**  
Precision - Faisceau moyen /  
Precision - Haz de luz medio  
(24°-12W, 17W, 24W, 33W)

**Code**  
**0.35136.0000**

Non applicable aux références/No para códigos:WM54A / YM54A / LM58B.DT / MM58B.DT


Non applicable aux références/No para códigos:WM54A / YM54A / LM58B.DT / MM58B.DT

Accessoires pour optique/  
Accesorios de las ópticas

**Description**  
Filtres en verre 1 mm /  
Filtro en cristal de 1 mm


**Code**  
**0.26406.00**

## Finishes



**Description**  
Grille en nid d'abeilles, maille fine /  
Rejilla alveolar de textura tupida

**Code**  
**0.26446.0000**



**Description**  
Grille en nid d'abeilles, maille large /  
Rejilla alveolar de textura ancha

**Code**  
**0.26454.0000**



**Description**  
Lames pour gel coloré (2 pièces) /  
Plaquetas de cristal para gel colorado  
(2 piezas)

**Code**  
**0.26414.0000**



**Description**  
Lentille pour faisceau elliptique /  
Lente para haz de luz elliptico

**Code**  
**0.26459.0000**



**Description**  
Filtre sélectif 3000K - 2700K /  
Filtro selector 3000K - 2700K

**Code**  
**0.26563.0000**




**Description**  
Lentille opale /  
Lente opalescente

**Code**  
**0.26466.0000**



**Description**  
Filtre sélectif 2700K - 2500K /  
Filtro selector 2700K - 2500K

**Code**  
**0.26422.0000**



**Description**  
Lentille diffusante /  
Lente difusora

**Code**  
**0.26474.0000**




**Description**  
Filtre sélectif 2700K - 2200K /  
Filtro selector 2700K - 2200K

**Code**  
**0.26430.0000**




**Description**  
Grille en croix /  
Rejilla cruciforme

**Code**  
**0.26479.0000**



**Description**  
Filtre sélectif 2700K - 2000K /  
Filtro selector 2700K - 2000K

**Code**  
**0.26438.0000**



**Description**  
Volets coupe-flux /  
Aletas antideslumbrantes

**Code**  
**0.26487.0000**



**Description**  
Filtre sélectif 3000K - 3600K /  
Filtro selector 3000K - 3600K

**Code**  
**0.26571.0000**



**Description**  
Cône 45° wall washer /  
Cono 45° wall washer

**Code**  
**0.26491.00**

## Finishes

**12**  
**31**









**Description**  
Filtre sélectif 3000K - 4000K /  
Filtro selector 3000K - 4000K
























**Code**  
**0.26579.0000**

## Ø 95 mm | Performance | Accessories


### Optiques IOS/ Ópticas IOS

		<b>Description</b> Performance - Faisceau étroit (10°)/ Performance - Haz de luz estrecho (10°) (10°-12W, 17W, 24W, 33W)	<b>Code</b> <b>0.35155.0000</b>			<b>Description</b> Performance - Faisceau large (31°)/ Performance - Haz de luz ancho (31°) (39°-12W, 17W, 24W, 33W)	<b>Code</b> <b>0.35157.0000</b>
		<b>Description</b> Performance - Faisceau moyen (20°)/ Performance - Haz de luz medio (20°) (20°-12W, 17W, 24W, 33W)	<b>Code</b> <b>0.35156.0000</b>				


### Accessoires pour optique/ Accesorios de las ópticas

	<b>Description</b> Filtres en verre 1 mm/ Filtro en cristal de 1 mm	<b>Code</b> <b>0.26407.00</b>	<b>Finishes</b> 4A  5A  6A  7A  8A  9A 		<b>Description</b> Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	<b>Code</b> <b>0.26580.0000</b>	
	<b>Description</b> Lames pour gel coloré (2 piezas)/ Plaquetas de cristal para gel colorado (2 piezas)	<b>Code</b> <b>0.26415.0000</b>			<b>Description</b> Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida	<b>Code</b> <b>0.26447.0000</b>	
	<b>Description</b> Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	<b>Code</b> <b>0.26564.0000</b>			<b>Description</b> Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha	<b>Code</b> <b>0.26455.0000</b>	
	<b>Description</b> Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	<b>Code</b> <b>0.26423.0000</b>			<b>Description</b> Lentille pour faisceau elliptique/ Lente para haz de luz elíptico	<b>Code</b> <b>0.26495.0000</b>	
	<b>Description</b> Filtre sélectif 2700K - 2200K / Filtro selector 2700K - 2200K	<b>Code</b> <b>0.26431.0000</b>			<b>Description</b> Lentille opale/ Lente opalescente	<b>Code</b> <b>0.26467.0000</b>	
	<b>Description</b> Filtre sélectif 2700K - 2000K / Filtro selector 2700K - 2000K	<b>Code</b> <b>0.26439.0000</b>			<b>Description</b> Lentille diffusante/ Lente difusora	<b>Code</b> <b>0.26475.0000</b>	
	<b>Description</b> Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	<b>Code</b> <b>0.26572.0000</b>			<b>Description</b> Grille en croix / Rejilla cruciforme	<b>Code</b> <b>0.26483.0000</b>	
					<b>Description</b> Cône 45° wall washer/ Cono 45° wall washer	<b>Code</b> <b>0.26499.00</b>	<b>Finishes</b> 12  31 



Ø 60 mm | Precision



Collerette apparente/  
Con aro visibile

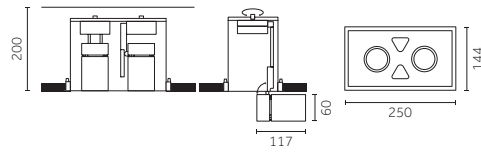

Collerette apparente/  
Con aro visibile

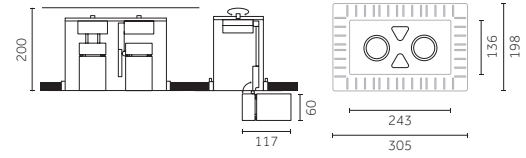

Code example:  
**X** . **1M52** **A** . **HW** **12**

Accessories: p.506  
Finishes: p.380  
Drivers: p.512-513  
Photometric data:  
www.reggiani.net

**9 W POWERLED** Lumen delivered up to 2x770 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<b>X</b> Not included	<b>1M52</b> Visible trim	<b>A</b> 8° Very narrow	<b>HW</b> 2700	>90	2x725	<3	<b>12</b>	<input type="checkbox"/>
	<b>2M52</b> Trimless		<b>HQ</b> 3000	>90	2x730	<3	<b>31</b>	<input checked="" type="checkbox"/>
			<b>WW</b> 3000	>80	2x845	<3		
			<b>NN</b> 4000	>80	2x940	<3		

LED nominal lumen

**9 W COBLED** Lumen delivered up to 2x1115 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<b>X</b> Not included	<b>NM52</b> Visible trim	<b>B</b> 12° Narrow	<b>HC</b> 3000	>98	2x960	<2	<b>12</b>	<input type="checkbox"/>
	<b>PM52</b> Trimless		<b>HW</b> 2700	>90	2x1050	<2	<b>31</b>	<input checked="" type="checkbox"/>
			<b>HQ</b> 3000	>90	2x1100	<2		
			<b>WW</b> 3000	>80	2x1300	<3		
		<b>K</b> - Without optics	<b>NN</b> 4000	>80	2x1360	<3		

LED nominal lumen

**12 W COBLED** Lumen delivered up to 2x1455 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<b>X</b> Not included	<b>NM53</b> Visible trim	<b>B</b> 12° Narrow	<b>HC</b> 3000	>98	2x1250	<2	<b>12</b>	<input type="checkbox"/>
	<b>PM53</b> Trimless		<b>HW</b> 2700	>90	2x1370	<2	<b>31</b>	<input checked="" type="checkbox"/>
			<b>HQ</b> 3000	>90	2x1420	<2		
			<b>WW</b> 3000	>80	2x1700	<3		
		<b>K</b> - Without optics	<b>NN</b> 4000	>80	2x1775	<3		

LED nominal lumen

**12 W Warm Dimming COBLED** Lumen delivered up to 2x690 lm / Lumen maintenance: L70 B50=50,000h


Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<b>X</b> Not included	<b>NM53</b> Visible trim	<b>B</b> 27° Medium	<b>DT</b> 1700-3000	>95	2x100-1000	<4	<b>12</b>	<input type="checkbox"/>
	<b>PM53</b> Trimless					<b>31</b>	<input checked="" type="checkbox"/>	

LED nominal lumen



# Ø 60 mm | Performance



Collettere apparente/  
Conaro visibile

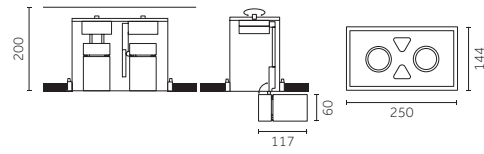

Collettere apparente/  
Conaro visibile

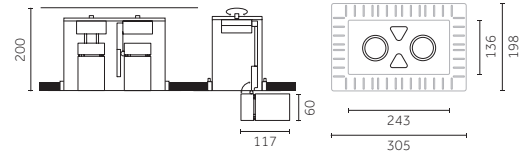

Code example:

X . **NM62** . B . **HC** . **12**

Accessories: p.507  
 Finishes: p.380  
 Drivers: p.512-513  
 Photometric data:  
 www.reggiani.net

## 9W COB LED

Lumen delivered up to 2x1200lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	NM62 Visible trim	B 13° Narrow	HC	3000	>98	2x960	<2	12
		E 24° Medium	HW	2700	>90	2x1050	<2	31
	H 40° Wide	HQ	3000	>90	2x1100	<2		
	K - Without optics	WW	3000	>80	2x1300	<3		
		NN	4000	>80	2x1360	<3		

LED nominal lumen

## 12W COB LED

Lumen delivered up to 2x1560lm / Lumen maintenance: L80 B10=50,000h


Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	NM63 Visible trim	B 13° Narrow	HC	3000	>98	2x1250	<2	12
		E 24° Medium	HW	2700	>90	2x1370	<2	31
	H 40° Wide	HQ	3000	>90	2x1420	<2		
	K - Without optics	WW	3000	>80	2x1700	<3		
		NN	4000	>80	2x1775	<3		

LED nominal lumen




## Ø 60 mm | Precision | Accessories

### Optiques interchangeables IOS/ Ópticas intercambiables IOS



**Description**  
Precision - Faisceau étroit/  
Precision - Haz de luz estrecho  
(12°-9W, 12W)

**Code**  
0.35125.0000



**Description**  
Precision - Faisceau moyen/  
Precision - Haz de luz medio  
(20°-9W, 12W)

**Code**  
0.35126.0000

Non applicable aux références/No para códigos:1M52A / 2M52A / NM53B.DT / PM53B.DT

Non applicable aux références/No para códigos:1M52A / 2M52A / NM53B.DT / PM53B.DT

### Accessoires pour optique/ Accesorios de las ópticas



**Description**  
Filtres en verre 1 mm/  
Filtro en cristal de 1 mm

**Code**  
0.26402.00


**Finishes**

4A	Red
5A	Green
6A	Blue
7A	Pink
8A	Yellow
9A	Orange



**Description**  
Grille en nid d'abeilles, maille fine/  
Rejilla alveolar de textura tupida

**Code**  
0.26442.0000



**Description**  
Grille en nid d'abeilles, maille large/  
Rejilla alveolar de textura ancha

**Code**  
0.26450.0000



**Description**  
Lames pour gel coloré (2 pièces)/  
Plaquetas de cristal para gel colorado  
(2 piezas)

**Code**  
0.26410.0000



**Description**  
Lentille pour faisceau elliptique/  
Lente para haz de luz elliptico

**Code**  
0.26457.0000



**Description**  
Filtre sélectif 3000K - 2700K /  
Filtro selector 3000K - 2700K

**Code**  
0.26559.0000




**Description**  
Lentille opale/  
Lente opalescente

**Code**  
0.26462.0000




**Description**  
Filtre sélectif 2700K - 2500K /  
Filtro selector 2700K - 2500K

**Code**  
0.26418.0000



**Description**  
Lentille diffusante/  
Lente difusora

**Code**  
0.26470.0000




**Description**  
Filtre sélectif 2700K - 2200K /  
Filtro selector 2700K - 2200K

**Code**  
0.26426.0000



**Description**  
Grille en croix/  
Rejilla cruciforme

**Code**  
0.26477.0000



**Description**  
Filtre sélectif 2700K - 2000K /  
Filtro selector 2700K - 2000K

**Code**  
0.26434.0000



**Description**  
Volets coupe-flux/  
Aletas antideslumbrantes

**Code**  
0.26485.0000



**Description**  
Filtre sélectif 3000K - 3600K /  
Filtro selector 3000K - 3600K

**Code**  
0.26567.0000



**Description**  
Cône 45° wall washer/  
Cono 45° wall washer

**Code**  
0.26489.00

**Finishes**  
12  
31









**Description**  
Filtre sélectif 3000K - 4000K /  
Filtro selector 3000K - 4000K
























**Code**  
0.26575.0000

Ø 60 mm | Performance | Accessories

Optiques interchangeables IOS/  
Ópticas intercambiables IOS

		<b>Description</b> Performance - Faisceau étroit/ Performance - Haz de luz estrecho (13°-9W, 12W)	<b>Code</b> <b>0.35145.0000</b>			<b>Description</b> Performance - Faisceau large/ Performance - Haz de luz ancho (40°-9W, 12W)	<b>Code</b> <b>0.35147.0000</b>
		<b>Description</b> Performance - Faisceau moyen/ Performance - Haz de luz medio (24°-9W, 12W)	<b>Code</b> <b>0.35146.0000</b>				

Accessoires pour optique/  
Accesorios de las ópticas


	<b>Description</b> Filtres en verre 1 mm/ Filtro en cristal de 1 mm	<b>Code</b> <b>0.26403.00</b>	<b>Finishes</b> 4A  5A  6A  7A  8A  9A 		<b>Description</b> Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	<b>Code</b> <b>0.26576.0000</b>	
	<b>Description</b> Lames pour gel coloré (2 piezas)/ Plaquetas de cristal para gel colorado (2 piezas)	<b>Code</b> <b>0.26411.0000</b>			<b>Description</b> Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida	<b>Code</b> <b>0.26443.0000</b>	
	<b>Description</b> Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	<b>Code</b> <b>0.26560.0000</b>			<b>Description</b> Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha	<b>Code</b> <b>0.26451.0000</b>	
	<b>Description</b> Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	<b>Code</b> <b>0.26419.0000</b>			<b>Description</b> Lentille pour faisceau elliptique/ Lente para haz de luz elíptico	<b>Code</b> <b>0.26493.0000</b>	
	<b>Description</b> Filtre sélectif 2700K - 2200K / Filtro selector 2700K - 2200K	<b>Code</b> <b>0.26427.0000</b>			<b>Description</b> Lentille opale/ Lente opalescente	<b>Code</b> <b>0.26463.0000</b>	
	<b>Description</b> Filtre sélectif 2700K - 2000K / Filtro selector 2700K - 2000K	<b>Code</b> <b>0.26435.0000</b>			<b>Description</b> Lentille diffusante/ Lente difusora	<b>Code</b> <b>0.26471.0000</b>	
	<b>Description</b> Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	<b>Code</b> <b>0.26568.0000</b>			<b>Description</b> Grille en croix / Rejilla cruciforme	<b>Code</b> <b>0.26481.0000</b>	
					<b>Description</b> Cône 45° wall washer/ Cono 45° wall washer	<b>Code</b> <b>0.26497.00</b>	<b>Finishes</b> 12  31 





Ø 95 mm | Precision



Collerette apparente/  
Con aro visibile

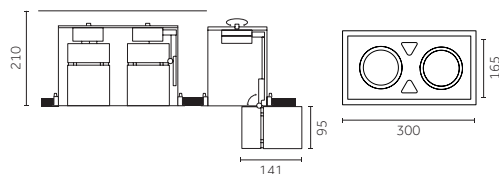

Collerette apparente/  
Con aro visibile

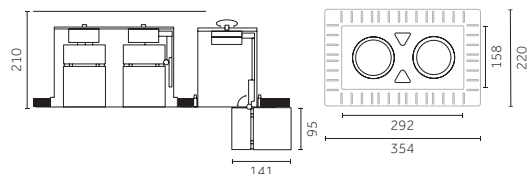

Code example:  
X . QM53 B . HC 12

Accessories: p.510  
Finishes: p.380  
Drivers: p.512-513  
Photometric data:  
www.reggiani.net

**12 W COB LED** Lumen delivered up to 2x 1690 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	QM53 Visible trim	B 12° Narrow	HC	3000	>98	2x1323	<2	12
	RM53 Trimless	E 24° Medium	HW	2700	>90	2x1491	<2	31
		K - Without optics	HQ	3000	>90	2x1533	<2	
			WW	3000	>80	2x1859	<3	
			NN	4000	>80	2x1920	<3	

LED nominal lumen

**17 W COB LED** Lumen delivered up to 2x 1510 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	3M54 Visible trim	A 7° Very narrow	HC	3000	>98	2x1700	<2	12
	4M54 Trimless		HW	2700	>90	2x1870	<2	31
			HQ	3000	>90	2x1920	<2	
			WW	3000	>80	2x2320	<3	
			NN	4000	>80	2x2400	<3	

LED nominal lumen

**17 W COB LED** Lumen delivered up to 2x 2350 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	QM54 Visible trim	B 12° Narrow	HC	3000	>98	2x1834	<2	12
	RM54 Trimless	E 24° Medium	HW	2700	>90	2x2067	<2	31
		K - Without optics	HQ	3000	>90	2x2122	<2	
			WW	3000	>80	2x2582	<3	
			NN	4000	>80	2x2665	<3	

LED nominal lumen

**24 W COB LED** Lumen delivered up to 2x 3170 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	QM56 Visible trim	B 12° Narrow	HC	3000	>98	2x2476	<2	12
	RM56 Trimless	E 24° Medium	HW	2700	>90	2x2792	<2	31
		K - Without optics	HQ	3000	>90	2x2860	<2	
			WW	3000	>80	2x3487	<3	
			NN	4000	>80	2x3602	<3	

LED nominal lumen

**33 W COB LED** Lumen delivered up to 2x 4080 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	QM58 Visible trim	B 12° Narrow	HC	3000	>98	3142	<2	12
	RM58 Trimless	E 24° Medium	HW	2700	>90	3635	<2	31
		K - Without optics	HQ	3000	>90	3735	<2	
			WW	3000	>80	4510	<3	
			NN	4000	>80	4695	<3	

LED nominal lumen

**33 W Warm Dimming COB LED** Lumen delivered up to 1520 lm / Lumen maintenance: L70 B50=50,000h


Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	QM58 Visible trim	B 27° Medium	DT	1700-3000	>95	2x100-3100	<4	12
	RM58 Trimless							31

LED nominal lumen



# Ø 95 mm | Performance



Collettere apparente/  
Conaro visibile

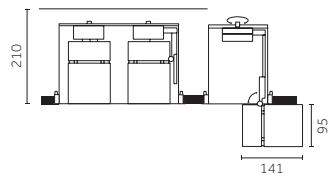

Collettere apparente/  
Conaro visibile

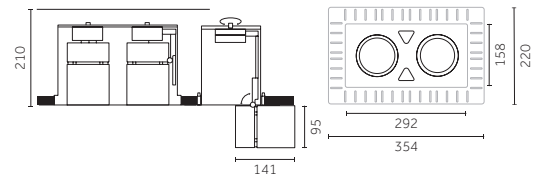

Code example:

X . **QM63** . **B** . **HC** . **12**

Accessories: p.511  
Finishes: p.380  
Drivers: p.512-513  
Photometric data:  
www.reggiani.net

12 W COBLED		Lumen delivered up to 2x1800 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>QM63</b> Visible trim	<b>B</b> 10° Narrow	<b>HC</b>	3000	>98	2x1323	<2	<b>12</b>
	<b>RM63</b> Trimless	<b>E</b> 20° Medium	<b>HW</b>	2700	>90	2x1491	<2	<b>31</b>
		<b>H</b> 31° Wide	<b>HQ</b>	3000	>90	2x1533	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	2x1859	<3	
			<b>NN</b>	4000	>80	2x1920	<3	

LED nominal lumen

17 W COBLED		Lumen delivered up to 2x2500 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>QM64</b> Visible trim	<b>B</b> 10° Narrow	<b>HC</b>	3000	>98	2x1834	<2	<b>12</b>
	<b>RM64</b> Trimless	<b>E</b> 20° Medium	<b>HW</b>	2700	>90	2x2067	<2	<b>31</b>
		<b>H</b> 31° Wide	<b>HQ</b>	3000	>90	2x2122	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	2x2582	<3	
			<b>NN</b>	4000	>80	2x2665	<3	

LED nominal lumen

24 W COBLED		Lumen delivered up to 2x3300 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>QM66</b> Visible trim	<b>B</b> 10° Narrow	<b>HC</b>	3000	>98	2x2476	<2	<b>12</b>
	<b>RM66</b> Trimless	<b>E</b> 20° Medium	<b>HW</b>	2700	>90	2x2792	<2	<b>31</b>
		<b>H</b> 31° Wide	<b>HQ</b>	3000	>90	2x2860	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	2x3487	<3	
			<b>NN</b>	4000	>80	2x3602	<3	


LED nominal lumen

33 W COBLED		Lumen delivered up to 2x4130 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>QM68</b> Visible trim	<b>B</b> 10° Narrow	<b>HC</b>	3000	>98	2x3142	<2	<b>12</b>
	<b>RM68</b> Trimless	<b>E</b> 20° Medium	<b>HW</b>	2700	>90	2x3635	<2	<b>31</b>
		<b>H</b> 31° Wide	<b>HQ</b>	3000	>90	2x3735	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	2x4510	<3	
			<b>NN</b>	4000	>80	2x4695	<3	

LED nominal lumen


## Ø 95 mm | Precision | Accessories

### Optiques interchangeables IOS/ Ópticas intercambiables IOS



**Description**  
Precision - Faisceau étroit /  
Precision - Haz de luz estrecho  
(12°-12W, 17W, 24W, 33W)

**Code**  
**0.35135.0000**



**Description**  
Precision - Faisceau moyen /  
Precision - Haz de luz medio  
(24°-12W, 17W, 24W, 33W)

**Code**  
**0.35136.0000**

Non applicable aux références/No para códigos: **3M54A / 4M54A / QM58B.DT / RM58B.DT**

Non applicable aux références/No para códigos: **3M54A / 4M54A / QM58B.DT / RM58B.DT**

### Accessoires pour optique/ Accesorios de las ópticas




**Description**  
Filtres en verre 1 mm /  
Filtro en cristal de 1 mm

**Code**  
**0.26406.00**


**Finishes**

4A	Red
5A	Green
6A	Blue
7A	Pink
8A	Yellow
9A	Orange



**Description**  
Grille en nid d'abeilles, maille fine /  
Rejilla alveolar de textura tupida

**Code**  
**0.26446.0000**



**Description**  
Grille en nid d'abeilles, maille large /  
Rejilla alveolar de textura ancha

**Code**  
**0.26454.0000**



**Description**  
Lames pour gel coloré (2 pièces) /  
Plaquetas de cristal para gel colorado  
(2 piezas)

**Code**  
**0.26414.0000**



**Description**  
Lentille pour faisceau elliptique /  
Lente para haz de luz elliptico

**Code**  
**0.26459.0000**



**Description**  
Filtre sélectif 3000K - 2700K /  
Filtro selector 3000K - 2700K

**Code**  
**0.26563.0000**




**Description**  
Lentille opale /  
Lente opalescente

**Code**  
**0.26466.0000**



**Description**  
Filtre sélectif 2700K - 2500K /  
Filtro selector 2700K - 2500K

**Code**  
**0.26422.0000**



**Description**  
Lentille diffusante /  
Lente difusora

**Code**  
**0.26474.0000**




**Description**  
Filtre sélectif 2700K - 2200K /  
Filtro selector 2700K - 2200K

**Code**  
**0.26430.0000**




**Description**  
Grille en croix /  
Rejilla cruciforme

**Code**  
**0.26479.0000**



**Description**  
Filtre sélectif 2700K - 2000K /  
Filtro selector 2700K - 2000K

**Code**  
**0.26438.0000**



**Description**  
Volets coupe-flux /  
Aletas antideslumbrantes

**Code**  
**0.26487.0000**



**Description**  
Filtre sélectif 3000K - 3600K /  
Filtro selector 3000K - 3600K

**Code**  
**0.26571.0000**









**Description**  
Cône 45° wall washer /  
Cono 45° wall washer

**Code**  
**0.26491.00**
























**Finishes**  
**12**  
**31**

## Ø 95 mm | Performance | Accessories

### Optiques interchangeables IOS/ Ópticas intercambiables IOS

		<b>Description</b> Performance - Faisceau étroit/ Performance - Haz de luz estrecho (10°-12W, 17W, 24W, 33W)	<b>Code</b> <b>0.35155.0000</b>			<b>Description</b> Performance - Faisceau large/ Performance - Haz de luz ancho (31°-12W, 17W, 24W, 33W)	<b>Code</b> <b>0.35157.0000</b>
		<b>Description</b> Performance - Faisceau moyen/ Performance - Haz de luz medio (20°-12W, 17W, 24W, 33W)	<b>Code</b> <b>0.35156.0000</b>				







### Accessoires pour optique/ Accesorios de las ópticas

	<b>Description</b> Filtres en verre 1 mm/ Filtro en cristal de 1 mm	<b>Code</b> <b>0.26407.00</b>	<b>Finishes</b> 4A  5A  6A  7A  8A  9A 		<b>Description</b> Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	<b>Code</b> <b>0.26580.0000</b>	
	<b>Description</b> Lames pour gel coloré (2 piezas)/ Plaquetas de cristal para gel colorado (2 piezas)	<b>Code</b> <b>0.26415.0000</b>			<b>Description</b> Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida	<b>Code</b> <b>0.26447.0000</b>	
	<b>Description</b> Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	<b>Code</b> <b>0.26564.0000</b>			<b>Description</b> Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha	<b>Code</b> <b>0.26455.0000</b>	
	<b>Description</b> Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	<b>Code</b> <b>0.26423.0000</b>			<b>Description</b> Lentille pour faisceau elliptique/ Lente para haz de luz elíptico	<b>Code</b> <b>0.26495.0000</b>	
	<b>Description</b> Filtre sélectif 2700K - 2200K / Filtro selector 2700K - 2200K	<b>Code</b> <b>0.26431.0000</b>			<b>Description</b> Lentille opale/ Lente opalescente	<b>Code</b> <b>0.26467.0000</b>	
	<b>Description</b> Filtre sélectif 2700K - 2000K / Filtro selector 2700K - 2000K	<b>Code</b> <b>0.26439.0000</b>			<b>Description</b> Lentille diffusante/ Lente difusora	<b>Code</b> <b>0.26475.0000</b>	
	<b>Description</b> Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	<b>Code</b> <b>0.26572.0000</b>			<b>Description</b> Grille en croix / Rejilla cruciforme	<b>Code</b> <b>0.26483.0000</b>	
					<b>Description</b> Cône 45° wall washer/ Cono 45° wall washer	<b>Code</b> <b>0.26499.00</b>	<b>Finishes</b> 12  31 

# Electrical Devices

## Ø 60 mm | Ø 95 mm | Electrical Devices

### Autres dispositifs/ Otros dispositivos





Type	Code	Size (mm)	Cut-out	Tech. specifications	Connectable fixtures	Max.distance	Cable section
 Dispositif de contrôle sans fil Bluetooth/ Dispositivo de control inalámbrico bluetooth	<b>0.26101.0000</b>		45 mm	220-240V, 50-60Hz 0,6A for DALI drivers	Max: 1	-	1.5 mm <sup>2</sup>
 Groupe de secours à lumière permanente 1h*/ Equipo de emergencia de tipo siempre operativo con autonomía de 1h*	<b>0.35081.0000</b>		105 mm	220-240V / 50/60 Hz	Max: 1	20 m	1.5 mm <sup>2</sup>
 Groupe de secours à lumière permanente 3h*/ Equipo de emergencia de tipo siempre operativo con autonomía de 3h*	<b>0.35081.UK00</b>		105 mm	220-240V / 50/60 Hz	Max: 1	20 m	1.5 mm <sup>2</sup>

Pour appareils LED (17-34W), batteries Ni/Cd /Para aparatos LED (17-34W) con baterías Ni/Cd





## Ø 60 mm | Electrical Devices

### Platines d'alimentation/ Drivers





#### 9 W POWER LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30420.0000</b>	20		56 mm	198-264Vac 170-280Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30420.0000</b>	12		45 mm	230-240 / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30420.0000</b>	20		56 mm	99-264Vac 170-280Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30420.0000</b>	20		56 mm	99-264Vac 170-280Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>




#### 9 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30021.0000</b>	10		51 mm	220-240Vac / 50/60Hz	260	Min: 1	10 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30021.0000</b>	10		52 mm	220-240Vac / 50/60Hz	260	Min: 1	10 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30021.0000</b>	33		45 mm	220-240Vac / 50/60Hz	260	Min: 1	10 m	1.5 mm <sup>2</sup>
DALI	<b>D.30021.0000</b>	33		45 mm	220-240Vac / 50/60Hz	260	Min: 1	10 m	1.5 mm <sup>2</sup>

#### 12 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30412.0000</b>	20		56 mm	198-264Vac 170-280Vdc / 0.50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30412.0000</b>	20		52 mm	220-240Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30040.0000</b>	33		45 mm	220-240Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30040.0000</b>	33		45 mm	220-240Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>





#### 12 W Warm Dimming COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
Phase-cut	<b>T.30424.0000</b>	18		52 mm	220-240Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30040.0000</b>	33		45 mm	198-264Vac 170-280Vdc / 0.50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30040.0000</b>	33		45 mm	198-264Vac 176-264Vdc / 0.50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>





## Ø 95 mm | Electrical Devices

### Platines d'alimentation/ Drivers





#### 12 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30341.0000</b>	25		54 mm	220-240Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30412.0000</b>	18		52 mm	220-240Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30341.0000</b>	33		45 mm	120-277Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30341.0000</b>	36		54 mm	99-264Vac 170-280Vdc / 0.50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>




#### 17 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30400.0000</b>	20		56 mm	198-264Vac 170-280Vdc / 0.50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30400.0000</b>	22		52 mm	220-240Vac / 50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30400.0000</b>	20		45 mm	99-264Vac 170-280Vdc / 0.50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30400.0000</b>	20		45 mm	99-264Vac 176-264Vdc / 0.50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>




#### 24 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30041.0000</b>	40		57 mm	100-240Vac / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30041.0000</b>	36		57 mm	220-240Vac / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30041.0000</b>	33		45 mm	220-240Vac / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30041.0000</b>	32		70 mm	99-264Vac 176-264Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>

#### 33 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30408.0000</b>	38		52 mm	198-264Vac 176-264Vdc / 50/60Hz	950	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30408.0000</b>	40		82 mm	99-264Vac 170-280Vdc / 0.50/60Hz	950	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30408.0000</b>	40		82 mm	198-264Vac 170-280Vdc / 0.50/60Hz	950	Min: 1	20 m	1.5 mm <sup>2</sup>

#### 33 W Warm dimming COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
Phase-cut	<b>T.30348.0000</b>	40		45 mm	220-240Vac / 50/60Hz	900	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30425.0000</b>	45		60 mm	220-240Vac / 50/60Hz	900	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30346.0000</b>	36		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	900	Min: 1	20 m	1.5 mm <sup>2</sup>





—

**Yori**

**Semi-recessed**



Ø 43 mm | Precision



Code example:  
**X . FM31 . A . HW 12**

Accessories: p.518  
 Finishes: p.380  
 Drivers: p.532-535  
 Photometric data:  
 www.reggiani.net

**4 W POWERLED** Lumen delivered up to 435 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	FM31 Precision	A 7° Very narrow	HW	2700	>90	410	<3	12 <input type="checkbox"/>
		B 11° Narrow	HQ	3000	>90	415	<3	31 <input type="checkbox"/>
		E 23° Medium	WW	3000	>80	485	<3	
		H 40° Wide	NN	4000	>80	530	<3	

LED nominal lumen

**9 W POWERLED** Lumen delivered up to 750 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	FM32 Precision	A 7° Very narrow	HW	2700	>90	725	<3	12 <input type="checkbox"/>
		B 11° Narrow	HQ	3000	>90	730	<3	31 <input type="checkbox"/>
		E 23° Medium	WW	3000	>80	845	<3	
		H 40° Wide	NN	4000	>80	940	<3	




LED nominal lumen

**6,5 W Warm Dimming COB LED** Lumen delivered up to 130 lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	FM32 Precision	B 27° Medium	DT	1800-2800	>95	10-550	<4	12 <input type="checkbox"/>
								31 <input type="checkbox"/>

LED nominal lumen

Ø 43 mm | Performance



Code example:

X . FM41 B . HW 12

Accessories: p.519  
 Finishes: p.380  
 Drivers: p.532-535  
 Photometric data:  
 www.reggiani.net

**4W POWER LED** Lumen delivered up to 450 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	FM41 Performance	B 6° Narrow	HW	2700	>90	410	<3	12
		E 18° Medium	HQ	3000	>90	415	<3	31
		H 36° Wide	WW	3000	>80	485	<3	
			NN	4000	>80	530	<3	

LED nominal lumen

**9W POWER LED** Lumen delivered up to 780 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	FM42 Performance	B 6° Narrow	HW	2700	>90	725	<3	12
		E 18° Medium	HQ	3000	>90	730	<3	31
		H 36° Wide	WW	3000	>80	845	<3	
			NN	4000	>80	940	<3	

LED nominal lumen



## Ø 43 mm | Precision Accessories

### Accessoires pour optique/ Accesorios de las ópticas



Image	Description	Code	Finishes		Image	Description	Code	Finishes	
			4A	5A				6A	7A
	Filtres en verre 1 mm/ Filtro en cristal de 1 mm	<b>0.26400.00</b>	4A	5A		Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida	<b>0.26440.0000</b>		
			6A	7A		Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha	<b>0.26448.0000</b>		
			8A	9A		Lentille pour faisceau elliptique/ Lente para haz de luz eliptico	<b>0.26456.0000</b>		
	Lames pour gel coloré (2 piezas)/ Plaquetas de cristal para gel colorado (2 piezas)	<b>0.26408.0000</b>				Lentille opale/ Lente opalescente	<b>0.26460.0000</b>		
	Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	<b>0.26557.0000</b>				Lentille diffusante/ Lente difusora	<b>0.26468.0000</b>		
	Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	<b>0.26416.0000</b>				Grille en croix/ Rejilla cruciforme	<b>0.26476.0000</b>		
	Filtre sélectif 2700K - 2200K / Filtro selector 2700K - 2200K	<b>0.26424.0000</b>				Volets coupe-flux/ Aletas antideslumbrantes	<b>0.26484.0000</b>		
	Filtre sélectif 2700K - 2000K / Filtro selector 2700K - 2000K	<b>0.26432.0000</b>				Cône 45° wall washer/ Cono 45° wall washer	<b>0.26488.00</b>	12	31
	Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	<b>0.26565.0000</b>				Cylindre court/ Cilindro corto	<b>0.26556.0000</b>	12	31
	Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	<b>0.26573.0000</b>							

## Ø 43 mm | Performance Accessories

Accessoires pour optique/  
Accesorios de las ópticas

Image	Description	Code	Finishes	Image	Description	Code	Finishes												
	Filtres en verre 1 mm/ Filtro en cristal de 1 mm	<b>0.26401.00</b>	<table border="1"> <tr><td>4A</td><td>Red</td></tr> <tr><td>5A</td><td>Green</td></tr> <tr><td>6A</td><td>Blue</td></tr> <tr><td>7A</td><td>Pink</td></tr> <tr><td>8A</td><td>Yellow</td></tr> <tr><td>9A</td><td>Orange</td></tr> </table>	4A	Red	5A	Green	6A	Blue	7A	Pink	8A	Yellow	9A	Orange		Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	<b>0.26574.0000</b>	
4A	Red																		
5A	Green																		
6A	Blue																		
7A	Pink																		
8A	Yellow																		
9A	Orange																		
	Lames pour gel coloré (2 piezas)/ Plaquetas de cristal para gel colorado (2 piezas)	<b>0.26409.0000</b>			Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida	<b>0.26441.0000</b>													
	Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	<b>0.26558.0000</b>			Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha	<b>0.26449.0000</b>													
	Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	<b>0.26417.0000</b>			Lentille pour faisceau elliptique/ Lente para haz de luz elíptico	<b>0.26492.0000</b>													
	Filtre sélectif 2700K - 2200K / Filtro selector 2700K - 2200K	<b>0.26425.0000</b>			Lentille opale/ Lente opalescente	<b>0.26461.0000</b>													
	Filtre sélectif 2700K - 2000K / Filtro selector 2700K - 2000K	<b>0.26433.0000</b>			Lentille diffusante/ Lente difusora	<b>0.26469.0000</b>													
	Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	<b>0.26566.0000</b>			Grille en croix / Rejilla cruciforme	<b>0.26480.0000</b>													
					Cône 45° wall washer/ Cono 45° wall washer	<b>0.26496.00</b>	<table border="1"> <tr><td>12</td><td>White</td></tr> <tr><td>31</td><td>Black</td></tr> </table>	12	White	31	Black								
12	White																		
31	Black																		

Ø 60 mm | Precision



Code example:  
**X . NM32 A . HW 12**

Accessories: p.522  
 Finishes: p.380  
 Drivers: p.532-535  
 Photometric data:  
 www.reggiani.net

**9 W POWERLED** Lumen delivered up to 770 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	NM32 Precision	A 8° Very narrow	HW	2700	>90	725	<3	12 <input type="checkbox"/>
			HQ	3000	>90	730	<3	31 <input type="checkbox"/>
			WW	3000	>80	845	<3	
			NN	4000	>80	940	<3	

LED nominal lumen

**9 W COB LED** Lumen delivered up to 1115 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GM32 Precision	B 12° Narrow	HC	3000	>98	960	<2	12 <input type="checkbox"/>
		E 20° Medium	HW	2700	>90	1050	<2	31 <input type="checkbox"/>
		K - Without optics	HQ	3000	>90	1100	<2	
			WW	3000	>80	1300	<3	
			NN	4000	>80	1360	<3	

LED nominal lumen

**12 W COB LED** Lumen delivered up to 1455 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GM33 Precision	B 12° Narrow	HC	3000	>98	1250	<2	12 <input type="checkbox"/>
		E 20° Medium	HW	2700	>90	1370	<2	31 <input type="checkbox"/>
		K - Without optics	HQ	3000	>90	1420	<2	
			WW	3000	>80	1700	<3	
			NN	4000	>80	1775	<3	

LED nominal lumen

**17 W COB LED** Lumen delivered up to 1970 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GM34 Precision	B 12° Narrow	HC	3000	>98	1700	<2	12 <input type="checkbox"/>
		E 20° Medium	HW	2700	>90	1870	<2	31 <input type="checkbox"/>
		K - Without optics	HQ	3000	>90	1920	<2	
			WW	3000	>80	2320	<3	
			NN	4000	>80	2400	<3	




LED nominal lumen

**12 W Warm Dimming COB LED** Lumen delivered up to 690 lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GM33 Precision	B 27° Medium	DT	1700-3000	>95	100-1000	<4	12 <input type="checkbox"/>
								31 <input type="checkbox"/>

LED nominal lumen

# Ø 60 mm | Performance



Code example:

X . GM42 B . HC 12

Accessories: p.523  
 Finishes: p.380  
 Drivers: p.532-535  
 Photometric data:  
 www.reggiani.net

## 9W COBLED Lumen delivered up to 1200lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GM42 Performance	B 13° Narrow	HC	3000	>98	960	<2	12
		E 24° Medium	HW	2700	>90	1050	<2	31
		H 40° Wide	HQ	3000	>90	1100	<2	
		K - Without optics	WW	3000	>80	1300	<3	
			NN	4000	>80	1360	<3	

LED nominal lumen

## 12W COBLED Lumen delivered up to 1560lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GM43 Performance	B 13° Narrow	HC	3000	>98	1250	<2	12
		E 24° Medium	HW	2700	>90	1370	<2	31
		H 40° Wide	HQ	3000	>90	1420	<2	
		K - Without optics	WW	3000	>80	1700	<3	
			NN	4000	>80	1775	<3	

LED nominal lumen


## 17W COBLED Lumen delivered up to 2110lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GM44 Performance	B 13° Narrow	HC	3000	>98	1700	<2	12
		E 24° Medium	HW	2700	>90	1870	<2	31
		H 40° Wide	HQ	3000	>90	1920	<2	
		K - Without optics	WW	3000	>80	2320	<3	
			NN	4000	>80	2400	<3	

LED nominal lumen


## Ø 60 mm | Precision | Accessories

### Optiques interchangeables IOS/ Ópticas intercambiables IOS



**Description**  
Precision - Faisceau étroit/  
Precision - Haz de luz estrecho  
(12°-9W, 12W, 17W)

**Code**  
**0.35125.0000**



**Description**  
Precision - Faisceau moyen/  
Precision - Haz de luz medio  
(20°-9W, 12W, 17W)

**Code**  
**0.35126.0000**

Non applicable aux références/No para códigos: **NM32A / GM53B.DT**

Non applicable aux références/No para códigos: **NM32A / GM53B.DT**

### Accessoires pour optique/ Accesorios de las ópticas



**Description**  
Filtres en verre 1 mm/  
Filtro en cristal de 1 mm

**Code**  
**0.26402.00**


**Finishes**

4A	Red
5A	Green
6A	Blue
7A	Pink
8A	Yellow
9A	Orange



**Description**  
Grille en nid d'abeilles, maille fine/  
Rejilla alveolar de textura tupida

**Code**  
**0.26442.0000**



**Description**  
Grille en nid d'abeilles, maille large/  
Rejilla alveolar de textura ancha

**Code**  
**0.26450.0000**



**Description**  
Lames pour gel coloré (2 pièces)/  
Plaquettes de cristal para gel colorado  
(2 piezas)

**Code**  
**0.26410.0000**



**Description**  
Lentille pour faisceau elliptique/  
Lente para haz de luz elliptico

**Code**  
**0.26457.0000**



**Description**  
Filtre sélectif 3000K - 2700K /  
Filtro selector 3000K - 2700K

**Code**  
**0.26559.0000**




**Description**  
Lentille opale/  
Lente opalescente

**Code**  
**0.26462.0000**



**Description**  
Filtre sélectif 2700K - 2500K /  
Filtro selector 2700K - 2500K

**Code**  
**0.26418.0000**



**Description**  
Lentille diffusante/  
Lente difusora

**Code**  
**0.26470.0000**




**Description**  
Filtre sélectif 2700K - 2200K /  
Filtro selector 2700K - 2200K

**Code**  
**0.26426.0000**




**Description**  
Grille en croix/  
Rejilla cruciforme

**Code**  
**0.26477.0000**



**Description**  
Filtre sélectif 2700K - 2000K /  
Filtro selector 2700K - 2000K

**Code**  
**0.26434.0000**



**Description**  
Volets coupe-flux/  
Aletas antideslumbrantes

**Code**  
**0.26485.0000**



**Description**  
Filtre sélectif 3000K - 3600K /  
Filtro selector 3000K - 3600K

**Code**  
**0.26567.0000**



**Description**  
Cône 45° wall washer/  
Cono 45° wall washer

**Code**  
**0.26489.0000**

**Finishes**


12	White
31	Black



**Description**  
Filtre sélectif 3000K - 4000K /  
Filtro selector 3000K - 4000K

**Code**  
**0.26575.0000**

### Projecteur cadreur/ Contorneador de luz




**Description**  
Projecteur cadreur, cadre de lumière - carré/  
Contorneador de luz, contorno de luz - cuadrado

**Code**  
**0.26651.00**

**Finishes**

21	Black
----	-------



**Description**  
Projecteur cadreur, cadre de lumière - rond/  
Contorneador de luz, contorno de luz - redondo







**Code**  
**0.26650.00**

**Finishes**
























21	Black
----	-------

Ø 60 mm | Performance | Accessories







Optiques interchangeables IOS/  
Ópticas intercambiables IOS

		<b>Description</b> Performance - Faisceau étroit/ Performance - Haz de luz estrecho (13°-9W, 12W, 17W)	<b>Code</b> <u>0.35145.0000</u>			<b>Description</b> Performance - Faisceau large/ Performance - Haz de luz ancho (40°-9W, 12W, 17W)	<b>Code</b> <u>0.35147.0000</u>
		<b>Description</b> Performance - Faisceau moyen/ Performance - Haz de luz medio (24°-9W, 12W, 17W)	<b>Code</b> <u>0.35146.0000</u>				

Accessoires pour optique/  
Accesorios de las ópticas

	<b>Description</b> Filtres en verre 1 mm/ Filtro en cristal de 1 mm	<b>Code</b> <u>0.26403.00</u>	<b>Finishes</b> 4A  5A  6A  7A  8A  9A 		<b>Description</b> Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	<b>Code</b> <u>0.26576.0000</u>	
	<b>Description</b> Lames pour gel coloré (2 piezas)/ Plaquetas de cristal para gel colorado (2 piezas)	<b>Code</b> <u>0.26411.0000</u>			<b>Description</b> Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida	<b>Code</b> <u>0.26443.0000</u>	
	<b>Description</b> Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	<b>Code</b> <u>0.26560.0000</u>			<b>Description</b> Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha	<b>Code</b> <u>0.26451.0000</u>	
	<b>Description</b> Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	<b>Code</b> <u>0.26419.0000</u>			<b>Description</b> Lentille pour faisceau elliptique/ Lente para haz de luz elíptico	<b>Code</b> <u>0.26493.0000</u>	
	<b>Description</b> Filtre sélectif 2700K - 2200K / Filtro selector 2700K - 2200K	<b>Code</b> <u>0.26427.0000</u>			<b>Description</b> Lentille opale/ Lente opalescente	<b>Code</b> <u>0.26463.0000</u>	
	<b>Description</b> Filtre sélectif 2700K - 2000K / Filtro selector 2700K - 2000K	<b>Code</b> <u>0.26435.0000</u>			<b>Description</b> Lentille diffusante/ Lente difusora	<b>Code</b> <u>0.26471.0000</u>	
	<b>Description</b> Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	<b>Code</b> <u>0.26568.0000</u>			<b>Description</b> Grille en croix / Rejilla cruciforme	<b>Code</b> <u>0.26481.0000</u>	
					<b>Description</b> Cône 45° wall washer/ Cono 45° wall washer	<b>Code</b> <u>0.26497.00</u>	<b>Finishes</b> 12  31 



Projecteur cadreur/  
Contorneador de luz

		<b>Description</b> Projecteur cadreur, cadre de lumière - carré/ Contorneador de luz, contorno de luz - cuadrado	<b>Code</b> <u>0.26651.00</u>	<b>Finishes</b> 21 
		<b>Description</b> Projecteur cadreur, cadre de lumière - rond/ Contorneador de luz, contorno de luz - redondo	<b>Code</b> <u>0.26650.00</u>	<b>Finishes</b> 21 



## Ø 75 mm | Precision

Risk 1 0.58 IP20 850° CE CB EAC



Code example:

X . LM33 B . HC 12

Accessories: p.526

Finishes: p.380

Drivers: p.532-535

Photometric data:

www.reggiani.net

**12 W COB LED** Lumen delivered up to 1575 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LM33 Precision	B 12° Narrow	HC	3000	>98	1323	<2	12
		E 24° Medium	HW	2700	>90	1491	<2	31
		K - Without optics	HQ	3000	>90	1533	<2	
			WW	3000	>80	1859	<3	
			NN	4000	>80	1920	<3	

LED nominal lumen

**17 W COB LED** Lumen delivered up to 1465 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	PM34 Precision	A 7° Very narrow	HC	3000	>98	1700	<2	12
			HW	2700	>90	1870	<2	31
			HQ	3000	>90	1920	<2	
			WW	3000	>80	2320	<3	
			NN	4000	>80	2400	<3	

LED nominal lumen

**17 W COB LED** Lumen delivered up to 2190 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LM34 Precision	B 12° Narrow	HC	3000	>98	1834	<2	12
		E 24° Medium	HW	2700	>90	2067	<2	31
		K - Without optics	HQ	3000	>90	2122	<2	
			WW	3000	>80	2582	<3	
			NN	4000	>80	2665	<3	

LED nominal lumen

**24 W COB LED** Lumen delivered up to 2955 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LM36 Precision	B 12° Narrow	HC	3000	>98	2476	<2	12
		E 24° Medium	HW	2700	>90	2792	<2	31
		K - Without optics	HQ	3000	>90	2860	<2	
			WW	3000	>80	3487	<3	
			NN	4000	>80	3602	<3	

LED nominal lumen

**28 W COB LED** Lumen delivered up to 3325 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LM37 Performance	B 12° Narrow	HC	3000	>98	2777	<2	12
		E 24° Medium	HW	2700	>90	3137	<2	31
		K - Without optics	HQ	3000	>90	3207	<2	
			WW	3000	>80	3898	<3	
			NN	4000	>80	4054	<3	



LED nominal lumen

**25 W Warm Dimming COB LED** Lumen delivered up to 1100 lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LM36 Precision	B 25° Medium	DT	1700-3000	>95	100-2500	<4	12
								31

LED nominal lumen

# Ø 75 mm | Performance



Code example:

X . LM43 B . HC 12

Accessories: p.527  
 Finishes: p.380  
 Drivers: p.532-535  
 Photometric data:  
 www.reggiani.net

## 12 W COBLED Lumen delivered up to 1800 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LM43 Performance	B 12° Narrow	HC	3000	>98	1323	<2	12
		E 24° Medium	HW	2700	>90	1491	<2	31
		H 48° Wide	HQ	3000	>90	1533	<2	
		K - Without optics	WW	3000	>80	1859	<3	
			NN	4000	>80	1920	<3	

LED nominal lumen

## 17 W COBLED Lumen delivered up to 2480 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LM44 Performance	B 12° Narrow	HC	3000	>98	1834	<2	12
		E 24° Medium	HW	2700	>90	2067	<2	31
		H 48° Wide	HQ	3000	>90	2122	<2	
		K - Without optics	WW	3000	>80	2582	<3	
			NN	4000	>80	2665	<3	

LED nominal lumen

## 24 W COBLED Lumen delivered up to 3550 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LM46 Performance	B 12° Narrow	HC	3000	>98	2476	<2	12
		E 24° Medium	HW	2700	>90	2792	<2	31
		H 48° Wide	HQ	3000	>90	2860	<2	
		K - Without optics	WW	3000	>80	3487	<3	
			NN	4000	>80	3602	<3	

LED nominal lumen


## 28 W COBLED Lumen delivered up to 3770 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LM47 Performance	B 12° Narrow	HC	3000	>98	2777	<2	12
		E 24° Medium	HW	2700	>90	3137	<2	31
		H 48° Wide	HQ	3000	>90	3207	<2	
		K - Without optics	WW	3000	>80	3898	<3	
			NN	4000	>80	4054	<3	

LED nominal lumen


## Ø 75 mm | Precision Accessories

### Optiques interchangeables IOS/ Ópticas intercambiables IOS



**Description**  
Precision - Faisceau étroit/  
Precision - Haz de luz estrecho  
(12°-12W, 17W, 24W, 28W)

**Code**  
**0.35130.0000**



**Description**  
Precision - Faisceau moyen/  
Precision - Haz de luz medio  
(24°-12W, 17W, 24W, 28W)

**Code**  
**0.35131.0000**

Non applicable aux références/No para códigos:PM34A / LM36B.DT

Non applicable aux références/No para códigos:PM34A / LM36B.DT

### Accessoires pour optique/ Accesorios de las ópticas



**Description**  
Filtres en verre 1 mm/  
Filtro en cristal de 1 mm

**Code**  
**0.26404.00**


**Finishes**

4A	Red
5A	Green
6A	Blue
7A	Pink
8A	Yellow
9A	Orange



**Description**  
Grille en nid d'abeilles, maille fine/  
Rejilla alveolar de textura tupida

**Code**  
**0.26444.0000**



**Description**  
Grille en nid d'abeilles, maille large/  
Rejilla alveolar de textura ancha

**Code**  
**0.26452.0000**



**Description**  
Lames pour gel coloré (2 piezas)/  
Plaquetas de cristal para gel colorado  
(2 piezas)

**Code**  
**0.26412.0000**



**Description**  
Lentille pour faisceau elliptique/  
Lente para haz de luz elliptico

**Code**  
**0.26458.0000**



**Description**  
Filtre sélectif 3000K - 2700K /  
Filtro selector 3000K - 2700K

**Code**  
**0.26561.0000**




**Description**  
Lentille opale/  
Lente opalescente

**Code**  
**0.26464.0000**




**Description**  
Filtre sélectif 2700K - 2500K /  
Filtro selector 2700K - 2500K

**Code**  
**0.26420.0000**



**Description**  
Lentille diffusante/  
Lente difusora

**Code**  
**0.26472.0000**



**Description**  
Filtre sélectif 2700K - 2200K /  
Filtro selector 2700K - 2200K

**Code**  
**0.26428.0000**




**Description**  
Grille en croix/  
Rejilla cruciforme

**Code**  
**0.26478.0000**



**Description**  
Filtre sélectif 2700K - 2000K /  
Filtro selector 2700K - 2000K

**Code**  
**0.26436.0000**



**Description**  
Volets coupe-flux/  
Aletas antideslumbrantes

**Code**  
**0.26486.0000**



**Description**  
Filtre sélectif 3000K - 3600K /  
Filtro selector 3000K - 3600K

**Code**  
**0.26569.0000**



**Description**  
Cône 45° wall washer/  
Cono 45° wall washer

**Code**  
**0.26490.00**

**Finishes**

12	White
31	Black









**Description**  
Filtre sélectif 3000K - 4000K /  
Filtro selector 3000K - 4000K
























**Code**  
**0.26577.0000**

## Ø 75 mm | Performance Accessories


### Optiques interchangeables IOS/ Ópticas intercambiables IOS

		<b>Description</b> Performance - Faisceau étroit/ Performance - Haz de luz estrecho (12°-12W, 17W, 24W, 28W)	<b>Code</b> <b>0.35150.0000</b>			<b>Description</b> Performance - Faisceau large/ Performance - Haz de luz ancho (48°-12W, 17W, 24W, 28W)	<b>Code</b> <b>0.35152.0000</b>
		<b>Description</b> Performance - Faisceau moyen/ Performance - Haz de luz medio (24°-12W, 17W, 24W, 28W)	<b>Code</b> <b>0.35151.0000</b>				

### Accessoires pour optique/ Accesorios de las ópticas

	<b>Description</b> Filtres en verre 1 mm/ Filtro en cristal de 1 mm	<b>Code</b> <b>0.26405.00</b>	<b>Finishes</b> 4A  5A  6A  7A  8A  9A 		<b>Description</b> Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	<b>Code</b> <b>0.26578.0000</b>	
	<b>Description</b> Lames pour gel coloré (2 piezas)/ Plaquetas de cristal para gel colorado (2 piezas)	<b>Code</b> <b>0.26413.0000</b>			<b>Description</b> Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida	<b>Code</b> <b>0.26445.0000</b>	
	<b>Description</b> Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	<b>Code</b> <b>0.26562.0000</b>			<b>Description</b> Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha	<b>Code</b> <b>0.26453.0000</b>	
	<b>Description</b> Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	<b>Code</b> <b>0.26421.0000</b>			<b>Description</b> Lentille pour faisceau elliptique/ Lente para haz de luz elíptico	<b>Code</b> <b>0.26494.0000</b>	
	<b>Description</b> Filtre sélectif 2700K - 2200K / Filtro selector 2700K - 2200K	<b>Code</b> <b>0.26429.0000</b>			<b>Description</b> Lentille opale/ Lente opalescente	<b>Code</b> <b>0.26465.0000</b>	
	<b>Description</b> Filtre sélectif 2700K - 2000K / Filtro selector 2700K - 2000K	<b>Code</b> <b>0.26437.0000</b>			<b>Description</b> Lentille diffusante/ Lente difusora	<b>Code</b> <b>0.26473.0000</b>	
	<b>Description</b> Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	<b>Code</b> <b>0.26570.0000</b>			<b>Description</b> Grille en croix / Rejilla cruciforme	<b>Code</b> <b>0.26482.0000</b>	
					<b>Description</b> Cône 45° wall washer/ Cono 45° wall washer	<b>Code</b> <b>0.26498.00</b>	<b>Finishes</b> 12  31 

## Ø 95 mm | Precision



Code example:

X . MM33 B . HC 12

Accessories: p.530

Finishes: p.380

Drivers: p.532-535

Photometric data:

www.reggiani.net

12 W COB LED		Lumen delivered up to 1690lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Notincluded	MM33 Precision	B 12° Narrow	HC	3000	>98	1323	<2	12
		E 24° Medium	HW	2700	>90	1491	<2	31
		K - Without optics	HQ	3000	>90	1533	<2	
			WW	3000	>80	1859	<3	
			NN	4000	>80	1920	<3	

LED nominal lumen

17 W COB LED		Lumen delivered up to 1510lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Notincluded	QM34 Precision	A 7° Very narrow	HC	3000	>98	1700	<2	12
			HW	2700	>90	1870	<2	31
			HQ	3000	>90	1920	<2	
			WW	3000	>80	2320	<3	
			NN	4000	>80	2400	<3	

LED nominal lumen

17 W COB LED		Lumen delivered up to 2350lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Notincluded	MM34 Precision	B 12° Narrow	HC	3000	>98	1834	<2	12
		E 24° Medium	HW	2700	>90	2067	<2	31
		K - Without optics	HQ	3000	>90	2122	<2	
			WW	3000	>80	2582	<3	
			NN	4000	>80	2665	<3	

LED nominal lumen

24 W COB LED		Lumen delivered up to 3170lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Notincluded	MM36 Precision	B 12° Narrow	HC	3000	>98	2476	<2	12
		E 24° Medium	HW	2700	>90	2792	<2	31
		K - Without optics	HQ	3000	>90	2860	<2	
			WW	3000	>80	3487	<3	
			NN	4000	>80	3602	<3	

LED nominal lumen

33 W COB LED		Lumen delivered up to 4080lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Notincluded	MM38 Precision	B 12° Narrow	HC	3000	>98	3142	<2	12
		E 24° Medium	HW	2700	>90	3635	<2	31
		K - Without optics	HQ	3000	>90	3735	<2	
			WW	3000	>80	4510	<3	
			NN	4000	>80	4695	<3	

LED nominal lumen



37 W COB LED		Lumen delivered up to 4480lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Notincluded	MM39 Precision	B 12° Narrow	HC	3000	>98	3473	<2	12
		E 18° Medium	HW	2700	>90	3940	<2	31
		K - Without optics	HQ	3000	>90	4000	<2	
			WW	3000	>80	4880	<3	
			NN	4000	>80	5090	<3	

LED nominal lumen

33 W Warm Dimming COB LED		Lumen delivered up to 1520lm / Lumen maintenance: L70 B50=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Notincluded	MM38 Precision	B 25° Medium	DT	1700-3000	>95	100-3100	<4	12
								31

LED nominal lumen

# Ø 95 mm | Performance



Code example:

X . MM43 B . HC 12

Accessories: p.531  
 Finishes: p.380  
 Drivers: p.532-535  
 Photometric data:  
 www.reggiani.net

**12 W COBLED** Lumen delivered up to 1800 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	MM43 Performance	B 10° Narrow	HC	3000	>98	1323	<2	12
		E 20° Medium	HW	2700	>90	1491	<2	31
		H 31° Wide	HQ	3000	>90	1533	<2	
		K - Without optics	WW	3000	>80	1859	<3	
			NN	4000	>80	1920	<3	

LED nominal lumen

**17 W COBLED** Lumen delivered up to 2500 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	MM44 Performance	B 10° Narrow	HC	3000	>98	1834	<2	12
		E 20° Medium	HW	2700	>90	2067	<2	31
		H 31° Wide	HQ	3000	>90	2122	<2	
		K - Without optics	WW	3000	>80	2582	<3	
			NN	4000	>80	2665	<3	

LED nominal lumen

**24 W COBLED** Lumen delivered up to 3300 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	MM46 Performance	B 10° Narrow	HC	3000	>98	2476	<2	12
		E 20° Medium	HW	2700	>90	2792	<2	31
		H 31° Wide	HQ	3000	>90	2860	<2	
		K - Without optics	WW	3000	>80	3487	<3	
			NN	4000	>80	3602	<3	

LED nominal lumen

**33 W COBLED** Lumen delivered up to 4300 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	MM48 Performance	B 10° Narrow	HC	3000	>98	3142	<2	12
		E 20° Medium	HW	2700	>90	3635	<2	31
		H 31° Wide	HQ	3000	>90	3735	<2	
		K - Without optics	WW	3000	>80	4510	<3	
			NN	4000	>80	4695	<3	

LED nominal lumen

**37 W COBLED** Lumen delivered up to 4530 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	MM49 Performance	B 10° Narrow	HC	3000	>98	3473	<2	12
		E 20° Medium	HW	2700	>90	3940	<2	31
		H 31° Wide	HQ	3000	>90	4000	<2	
		K - Without optics	WW	3000	>80	4880	<3	
			NN	4000	>80	5090	<3	

LED nominal lumen


## Ø 95 mm | Precision | Accessories

### Optiques interchangeables IOS/ Ópticas intercambiables IOS



**Description**  
Precision - Faisceau étroit /  
Precision - Haz de luz estrecho  
(12°-12W, 17W, 24W, 33W, 37W)

**Code**  
**0.35135.0000**



**Description**  
Precision - Faisceau moyen /  
Precision - Haz de luz medio  
(24°-12W, 17W, 24W, 33W, 37W)

**Code**  
**0.35136.0000**

Non applicable aux références/No para códigos: **QM34A / MM38B.DT**

Non applicable aux références/No para códigos: **QM34A / MM38B.DT**

### Accessoires pour optique/ Accesorios de las ópticas



**Description**  
Filtres en verre 1 mm /  
Filtro en cristal de 1 mm


**Code**  
**0.26406.00**

Finishes
4A
5A
6A
7A
8A
9A



**Description**  
Grille en nid d'abeilles, maille fine /  
Rejilla alveolar de textura tupida

**Code**  
**0.26446.0000**



**Description**  
Grille en nid d'abeilles, maille large /  
Rejilla alveolar de textura ancha

**Code**  
**0.26454.0000**



**Description**  
Lames pour gel coloré (2 piezas) /  
Plaquetas de cristal para gel colorado  
(2 piezas)

**Code**  
**0.26414.0000**



**Description**  
Lentille pour faisceau elliptique /  
Lente para haz de luz elíptico

**Code**  
**0.26459.0000**



**Description**  
Filtre sélectif 3000K - 2700K /  
Filtro selector 3000K - 2700K

**Code**  
**0.26563.0000**




**Description**  
Lentille opale /  
Lente opalescente

**Code**  
**0.26466.0000**




**Description**  
Filtre sélectif 2700K - 2500K /  
Filtro selector 2700K - 2500K

**Code**  
**0.26422.0000**



**Description**  
Lentille diffusante /  
Lente difusora

**Code**  
**0.26474.0000**




**Description**  
Filtre sélectif 2700K - 2200K /  
Filtro selector 2700K - 2200K

**Code**  
**0.26430.0000**




**Description**  
Grille en croix /  
Rejilla cruciforme

**Code**  
**0.26479.0000**



**Description**  
Filtre sélectif 2700K - 2000K /  
Filtro selector 2700K - 2000K

**Code**  
**0.26438.0000**




**Description**  
Volets coupe-flux /  
Aletas antideslumbrantes

**Code**  
**0.26487.0000**



**Description**  
Filtre sélectif 3000K - 3600K /  
Filtro selector 3000K - 3600K

**Code**  
**0.26571.0000**



**Description**  
Cône 45° wall washer /  
Cono 45° wall washer

**Code**  
**0.26491.00**

Finishes
12
31









**Description**  
Filtre sélectif 3000K - 4000K /  
Filtro selector 3000K - 4000K
























**Code**  
**0.26579.0000**

## Ø 95 mm | Performance | Accessories

### Optiques interchangeables IOS/ Ópticas intercambiables IOS

		<b>Description</b> Performance - Faisceau étroit/ Performance - Haz de luz estrecho (10°-12W, 17W, 24W, 33W, 37W)	<b>Code</b> <b>0.35155.0000</b>			<b>Description</b> Performance - Faisceau large/ Performance - Haz de luz ancho (31°-12W, 17W, 24W, 33W, 37W)	<b>Code</b> <b>0.35157.0000</b>
		<b>Description</b> Performance - Faisceau moyen/ Performance - Haz de luz medio (20°-12W, 17W, 24W, 33W, 37W)	<b>Code</b> <b>0.35156.0000</b>				

### Accessoires pour optique/ Accesorios de las ópticas




	<b>Description</b> Filtres en verre 1 mm/ Filtro en cristal de 1 mm	<b>Code</b> <b>0.26407.00</b>	<b>Finishes</b> 4A  5A  6A  7A  8A  9A 		<b>Description</b> Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	<b>Code</b> <b>0.26580.0000</b>	
	<b>Description</b> Lames pour gel coloré (2 piezas)/ Plaquetas de cristal para gel colorado (2 piezas)	<b>Code</b> <b>0.26415.0000</b>			<b>Description</b> Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida	<b>Code</b> <b>0.26447.0000</b>	
	<b>Description</b> Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	<b>Code</b> <b>0.26564.0000</b>			<b>Description</b> Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha	<b>Code</b> <b>0.26455.0000</b>	
	<b>Description</b> Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	<b>Code</b> <b>0.26423.0000</b>			<b>Description</b> Lentille pour faisceau elliptique/ Lente para haz de luz elíptico	<b>Code</b> <b>0.26495.0000</b>	
	<b>Description</b> Filtre sélectif 2700K - 2200K / Filtro selector 2700K - 2200K	<b>Code</b> <b>0.26431.0000</b>			<b>Description</b> Lentille opale/ Lente opalescente	<b>Code</b> <b>0.26467.0000</b>	
	<b>Description</b> Filtre sélectif 2700K - 2000K / Filtro selector 2700K - 2000K	<b>Code</b> <b>0.26439.0000</b>			<b>Description</b> Lentille diffusante/ Lente difusora	<b>Code</b> <b>0.26475.0000</b>	
	<b>Description</b> Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	<b>Code</b> <b>0.26572.0000</b>			<b>Description</b> Grille en croix / Rejilla cruciforme	<b>Code</b> <b>0.26483.0000</b>	
					<b>Description</b> Cône 45° wall washer/ Cono 45° wall washer	<b>Code</b> <b>0.26499.00</b>	<b>Finishes</b> 12  31 



# Electrical devices

Ø 43 mm | Ø 60 mm | Ø 75 mm | Ø 95 mm | Electrical Devices

## Autres dispositifs/ Otros dispositivos

Type	Code	Size (mm)	Cut-out	Tech. specifications	Connectable fixtures	Max.distance	Cable section
•)) Dispositif de contrôle sans fil Bluetooth/ Dispositivo de control inalámbrico bluetooth	<b>0.26101.0000</b>		45 mm	220-240V, 50-60Hz 0,6A for DALI drivers	Max: 1	-	1.5 mm <sup>2</sup>
+ - Groupe de secours à lumière permanente 1h*/ Equipo de emergencia de tipo siempre operativo con autonomía de 1h*	<b>0.35081.0000</b>		105 mm	220-240V / 50/60 Hz	Max: 1	20 m	1.5 mm <sup>2</sup>
+ - Groupe de secours à lumière permanente 3h*/ Equipo de emergencia de tipo siempre operativo con autonomía de 3h*	<b>0.35081.UK00</b>		105 mm	220-240V / 50/60 Hz	Max: 1	20 m	1.5 mm <sup>2</sup>





Groupe de secours pour appareils LED avec batteries Ni/Cd, autonomie 1h/3h / Equipo de emergencia para aparatos de iluminación LED con baterías Ni/Cd y autonomía de 1h/3h.

Le groupe de secours ne peut pas passer par le trou d'encastrement du produit; l'accessoire doit donc être positionné à une distance de 5 m maximum du produit. / El equipo de emergencia no puede pasar a través del agujero de empotramiento del producto y, por tanto, debe colocarse fuera de él a una distancia máx. de 5 m desde el aparato.





## Ø 43 mm | Electrical Devices

### Platines d'alimentation/ Drivers



#### 4 W POWER LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30375.0000</b>	4		45 mm	198-264Vac 190-245Vdc / 0.50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30370.0000</b>	4		45 mm	230-240 / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30375.0000</b>	4		45 mm	198-264Vac 170-280Vdc / 0.50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30375.0000</b>	4		45 mm	198-264Vac 176-264Vdc / 0.50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>

#### 9 W POWER LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30340.0000</b>	10		45 mm	198-264Vac 190-245Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30320.0000</b>	12		45 mm	230-240 / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30349.0000</b>	14		45 mm	198-264Vac 170-280Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30349.0000</b>	14		45 mm	198-264Vac 176-264Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>





#### 6,5 W Warm dimming COBLED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
Dimm 1-10V	<b>V.30349.0000</b>	14		45 mm	198-264Vac 170-280Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30349.0000</b>	14		45 mm	198-264Vac 176-264Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>





## Ø 60 mm | Electrical Devices

### Platines d'alimentation/ Drivers





#### 9 W POWERLED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30340.0000</b>	10		45 mm	198-264Vac 190-245Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30320.0000</b>	12		45 mm	230-240 / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30349.0000</b>	14		45 mm	198-264Vac 170-280Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30349.0000</b>	14		45 mm	198-264Vac 176-264Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>





#### 9 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30021.0000</b>	10		51 mm	220-240Vac / 50/60Hz	260	Min: 1	10 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30021.0000</b>	10		52 mm	220-240Vac / 50/60Hz	260	Min: 1	10 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30021.0000</b>	33		45 mm	120-277Vac / 50/60Hz	260	Min: 1	10 m	1.5 mm <sup>2</sup>
DALI	<b>D.30021.0000</b>	33		45 mm	220-240Vac / 50/60Hz	260	Min: 1	10 m	1.5 mm <sup>2</sup>




#### 12 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30341.0000</b>	25		54 mm	220-240Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30412.0000</b>	18		52 mm	220-240Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30341.0000</b>	33		45 mm	120-277Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30341.0000</b>	36		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>

#### 17 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30342.0000</b>	25		54 mm	220-240Vac / 50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30342.0000</b>	22		52 mm	220-240Vac / 50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30342.0000</b>	33		45 mm	120-277Vac / 50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30342.0000</b>	36		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>





#### 12 W Warm dimming COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
Phase-cut	<b>T.30412.0000</b>	18		52 mm	220-240Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30341.0000</b>	33		45 mm	120-277Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30341.0000</b>	36		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>





## Ø 75 mm | Electrical Devices

### Platines d'alimentation/ Drivers





#### 12 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30341.0000</b>	25		54 mm	220-240Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30412.0000</b>	18		52 mm	220-240Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30341.0000</b>	33		45 mm	120-277Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30341.0000</b>	36		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>





#### 17 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30342.0000</b>	25		54 mm	220-240Vac / 50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30342.0000</b>	22		52 mm	220-240Vac / 50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30342.0000</b>	33		45 mm	120-277Vac / 50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30342.0000</b>	36		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>




#### 24 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30344.0000</b>	35		54 mm	220-240Vac / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	<b>M.30023.T000</b>	33		45 mm	220-240Vac / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30343.0000</b>	33		45 mm	120-277Vac / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30344.0000</b>	36		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>

#### 28 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30345.0000</b>	35		54 mm	220-240Vac / 50/60Hz	800	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30345.0000</b>	40		50 mm		800	Min: 1	20 m	
Dimm 1-10V	<b>V.30345.0000</b>	33		45 mm	120-277Vac / 50/60Hz	800	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30345.0000</b>	36		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	800	Min: 1	20 m	1.5 mm <sup>2</sup>





#### 25 W Warm dimming COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
Phase-cut	<b>M.30023.T000</b>	33		45 mm	220-240Vac / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30343.0000</b>	33		45 mm	120-277Vac / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30344.0000</b>	33		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>





## Ø 95 mm | Electrical Devices

### Platines d'alimentation/ Drivers





#### 12 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30341.0000	25		54 mm	220-240Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	T.30412.0000	18		52 mm	220-240Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	V.30341.0000	33		45 mm	120-277Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	D.30341.0000	36		54 mm	99-264Vac 170-280Vdc / 0.50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>





#### 17 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30342.0000	25		54 mm	220-240Vac / 50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	T.30342.0000	22		52 mm	220-240Vac / 50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	V.30342.0000	33		45 mm	120-277Vac / 50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	D.30342.0000	36		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>





#### 24 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30344.0000	35		54 mm	220-240Vac / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	M.30023.T000	33		45 mm	220-240Vac / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	V.30343.0000	33		45 mm	120-277Vac / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	D.30344.0000	36		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>




#### 33 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30346.0000	40		54 mm	220-240Vac / 50/60Hz	950	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	T.30346.0000	38		50 mm	220-240Vac / 50/60Hz	950	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	V.30346.0000	33		45 mm	120-277Vac / 50/60Hz	950	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	D.30346.0000	36		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	950	Min: 1	20 m	1.5 mm <sup>2</sup>

#### 37 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30347.0000	40		54 mm	220-240Vac / 50/60Hz	1050	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	T.30347.0000	37		54 mm	220-240Vac / 50/60Hz	1050	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	V.30347.0000	40		54 mm	120-277Vac / 50/60Hz	1050	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	D.30347.0000	36		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	1050	Min: 1	20 m	1.5 mm <sup>2</sup>

#### 33 W Warm dimming COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
Phase-cut	T.30348.0000	40		45 mm	220-240Vac / 50/60Hz	900	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	V.30425.0000	45		60 mm	220-240Vac / 50/60Hz	900	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	D.30346.0000	36		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	900	Min: 1	20 m	1.5 mm <sup>2</sup>