

Yori



Yori range:



Yori Surface/Pendant




861 Yori Wall



805 Yori Linear

719

Track



Yori Evo Ghosttrack
p.397



Yori Evo Box
p.441



Yori Slot
p.461



Yori and Zoom+lighstaper
p.477

Recessed



Yori Recessed
p.485



Yori Semirecessed
p.515

Modular



Yori Channel
p.537





Yori Channel Arm
p.563



Yori Edge
p.577








FR Minimalisme et rigueur au service de la fonctionnalité. Yori est conçu pour héberger les sources lumineuses LED les plus innovantes et il est pré-équipé pour une application sur rail, à l'intérieur de chemins, à encastrer, de surface et à l'intérieur de corniches créées dans le plafond. Grâce à sa polyvalence et à son design élégant, Yori est la solution idéale pour l'éclairage d'accentuation de surfaces commerciales, résidentielles et d'expositions.









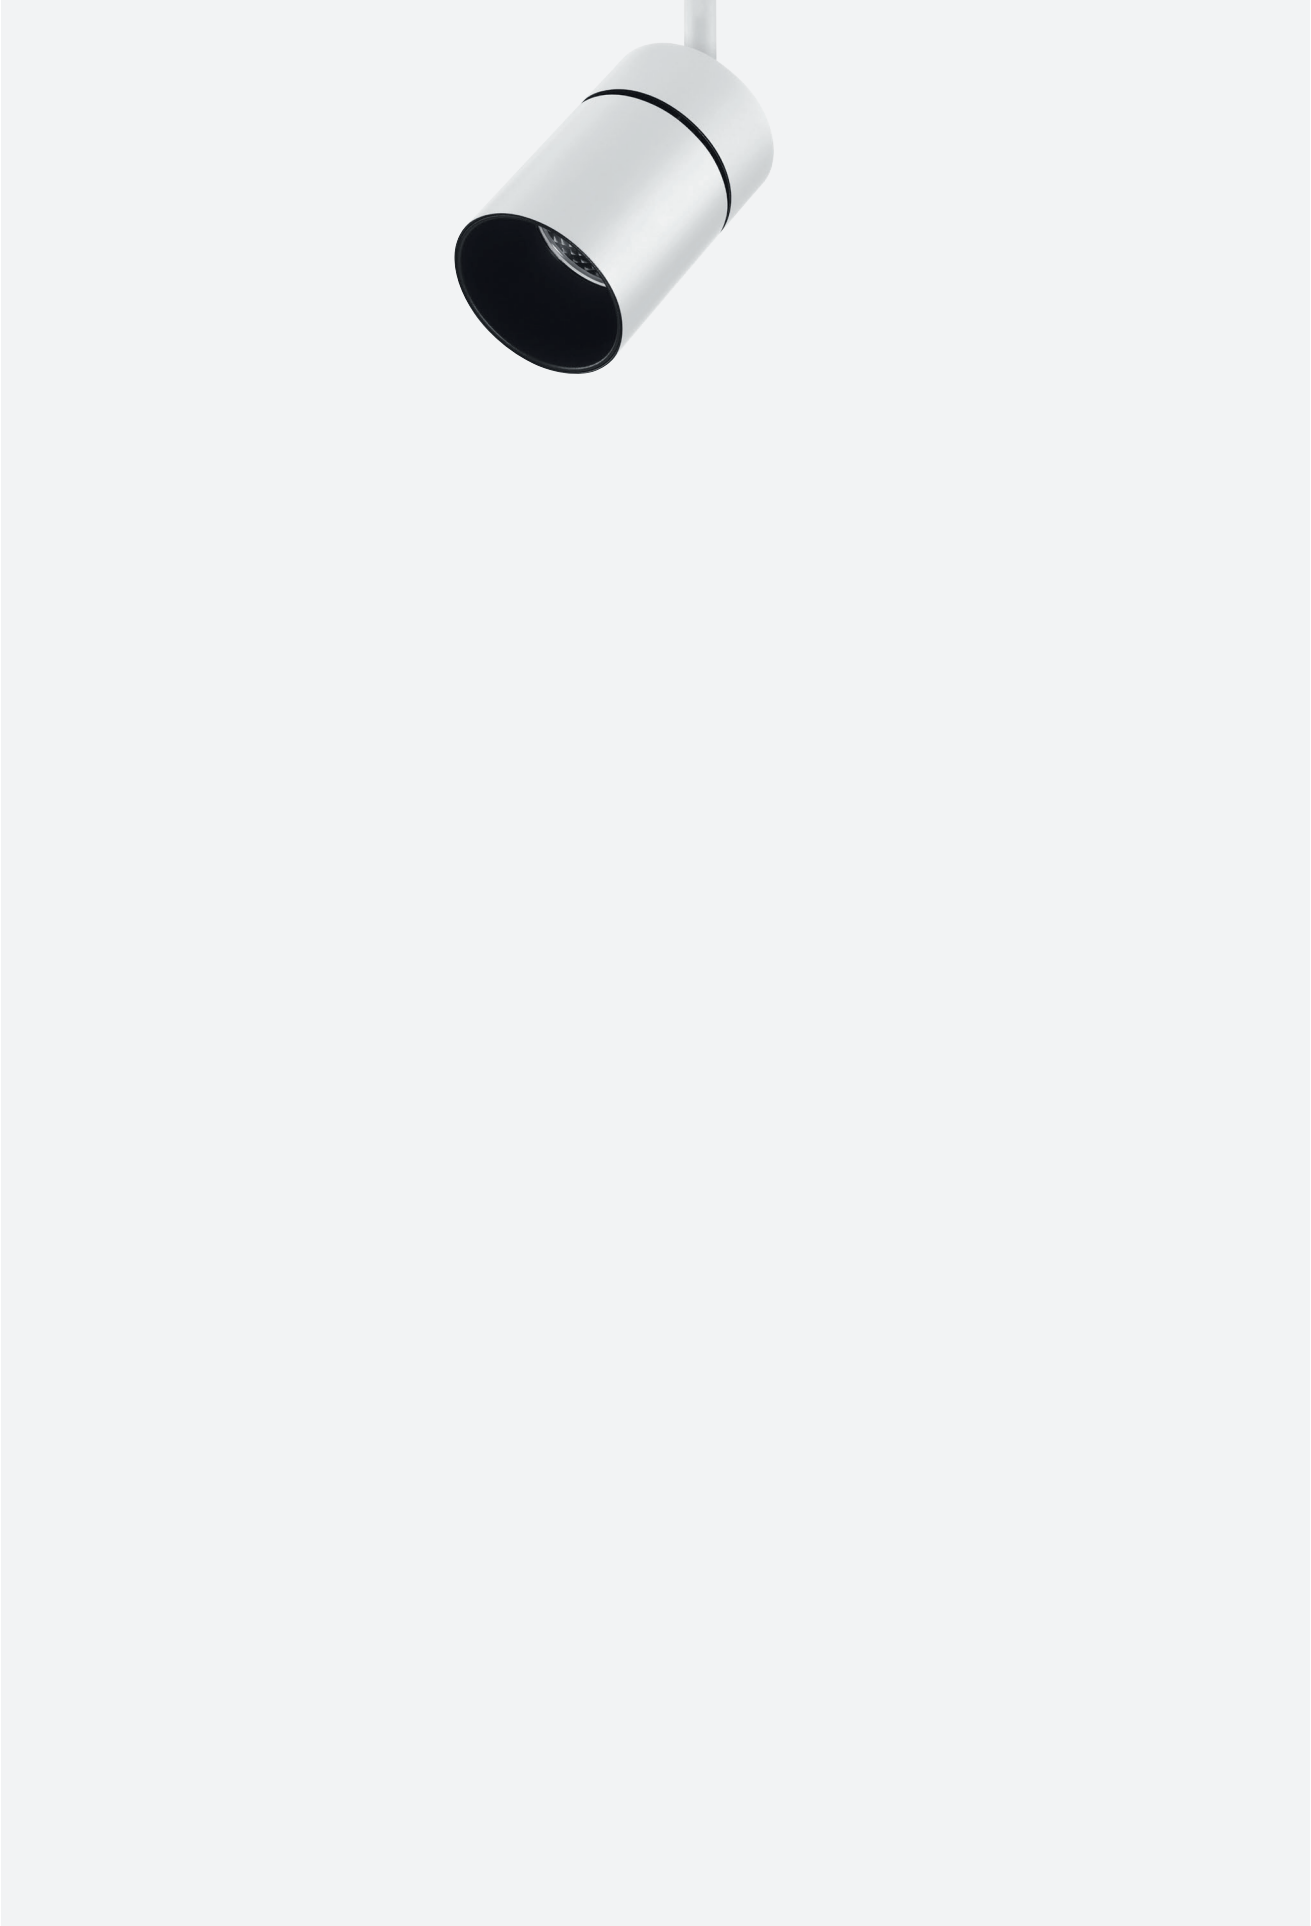
















ES Minimalismo y rigor al servicio de la funcionalidad. Yori se ha diseñado para acoger las más novedosas fuentes luminosas LED y para aplicarse a carriles, en el interior de canales, a instalaciones de empotrar, de superficie y en el interior de ranuras/cajas creadas en el techo. Su versatilidad y su elegante diseño hacen de Yori la mejor solución para la iluminación de relieve en superficies comerciales, residenciales y de exposición.

Overview













Application:	Track, Recessed, Modular
Light source:	POWER LED , COB LED
Watt:	2,5 W - 37 W
Kelvin	2700 K, 3000 K, 4000 K
Lumen:	215 lm - 4695 lm
CRI:	>80, >90, >95, >98
SDCM:	<2, <3
IP:	20
Control options:	On/Off, Phase-cut, Dimm 1-10V, DALI
Technologies:	Warm Dimming, Bluetooth









Disponible pour l'Amérique du Nord : rendez-vous sur www.reggianiusa.com/
 Disponible para América del Norte: consulte la página www.reggianiusa.com



















Système/ Sistema															
Track	 Yori Evo Ghosttrack p.397		 Yori Evo Box p.441		 Yori Slot p.461		 Yori and Zoom+lighstaper p.477								
Recessed	 Yori Recessed p.485		 Yori Semi-recessed p.515												
Modular	 Yori Channel p.537		 Yori Channel Arm p.563			 Yori Edge p.577									
Finitions/ Acabados Yori Evo Ghosttrack only	 12 Blanc opaque gauffré/ Blanco mate gofrado		 31 Noir opaque gauffré/ Negro mate gofrado												
 C0 Blanc opaque royal/ Blanco mate royal		 B0 Noir opaque royal/ Negro mate royal		 D0 Laiton brossé/ Latón cepillado		 E0 Or brossé/ Dorado cepillado		 O1 Chrome/ Aluminio Cromado		 M0 Aluminium brossé/ Aluminio cepillado		 N0 Cuivre brossé/ Cobre cepillado		 L0 Bronze brossé vieilli / Bronce cepillado antiguo	
Faisceaux/ Haces de luz	 Très étroit/ Muy estrecho		 Étroit/ Estrecho		 Moyen/ Medio		 Large/ Ancho								
Orientation/ Orientabilidad	 Axe vertical/ Eje vertical		 Axe horizontal/ Eje horizontal						Yori Slot p.462 Yori Channel Arm p.564 Yori Edge p.579						











Dimensions et données techniques/ Dimensiones e información técnica	Track			
	Mini Ø 43 mm (Cluster only)	Ø 60 mm	Ø 75 mm	Ø 95 mm
Yori Evo Ghostrack				
	p.406	p.414	p.424	p.432
2X				
	p.408	p.416	p.426	p.434
3X				
		p.418	p.428	p.436
4X				
		p.419		
Driver inclus/ Driver incluido		•	•	•
Ouverture du faisceau lumineux/ Amplitud del haz de luz				
Precision	7°, 10°, 11°, 22°, 23°, 27°, 38°, 40°	12°, 20°, 27°	7°, 12°, 24°, 25°	7°, 12°, 24°, 25°
Performance	6°, 18°, 36°	13, 24°, 40°	12°, 24°, 48°	10°, 20°, 31°
Source lumineuse/ Fuente luminosa	POWER LED 2,5 W, 4 W, 9 W 215 lm-940 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >80, CRI >90 Warm Dimming COB LED 6,5 W 10 lm - 550 lm L70 B50=50,000h 1800 K-2800 K SDCM <4 CRI >95	COB LED 9 W, 12 W, 17 W 960 lm-2400 lm L80 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <2 <3 CRI >80, CRI >90, CRI >98 Warm Dimming COB LED 12 W 100 lm - 1000 lm L70 B50=50,000h 1700 K-3000 K SDCM <4 CRI >95	COB LED 12 W, 17 W, 24 W, 28 W 1323 lm-4054 lm L80 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <2 <3 CRI >80, CRI >90, CRI >98 Warm Dimming COB LED 25 W 100 lm - 2500 lm L70 B50=50,000h 1700 K-3000 K SDCM <4 CRI >95	COB LED 12 W, 17 W, 24 W, 33 W 1323 lm-4695 lm L80 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <2 <3 CRI >80, CRI >90, CRI >98 Warm Dimming COB LED 33 W 100 lm - 3100 lm L70 B50=50,000h 1700 K-3000 K SDCM <4 CRI >95















Dimensions et données techniques/ Dimensiones e información técnica	Track			
	Ø 43 mm	Ø 60 mm	Ø 75 mm	Ø 95 mm
Yori Evo Box	 p.444	 p.448	 p.452	 p.456
Yori Slot	 p.464	 p.468	 p.472	
Ouverture du faisceau lumineux/ Amplitud del haz de luz				
Precision	7°, 11°, 23°, 27°, 40°	8°, 12°, 20°, 27°	7°, 12°, 24°	7°, 12°, 24°, 25°
Performance	6°, 18°, 36°	13°, 24°, 40°	12°, 24°, 48°	10°, 20°, 31°
Yori and Zoom+lighstaper				 p.477
Source lumineuse/ Fuente luminosa	POWER LED 4 W, 9 W 410 lm - 940 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >80, CRI >90 Warm Dimming COB LED 6,5 W 10 lm - 550 lm L70 B50=50,000h 1800 K - 2800 K SDCM <4 CRI >95	POWER LED 1x9 W 725 lm - 940 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >80, CRI >90 COB LED 9 W, 12 W, 17 W 960 lm - 2400 lm L80 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <2 <3 CRI >80, CRI >90, CRI >98 Warm Dimming COB LED 12 W 100 lm - 1000 lm L70 B50=50,000h 1700 K - 3000 K SDCM <4 CRI >95	COB LED 12 W, 17 W, 24 W, 28 W 1323 lm - 4054 lm L80 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <2 <3 CRI >80, CRI >90, CRI >98 Warm Dimming COB LED 25 W 100 lm - 2500 lm L70 B50=50,000h 1700 K - 3000 K SDCM <4 CRI >95	COB LED 12 W, 17 W, 24 W, 33 W, 37 W 1323 lm - 5090 lm L80 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <2 <3 CRI >80, CRI >90, CRI >98 Warm Dimming COB LED 33 W 100 lm - 3100 lm L70 B50=50,000h 1700 K - 3000 K SDCM <4 CRI >95

Dimensions et données techniques/ Dimensiones e información técnica	Recessed	
	Ø 60 mm	Ø 95 mm
Yori Recessed Round	 Trim p.488 Trimless p.488	 Trim p.492 Trimless p.492
Yori Recessed Square	 Trim p.496 Trimless p.496	 Trim p.500 Trimless p.500
Yori Recessed Square Double	 Trim p.504 Trimless p.504	 Trim p.508 Trimless p.508
Encombrement intérieur max/ Dimensiones interiores máximas	 Ø136 136x136 136x243	 Ø158 158x158 158x292
Ouverture du faisceau lumineux/ Amplitud del haz de luz	Precision 8°, 12°, 20°, 27° Performance 13°, 24°, 40°	Precision 7°, 12°, 24°, 25° Performance 10°, 20°, 31°
Source lumineuse/ Fuente luminosa	POWER LED 9 W 725 lm-940 lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >80, CRI >90 COB LED 9 W, 12 W 960 lm-1775 lm L80 B10=50,000h 2700K, 3000K, 4000K SDCM <2 <3 CRI >80, CRI >90, CRI >98 Warm Dimming COB LED 12 W 100 lm - 1000 lm L70 B50=50,000h 1700 K-3000 K SDCM <4 CRI >95	COB LED 12 W, 17 W, 24 W, 33 W 1323 lm-4695 lm L80 B10=50,000h 2700K, 3000K, 4000K SDCM <2 <3 CRI >80, CRI >90, CRI >98 Warm Dimming COB LED 33 W 100 lm - 3100 lm L70 B50=50,000h 1700 K-3000 K SDCM <4 CRI >95


Dimensions et données techniques/ Dimensiones e información técnica	Semi-recessed			
	Ø 43 mm	Ø 60 mm	Ø 75 mm	Ø 95 mm
Yori Semi-recessed				
	p.516	p.520	p.524	p.528
Encombrement intérieur max/ Dimensiones interiores máximas	 Ø43	 Ø55	 Ø55	 Ø55
Ouverture du faisceau lumineux/ Amplitud del haz de luz				
Precision	7°, 11°, 23°, 27°, 40°	8°, 12°, 20°, 27°	7°, 12°, 24°, 25°	7°, 12°, 24°, 25°
Performance	6°, 18°, 36°	13°, 24°, 40°	12°, 24°, 48°	10°, 20°, 31°
Source lumineuse/ Fuente luminosa	POWER LED 4 W, 9 W 410 lm-941 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >80, CRI >90 Warm Dimming COB LED 6,5 W 10 lm - 550 lm L70 B50=50,000h 1800 K-2800 K SDCM <4 CRI >95	POWER LED 9 W 725 lm-940 lm L90 B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >80, CRI >90 COB LED 9 W, 12 W, 17 W 960 lm-2400 lm L80 B10=50,000h 2700K, 3000K, 4000K SDCM <2 <3 CRI >80, CRI >90, CRI >98 Warm Dimming COB LED 12 W 100 lm - 1000 lm L70 B50=50,000h 1700 K-3000 K SDCM <4 CRI >95	COB LED 12 W, 17 W, 24 W, 28 W 1323 lm-4054 lm L80 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <2 <3 CRI >80, CRI >90, CRI >98 Warm Dimming COB LED 25 W 100 lm - 2500 lm L70 B50=50,000h 1700 K-3000 K SDCM <4 CRI >95	COB LED 12 W, 17 W, 24 W, 33 W, 37 W 1323 lm-5090 lm L80 B10=50,000h 2700K, 3000K, 4000K SDCM <2 <3 CRI >80, CRI >90, CRI >98 Warm Dimming COB LED 33 W 100 lm - 3100 lm L70 B50=50,000h 1700 K-3000 K SDCM <4 CRI >95

Dimensions et données techniques/ Dimensiones e información técnica	Modular			
	Ø 43 mm	Ø 60 mm	Ø 75 mm	Ø 95 mm
Yori Channel	 p.540	 p.544	 p.548	 p.552
Yori Channel Arm		 p.566		 p.570
Yori Edge		 p.584	 p.588	
Ouverture du faisceau lumineux/ Amplitud del haz de luz				
Precision	7°, 11°, 23°, 27°, 40°	8°, 12°, 20°, 27°	7°, 12°, 24°, 25°	7°, 12°, 24°, 25°
Performance	6°, 18°, 36°	13°, 24°, 40°	12°, 24°, 48°	10°, 20°, 31°
Source lumineuse/ Fuente luminosa	POWER LED 4 W, 9 W 410lm-940lm L90B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >80, CRI >90 Warm Dimming COB LED 6,5 W 10lm - 550lm L70B50=50,000h 1800K-2800K SDCM <4 CRI >95	POWER LED 9 W 725lm-941lm L90B10=50,000h 2700K, 3000K, 4000K SDCM <3 CRI >80, CRI >90 COB LED 9 W, 12 W, 17 W 960lm-2400lm L80B10=50,000h 2700K, 3000K, 4000K SDCM <2 <3 CRI >80, CRI >90, CRI >98 Warm Dimming COB LED 12 W 100lm - 1000lm L70B50=50,000h 1700K-3000K SDCM <4 CRI >95	COB LED 12 W, 17 W, 24 W, 28 W 1323lm-4054lm L80B10=50,000h 2700K, 3000K, 4000K SDCM <2 <3 CRI >80, CRI >90, CRI >98 Warm Dimming COB LED 25 W 100lm - 2500lm L70B50=50,000h 1700K-3000K SDCM <4 CRI >95	COB LED 12 W, 17 W, 24 W, 33 W, 37 W 1323lm-5090lm L80B10=50,000h 2700K, 3000K, 4000K SDCM <2 <3 CRI >80, CRI >90, CRI >98 Warm Dimming COB LED 33 W 100lm - 3100lm L70B50=50,000h 1700K-3000K SDCM <4 CRI >95



Accessoires/ Accesorios				
<p>Accessoires pour optique/ Accesorios de las ópticas</p>	 <p>Filtres en verre 1 mm/ Filtros en cristal de 1 mm</p>	 <p>Lames pour gel coloré/ Plaquetas de cristal para gel colorados</p>	 <p>Filtres sélectifs/ Filtros selectores</p>	 <p>Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida</p>
	 <p>Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha</p>	 <p>Lentille pour faisceau elliptique/ Lente para haz de luz elíptico</p>	 <p>Lentille opale/ Lente opalescente</p>	 <p>Lentille diffusante/ Lente difusora</p>
	 <p>Grille en croix/ Rejilla cruciforme</p>	 <p>Cône 45° wall washer/ Cono 45° wall washer</p>	 <p>Cylindre court/ Cilindro corto</p>	 <p>Volets coupe-flux/ Aletas antideslumbrantes</p>
	 <p>Projecteur cadreur/ Contorneador de luz</p>			
<p>Yori Ghostrack only</p>	 <p>Entretroises/ Distanciadores</p>			

Precision


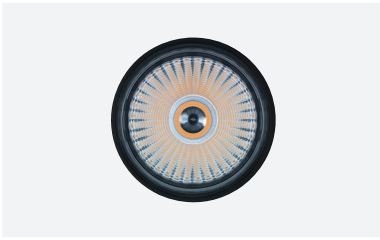


FR Système de lentilles interchangeable en matière plastique résistante aux hautes températures, stabilisée jusqu'à 140°, autoextinguible V0 avec rendement jusqu'à 89%. Faisceaux très étroits, étroits et moyens avec valeurs d'intensité jusqu'à 60 000 cd.


ES Sistema de lentes intercambiables en plástico resistente a las altas temperaturas, estabilizado hasta 140°, incombustible V0 con eficiencia hasta el 89%. Haces de luz muy estrechos, estrechos y medios con valores de intensidad luminosa hasta 60.000 cd.




Precision for YORI Ø43
LED: 9W/11°/3000K (HQ)

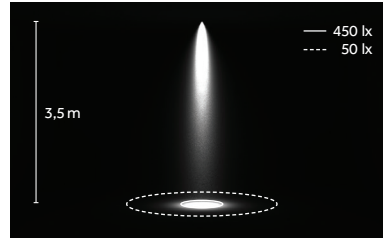


Très étroit/
Muy estrecho
A 7°




Étroit/
Estrecho
B 11°





Moyen/
Medio
E 23°




Large/
Ancho
H 40°




Precision for YORI Ø60
LED: 17W/12°/3000K (HQ)

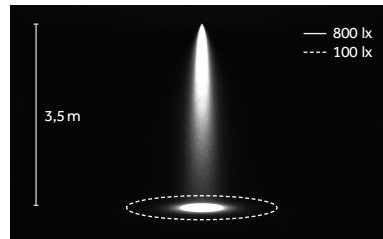


Très étroit/
Muy estrecho
A 8°




Étroit/
Estrecho
B 12°




Moyen/
Medio
E 20°




Precision for YORI Ø75
LED: 28W/12°/3000K (HQ)

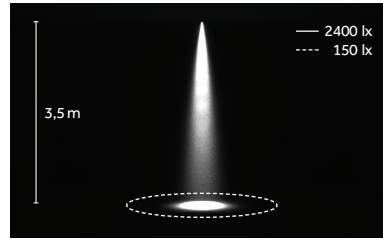


Très étroit/
Muy estrecho
A 7°




Étroit/
Estrecho
B 12°




Moyen/
Medio
E 24°




Precision for YORI Ø95
LED: 37W/12°/3000K (HQ)

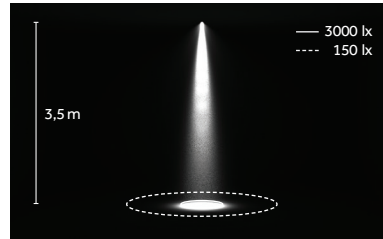

Très étroit/
Muy estrecho
A 7°




Étroit/
Estrecho
B 12°




Moyen/
Medio
E 24°

Performance


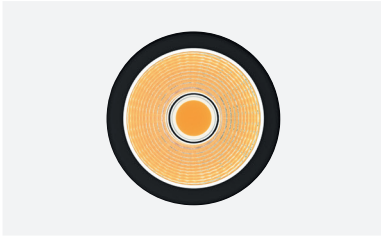


^{FR} Système de réflecteurs interchangeables en aluminium pur à 99 %, avec traitement superficiel, rendement jusqu'à 90 % et verre de sécurité anti-reflet doté d'un indice de transmission élevé (99 %). Faisceaux étroits, moyens et larges pour un rendement de l'appareil pouvant atteindre 120 lm/W.


^{ES} Sistema de reflectores intercambiables en aluminio (pureza 99%) con tratamiento superficial, eficiencia hasta el 90% y cristal de seguridad antideslumbrante con elevado coeficiente de transmisión (99%). Haces de luz estrechos, medios y anchos para aparatos con eficiencia hasta 120 lm/W.



Performance for YORI Ø43
LED: 9W/18°/3000K (HQ)

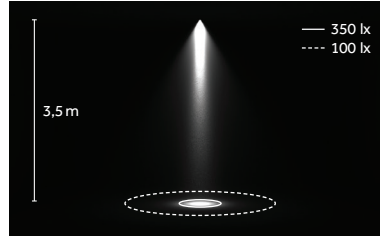


Étroit/
Estrecho
B 6°





Moyen/
Medio
E 18°




Large/
Ancho
H 36°




Performance for YORI Ø60
LED: 17W/24°/3000K (HQ)

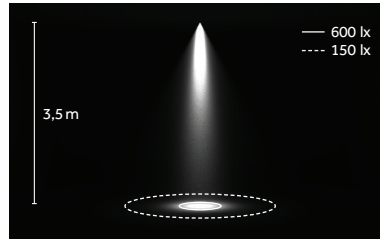


Étroit/
Estrecho
B 13°





Moyen/
Medio
E 24°




Large/
Ancho
H 40°




Performance for YORI Ø75
LED: 28W/12°/3000K (HQ)

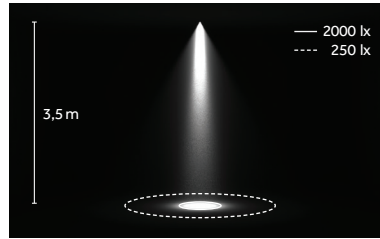


Étroit/
Estrecho
B 12°





Moyen/
Medio
E 24°




Large/
Ancho
H 48°




Performance for YORI Ø95
LED: 37W/10°/3000K (HQ)

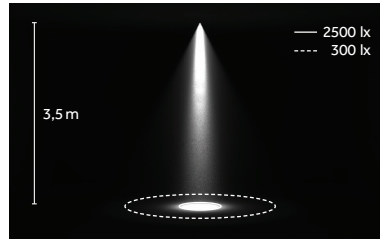

Étroit/
Estrecho
B 10°




Moyen/
Medio
E 20°



Large/
Ancho
H 31°

COB



2700 K, 3000 K, 4000 K
SDCM <2, <3
CRI>80, CRI > 90, CRI >98


TM 30
Rf: 90, Rg: 100
(3000K, CRI>90)

L80 B10=50,000h
Ta: 25°
Tc: 85°
~9,000 hr
Lm Maintenance: 98%
(Source: LM80 test report)

Note:
Yori Ø 43, Ø 60
(POWER LED)




R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
100	99	97	99	99	99	99	97	93	97	98	87	99	97	98

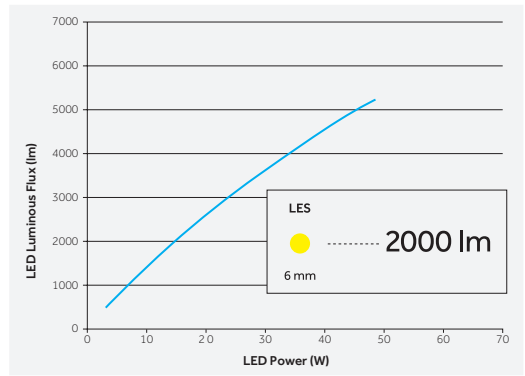

FR Les COB LED et POWER LED se distinguent par une excellente intensité lumineuse allée à une compacité unique sur le marché. Cette caractéristique permet d'intégrer ces sources lumineuses dans des produits dont les dimensions sont très réduites tout en offrant des performances hors pair, une intensité maximale du faisceau en candelas très élevée et un flux lumineux de 150 lm à 4 000 lm. Ces sources lumineuses se distinguent par un maintien du lumen à de hautes températures d'utilisation grâce à une optimisation de leur rendement à haute température et à une meilleure stabilité optique au fil du temps.


ES Los LEDs COB y los LEDs de potencia (POWER LED) se distinguen por su excelente intensidad luminosa en los tamaños más pequeños ahora disponibles en el mercado. Esta característica hace que estas fuentes luminosas puedan incorporarse en aparatos de iluminación muy compactos garantizando un rendimiento único, picos de intensidad en candelas muy elevados y lúmenes emitidos desde 150 lm hasta 4000 lm. Estas fuentes luminosas mantienen constante en el tiempo el nivel de lúmenes a altas temperaturas de empleo gracias a una mayor eficiencia a las altas temperaturas y a una mejor estabilidad óptica en el tiempo.

Warm Dimming

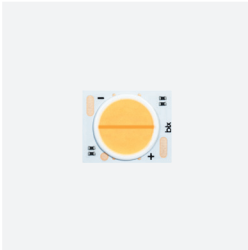


1700 K-3000 K
SDCM <4
CRI>95

L70 B10=50,000h

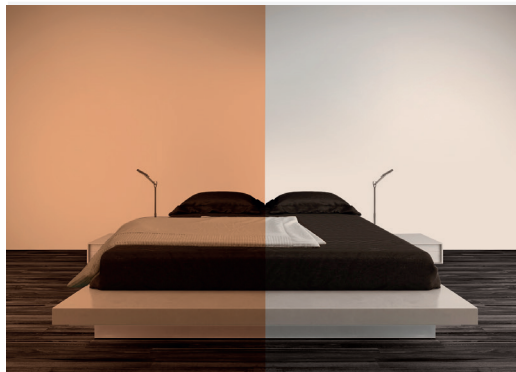

Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	
1700K	94	94	95	97	90	91	88	97	97	94	92	81	78	93	96	98
3000K	97	95	97	97	97	96	95	99	97	94	97	94	86	95	97	95

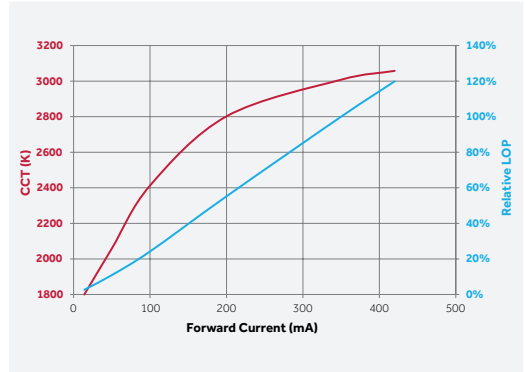

FR Notre solution allie deux puces en un seul COB LED. Grâce à cette configuration, l'alimentation est constituée d'un seul driver qui réduit progressivement l'ampérage d'entrée en fonction du rendement désiré. La réduction de l'alimentation des puces provoque la diminution du flux, et la température de couleur - issue de la combinaison de chaque température de couleur fixée - est équilibrée automatiquement en conséquence. Cette technologie offre une très large plage de réglage de la luminosité allée à une variation de la température de couleur très flexible et graduelle, comprise entre un maximum de 3 000 K et un minimum de 1 700 K. L'IRC et le rendu des couleurs sont excellents sur l'ensemble de la plage de gradation, avec des valeurs d'IRC allant jusqu'à 97 et de R9 pouvant atteindre 94

ES Nuestra solución combina dos chip en un solo LED COB. Con esta configuración, la alimentación es un único driver que reduce gradualmente el amperaje en entrada en función del rendimiento deseado. Disminuyendo la alimentación a los chip, disminuye el flujo y, por consecuencia, la temperatura de color, resultante de la combinación de las varias temperaturas de color designadas, se regula automáticamente. Esta tecnología ofrece un rango de regulación de la intensidad luminosa muy amplio con una variación muy suave y gradual de la temperatura de color, desde un máximo de 3000K hasta un mínimo de 1700K. El IRC y la reproducción del color es excelente para todo el rango de regulación, con valores de IRC hasta 97 y un R9 de 94.





FR Grâce à son optique en retrait, Yori Recessed est un appareil au confort visuel excellent ; la position de l'optique permet par ailleurs d'héberger différents types d'accessoires à l'intérieur du corps cylindrique du projecteur.

ES Gracias a la óptica hacia atrás, Yori Recessed es un aparato de excelente confort visual. Además, la posición de la óptica permite montar diferentes tipologías de accesorios en el interior del cuerpo cilíndrico del proyector.

FR Ailette de refroidissement en aluminium moulé sous pression pour une excellente dissipation de la chaleur.
ES Disipador de aluminio inyectado para una excelente disipación del calor.



FR Écran anti-éblouissement intégré et optique en retrait pour un plus grand confort visuel.
ES Pantalla antideslumbrante integrada y óptica hacia atrás para el mayor confort visual.

FR Filtres et lentilles
ES Filtros y lentes



Filtres en verre 1 mm/
Filtros en cristal de 1 mm



Lentille pour faisceau elliptique/
Lente para haz de luz elíptico



Grille en nid d'abeilles, maille large/
Rejilla alveolar de textura ancha



Lames pour gel coloré/
Plaquetas de cristal para gel colorados



Lentille opale/
Lente opalescente



Grille en nid d'abeilles, maille fine/
Rejilla alveolar de textura tupida



Filtres sélectifs/
Filtros selectores



Lentille diffusante/
Lente difusora

FR Supports pour filtres et lentilles
ES Soportes para filtros y lentes




Élément anti-éblouissement/
Visera antideslumbrante




Grille en croix/
Rejilla cruciforme



Cône 45° wall washer/
Cono 45° wall washer



Volets coupe-flux/
Aletas antideslumbrantes

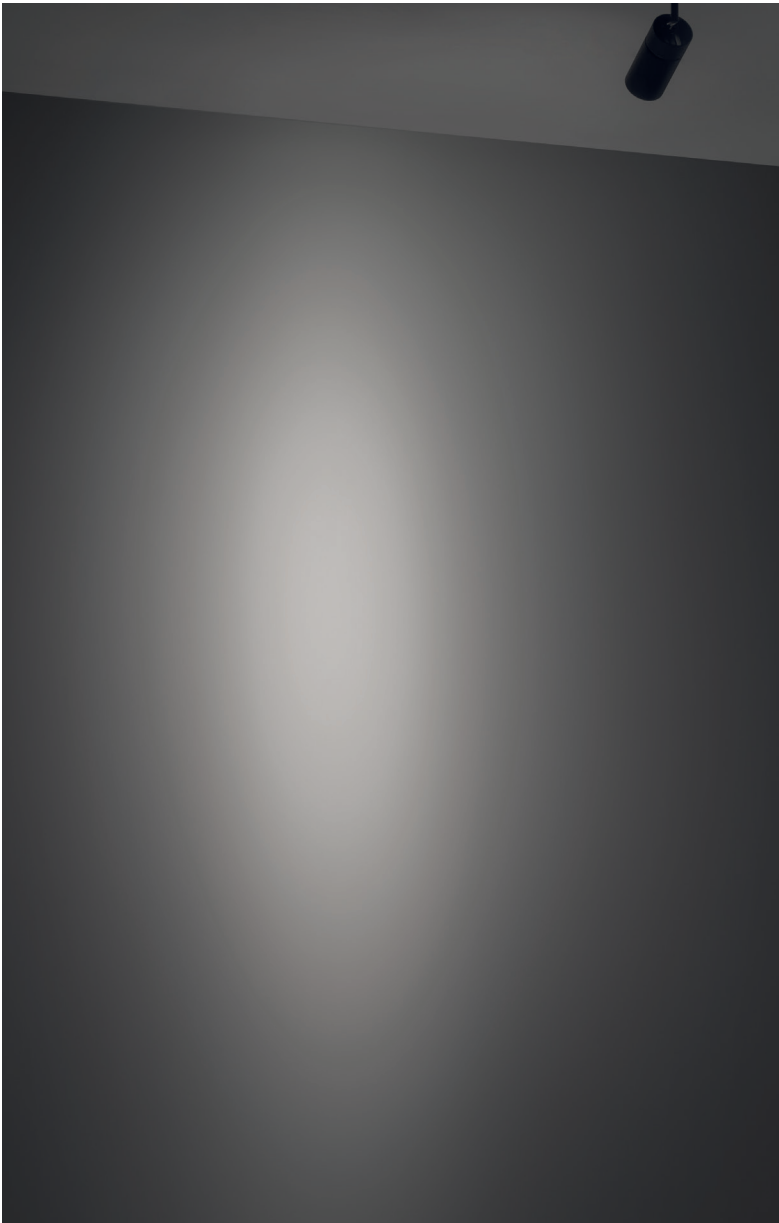

FR Effet lumineux avec verre cannelé
ES Efecto luz con cristal acanalado



FR Tous les porte-filtres/lentilles disposent de deux fentes qui permettent l'insertion simultanée de deux accessoires
ES Todos los soportes para filtros/lentes disponen de dos alojamientos que permiten instalar dos accesorios contemporáneamente



—

Yori Evo Ghostrack

Yori Evo Ghostrack

FR Cette nouvelle gamme révolutionnaire de projecteurs sur rail, en 4 dimensions, est proposée disposée en rangée simple ou dans plusieurs modules, avec un vaste choix de lentilles ou de réflecteurs Precision et Performance. Les technologies optiques adoptées et les nouveaux drivers et adaptateurs invisibles pour rails standard à 3 circuits d'allumage fournissent des configurations uniques extrêmement flexibles.


ES Esta nueva revolucionaria serie de proyectores para carril cuenta con 4 dimensiones, dos modelos (simple o cluster) y una amplia gama de lentes (Precision y Performance). Las tecnologías ópticas, los nuevos driver y los adaptadores invisibles para carriles estándar de 3 circuitos de encendido permiten crear configuraciones únicas y sumamente flexibles.



FR Montage de Yori Ghostrack
ES Montaje Yori Ghostrack



FR Montage du driver Ghostrack
ES Montaje driver Ghostrack

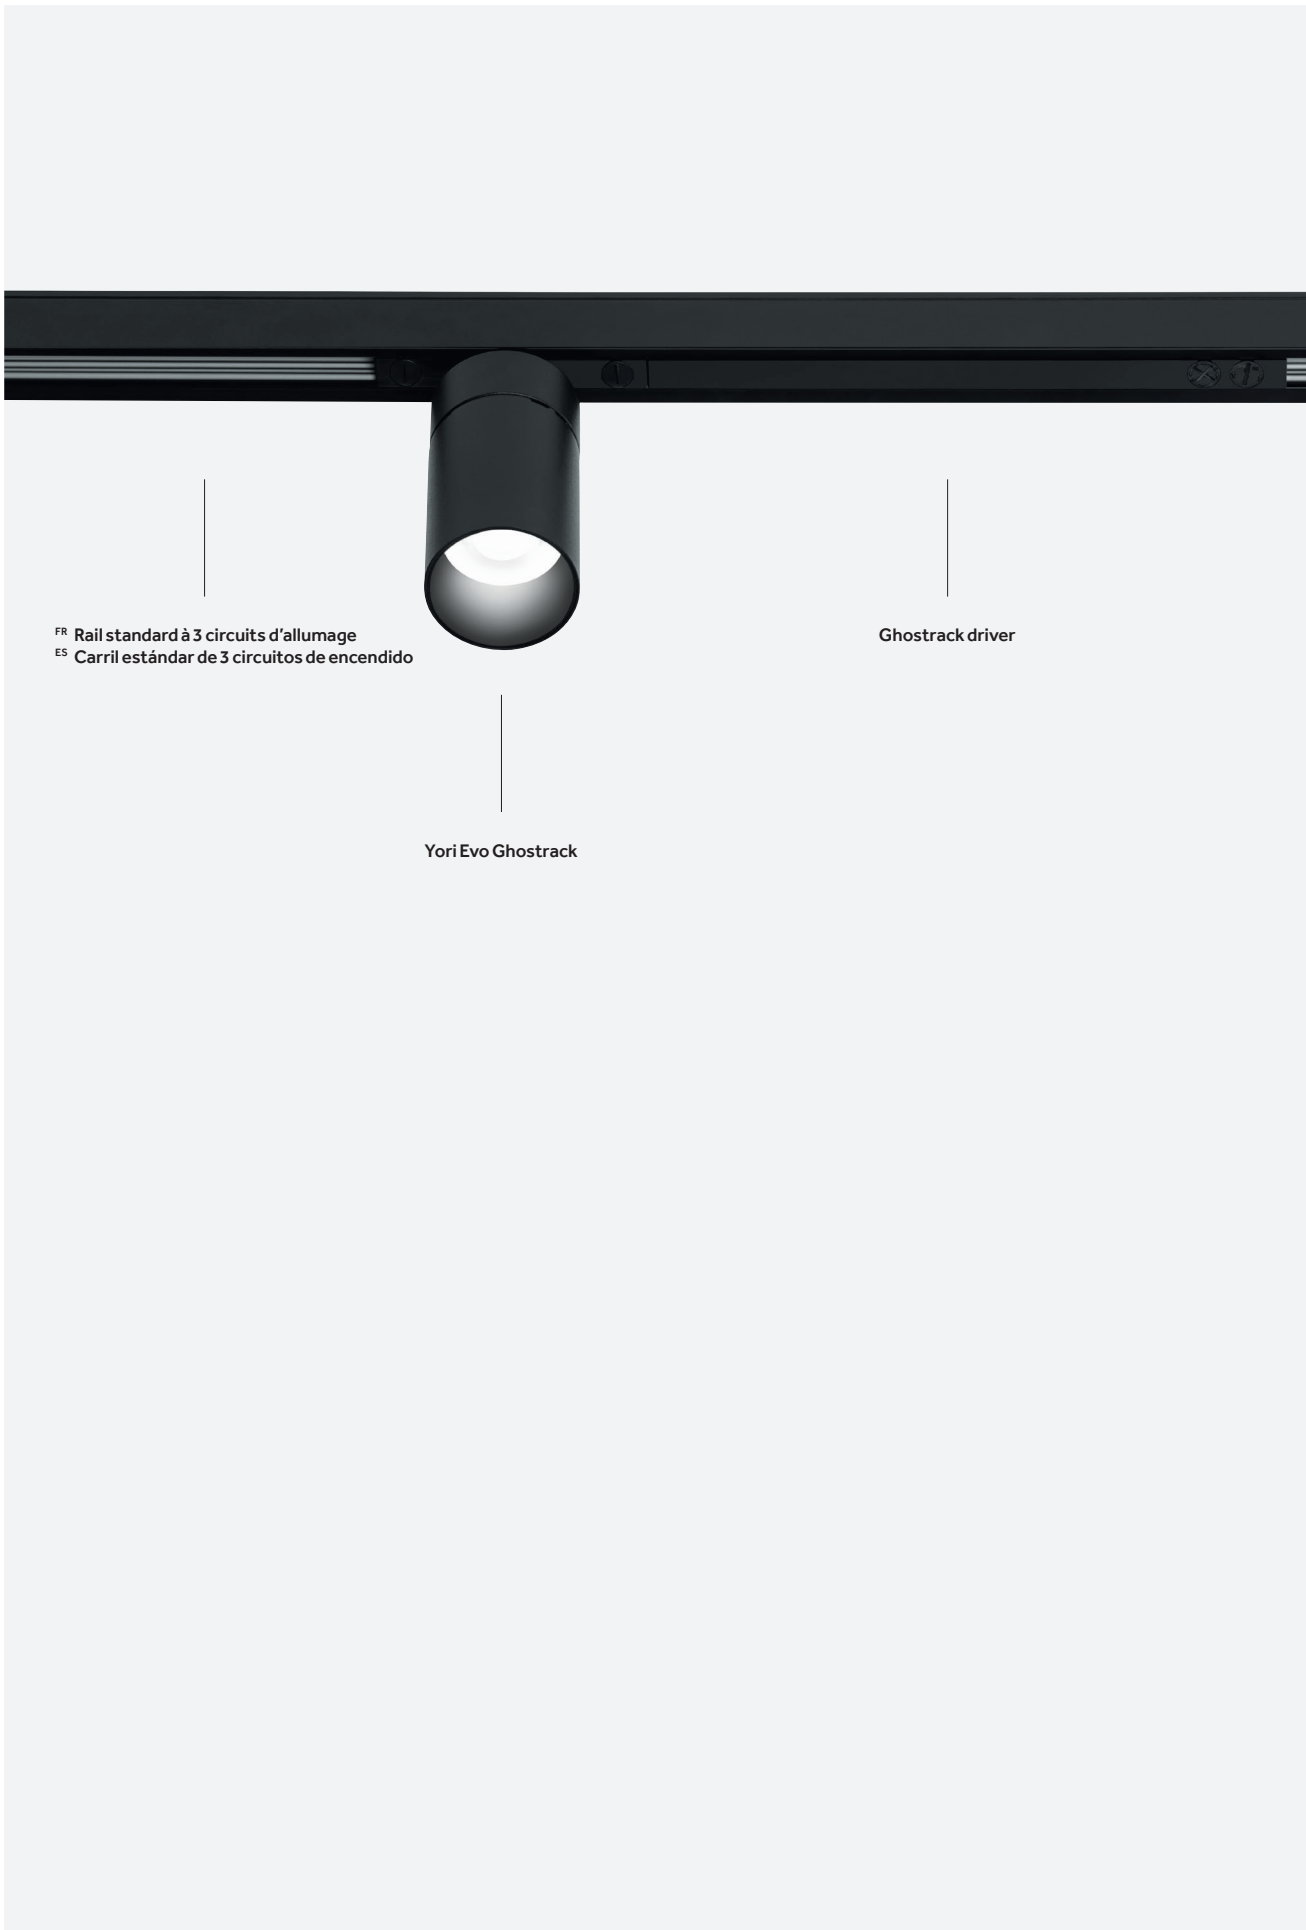

FR Rail standard à 3 circuits d'allumage
ES Carril estándar de 3 circuitos de encendido


Ghostrack driver

Yori Evo Ghostrack

FR Yori Evo Ghostrack offre la possibilité de créer des configurations et des agencements d'éclairage exceptionnels. Grâce à une technologie brevetée particulièrement innovante, il est muni d'un adaptateur et d'un driver invisibles pour une installation dans une rangée simple ou dans plusieurs modules, sur des rails standard à 3 circuits d'allumage.

ES Yori Evo Ghostrack permite crear configuraciones y layout luminotécnicos extraordinarios. Gracias a su nueva tecnología patentada, cuenta con un adaptador y un driver invisibles para instalaciones individuales o de clusters en carriles estándar de 3 circuitos de encendido.

Single

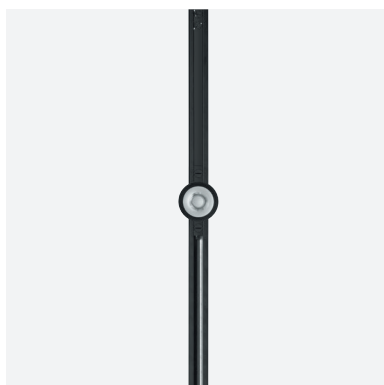

Single
(1 Ghostrack driver + 1 Yori Evo Ghostrack)





Ø 60 mm

Ø 75 mm

Ø 95 mm

Cluster (2X)

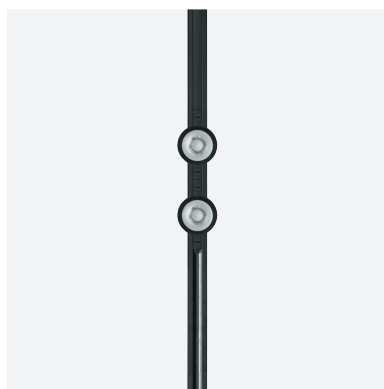

Cluster (2X)
(1 Ghostrack driver + 2 Yori Evo Ghostrack)




Ø 60 mm

Ø 75 mm

Ø 95 mm

Cluster (3X)




Cluster (3X)
(1 Ghostrack driver + 3 Yori Evo Ghostrack)



Ø 60 mm





Ø 75 mm



Ø 95 mm

Cluster (4X)

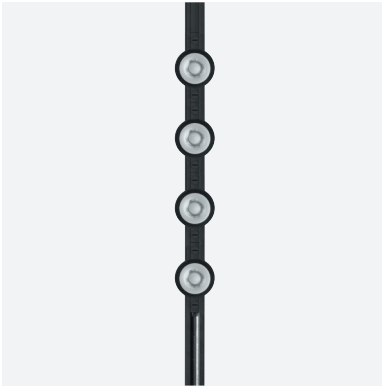


Cluster (4X)
(1 Ghostrack driver + 4 Yori Evo Ghostrack)




Ø 60 mm

Cluster (1 to 14)

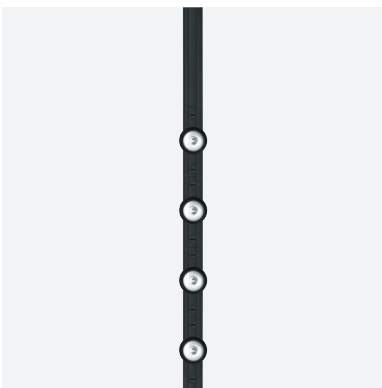

Create your Custom Cluster:
from 1 to 14 Yori Evo Ghostrack Mini (Ø43 mm)



Ghostrack driver

Single Mini Ø43 mm
(1X)

Double Mini Ø 43 mm
(2X)




Mini Ø 43 mm

FR Les versions sur plusieurs modules de Yori Evo Ghostrack peuvent être personnalisées avec l'ajout d'une entretoise en guise d'accessoire. Disponible en différentes longueurs, l'entretoise est un élément qui permet de positionner les projecteurs de manière flexible en réalisant sur le rail la configuration la mieux adaptée aux exigences d'éclairage du projet.

ES Los modelos cluster de Yori Evo Ghostrack pueden personalizarse con un accesorio distanciador. El distanciador, disponible en varias longitudes, permite posicionar los proyectores con flexibilidad realizando, en el carril, la configuración más adecuada según las exigencias luminotécnicas del proyecto.

Spacer

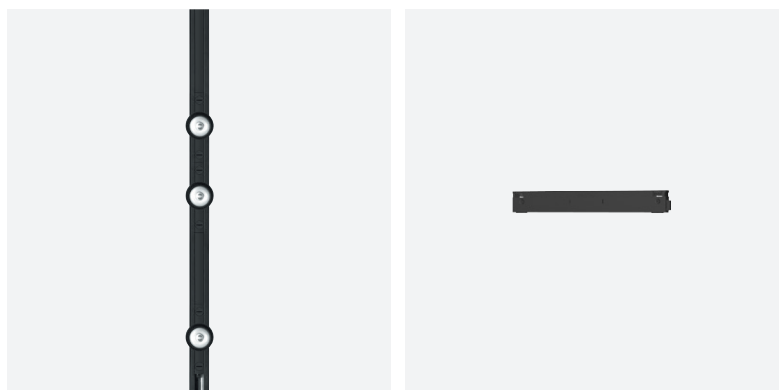

Longueurs/ Longitudes


- 110 mm
- 220 mm
- 300 mm
- 400 mm
- 600 mm
- 800 mm
- 1000 mm
- 1200 mm




FR Les entretoises (de 300 mm jusqu'à 1200 mm de longueur) peuvent être coupées sur mesure afin d'obtenir la distance souhaitée entre les appareils.
 ES Los distanciadores (de 300mm a 1200mm de longitud) pueden cortarse a medida, según las diferentes necesidades de distancia entre los aparatos.

Examples:


Ø75 | Cluster (2X) + 1 Spacer

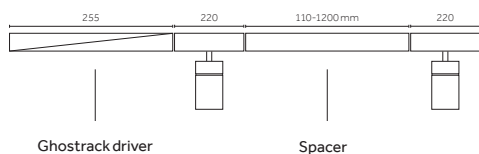

Ø60 | Cluster (4X) + 2 Spacer

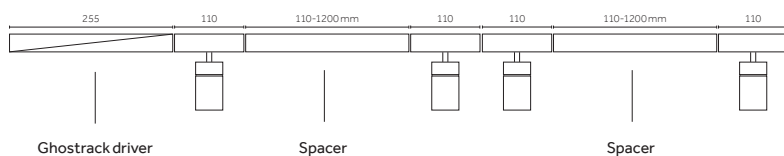

Ø43 | Cluster (1 to 14) + 2 Spacer

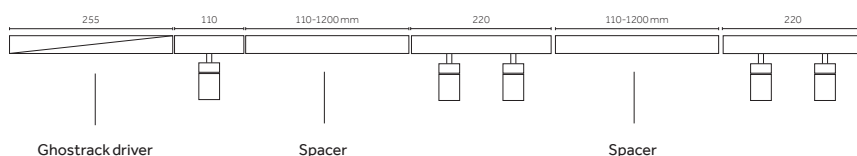



403

FR La vaste sélection de finitions spéciales, disponibles de série pour Yori Evo Ghostrack, et de nouveaux accessoires, offre une grande flexibilité au niveau de l'utilisation de l'appareil et permet de l'insérer dans des espaces qui se distinguent par la diversité des éléments architecturaux et des matériaux.

ES La amplia gama de acabados especiales, disponibles como estándar para Yori Evo Ghostrack, y de nuevos accesorios, hace que el aparato, siendo sumamente flexible, pueda utilizarse en varios entornos caracterizados por diferentes detalles arquitectónicos y materiales.



FR **12** Blanc opaque gaufré
ES **12** Blanco mate gofrado



FR **C0** Blanc opaque royal
ES **C0** Blanco mate royal



FR **31** Noir opaque gaufré
ES **31** Negro mate gofrado



FR **B0** Noir opaque royal
ES **B0** Negro mate royal



FR **D0** Laiton brossé
ES **D0** Latón cepillado



FR **E0** Or brossé
ES **E0** Dorado cepillado



FR **01** Chrome
ES **01** Cromado




FR **M0** Aluminium brossé
ES **M0** Aluminio cepillado





FR **N0** Cuivre brossé
ES **N0** Cobre cepillado



FR **L0** Bronze brossé vieilli
ES **L0** Bronce cepillado antiguo

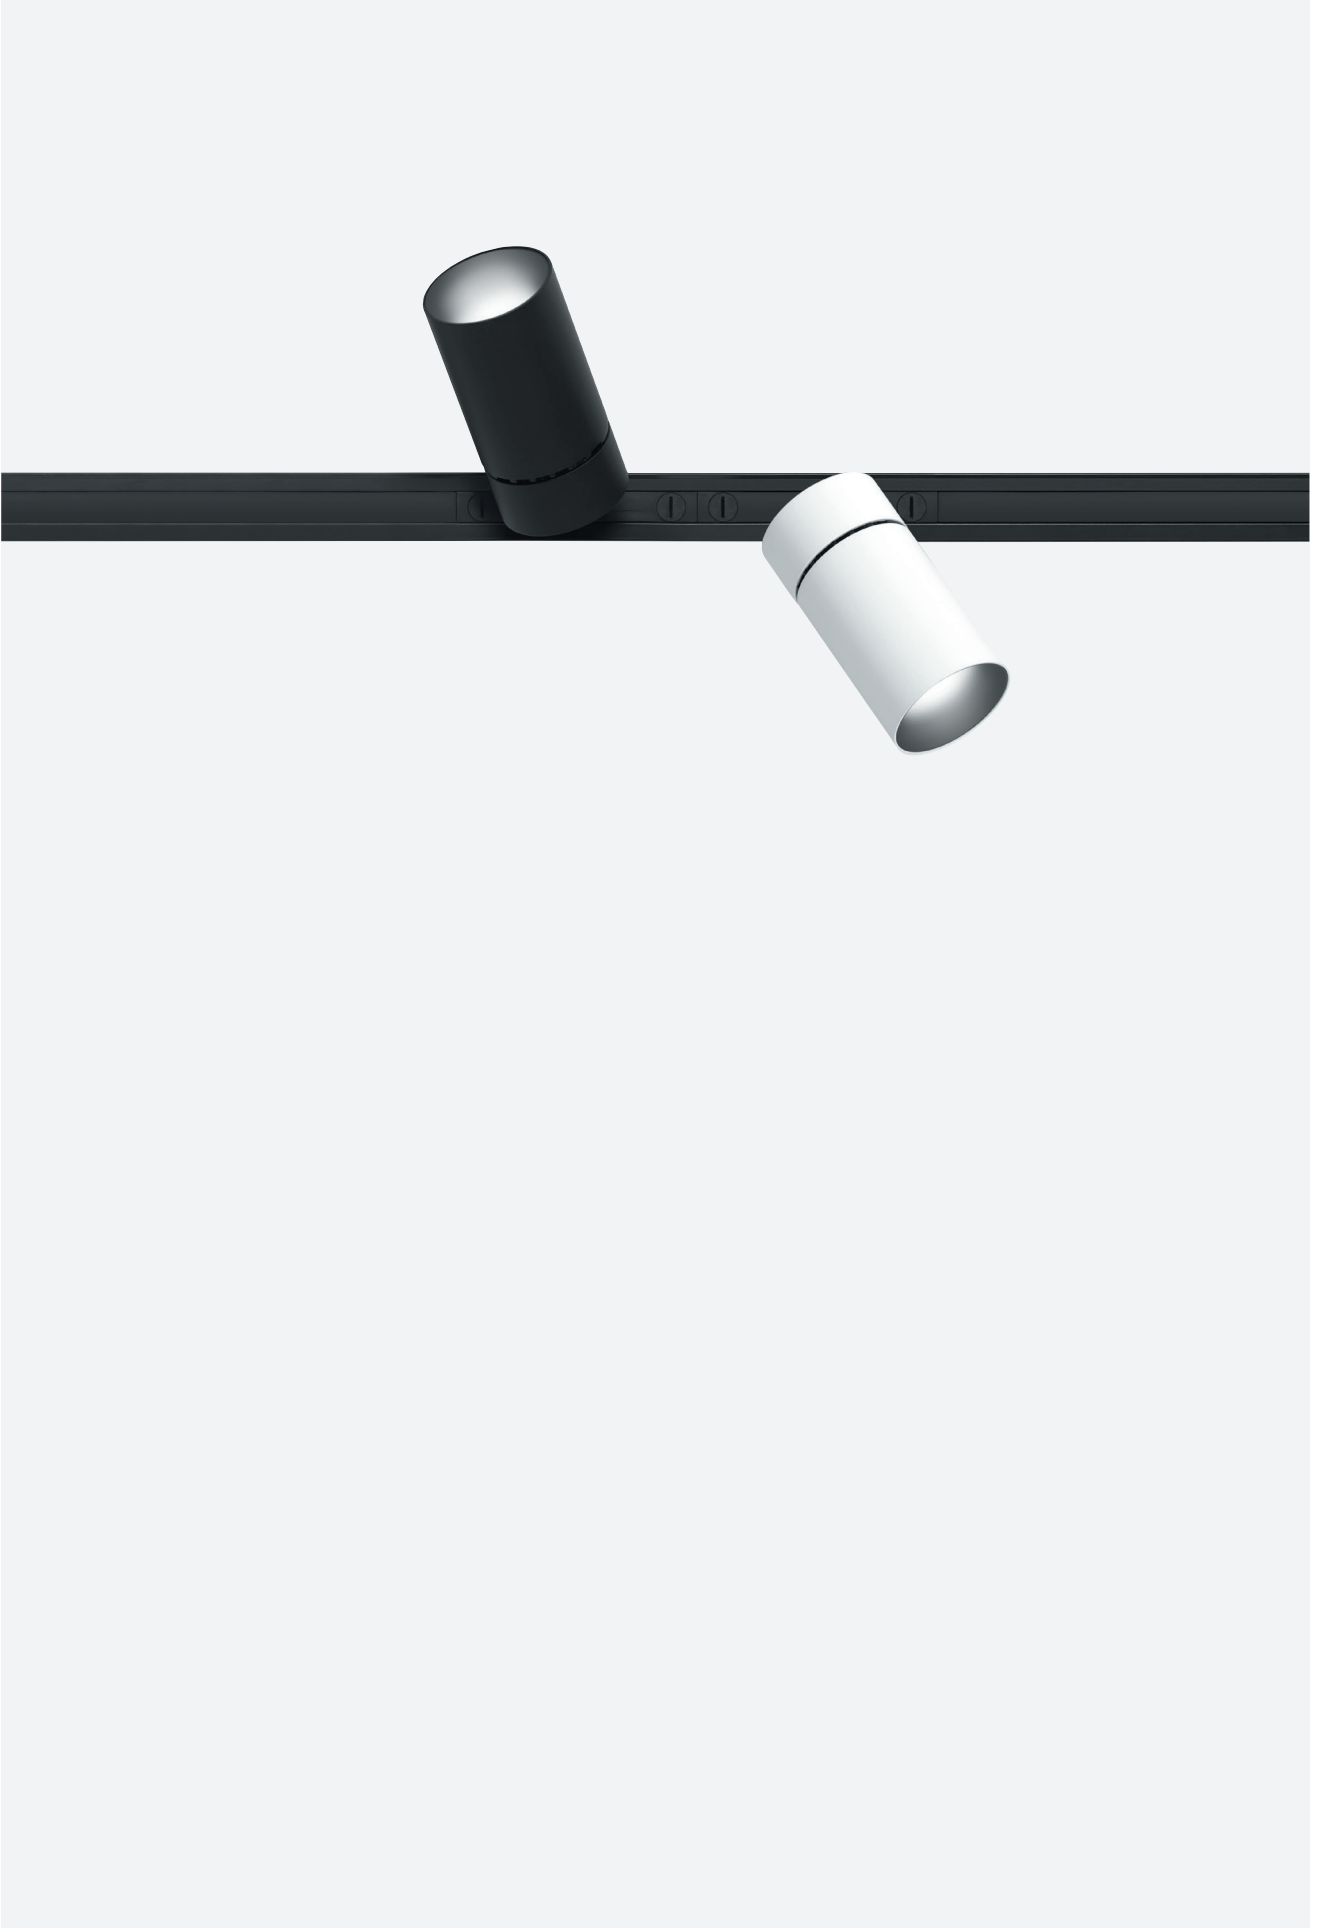

Mini Ø 43 mm | Precision (1X)



Code example:
X . **1X.FH60** **A** . **HW** **12**

Accessories: p.410
 Entretoises/Distanciadores:p.412
 Rail/Carril : p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net
 Ghostrack driver: p.412



2,5 W POWER LED Lumen delivered up to 250lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	1X.FH60 Precision	A 7° Very narrow	HW	2700	>90	215	<3	01
		B 10° Narrow	HQ	3000	>90	220	<3	12
		E 22° Medium	WW	3000	>80	253	<3	31
		H 38° Wide	NN	4000	>80	288	<3	B0
								C0
								D0
								E0
								L0
								M0
								N0

LED nominal lumen

4 W POWER LED Lumen delivered up to 435lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	1X.FH61 Precision	A 7° Very narrow	HW	2700	>90	410	<3	01
		B 11° Narrow	HQ	3000	>90	415	<3	12
		E 23° Medium	WW	3000	>80	485	<3	31
		H 40° Wide	NN	4000	>80	530	<3	B0
								C0
								D0
								E0
								L0
								M0
								N0

LED nominal lumen

9 W POWER LED Lumen delivered up to 750lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	1X.FH62 Precision	A 7° Very narrow	HW	2700	>90	725	<3	01
		B 11° Narrow	HQ	3000	>90	730	<3	12
		E 23° Medium	WW	3000	>80	845	<3	31
		H 40° Wide	NN	4000	>80	940	<3	B0
								C0
								D0
								E0
								L0
								M0
								N0



LED nominal lumen

6,5 W Warm Dimming COB LED Lumen delivered up to 130lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	1X.FH62 Precision	B 27° Medium	DT	1800-2800	>95	10-550	<4	01
								12
								31
								B0
								C0
								D0
								E0
								L0
								M0
								N0

LED nominal lumen


Mini Ø 43 mm | Performance (1X)



Code example:

X . 1X.FH71 B . HW 12

Accessories: p.411
 Entretoises/Distanciadores: p.412
 Rail/Carril : p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net
 Ghosttrack driver: p.412




4W POWERLED Lumen delivered up to 450 lm / Lumen maintenance: L90B10=50,000h



Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	1X.FH71 Performance	B 6° Narrow	HW	2700	>90	410	<3	01
		E 18° Medium	HQ	3000	>90	415	<3	12
		H 36° Wide	WW	3000	>80	485	<3	31
			NN	4000	>80	530	<3	B0
			LED nominal lumen					C0
								D0
								E0
								L0
								M0
								NO

9W POWERLED Lumen delivered up to 780 lm / Lumen maintenance: L90B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	1X.FH72 Performance	B 6° Narrow	HW	2700	>90	725	<3	01
		E 18° Medium	HQ	3000	>90	730	<3	12
		H 36° Wide	WW	3000	>80	845	<3	31
			NN	4000	>80	940	<3	B0
			LED nominal lumen					C0
								D0
								E0
								L0
								M0
								NO

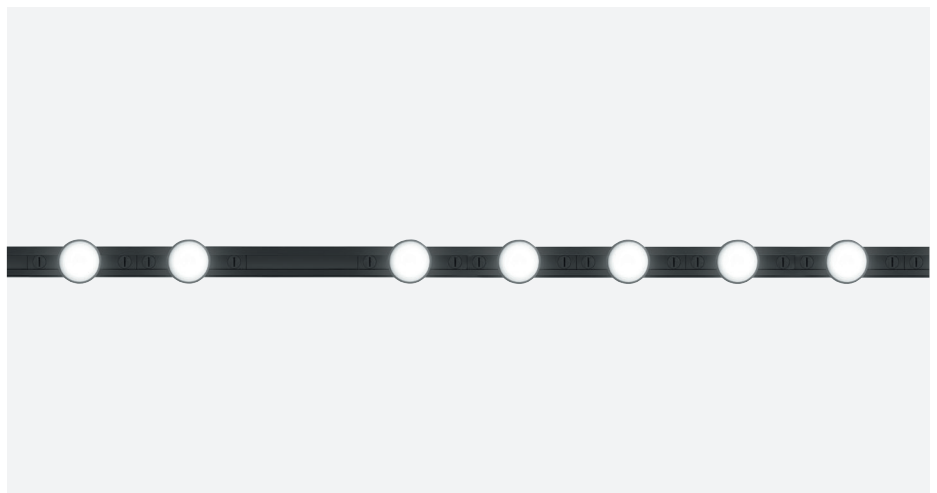


Mini Ø 43 mm | Precision (2X)



Code example:
X . 2X.FH60 A . HW 12

Accessories: p.410
 Entretoises/Distanciadores: p.412
 Rail/Carril: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net
 Ghostrack driver: p.412



2,5 W POWER LED Lumen delivered up to 2x250lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	2X.FH60 Precision	A 7° Very narrow	HW	2700	>90	2x215	<3	01
		B 10° Narrow	HQ	3000	>90	2x220	<3	12
		E 22° Medium	WW	3000	>80	2x253	<3	31
		H 38° Wide	NN	4000	>80	2x288	<3	B0
								C0
								D0
								E0
								L0
								M0
								N0

LED nominal lumen

4 W POWER LED Lumen delivered up to 2x435lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	2X.FH61 Precision	A 7° Very narrow	HW	2700	>90	2x410	<3	01
		B 11° Narrow	HQ	3000	>90	2x415	<3	12
		E 23° Medium	WW	3000	>80	2x485	<3	31
		H 40° Wide	NN	4000	>80	2x530	<3	B0
								C0
								D0
								E0
								L0
								M0
								N0

LED nominal lumen

9 W POWER LED Lumen delivered up to 2x750lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	2X.FH62 Precision	A 7° Very narrow	HW	2700	>90	2x725	<3	01
		B 11° Narrow	HQ	3000	>90	2x730	<3	12
		E 23° Medium	WW	3000	>80	2x845	<3	31
		H 40° Wide	NN	4000	>80	2x940	<3	B0
								C0
								D0
								E0
								L0
								M0
								N0



LED nominal lumen

6,5 W Warm Dimming COB LED Lumen delivered up to 2x130lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	2X.FH62 Precision	B 27° Medium	DT	1800-2800	>95	2x10-550	<4	01
								12
								31
								B0
								C0
								D0
								E0
								L0
								M0
								N0

LED nominal lumen

Mini Ø 43 mm | Performance (2X)



Code example:

X . 2X.FH71 B . HW 12

Accessories: p.411
 Entretoises/Distanciadores: p.412
 Rail/Carril : p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net
 Ghostack driver: p.412



4W POWERLED Lumen delivered up to 2x450lm / Lumen maintenance: L90B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	2X.FH71 Performance	B 6° Narrow	HW	2700	>90	2x410	<3	01
		E 18° Medium	HQ	3000	>90	2x415	<3	12
		H 36° Wide	WW	3000	>80	2x485	<3	31
			NN	4000	>80	2x530	<3	B0
			LED nominal lumen					C0
								D0
								E0
								L0
								M0
								NO

9W POWERLED Lumen delivered up to 2x780lm / Lumen maintenance: L90B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	2X.FH72 Performance	B 6° Narrow	HW	2700	>90	2x725	<3	01
		E 18° Medium	HQ	3000	>90	2x730	<3	12
		H 36° Wide	WW	3000	>80	2x845	<3	31
			NN	4000	>80	2x940	<3	B0
			LED nominal lumen					C0
								D0
								E0
								L0
								M0
								NO























Mini Ø 43 mm | Precision | Accessories

Accessoires pour optique/
Accesorios de las ópticas

Image	Description	Code	Finishes		Image	Description	Code	Finishes	
			4A	5A				12	31
	Filtres en verre 1 mm/ Filtros en cristal de 1 mm	0.26400.00				Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida	0.26440.0000		
						Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha	0.26448.0000		
						Lentille pour faisceau elliptique/ Lente para haz de luz eliptico	0.26456.0000		
	Lames pour gel coloré (2 pièces)/ Plaquetas de cristal para gel colorado (2 piezas)	0.26408.0000				Lentille opale/ Lente opalescente	0.26460.0000		
	Filtre sélectif 3000K - 2700K/ Filtro selector 3000K - 2700K	0.26557.0000				Lentille diffusante/ Lente difusora	0.26468.0000		
	Filtre sélectif 2700K - 2500K/ Filtro selector 2700K - 2500K	0.26416.0000				Grille en croix/ Rejilla cruciforme	0.26476.0000		
	Filtre sélectif 2700K - 2200K/ Filtro selector 2700K - 2200K	0.26424.0000				Volets coupe-flux/ Aletas antideslumbrantes	0.26484.0000		
	Filtre sélectif 2700K - 2000K/ Filtro selector 2700K - 2000K	0.26432.0000				Cône 45° wall washer/ Cono 45° wall washer	0.26488.00		
	Filtre sélectif 3000K - 3600K/ Filtro selector 3000K - 3600K	0.26565.0000				Cylindre court/ Cilindro corto	0.26556.00		
	Filtre sélectif 3000K - 4000K/ Filtro selector 3000K - 4000K	0.26573.0000							
	 Description Ghost lock - max 3,5kg Pour installation verticale/ Para instalación vertical	0.26508.00							









Mini Ø 43 mm | Performance | Accessories

Accessoires pour optique/ Accesorios de las ópticas

Description		Code	Finishes		Description		Code
	Filtres en verre 1 mm/ Filtros en cristal de 1 mm	<u>0.26401.00</u>	4A			Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	<u>0.26574.0000</u>
			5A				
			6A				
			7A				
			8A				
			9A				
	Lames pour gel coloré (2 pièces)/ Plaquetas de cristal para gel colorado (2 piezas)	<u>0.26409.0000</u>				Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida	<u>0.26441.0000</u>
	Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	<u>0.26558.0000</u>				Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha	<u>0.26449.0000</u>
	Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	<u>0.26417.0000</u>				Lentille pour faisceau elliptique/ Lente para haz de luz elíptico	<u>0.26492.0000</u>
	Filtre sélectif 2700K - 2200K / Filtro selector 2700K - 2200K	<u>0.26425.0000</u>				Lentille opale/ Lente opalescente	<u>0.26461.0000</u>
	Filtre sélectif 2700K - 2000K / Filtro selector 2700K - 2000K	<u>0.26433.0000</u>				Lentille diffusante/ Lente difusora	<u>0.26469.0000</u>
	Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	<u>0.26566.0000</u>				Grille en croix / Rejilla cruciforme	<u>0.26480.0000</u>
	Ghost lock - max 3,5kg Pour installation verticale/ Para instalación vertical	<u>0.26508.00</u>				Cône 45° wall washer/ Cono 45° wall washer	<u>0.26496.00</u>
							12
							31

Mini Ø 43 mm | Accessories



Accessoires de montage/ Accesorios de montaje

	Description Entretoise - 110mm/ Distanciador - 110mm	Code 0.26500.0000		Description Entretoise - 600mm/ Distanciador - 600mm	Code 0.26504.0000
	Description Entretoise - 220mm/ Distanciador - 220mm	Code 0.26501.0000		Description Entretoise - 800mm/ Distanciador - 800mm	Code 0.26505.0000
	Description Entretoise - 300mm/ Distanciador - 300mm	Code 0.26502.0000		Description Entretoise - 1000mm/ Distanciador - 1000mm	Code 0.26506.0000
	Description Entretoise - 400mm/ Distanciador - 400mm	Code 0.26503.0000		Description Entretoise - 1200mm/ Distanciador - 1200mm	Code 0.26507.0000



Mini Ø 43 mm | Electrical Devices

Ghosttrack driver



2,5 W POWER LED

Type	Code	W	Size (mm)	Tech. info	mA	Connectable fixtures
On/Off	0.30456.0000	-		220-240Vac / 50/60Hz	700	Min-Max: 8-14 (1X); 4-7 (2X)
DALI	D.30456.0000	-		120-277Vac / 50/60Hz	700	Min-Max: 4-14 (1X); 2-7 (2X)

4 W POWER LED

Type	Code	W	Size (mm)	Tech. info	mA	Connectable fixtures
On/Off	0.30451.0000	-		220-240Vac / 50/60Hz	350	Min-Max: 3-4 (1X); 2 (2X)
DALI	D.30451.0000	-		120-277Vac / 50/60Hz	350	Min-Max: 1-4 (1X); 1-2 (2X)


9 W POWER LED

Type	Code	W	Size (mm)	Tech. info	mA	Connectable fixtures
On/Off	0.30453.0000	-		220-240Vac / 50/60Hz	700	Min-Max: 3-4 (1X); 2 (2X)
DALI	D.30453.0000	-		120-277Vac / 50/60Hz	700	Min-Max: 1-4 (1X); 1-2 (2X)

6,5 W Warm dimming COBLED



Type	Code	W	Size (mm)	Tech. info	mA	Connectable fixtures
DALI	D.30453.0000	-		120-277Vac / 50/60Hz	700	Min-Max: 2-5 (1X); 1-2 (2X)

Create your Custom Cluster:
from 1 to 14 Yori Evo Ghosttrack Mini (Ø43 mm)

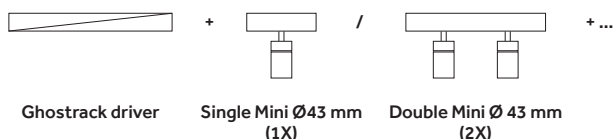



Ø 60 mm | Precision

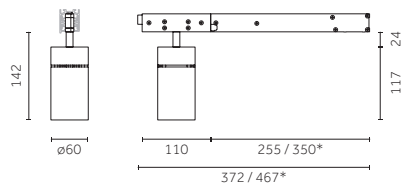

Code example:
0 . 1X.GH62 B . HC 01

Accessories: p.420
 Entretoises/Distanciadores: p.422
 Rail/Carril: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net



9W COB LED		Lumen delivered up to 1115 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>1X.GH62</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	960	< 2	<u>01</u>
<u>D</u> *DALI		<u>E</u> 20° Medium	<u>HW</u>	2700	>90	1050	< 2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	1100	< 2	<u>31</u>
			<u>WW</u>	3000	>80	1300	< 3	<u>B0</u>
			<u>NN</u>	4000	>80	1360	< 3	<u>C0</u>
						LED nominal lumen		<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

12W COB LED		Lumen delivered up to 1455 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>1X.GH63</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1250	< 2	<u>01</u>
<u>D</u> *DALI		<u>E</u> 20° Medium	<u>HW</u>	2700	>90	1370	< 2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	1420	< 2	<u>31</u>
			<u>WW</u>	3000	>80	1700	< 3	<u>B0</u>
			<u>NN</u>	4000	>80	1775	< 3	<u>C0</u>
						LED nominal lumen		<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

17W COB LED		Lumen delivered up to 1970 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>1X.GH64</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1700	< 2	<u>01</u>
<u>D</u> *DALI		<u>E</u> 20° Medium	<u>HW</u>	2700	>90	1870	< 2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	1920	< 2	<u>31</u>
			<u>WW</u>	3000	>80	2320	< 3	<u>B0</u>
			<u>NN</u>	4000	>80	2400	< 3	<u>C0</u>
						LED nominal lumen		<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

12W Warm Dimming COB LED		Lumen delivered up to 690 lm / Lumen maintenance: L70 B50=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>D</u> *DALI	<u>1X.GH63</u> Precision	<u>B</u> 27° Medium	<u>DT</u>	1700-3000	>95	100-1000	< 4	<u>01</u>
						LED nominal lumen		<u>12</u>
								<u>31</u>
								<u>B0</u>
								<u>C0</u>
								<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

Ø 60 mm | Performance

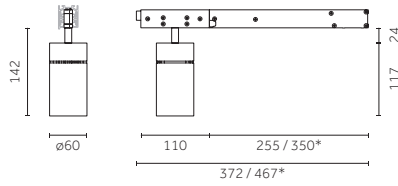

Code example:

0 . 1X.GH72 B . HC 01

Accessories: p.421

Entretrois/Distanciadores: p.422

Rail/Carril : p.707

Finishes: p.380

Photometric data:



www.reggiani.net

9W COB LED		Lumen delivered up to 1200lm / Lumen maintenance: L80 B10=50,000h							Finishes
Driver	Version	Optics	LED	K	CRI	lm	SDCM		
0 On-Off	1X.GH72 Performance	B 13° Narrow	HC	3000	>98	960	<2	01	
D *DALI		E 24° Medium	HW	2700	>90	1050	<2	12	
		H 40° Wide	HQ	3000	>90	1100	<2	31	
		K - Without optics	WW	3000	>80	1300	<3	B0	
			NN	4000	>80	1360	<3	C0	
			LED nominal lumen					D0	
								E0	
								L0	
								M0	
								N0	

12W COB LED		Lumen delivered up to 1560lm / Lumen maintenance: L80 B10=50,000h							Finishes
Driver	Version	Optics	LED	K	CRI	lm	SDCM		
0 On-Off	1X.GH73 Performance	B 13° Narrow	HC	3000	>98	1250	<2	01	
D *DALI		E 24° Medium	HW	2700	>90	1370	<2	12	
		H 40° Wide	HQ	3000	>90	1420	<2	31	
		K - Without optics	WW	3000	>80	1700	<3	B0	
			NN	4000	>80	1775	<3	C0	
			LED nominal lumen					D0	
								E0	
								L0	
								M0	
								N0	

17W COB LED		Lumen delivered up to 2110lm / Lumen maintenance: L80 B10=50,000h							Finishes
Driver	Version	Optics	LED	K	CRI	lm	SDCM		
0 On-Off	1X.GH74 Performance	B 13° Narrow	HC	3000	>98	1700	<2	01	
D *DALI		E 24° Medium	HW	2700	>90	1870	<2	12	
		H 40° Wide	HQ	3000	>90	1920	<2	31	
		K - Without optics	WW	3000	>80	2320	<3	B0	
			NN	4000	>80	2400	<3	C0	
			LED nominal lumen					D0	
								E0	
								L0	
								M0	
								N0	

Ø 60 mm | Precision (2X)

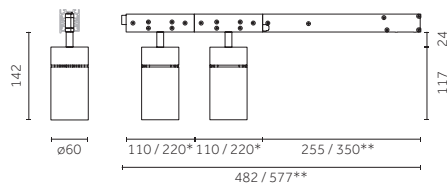

Code example:
0 . 2X.GH62 B . HC 01

Accessories: p.420
 Entretoises/Distanciadores: p.422
 Rail/Carril: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

Notes:
 *Disponibile avec un adaptateur de 220 mm/
 *Disponibile con adattador de 220 mm

9W COB LED Lumen delivered up to 2x1115 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>2X.GH62</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	2x960	<2	<u>01</u>
<u>D</u> **DALI		<u>E</u> 20° Medium	<u>HW</u>	2700	>90	2x1050	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	2x1100	<2	<u>31</u>
			<u>WW</u>	3000	>80	2x1300	<3	<u>B0</u>
			<u>NN</u>	4000	>80	2x1360	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>



12W COB LED Lumen delivered up to 2x1455 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>2X.GH63</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	2x1250	<2	<u>01</u>
<u>D</u> **DALI		<u>E</u> 20° Medium	<u>HW</u>	2700	>90	2x1370	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	2x1420	<2	<u>31</u>
			<u>WW</u>	3000	>80	2x1700	<3	<u>B0</u>
			<u>NN</u>	4000	>80	2x1775	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

17W COB LED Lumen delivered up to 2x1970 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>2X.GH64</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	2x1700	<2	<u>01</u>
<u>D</u> **DALI		<u>E</u> 20° Medium	<u>HW</u>	2700	>90	2x1870	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	2x1920	<2	<u>31</u>
			<u>WW</u>	3000	>80	2x2320	<3	<u>B0</u>
			<u>NN</u>	4000	>80	2x2400	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

Ø 60 mm | Performance (2X)

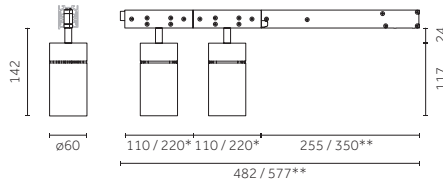

Code example:

0 . **2X.GH72** **B** . **HC** **01**

Accessories: p.421
 Entretoises/Distanciadores: p.422
 Rail/Carril : p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net



Notes:
 *Disponibile avec un adaptateur de 220 mm/
 *Disponibile con adattador de 220 mm

9W COB LED		Lumen delivered up to 2x1200 lm / Lumen maintenance: L80 B10=50,000h							Finishes
Driver	Version	Optics	LED	K	CRI	lm	SDCM		
0 On-Off	2X.GH72 Performance	B 13° Narrow	HC	3000	>98	2x960	<2	01	
D **DALI		E 24° Medium	HW	2700	>90	2x1050	<2	12	
		H 40° Wide	HQ	3000	>90	2x1100	<2	31	
		K - Without optics	WW	3000	>80	2x1300	<3	B0	
			NN	4000	>80	2x1360	<3	C0	
			LED nominal lumen					D0	
								E0	
								L0	
								M0	
								N0	

12W COB LED		Lumen delivered up to 2x1560 lm / Lumen maintenance: L80 B10=50,000h							Finishes
Driver	Version	Optics	LED	K	CRI	lm	SDCM		
0 On-Off	2X.GH73 Performance	B 13° Narrow	HC	3000	>98	2x1250	<2	01	
D **DALI		E 24° Medium	HW	2700	>90	2x1370	<2	12	
		H 40° Wide	HQ	3000	>90	2x1420	<2	31	
		K - Without optics	WW	3000	>80	2x1700	<3	B0	
			NN	4000	>80	2x1775	<3	C0	
			LED nominal lumen					D0	
								E0	
								L0	
								M0	
								N0	

17W COB LED		Lumen delivered up to 2x2110 lm / Lumen maintenance: L80 B10=50,000h							Finishes
Driver	Version	Optics	LED	K	CRI	lm	SDCM		
0 On-Off	2X.GH74 Performance	B 13° Narrow	HC	3000	>98	2x1700	<2	01	
D **DALI		E 24° Medium	HW	2700	>90	2x1870	<2	12	
		H 40° Wide	HQ	3000	>90	2x1920	<2	31	
		K - Without optics	WW	3000	>80	2x2320	<3	B0	
			NN	4000	>80	2x2400	<3	C0	
			LED nominal lumen					D0	
								E0	
								L0	
								M0	
								N0	

Ø 60 mm | Precision (3X)

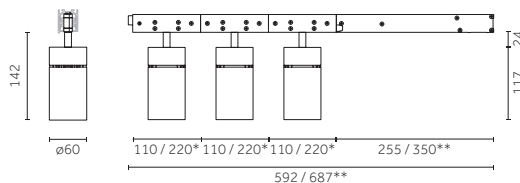

Code example:
0 . 3X.GH62 B . HC 01



Accessories: p.420
 Entretoises/Distanciadores: p.422
 Rail/Carril: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

Notes:
 *Disponibile avec un adaptateur de 220 mm/
 *Disponibile con adaptador de 220 mm

9W COB LED		Lumen delivered up to 3x1115 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>3X.GH62</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	3x960	<2	<u>01</u>
<u>D</u> **DALI		<u>E</u> 20° Medium	<u>HW</u>	2700	>90	3x1050	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	3x1100	<2	<u>31</u>
			<u>WW</u>	3000	>80	3x1300	<3	<u>B0</u>
			<u>NN</u>	4000	>80	3x1360	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

12W COB LED		Lumen delivered up to 2x1455 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>3X.GH63</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	3x1250	<2	<u>01</u>
<u>D</u> **DALI		<u>E</u> 20° Medium	<u>HW</u>	2700	>90	3x1370	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	3x1420	<2	<u>31</u>
			<u>WW</u>	3000	>80	3x1700	<3	<u>B0</u>
			<u>NN</u>	4000	>80	3x1775	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

Ø 60 mm | Performance (3X)

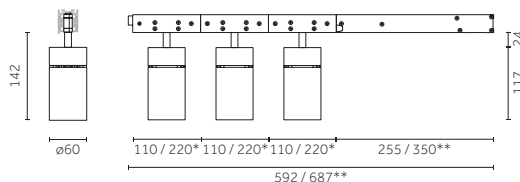

Code example:
0 . 3X.GH72 B . HC 01



Accessories: p.421
 Entretoises/Distanciadores: p.422
 Rail/Carril: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

Notes:
 *Disponibile avec un adaptateur de 220 mm/
 *Disponibile con adaptador de 220 mm

9W COB LED		Lumen delivered up to 3x1200 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>3X.GH72</u> Performance	<u>B</u> 13° Narrow	<u>HC</u>	3000	>98	3x960	<2	<u>01</u>
<u>D</u> **DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	3x1050	<2	<u>12</u>
		<u>H</u> 40° Wide	<u>HQ</u>	3000	>90	3x1100	<2	<u>31</u>
		<u>K</u> - Without optics	<u>WW</u>	3000	>80	3x1300	<3	<u>B0</u>
			<u>NN</u>	4000	>80	3x1360	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

12W COB LED		Lumen delivered up to 2x1560 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>3X.GH73</u> Performance	<u>B</u> 13° Narrow	<u>HC</u>	3000	>98	3x1250	<2	<u>01</u>
<u>D</u> **DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	3x1370	<2	<u>12</u>
		<u>H</u> 40° Wide	<u>HQ</u>	3000	>90	3x1420	<2	<u>31</u>
		<u>K</u> - Without optics	<u>WW</u>	3000	>80	3x1700	<3	<u>B0</u>
			<u>NN</u>	4000	>80	3x1775	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

Ø 60 mm | Precision (4X)

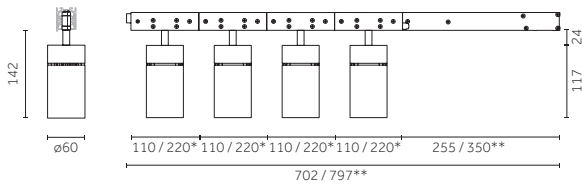




Code example:
0 . 4X.GH62 B . HC 01

Accessories: p.420
 Entretoises/Distanciadores: p.422
 Rail/Carril : p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

Notes:
 *Disponibile avec un adaptateur de 220 mm/
 *Disponibile con adattador de 220 mm

9W COBLED		Lumen delivered up to 4x1115 lm / Lumen maintenance: L80B10=50,000h							Finishes
Driver	Version	Optics	LED	K	CRI	lm	SDCM		
0 On-Off	4X.GH62 Precision	B 12° Narrow	HC	3000	>98	4x960	<2	01	
D **DALI		E 40° Medium	HW	2700	>90	4x1050	<2	12	
		K - Without optics	HQ	3000	>90	4x1100	<2	31	
			WW	3000	>80	4x1300	<3	B0	
			NN	4000	>80	4x1360	<3	C0	
			LED nominal lumen					D0	
								E0	
								L0	
								M0	
								N0	

Ø 60 mm | Performance (4X)

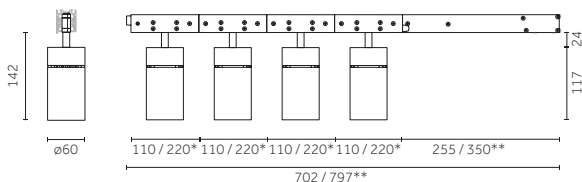

Code example:
0 . 4X.GH72 B . HC 01



Accessories: p.421
 Entretoises/Distanciadores: p.422
 Rail/Carril : p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

Notes:
 *Disponibile avec un adaptateur de 220 mm/
 *Disponibile con adattador de 220 mm

9W COBLED		Lumen delivered up to 3x1200 lm / Lumen maintenance: L80B10=50,000h							Finishes
Driver	Version	Optics	LED	K	CRI	lm	SDCM		
0 On-Off	4X.GH72 Performance	B 13° Narrow	HC	3000	>98	4x960	<2	01	
D **DALI		E 24° Medium	HW	2700	>90	4x1050	<2	12	
		H 40° Wide	HQ	3000	>90	4x1100	<2	31	
		K - Without optics	WW	3000	>80	4x1300	<3	B0	
			NN	4000	>80	4x1360	<3	C0	
			LED nominal lumen					D0	
								E0	
								L0	
								M0	
								N0	

Ø 60 mm | Precision | Accessories

Optiques interchangeables IOS/
Ópticas intercambiables IOS








		Description Precision - Faisceau étroit/ Precision - Haz de luz estrecho (12°-9W, 12W, 17W)	Code <u>0.35125.0000</u>
---	---	---	------------------------------------


		Description Precision - Faisceau moyen/ Precision - Haz de luz medio (20°-9W, 12W, 17W)	Code <u>0.35126.0000</u>
---	--	---	------------------------------------


Non applicable aux références /No para códigos: **1X.GH63B.DT**


Non applicable aux références /No para códigos: **1X.GH63B.DT**


Accessoires pour optique/
Accesorios de las ópticas


	Description Filtres en verre 1 mm/ Filtros en cristal de 1 mm	Code <u>0.26402.00</u>	Finishes 4A  5A  6A  7A  8A  9A 
---	--	----------------------------------	---


	Description Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida	Code <u>0.26442.0000</u>
---	--	------------------------------------


	Description Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha	Code <u>0.26450.0000</u>
---	--	------------------------------------


	Description Lames pour gel coloré (2 pièces)/ Plaquetas de cristal para gel colorado (2 piezas)	Code <u>0.26410.0000</u>
---	---	------------------------------------


	Description Lentille pour faisceau elliptique/ Lente para haz de luz elíptico	Code <u>0.26457.0000</u>
---	--	------------------------------------


	Description Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	Code <u>0.26559.0000</u>
--	--	------------------------------------


	Description Lentille opale/ Lente opalescente	Code <u>0.26462.0000</u>
--	--	------------------------------------


	Description Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	Code <u>0.26418.0000</u>
---	--	------------------------------------


	Description Lentille diffusante/ Lente difusora	Code <u>0.26470.0000</u>
---	--	------------------------------------

	Description Filtre sélectif 2700K - 2200K/ Filtro selector 2700K - 2200K	Code <u>0.26426.0000</u>
---	---	------------------------------------


	Description Grille en croix/ Rejilla cruciforme	Code <u>0.26477.0000</u>
---	--	------------------------------------


	Description Filtre sélectif 2700K - 2000K/ Filtro selector 2700K - 2000K	Code <u>0.26434.0000</u>
---	---	------------------------------------

	Description Volets coupe-flux/ Aletas antideslumbrantes	Code <u>0.26485.0000</u>
---	--	------------------------------------




	Description Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	Code <u>0.26567.0000</u>
---	--	------------------------------------




	Description Cône 45° wall washer/ Cono 45° wall washer	Code <u>0.26489.00</u>	Finishes 12  31 
---	---	----------------------------------	---

	Description Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	Code <u>0.26575.0000</u>
---	--	------------------------------------

		Description Ghost lock - max 3,5kg Pour installation verticale/ Para instalación vertical	Code <u>0.26508.00</u>
---	--	---	----------------------------------







Projecteur cadreur/
Contorneador de luz

		Description Projecteur cadreur, cadre de lumière - carré/ Contorneador de luz, contorno de luz - cuadrado	Code <u>0.26651.00</u>	Finishes 21 
---	---	--	----------------------------------	---

























		Description Projecteur cadreur, cadre de lumière - rond/ Contorneador de luz, contorno de luz - redondo	Code <u>0.26650.00</u>	Finishes 21 
---	---	--	----------------------------------	---

Ø 60 mm | Performance | Accessories







Optiques interchangeables IOS/
Ópticas intercambiables IOS

		Description Performance - Faisceau étroit/ Performance - Haz de luz estrecho (13°-9W, 12W, 17W)	Code <u>0.35145.0000</u>			Description Performance - Faisceau large/ Performance - Haz de luz ancho (40°-9W, 12W, 17W)	Code <u>0.35147.0000</u>
		Description Performance - Faisceau moyen/ Performance - Haz de luz medio (24°-9W, 12W, 17W)	Code <u>0.35146.0000</u>				

Accessoires pour optique/
Accesorios de las ópticas









	Description Filtres en verre 1 mm/ Filtros en cristal de 1 mm	Code <u>0.26403.00</u>	Finishes 4A  5A  6A  7A  8A  9A 		Description Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	Code <u>0.26576.0000</u>	
	Description Lames pour gel coloré (2 pièces)/ Plaquetas de cristal para gel colorado (2 piezas)	Code <u>0.26411.0000</u>			Description Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida	Code <u>0.26443.0000</u>	
	Description Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	Code <u>0.26560.0000</u>			Description Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha	Code <u>0.26451.0000</u>	
	Description Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	Code <u>0.26419.0000</u>			Description Lentille pour faisceau elliptique/ Lente para haz de luz elíptico	Code <u>0.26493.0000</u>	
	Description Filtre sélectif 2700K - 2200K / Filtro selector 2700K - 2200K	Code <u>0.26427.0000</u>			Description Lentille opale/ Lente opalescente	Code <u>0.26463.0000</u>	
	Description Filtre sélectif 2700K - 2000K / Filtro selector 2700K - 2000K	Code <u>0.26435.0000</u>			Description Lentille diffusante/ Lente difusora	Code <u>0.26471.0000</u>	
	Description Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	Code <u>0.26568.0000</u>			Description Grille en croix / Rejilla cruciforme	Code <u>0.26481.0000</u>	
	Description Ghost lock - max 3,5kg Pour installation verticale/ Para instalación vertical	Code <u>0.26508.00</u>			Description Cône 45° wall washer/ Cono 45° wall washer	Code <u>0.26497.00</u>	Finishes 12  31 

Projecteur cadreur/
Contorneador de luz

		Description Projecteur cadreur, cadre de lumière - carré/ Contorneador de luz, contorno de luz - cuadrado	Code <u>0.26651.00</u>	Finishes 21 
		Description Projecteur cadreur, cadre de lumière - rond/ Contorneador de luz, contorno de luz - redondo	Code <u>0.26650.00</u>	Finishes 21 




Ø 60 mm | Accessories

Accessoires de montage/ Accesorios de montaje

	Description Entretoise - 110mm/ Distanciador - 110mm	Code 0.26500.0000		Description Entretoise - 600mm/ Distanciador - 600mm	Code 0.26504.0000
	Description Entretoise - 220mm/ Distanciador - 220mm	Code 0.26501.0000		Description Entretoise - 800mm/ Distanciador - 800mm	Code 0.26505.0000
	Description Entretoise - 300mm/ Distanciador - 300mm	Code 0.26502.0000		Description Entretoise - 1000mm/ Distanciador - 1000mm	Code 0.26506.0000
	Description Entretoise - 400mm/ Distanciador - 400mm	Code 0.26503.0000		Description Entretoise - 1200mm/ Distanciador - 1200mm	Code 0.26507.0000



Ø 75 mm | Precision

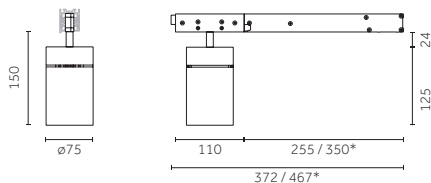

Code example:
0 . 1X.LH63 B . HC 01

Accessories: p.429
 Entretoises/Distanciadores: p.431
 Rail/Carril: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

12 W COB LED Lumen delivered up to 1575 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>1X.LH63</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1323	<2	<u>01</u>
<u>D</u> *DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	1491	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	1533	<2	<u>31</u>
			<u>WW</u>	3000	>80	1859	<3	<u>B0</u>
			<u>NN</u>	4000	>80	1920	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

17 W COB LED Lumen delivered up to 2190 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>1X.LH64</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1834	<2	<u>01</u>
<u>D</u> *DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	2067	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	2122	<2	<u>31</u>
			<u>WW</u>	3000	>80	2582	<3	<u>B0</u>
			<u>NN</u>	4000	>80	2665	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

17 W COB LED Lumen delivered up to 1465 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>1X.NH64</u> Precision	<u>A</u> 7° Very narrow	<u>HC</u>	3000	>98	1700	<2	<u>01</u>
<u>D</u> *DALI			<u>HW</u>	2700	>90	1870	<2	<u>12</u>
			<u>HQ</u>	3000	>90	1920	<2	<u>31</u>
			<u>WW</u>	3000	>80	2320	<3	<u>B0</u>
			<u>NN</u>	4000	>80	2400	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

24 W COB LED Lumen delivered up to 2955 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>1X.LH66</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	2476	<2	<u>01</u>
<u>D</u> *DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	2792	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	2860	<2	<u>31</u>
			<u>WW</u>	3000	>80	3487	<3	<u>B0</u>
			<u>NN</u>	4000	>80	3602	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

28 W COB LED Lumen delivered up to 3325 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>1X.LH67</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	2777	<2	<u>01</u>
<u>D</u> *DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	3137	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	3207	<2	<u>31</u>
			<u>WW</u>	3000	>80	3898	<3	<u>B0</u>
			<u>NN</u>	4000	>80	4054	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>



Code example:

0 . 1X.LH66 B . DT 01



Accessories: p.429
 Entretoises/Distanciadores: p.431
 Rail/Carril : p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

25 W Warm Dimming COBLED Lumen delivered up to 1100lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
D *DALI	1X.LH66 Precision	B 25° Medium	DT	1700-3000	>95	100-2500	<4	01 12 31 B0 C0 D0 E0 L0 M0 NO

LED nominal lumen

Ø 75 mm | Performance

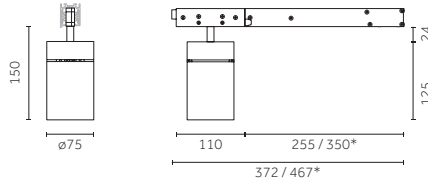

12 W COBLED Lumen delivered up to 1800lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	1X.LH73 Performance	B 12° Narrow	HC	3000	>98	1323	<2	01 12 31 B0 C0 D0 E0 L0 M0 NO
D *DALI		E 24° Medium	HW	2700	>90	1491	<2	
		H 48° Wide	HQ	3000	>90	1533	<2	
		K - Without optics	WW	3000	>80	1859	<3	
			NN	4000	>80	1920	<3	

LED nominal lumen



Code example:

0 . 1X.LH73 B . HW 12

Accessories: p.430
 Entretoises/Distanciadores: p.431
 Rail/Carril : p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

17 W COBLED Lumen delivered up to 2480lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	1X.LH74 Performance	B 12° Narrow	HC	3000	>98	1834	<2	01 12 31 B0 C0 D0 E0 L0 M0 NO
D *DALI		E 24° Medium	HW	2700	>90	2067	<2	
		H 48° Wide	HQ	3000	>90	2122	<2	
		K - Without optics	WW	3000	>80	2582	<3	
			NN	4000	>80	2665	<3	

LED nominal lumen

24 W COBLED Lumen delivered up to 3350lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	1X.LH76 Performance	B 12° Narrow	HC	3000	>98	2476	<2	01 12 31 B0 C0 D0 E0 L0 M0 NO
D *DALI		E 24° Medium	HW	2700	>90	2792	<2	
		H 48° Wide	HQ	3000	>90	2860	<2	
		K - Without optics	WW	3000	>80	3487	<3	
			NN	4000	>80	3602	<3	




LED nominal lumen

28 W COBLED Lumen delivered up to 3770lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	1X.LH77 Performance	B 12° Narrow	HC	3000	>98	2777	<2	01 12 31 B0 C0 D0 E0 L0 M0 NO
D *DALI		E 24° Medium	HW	2700	>90	3137	<2	
		H 48° Wide	HQ	3000	>90	3207	<2	
		K - Without optics	WW	3000	>80	3898	<3	
			NN	4000	>80	4054	<3	

LED nominal lumen

Ø 75 mm | Precision (2X)

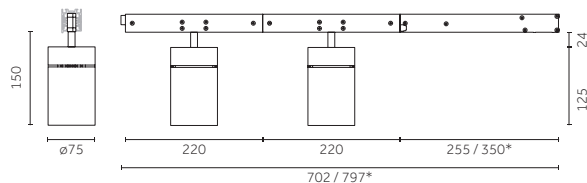

Code example:
0 . 2X.LH62 B . HW 01

Accessories: p.429
 Entretoises/Distanciadores: p.431
 Rail/Carril: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

9W COB LED Lumen delivered up to 2x 1450 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>2X.LH62</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1215	<2	<u>01</u>
<u>D</u> *DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	1370	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	1410	<2	<u>31</u>
			<u>WW</u>	3000	>80	1710	<3	<u>B0</u>
			<u>NN</u>	4000	>80	1765	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

12W COB LED Lumen delivered up to 2x1575 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>2X.LH63</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1323	<2	<u>01</u>
<u>D</u> *DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	1491	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	1533	<2	<u>31</u>
			<u>WW</u>	3000	>80	1859	<3	<u>B0</u>
			<u>NN</u>	4000	>80	1920	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>



17W COB LED Lumen delivered up to 2x1465 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>2X.NH64</u> Precision	<u>A</u> 7° Very narrow	<u>HC</u>	3000	>98	1700	<2	<u>01</u>
<u>D</u> *DALI			<u>HW</u>	2700	>90	1870	<2	<u>12</u>
			<u>HQ</u>	3000	>90	1920	<2	<u>31</u>
			<u>WW</u>	3000	>80	2320	<3	<u>B0</u>
			<u>NN</u>	4000	>80	2400	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

17W COB LED Lumen delivered up to 2x2190 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>2X.LH64</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1834	<2	<u>01</u>
<u>D</u> *DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	2067	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	2122	<2	<u>31</u>
			<u>WW</u>	3000	>80	2582	<3	<u>B0</u>
			<u>NN</u>	4000	>80	2665	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>N0</u>

Ø 75 mm | Performance (2X)

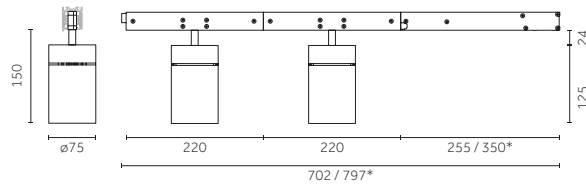

Code example:

0 . **2X.LH72** **B** . **HW** **12**



Accessories: p.430
 Entretroises/Distanciadores: p.431
 Rail/Carril : p.707
 Finishes: p.380
 Photometric data:
www.reggiani.net

9W COBLED		Lumen delivered up to 2x1650lm / Lumen maintenance: L80B10=50,000h							Finishes
Driver	Version	Optics	LED	K	CRI	lm	SDCM		
0 On-Off	2X.LH72 Performance	B 12° Narrow	HC	3000	>98	1215	<2	01	
D *DALI		E 24° Medium	HW	2700	>90	1370	<2	12	
		H 48° Wide	HQ	3000	>90	1410	<2	31	
		K - Without optics	WW	3000	>80	1710	<3	B0	
			NN	4000	>80	1765	<3	C0	
			LED nominal lumen					D0	
								E0	
								L0	
								M0	
								N0	

12W COBLED		Lumen delivered up to 2x1800lm / Lumen maintenance: L80B10=50,000h							Finishes
Driver	Version	Optics	LED	K	CRI	lm	SDCM		
0 On-Off	2X.LH73 Performance	B 12° Narrow	HC	3000	>98	1323	<2	01	
D *DALI		E 24° Medium	HW	2700	>90	1491	<2	12	
		H 48° Wide	HQ	3000	>90	1533	<2	31	
		K - Without optics	WW	3000	>80	1859	<3	B0	
			NN	4000	>80	1920	<3	C0	
			LED nominal lumen					D0	
								E0	
								L0	
								M0	
								N0	

17W COBLED		Lumen delivered up to 2x2480lm / Lumen maintenance: L80B10=50,000h							Finishes
Driver	Version	Optics	LED	K	CRI	lm	SDCM		
0 On-Off	2X.LH74 Performance	B 12° Narrow	HC	3000	>98	1834	<2	01	
D *DALI		E 24° Medium	HW	2700	>90	2067	<2	12	
		H 48° Wide	HQ	3000	>90	2122	<2	31	
		K - Without optics	WW	3000	>80	2582	<3	B0	
			NN	4000	>80	2665	<3	C0	
			LED nominal lumen					D0	
								E0	
								L0	
								M0	
								N0	

Ø 75 mm | Precision (3X)

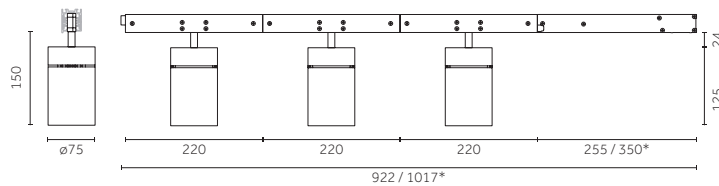



Code example:
0 . 3X.LH62 B . HW 01

Accessories: p.429
 Entretoises/Distanciadores: p.431
 Rail/Carril: p.707
 Photometric data:
 www.reggiani.net

9W COB LED		Lumen delivered up to 3x1450lm / Lumen maintenance: L80 B10=50,000h								
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
0 On-Off	3X.LH62 Precision	B 12° Narrow	HC	3000	>98	1215	<2	01		
D *DALI		E 24° Medium	HW	2700	>90	1370	<2	12		
		K - Without optics	HQ	3000	>90	1410	<2	31		
			WW	3000	>80	1710	<3	B0		
			NN	4000	>80	1765	<3	C0		
			LED nominal lumen						D0	
								E0		
								L0		
								M0		
								N0		

12W COB LED		Lumen delivered up to 3x1575lm / Lumen maintenance: L80 B10=50,000h								
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
0 On-Off	3X.LH63 Precision	B 12° Narrow	HC	3000	>98	1323	<2	01		
D *DALI		E 24° Medium	HW	2700	>90	1491	<2	12		
		K - Without optics	HQ	3000	>90	1533	<2	31		
			WW	3000	>80	1859	<3	B0		
			NN	4000	>80	1920	<3	C0		
			LED nominal lumen						D0	
								E0		
								L0		
								M0		
								N0		

Ø 75 mm | Performance (3X)

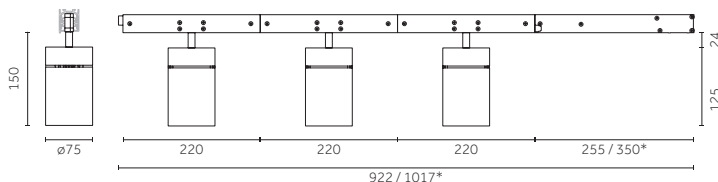

Code example:
0 . 3X.LH72 B . HW 01





Accessories: p.430
 Entretoises/Distanciadores: p.431
 Rail/Carril: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

9W COB LED		Lumen delivered up to 3x1650lm / Lumen maintenance: L80 B10=50,000h								
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
0 On-Off	3X.LH72 Performance	B 12° Narrow	HC	3000	>98	1215	<2	01		
D *DALI		E 24° Medium	HW	2700	>90	1370	<2	12		
		H 48° Wide	HQ	3000	>90	1410	<2	31		
		K - Without optics	WW	3000	>80	1710	<3	B0		
			NN	4000	>80	1765	<3	C0		
			LED nominal lumen						D0	
								E0		
								L0		
								M0		
								N0		

12W COB LED		Lumen delivered up to 3x1800lm / Lumen maintenance: L80 B10=50,000h								
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
0 On-Off	3X.LH73 Performance	B 12° Narrow	HC	3000	>98	1323	<2	01		
D *DALI		E 24° Medium	HW	2700	>90	1491	<2	12		
		H 48° Wide	HQ	3000	>90	1533	<2	31		
		K - Without optics	WW	3000	>80	1859	<3	B0		
			NN	4000	>80	1920	<3	C0		
			LED nominal lumen						D0	
								E0		
								L0		
								M0		
								N0		

Ø 75 mm | Precision | Accessories


























Optiques interchangeables IOS/
Ópticas intercambiables IOS

		Description Precision - Faisceau étroit/ Precision - Haz de luz estrecho (12°-12W, 17W, 24W, 28W)	Code 0.35130.0000			Description Precision - Faisceau moyen/ Precision - Haz de luz medio (24°-12W, 17W, 24W, 28W)	Code 0.35131.0000
---	---	---	------------------------------------	---	--	---	------------------------------------

Non applicable aux références /No para códigos: 1X.NH64A / 2X.NH64A / 1X.LH66B.DT





Non applicable aux références /No para códigos: 1X.NH64A / 2X.NH64A / 1X.LH66B.DT



Accessoires pour optique/
Accesorios de las ópticas

	Description Filtres en verre 1 mm/ Filtros en cristal de 1 mm	Code 0.26404.00	Finishes 4A  5A  6A  7A  8A  9A 		Description Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida	Code 0.26444.0000	
	Description Lames pour gel coloré (2 pièces)/ Plaquetas de cristal para gel colorado (2 piezas)	Code 0.26412.0000			Description Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha	Code 0.26452.0000	
	Description Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	Code 0.26561.0000			Description Lentille pour faisceau elliptique/ Lente para haz de luz elíptico	Code 0.26458.0000	
	Description Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	Code 0.26420.0000			Description Lentille opale/ Lente opalescente	Code 0.26464.0000	
	Description Filtre sélectif 2700K - 2200K / Filtro selector 2700K - 2200K	Code 0.26428.0000			Description Lentille diffusante/ Lente difusora	Code 0.26472.0000	
	Description Filtre sélectif 2700K - 2000K / Filtro selector 2700K - 2000K	Code 0.26436.0000			Description Grille en croix/ Rejilla cruciforme	Code 0.26478.0000	
	Description Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	Code 0.26569.0000			Description Volets coupe-flux/ Aletas antideslumbrantes	Code 0.26486.0000	
	Description Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	Code 0.26577.0000			Description Cône 45° wall washer/ Cono 45° wall washer	Code 0.26490.00	Finishes 12  31 
					Description Ghost lock - max 3,5kg Pour installation verticale/ Para instalación vertical	Code 0.26508.00	








Ø 75 mm | Performance | Accessories


Optiques interchangeables IOS/ Ópticas intercambiables IOS


		Description Performance - Faisceau étroit/ Performance - Haz de luz estrecho (12°-12W, 17W, 24W, 28W)	Code <u>0.35150.0000</u>
		Description Performance - Faisceau moyen/ Performance - Haz de luz medio (24°-12W, 17W, 24W, 28W)	Code <u>0.35151.0000</u>


		Description Performance - Faisceau large/ Performance - Haz de luz ancho (48°-12W, 17W, 24W, 28W)	Code <u>0.35152.0000</u>
---	--	---	------------------------------------


Accessoires pour optique/ Accesorios de las ópticas


	Description Filtres en verre 1 mm/ Filtros en cristal de 1 mm	Code <u>0.26405.00</u>	Finishes 4A  5A  6A  7A  8A  9A 
---	--	----------------------------------	---


	Description Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	Code <u>0.26578.0000</u>
---	--	------------------------------------


	Description Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida	Code <u>0.26445.0000</u>
---	--	------------------------------------


	Description Lames pour gel coloré (2 pièces)/ Plaquetas de cristal para gel colorado (2 piezas)	Code <u>0.26413.0000</u>
--	---	------------------------------------


	Description Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha	Code <u>0.26453.0000</u>
--	--	------------------------------------


	Description Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	Code <u>0.26562.0000</u>
---	--	------------------------------------


	Description Lentille pour faisceau elliptique/ Lente para haz de luz elliptico	Code <u>0.26494.0000</u>
---	---	------------------------------------


	Description Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	Code <u>0.26421.0000</u>
---	--	------------------------------------


	Description Lentille opale/ Lente opalescente	Code <u>0.26465.0000</u>
---	--	------------------------------------




	Description Filtre sélectif 2700K - 2200K / Filtro selector 2700K - 2200K	Code <u>0.26429.0000</u>
---	--	------------------------------------

	Description Lentille diffusante/ Lente difusora	Code <u>0.26473.0000</u>
---	--	------------------------------------

	Description Filtre sélectif 2700K - 2000K / Filtro selector 2700K - 2000K	Code <u>0.26437.0000</u>
---	--	------------------------------------

	Description Grille en croix/ Rejilla cruciforme	Code <u>0.26482.0000</u>
---	--	------------------------------------















	Description Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	Code <u>0.26570.0000</u>
---	--	------------------------------------

	Description Cône 45° wall washer/ Cono 45° wall washer	Code <u>0.26498.00</u>	Finishes 12  31 
---	---	----------------------------------	---

		Description Ghost lock - max 3,5kg Pour installation verticale/ Para instalación vertical	Code <u>0.26508.00</u>
---	---	---	----------------------------------



Ø 75 mm | Accessories

Accessoires de montage/ Accesorios de montaje

	Description Entretoise - 110mm/ Distanciador - 110mm	Code <u>0.26500.0000</u>		Description Entretoise - 600mm/ Distanciador - 600mm  p.00	Code <u>0.26504.0000</u>
	Description Entretoise - 220mm/ Distanciador - 220mm	Code <u>0.26501.0000</u>		Description Entretoise - 800mm/ Distanciador - 800mm  p.00	Code <u>0.26505.0000</u>
	Description Entretoise - 300mm/ Distanciador - 300mm  p.00	Code <u>0.26502.0000</u>		Description Entretoise - 1000mm/ Distanciador - 1000mm  p.00	Code <u>0.26506.0000</u>
	Description Entretoise - 400mm/ Distanciador - 400mm  p.00	Code <u>0.26503.0000</u>		Description Entretoise - 1200mm/ Distanciador - 1200mm  p.00	Code <u>0.26507.0000</u>



Ø 95 mm | Precision

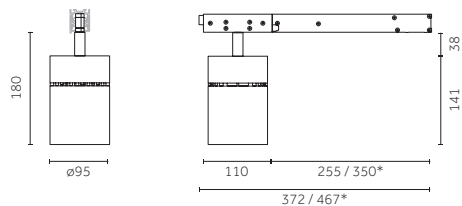

Code example:
0 . 1X.MH63 B . HC 01

Accessories: p.437
 Entretoises/Distanciadores: p.439
 Rail/Carril: p.707
 Finishes: p.380
 Photometric data:
www.reggiani.net

12 W COB LED Lumen delivered up to 1690 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	1X.MH63 Precision	B 12° Narrow	HC	3000	>98	1323	<2	01
D *DALI		E 24° Medium	HW	2700	>90	1491	<2	12
		K - Without optics	HQ	3000	>90	1533	<2	31
			WW	3000	>80	1859	<3	B0
			NN	4000	>80	1920	<3	C0
			LED nominal lumen					D0
								E0
								L0
								M0
								N0

17 W COB LED Lumen delivered up to 1510 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	1X.PH64 Precision	A 7° Verynarrow	HC	3000	>98	1700	<2	01
D *DALI			HW	2700	>90	1870	<2	12
			HQ	3000	>90	1920	<2	31
			WW	3000	>80	2320	<3	B0
			NN	4000	>80	2400	<3	C0
			LED nominal lumen					D0
								E0
								L0
								M0
								N0

17 W COB LED Lumen delivered up to 2350 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	1X.MH64 Precision	B 12° Narrow	HC	3000	>98	1834	<2	01
D *DALI		E 24° Medium	HW	2700	>90	2067	<2	12
		K - Without optics	HQ	3000	>90	2122	<2	31
			WW	3000	>80	2582	<3	B0
			NN	4000	>80	2665	<3	C0
			LED nominal lumen					D0
								E0
								L0
								M0
								N0

24 W COB LED Lumen delivered up to 3170 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	1X.MH66 Precision	B 12° Narrow	HC	3000	>98	2476	<2	01
D *DALI		E 24° Medium	HW	2700	>90	2792	<2	12
		K - Without optics	HQ	3000	>90	2860	<2	31
			WW	3000	>80	3487	<3	B0
			NN	4000	>80	3602	<3	C0
			LED nominal lumen					D0
								E0
								L0
								M0
								N0

33 W COB LED Lumen delivered up to 4130 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	1X.MH68 Precision	B 12° Narrow	HC	3000	>98	3142	<2	01
D *DALI		E 24° Medium	HW	2700	>90	3635	<2	12
		K - Without optics	HQ	3000	>90	3735	<2	31
			WW	3000	>80	4510	<3	B0
			NN	4000	>80	4695	<3	C0
			LED nominal lumen					D0
								E0
								L0
								M0
								N0






Code example:
0 . **1X.MH68** **B** . **DT** **01**

Accessories: p.437
 Entretoises/Distanciadores: p.439
 Rail/Carril : p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

33 W Warm Dimming COBLED				Lumen delivered up to 1520lm / Lumen maintenance: L70 B50=50,000h					Finishes	
Driver	Version	Optics	LED	K	CRI	lm	SDCM			
X Not included	1X.MH68 Precision	B 25° Medium	DT	1700-3000	>95	100-3100	<4	01		
									12	
									31	
									B0	
									CO	
									DO	
									EO	
									LO	
									MO	
									NO	

Ø 95 mm | Performance

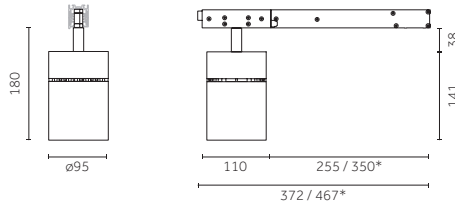

Code example:
0 . **1X.MH73** **B** . **HW** **12**

Accessories: p.438
 Entretoises/Distanciadores: p.439
 Rail/Carril : p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net



12 W COBLED				Lumen delivered up to 1800lm / Lumen maintenance: L80 B10=50,000h					Finishes	
Driver	Version	Optics	LED	K	CRI	lm	SDCM			
0 On-Off	1X.MH73 Performance	B 10° Narrow	HC	3000	>98	1323	<2	01		
D *DALI		E 20° Medium	HW	2700	>90	1491	<2	12		
									31	
									B0	
									CO	
									DO	
									EO	
									LO	
									MO	
									NO	

17 W COBLED				Lumen delivered up to 2500lm / Lumen maintenance: L80 B10=50,000h					Finishes	
Driver	Version	Optics	LED	K	CRI	lm	SDCM			
0 On-Off	1X.MH74 Performance	B 10° Narrow	HC	3000	>98	1834	<2	01		
D *DALI		E 20° Medium	HW	2700	>90	2067	<2	12		
									31	
									B0	
									CO	
									DO	
									EO	
									LO	
									MO	
									NO	

24 W COBLED				Lumen delivered up to 3300lm / Lumen maintenance: L80 B10=50,000h					Finishes	
Driver	Version	Optics	LED	K	CRI	lm	SDCM			
0 On-Off	1X.MH76 Performance	B 10° Narrow	HC	3000	>98	2476	<2	01		
D *DALI		E 20° Medium	HW	2700	>90	2792	<2	12		
									31	
									B0	
									CO	
									DO	
									EO	
									LO	
									MO	
									NO	

33 W COBLED				Lumen delivered up to 4110lm / Lumen maintenance: L80 B10=50,000h					Finishes	
Driver	Version	Optics	LED	K	CRI	lm	SDCM			
0 On-Off	1X.MH78 Performance	B 10° Narrow	HC	3000	>98	3142	<2	01		
D *DALI		E 20° Medium	HW	2700	>90	3635	<2	12		
									31	
									B0	
									CO	
									DO	
									EO	
									LO	
									MO	
									NO	

Ø 95 mm | Precision (2X)

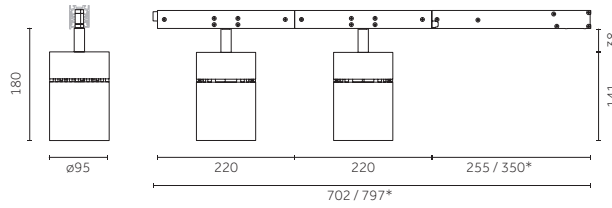

Code example:
0 . 2X.MH63 B . HC 01


Accessories: p.437
 Entretoises/Distanciadores: p.439
 Rail/Carril: p.707
 Finishes: p.380
 Photometric data:
www.reggiani.net

12 W COB LED		Lumen delivered up to 2x1690lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>2X.MH63</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1323	<2	<u>01</u>
<u>D</u> *DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	1491	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	1533	<2	<u>31</u>
			<u>WW</u>	3000	>80	1859	<3	<u>B0</u>
			<u>NN</u>	4000	>80	1920	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>NO</u>

17 W COB LED		Lumen delivered up to 2x1510lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>2X.PH64</u> Precision	<u>A</u> 7° Verynarrow	<u>HC</u>	3000	>98	1700	<2	<u>01</u>
<u>D</u> *DALI			<u>HW</u>	2700	>90	1870	<2	<u>12</u>
			<u>HQ</u>	3000	>90	1920	<2	<u>31</u>
			<u>WW</u>	3000	>80	2320	<3	<u>B0</u>
			<u>NN</u>	4000	>80	2400	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>NO</u>

17 W COB LED		Lumen delivered up to 2x2350lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>2X.PH64</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1834	<2	<u>01</u>
<u>D</u> *DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	2067	<2	<u>12</u>
		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	2122	<2	<u>31</u>
			<u>WW</u>	3000	>80	2582	<3	<u>B0</u>
			<u>NN</u>	4000	>80	2665	<3	<u>C0</u>
			LED nominal lumen					<u>D0</u>
								<u>E0</u>
								<u>L0</u>
								<u>M0</u>
								<u>NO</u>

Ø 95 mm | Performance (2X)

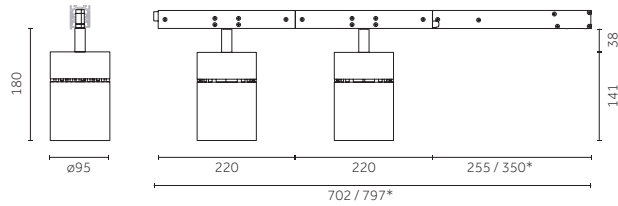

Code example:

0 . 2X.MH73 B . HC 01

Accessories: p.438

Entretroises/Distanciadores: p.439

Rail/Carril: p.707

Finishes: p.380



Photometric data:

www.reggiani.net

12 W COB LED		Lumen delivered up to 2x1800 lm / Lumen maintenance: L80 B10=50,000h							Finishes
Driver	Version	Optics	LED	K	CRI	lm	SDCM		
0 On-Off	2X.MH73 Performance	B 10° Narrow	HC	3000	>98	1323	<2	01	
D *DALI		E 20° Medium	HW	2700	>90	1491	<2	12	
		H 31° Wide	HQ	3000	>90	1533	<2	31	
		K - Without optics	WW	3000	>80	1859	<3	B0	
			NN	4000	>80	1920	<3	C0	
			LED nominal lumen					D0	
								E0	
								L0	
								M0	
								N0	

17 W COB LED		Lumen delivered up to 2x2500 lm / Lumen maintenance: L80 B10=50,000h							Finishes
Driver	Version	Optics	LED	K	CRI	lm	SDCM		
0 On-Off	2X.MH74 Performance	B 10° Narrow	HC	3000	>98	1834	<2	01	
D *DALI		E 20° Medium	HW	2700	>90	2067	<2	12	
		H 31° Wide	HQ	3000	>90	2122	<2	31	
		K - Without optics	WW	3000	>80	2582	<3	B0	
			NN	4000	>80	2665	<3	C0	
			LED nominal lumen					D0	
								E0	
								L0	
								M0	
								N0	

Ø 95 mm | Precision (3X)

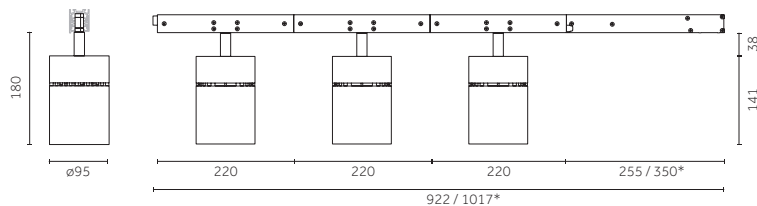

Code example:
0 . 3X.MH63 B . HC 01




Accessories: p.437
 Entretoises/Distanciadores: p.439
 Rail/Carril: p.707
 Finishes: p.380
 Photometric data:
www.reggiani.net

12 W COB LED Lumen delivered up to 3x1690lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	3X.MH63 Precision	B 12° Narrow	HC	3000	>98	1323	<2	01
D *DALI		E 24° Medium	HW	2700	>90	1491	<2	12
		K - Without optics	HQ	3000	>90	1533	<2	31
			WW	3000	>80	1859	<3	B0
			NN	4000	>80	1920	<3	C0
								D0
								E0
								L0
								M0
								N0

LED nominal lumen

Ø 95 mm | Performance (3X)

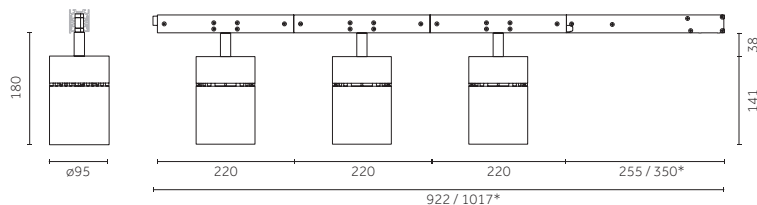

Code example:
0 . 3X.MH73 B . HC 01

Accessories: p.438
 Entretoises/Distanciadores: p.439
 Rail/Carril: p.707
 Finishes: p.380
 Photometric data:
www.reggiani.net



12 W COB LED Lumen delivered up to 3x1800lm / Lumen maintenance: L80 B10=50,000h



Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	3X.MH73 Performance	B 10° Narrow	HC	3000	>98	1323	<3	01
D *DALI		E 20° Medium	HW	2700	>90	1491	<3	12
		H 31° Wide	HQ	3000	>90	1533	<3	31
		K - Without optics	WW	3000	>80	1859	<3	B0
			NN	4000	>80	1920	<3	C0
								D0
								E0
								L0
								M0
								N0

LED nominal lumen

Ø 95 mm | Precision | Accessories

Optiques interchangeables IOS/
Ópticas intercambiables IOS








		Description Precision - Faisceau étroit / Precision - Haz de luz estrecho (12°-12W, 17W, 24W, 33W)	Code 0.35135.0000
---	---	--	------------------------------------


		Description Precision - Faisceau moyen/ Precision - Haz de luz medio (24°-12W, 17W, 24W, 33W)	Code 0.35136.0000
---	--	---	------------------------------------


Non applicable aux références /No para códigos: 1X.PH64A / 2X.PH64A / 1X.MH68B.DT


Non applicable aux références /No para códigos: 1X.PH64A / 2X.PH64A / 1X.MH68B.DT


Accessoires pour optique/
Accesorios de las ópticas


	Description Filtres en verre 1 mm/ Filtros en cristal de 1 mm	Code 0.26406.00	Finishes 4A  5A  6A  7A  8A  9A 
---	--	----------------------------------	---


	Description Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida	Code 0.26446.0000
---	--	------------------------------------


	Description Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha	Code 0.26454.0000
---	--	------------------------------------


	Description Lames pour gel coloré (2 pièces)/ Plaquetas de cristal para gel colorado (2 piezas)	Code 0.26414.0000
---	---	------------------------------------


	Description Lentille pour faisceau elliptique/ Lente para haz de luz elíptico	Code 0.26459.0000
---	--	------------------------------------

	Description Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	Code 0.26563.0000
--	--	------------------------------------


	Description Lentille opale/ Lente opalescente	Code 0.26466.0000
--	--	------------------------------------


	Description Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	Code 0.26422.0000
---	--	------------------------------------


	Description Lentille diffusante/ Lente difusora	Code 0.26474.0000
---	--	------------------------------------

	Description Filtre sélectif 2700K - 2200K / Filtro selector 2700K - 2200K	Code 0.26430.0000
---	--	------------------------------------


	Description Grille en croix/ Rejilla cruciforme	Code 0.26479.0000
---	--	------------------------------------

	Description Filtre sélectif 2700K - 2000K / Filtro selector 2700K - 2000K	Code 0.26438.0000
---	--	------------------------------------

	Description Volets coupe-flux/ Aletas antideslumbrantes	Code 0.26487.0000
---	--	------------------------------------

	Description Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	Code 0.26571.0000
---	--	------------------------------------





	Description Cône 45° wall washer/ Cono 45° wall washer	Code 0.26491.00	Finishes 12  31 
---	---	----------------------------------	---



	Description Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	Code 0.26579.0000
---	--	------------------------------------

	Description Ghost lock - max 3,5kg Pour installation verticale/ Para instalación vertical	Code 0.26508.00
---	---	----------------------------------








Ø 95 mm | Performance | Accessories


Optiques interchangeables IOS/
Ópticas intercambiables IOS


		Description Performance - Faisceau étroit/ Performance - Haz de luz estrecho (10°-12W, 17W, 24W, 33W)	Code <u>0.35155.0000</u>
		Description Performance - Faisceau moyen/ Performance - Haz de luz medio (20°-12W, 17W, 24W, 33W)	Code <u>0.35156.0000</u>


		Description Performance - Faisceau large/ Performance - Haz de luz ancho (31°-12W, 17W, 24W, 33W)	Code <u>0.35157.0000</u>
---	--	---	------------------------------------


Accessoires pour optique/
Accesorios de las ópticas


	Description Filtres en verre 1 mm/ Filtros en cristal de 1 mm	Code <u>0.26407.00</u>	Finishes 4A  5A  6A  7A  8A  9A 
---	--	----------------------------------	---


	Description Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	Code <u>0.26580.0000</u>
---	--	------------------------------------


	Description Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida	Code <u>0.26447.0000</u>
---	--	------------------------------------

	Description Lames pour gel coloré (2 pièces)/ Plaquetas de cristal para gel colorado (2 piezas)	Code <u>0.26415.0000</u>
--	---	------------------------------------


	Description Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha	Code <u>0.26455.0000</u>
--	--	------------------------------------


	Description Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	Code <u>0.26564.0000</u>
---	--	------------------------------------


	Description Lentille pour faisceau elliptique/ Lente para haz de luz elliptico	Code <u>0.26495.0000</u>
---	---	------------------------------------


	Description Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	Code <u>0.26423.0000</u>
---	--	------------------------------------


	Description Lentille opale/ Lente opalescente	Code <u>0.26467.0000</u>
---	--	------------------------------------




	Description Filtre sélectif 2700K - 2200K / Filtro selector 2700K - 2200K	Code <u>0.26431.0000</u>
---	--	------------------------------------


	Description Lentille diffusante/ Lente difusora	Code <u>0.26475.0000</u>
---	--	------------------------------------

	Description Filtre sélectif 2700K - 2000K / Filtro selector 2700K - 2000K	Code <u>0.26439.0000</u>
---	--	------------------------------------

	Description Grille en croix/ Rejilla cruciforme	Code <u>0.26483.0000</u>
---	--	------------------------------------















	Description Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	Code <u>0.26572.0000</u>
---	--	------------------------------------

	Description Cône 45° wall washer/ Cono 45° wall washer	Code <u>0.26499.00</u>	Finishes 12  31 
---	---	----------------------------------	---

		Description Ghost lock - max 3,5kg Pour installation verticale/ Para instalación vertical	Code <u>0.26508.00</u>
---	---	---	----------------------------------

Ø 95 mm | Accessories

Accessoires de montage/ Accesorios de montaje

	Description Entretoise - 110mm/ Distanciador - 110mm	Code <u>0.26500.0000</u>		Description Entretoise - 600mm/ Distanciador - 600mm  p. 402	Code <u>0.26504.0000</u>
	Description Entretoise - 220mm/ Distanciador - 220mm	Code <u>0.26501.0000</u>		Description Entretoise - 800mm/ Distanciador - 800mm  p. 402	Code <u>0.26505.0000</u>
	Description Entretoise - 300mm/ Distanciador - 300mm  p. 402	Code <u>0.26502.0000</u>		Description Entretoise - 1000mm/ Distanciador - 1000mm  p. 402	Code <u>0.26506.0000</u>
	Description Entretoise - 400mm/ Distanciador - 400mm  p. 402	Code <u>0.26503.0000</u>		Description Entretoise - 1200mm/ Distanciador - 1200mm  p. 402	Code <u>0.26507.0000</u>



— Yori Evo Box


— Yori Evo Box

FR Issu du développement et de l'évolution du projecteur sur rail Yori Track, Yori Evo Box élargit les aspects techniques spécifiques de la gamme Yori dans un nouvel appareil flexible, au design simple et élégant. Disponible en quatre dimensions, ce projecteur est muni des nouvelles optiques Precision et Performance qui se caractérisent par tout un éventail de rendements, d'ouvertures du faisceau et d'intensité. Les accessoires qui complètent la famille donnent encore plus de flexibilité à ce projecteur.




ES Yori Evo Box es el resultado del desarrollo y evolución del proyector para carril Yori Track. Yori Evo Box amplía las características propias de la serie Yori en un nuevo aparato flexible y de diseño simple y elegante. Se encuentra disponible en cuatro dimensiones y cuenta con nuevas ópticas Precision y Performance caracterizadas por múltiples rendimientos, amplitudes del haz de luz e intensidades. Los accesorios que completan la familia hacen que este producto sea aún más versátil.





FR Version avec gradateur embarqué
ES Modelo con dimmer en el aparato

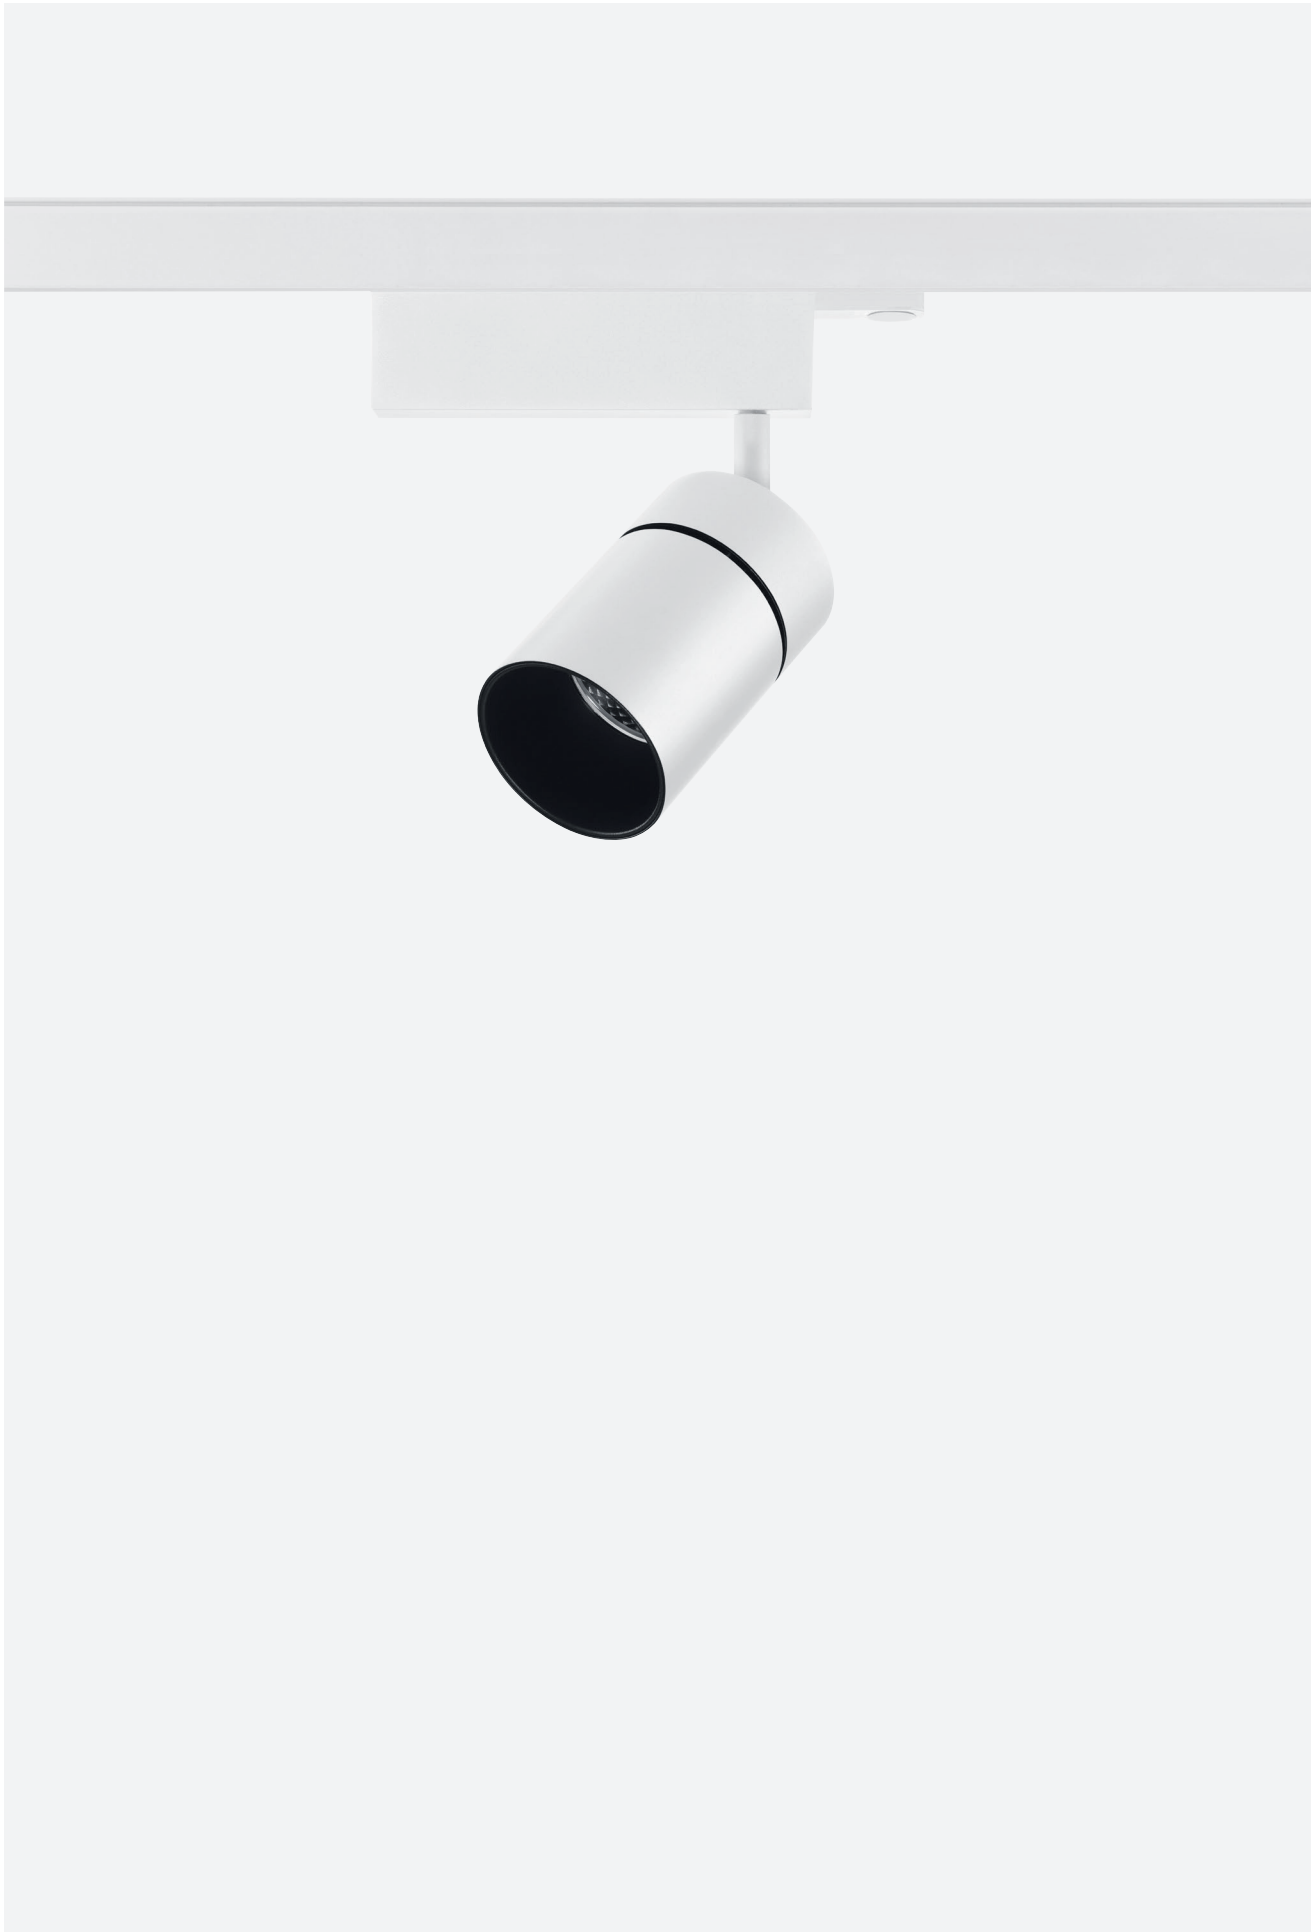

Ø 43 mm | Precision



Phase-cut / Dali / Dimmer on board / Bluetooth



Code example:
0 . FH81 A . HW 12

Accessories: p.446
 Rail/Carril: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

4 W POWERLED		Lumen delivered up to 435 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>FH81</u> Precision	<u>A</u> 7° Very narrow	<u>HW</u>	2700	>90	410	<3	<u>12</u> <input type="checkbox"/>
<u>T</u> Phase-cut		<u>B</u> 11° Narrow	<u>HQ</u>	3000	>90	415	<3	<u>31</u> <input checked="" type="checkbox"/>
<u>D</u> DALI		<u>E</u> 23° Medium	<u>WW</u>	3000	>80	485	<3	
<u>P</u> Dimmer on board		<u>H</u> 40° Wide	<u>NN</u>	4000	>80	530	<3	
<u>H</u> Bluetooth								

LED nominal lumen



9 W POWERLED		Lumen delivered up to 750 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>FH82</u> Precision	<u>A</u> 7° Very narrow	<u>HW</u>	2700	>90	725	<3	<u>12</u> <input type="checkbox"/>
<u>T</u> Phase-cut		<u>B</u> 11° Narrow	<u>HQ</u>	3000	>90	730	<3	<u>31</u> <input checked="" type="checkbox"/>
<u>D</u> DALI		<u>E</u> 23° Medium	<u>WW</u>	3000	>80	845	<3	
<u>P</u> Dimmer on board		<u>H</u> 40° Wide	<u>NN</u>	4000	>80	940	<3	
<u>H</u> Bluetooth								

LED nominal lumen


6,5 W Warm Dimming COB LED		Lumen delivered up to 130 lm / Lumen maintenance: L70 B50=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>D</u> DALI	<u>FH82</u> Precision	<u>B</u> 27° Medium	<u>DT</u>	1800-2800	>95	10-550	<4	<u>12</u> <input type="checkbox"/>
<u>P</u> Dimmer on board								<u>31</u> <input checked="" type="checkbox"/>
<u>H</u> Bluetooth								

LED nominal lumen

Ø 43 mm | Performance



Phase-cut / Dali / Dimmer on board / Bluetooth



Code example:

0 . FH91 B . HW 12

Accessories: p.447
 Rail/Carril : p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

4W POWER LED		Lumen delivered up to 450lm / Lumen maintenance: L90B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	FH91 Performance	B 6° Narrow	HW	2700	>90	410	< 3	12
T Phase-cut		E 18° Medium	HQ	3000	>90	415	< 3	31
D DALI		H 36° Wide	WW	3000	>80	485	< 3	
P Dimmer on board			NN	4000	>80	530	< 3	
H Bluetooth				LED nominal lumen				

9W POWER LED		Lumen delivered up to 780lm / Lumen maintenance: L90B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	FH92 Performance	B 6° Narrow	HW	2700	>90	725	< 3	12
T Phase-cut		E 18° Medium	HQ	3000	>90	730	< 3	31
D DALI		H 36° Wide	WW	3000	>80	845	< 3	
P Dimmer on board			NN	4000	>80	940	< 3	
H Bluetooth				LED nominal lumen				



Ø 43 mm | Precision | Accessories

Accessoires pour optique/
Accesorios de las ópticas



Image	Description	Code	Finishes		Image	Description	Code	Finishes	
			4A	5A				12	31
	Filtres en verre 1 mm/ Filtros en cristal de 1 mm	0.26400.00	4A	5A		Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida	0.26440.0000		
			6A	7A		Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha	0.26448.0000		
			8A	9A		Lentille pour faisceau elliptique/ Lente para haz de luz eliptico	0.26456.0000		
	Lames pour gel coloré (2 pièces)/ Plaquetas de cristal para gel colorado (2 piezas)	0.26408.0000				Lentille opale/ Lente opalescente	0.26460.0000		
	Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	0.26557.0000				Lentille diffusante/ Lente difusora	0.26468.0000		
	Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	0.26416.0000				Grille en croix/ Rejilla cruciforme	0.26476.0000		
	Filtre sélectif 2700K - 2200K / Filtro selector 2700K - 2200K	0.26424.0000				Volets coupe-flux/ Aletas antideslumbrantes	0.26484.0000		
	Filtre sélectif 2700K - 2000K / Filtro selector 2700K - 2000K	0.26432.0000				Cône 45° wall washer/ Cono 45° wall washer	0.26488.00	12	31
	Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	0.26565.0000				Cylindre court/ Cilindro corto	0.26556.0000	12	31
	Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	0.26573.0000							

Ø 43 mm | Performance | Accessories

Accessoires pour optique/ Accesorios de las ópticas

Image	Description	Code	Finishes	Image	Description	Code	Finishes												
	Filtres en verre 1 mm/ Filtros en cristal de 1 mm	<u>0.26401.00</u>	<table border="1"> <tr><td>4A</td><td>Red</td></tr> <tr><td>5A</td><td>Green</td></tr> <tr><td>6A</td><td>Blue</td></tr> <tr><td>7A</td><td>Pink</td></tr> <tr><td>8A</td><td>Yellow</td></tr> <tr><td>9A</td><td>Orange</td></tr> </table>	4A	Red	5A	Green	6A	Blue	7A	Pink	8A	Yellow	9A	Orange		Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	<u>0.26574.0000</u>	
4A	Red																		
5A	Green																		
6A	Blue																		
7A	Pink																		
8A	Yellow																		
9A	Orange																		
	Lames pour gel coloré (2 pièces)/ Plaquetas de cristal para gel colorado (2 piezas)	<u>0.26409.0000</u>			Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida	<u>0.26441.0000</u>													
	Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	<u>0.26558.0000</u>			Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha	<u>0.26449.0000</u>													
	Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	<u>0.26417.0000</u>			Lentille pour faisceau elliptique/ Lente para haz de luz elíptico	<u>0.26492.0000</u>													
	Filtre sélectif 2700K - 2200K / Filtro selector 2700K - 2200K	<u>0.26425.0000</u>			Lentille opale/ Lente opalescente	<u>0.26461.0000</u>													
	Filtre sélectif 2700K - 2000K / Filtro selector 2700K - 2000K	<u>0.26433.0000</u>			Lentille diffusante/ Lente difusora	<u>0.26469.0000</u>													
	Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	<u>0.26566.0000</u>			Grille en croix / Rejilla cruciforme	<u>0.26480.0000</u>													
					Cône 45° wall washer / Cono 45° wall washer	<u>0.26496.00</u>	<table border="1"> <tr><th>Finishes</th></tr> <tr><td>12</td></tr> <tr><td>31</td></tr> </table>	Finishes	12	31									
Finishes																			
12																			
31																			

Ø 60 mm | Precision



Code example:
0 . RH82 A . HW 12

Accessories: p.450
 Rail/Carril: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

9W POWERLED Lumen delivered up to 772 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>RH82</u> Precision	<u>A</u> 8° Very narrow	<u>HW</u>	2700	>90	725	<3	<u>12</u> <input type="checkbox"/>
<u>T</u> Phase-cut			<u>HQ</u>	3000	>90	730	<3	<u>31</u> <input type="checkbox"/>
<u>D</u> DALI			<u>WW</u>	3000	>80	844	<3	
<u>P</u> Dimmer on board			<u>NN</u>	4000	>80	941	<3	
<u>H</u> Bluetooth			LED nominal lumen					

9W COBLED Lumen delivered up to 1115 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>GH82</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	960	<2	<u>12</u> <input type="checkbox"/>
<u>T</u> Phase-cut		<u>E</u> 20° Medium	<u>HW</u>	2700	>90	1050	<2	<u>31</u> <input type="checkbox"/>
<u>D</u> DALI		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	1100	<2	
<u>P</u> Dimmer on board			<u>WW</u>	3000	>80	1300	<3	
<u>H</u> Bluetooth			<u>NN</u>	4000	>80	1360	<3	
			LED nominal lumen					

12W COBLED Lumen delivered up to 1455 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>GH83</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1250	<2	<u>12</u> <input type="checkbox"/>
<u>T</u> Phase-cut		<u>E</u> 20° Medium	<u>HW</u>	2700	>90	1370	<2	<u>31</u> <input type="checkbox"/>
<u>D</u> DALI		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	1420	<2	
<u>P</u> Dimmer on board			<u>WW</u>	3000	>80	1700	<3	
<u>H</u> Bluetooth			<u>NN</u>	4000	>80	1775	<3	
			LED nominal lumen					



17W COBLED Lumen delivered up to 1970 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>GH84</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1700	<2	<u>12</u> <input type="checkbox"/>
<u>T</u> Phase-cut		<u>E</u> 20° Medium	<u>HW</u>	2700	>90	1870	<2	<u>31</u> <input type="checkbox"/>
<u>D</u> DALI		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	1920	<2	
<u>P</u> Dimmer on board			<u>WW</u>	3000	>80	2320	<3	
<u>H</u> Bluetooth			<u>NN</u>	4000	>80	2400	<3	
			LED nominal lumen					

12W Warm Dimming COBLED Lumen delivered up to 690 lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>D</u> DALI	<u>GH83</u> Precision	<u>B</u> 27° Narrow	<u>DT</u>	1700-3000	>95	100-1000	<4	<u>12</u> <input type="checkbox"/>
<u>P</u> Dimmer on board			LED nominal lumen					
<u>H</u> Bluetooth								<u>31</u> <input type="checkbox"/>

Ø 60 mm | Performance



Code example:

O . **GH92** **B** . **HW** **12**

Accessories: p.451
 Rail/Carril : p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

9W COBLED Lumen delivered up to 1200lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	GH92 Performance	B 13° Narrow	HC	3000	>98	960	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	1050	<2	31
D DALI		H 40° Wide	HQ	3000	>90	1100	<2	
P Dimmer on board		K - Without optics	WW	3000	>80	1300	<3	
H Bluetooth			NN	4000	>80	1360	<3	

LED nominal lumen

12W COBLED Lumen delivered up to 1560lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	GH93 Performance	B 13° Narrow	HC	3000	>98	1250	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	1370	<2	31
D DALI		H 40° Wide	HQ	3000	>90	1420	<2	
P Dimmer on board		K - Without optics	WW	3000	>80	1700	<3	
H Bluetooth			NN	4000	>80	1775	<3	

LED nominal lumen

17W COBLED Lumen delivered up to 2110lm / Lumen maintenance: L80B10=50,000h



Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	GH94 Performance	B 13° Narrow	HC	3000	>98	1700	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	1870	<2	31
D DALI		H 40° Wide	HQ	3000	>90	1920	<2	
P Dimmer on board		K - Without optics	WW	3000	>80	2320	<3	
H Bluetooth			NN	4000	>80	2400	<3	

LED nominal lumen




Ø 60 mm | Precision | Accessories

Optiques interchangeables IOS/ Ópticas intercambiables IOS








		Description Precision - Faisceau étroit / Precision - Haz de luz estrecho (12°-9W, 12W, 17W)	Code <u>0.35125.0000</u>
---	---	--	------------------------------------


Non applicable aux références / No para códigos: **GH83B / GH83B.DT**

		Description Precision - Faisceau moyen/ Precision - Haz de luz medio (20°-9W, 12W, 17W)	Code <u>0.35126.0000</u>
---	--	---	------------------------------------


Non applicable aux références / No para códigos: **GH83B / GH83B.DT**


Accessoires pour optique/ Accesorios de las ópticas


	Description Filtres en verre 1 mm/ Filtros en cristal de 1 mm	Code <u>0.26402.00</u>	Finishes 4A  5A  6A  7A  8A  9A 
---	--	----------------------------------	---

	Description Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida	Code <u>0.26442.0000</u>
---	--	------------------------------------


	Description Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha	Code <u>0.26450.0000</u>
---	--	------------------------------------


	Description Lames pour gel coloré (2 pièces)/ Plaquetas de cristal para gel colorado (2 piezas)	Code <u>0.26410.0000</u>
---	---	------------------------------------


	Description Lentille pour faisceau elliptique/ Lente para haz de luz elíptico	Code <u>0.26457.0000</u>
---	--	------------------------------------


	Description Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	Code <u>0.26559.0000</u>
--	--	------------------------------------


	Description Lentille opale/ Lente opalescente	Code <u>0.26462.0000</u>
--	--	------------------------------------


	Description Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	Code <u>0.26418.0000</u>
---	--	------------------------------------


	Description Lentille diffusante/ Lente difusora	Code <u>0.26470.0000</u>
---	--	------------------------------------




	Description Filtre sélectif 2700K - 2200K / Filtro selector 2700K - 2200K	Code <u>0.26426.0000</u>
---	--	------------------------------------


	Description Grille en croix/ Rejilla cruciforme	Code <u>0.26477.0000</u>
---	--	------------------------------------

	Description Filtre sélectif 2700K - 2000K / Filtro selector 2700K - 2000K	Code <u>0.26434.0000</u>
---	--	------------------------------------




	Description Volets coupe-flux/ Aletas antideslumbrantes	Code <u>0.26485.0000</u>
---	--	------------------------------------




	Description Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	Code <u>0.26567.0000</u>
---	--	------------------------------------

	Description Cône 45° wall washer/ Cono 45° wall washer	Code <u>0.26489.00</u>	Finishes 12  31 
---	---	----------------------------------	---

	Description Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	Code <u>0.26575.0000</u>
---	--	------------------------------------







Projecteur cadreur/ Contorneador de luz

		Description Projecteur cadreur, cadre de lumière - carré/ Contorneador de luz, contorno de luz - cuadrado	Code <u>0.26651.00</u>	Finishes 21 
---	---	--	----------------------------------	---
























		Description Projecteur cadreur, cadre de lumière - rond/ Contorneador de luz, contorno de luz - redondo	Code <u>0.26650.00</u>	Finishes 21 
---	---	--	----------------------------------	---

Ø 60 mm | Performance | Accessories







Optiques interchangeables IOS/ Ópticas intercambiables IOS

		Description Performance - Faisceau étroit/ Performance - Haz de luz estrecho (13°-9W, 12W, 17W)	Code 0.35145.0000			Description Performance - Faisceau large/ Performance - Haz de luz ancho (40°-9W, 12W, 17W)	Code 0.35147.0000
		Description Performance - Faisceau moyen/ Performance - Haz de luz medio (24°-9W, 12W, 17W)	Code 0.35146.0000				



Accessoires pour optique/ Accesorios de las ópticas

	Description Filtres en verre 1 mm/ Filtros en cristal de 1 mm	Code 0.26403.00	Finishes 4A  5A  6A  7A  8A  9A 		Description Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	Code 0.26576.0000	
	Description Lames pour gel coloré (2 pièces)/ Plaquetas de cristal para gel colorado (2 piezas)	Code 0.26411.0000			Description Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida	Code 0.26443.0000	
	Description Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	Code 0.26560.0000			Description Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha	Code 0.26451.0000	
	Description Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	Code 0.26419.0000			Description Lentille pour faisceau elliptique/ Lente para haz de luz elíptico	Code 0.26493.0000	
	Description Filtre sélectif 2700K - 2200K / Filtro selector 2700K - 2200K	Code 0.26427.0000			Description Lentille opale/ Lente opalescente	Code 0.26463.0000	
	Description Filtre sélectif 2700K - 2000K / Filtro selector 2700K - 2000K	Code 0.26435.0000			Description Lentille diffusante/ Lente difusora	Code 0.26471.0000	
	Description Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	Code 0.26568.0000			Description Grille en croix/ Rejilla cruciforme	Code 0.26481.0000	
					Description Cône 45° wall washer/ Cono 45° wall washer	Code 0.26497.00	Finishes 12  31 

Projecteur cadreur/ Contorneador de luz

		Description Projecteur cadreur, cadre de lumière - carré/ Contorneador de luz, contorno de luz - cuadrado	Code 0.26651.00	Finishes 21 
		Description Projecteur cadreur, cadre de lumière - rond/ Contorneador de luz, contorno de luz - redondo	Code 0.26650.00	Finishes 21 

Ø 75 mm | Precision



Code example:
0 . LH83 B . HC 12

Accessories: p.454
 Rail/Carril: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

12 W COB LED Lumen delivered up to 1575 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>LH83</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1323	<2	<u>12</u> <input type="checkbox"/>
<u>T</u> Phase-cut		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	1491	<2	<u>31</u> <input type="checkbox"/>
<u>D</u> DALI		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	1533	<2	
<u>P</u> Dimmer on board			<u>WW</u>	3000	>80	1859	<3	
<u>H</u> Bluetooth			<u>NN</u>	4000	>80	1920	<3	

LED nominal lumen

17 W COB LED Lumen delivered up to 1465 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>NH84</u> Precision	<u>A</u> 7° Very narrow	<u>HC</u>	3000	>98	1700	<2	<u>12</u> <input type="checkbox"/>
<u>T</u> Phase-cut			<u>HW</u>	2700	>90	1870	<2	<u>31</u> <input type="checkbox"/>
<u>D</u> DALI			<u>HQ</u>	3000	>90	1920	<2	
<u>P</u> Dimmer on board			<u>WW</u>	3000	>80	2320	<3	
<u>H</u> Bluetooth			<u>NN</u>	4000	>80	2400	<3	

LED nominal lumen

17 W COB LED Lumen delivered up to 2190 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>LH84</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1834	<2	<u>12</u> <input type="checkbox"/>
<u>T</u> Phase-cut		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	2067	<2	<u>31</u> <input type="checkbox"/>
<u>D</u> DALI		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	2122	<2	
<u>P</u> Dimmer on board			<u>WW</u>	3000	>80	2582	<3	
<u>H</u> Bluetooth			<u>NN</u>	4000	>80	2665	<3	

LED nominal lumen

24 W COB LED Lumen delivered up to 2955 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>LH86</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	2476	<3	<u>12</u> <input type="checkbox"/>
<u>T</u> Phase-cut		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	2792	<3	<u>31</u> <input type="checkbox"/>
<u>D</u> DALI		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	2860	<3	
<u>P</u> Dimmer on board			<u>WW</u>	3000	>80	3487	<3	
<u>H</u> Bluetooth			<u>NN</u>	4000	>80	3602	<3	

LED nominal lumen

28 W COB LED Lumen delivered up to 3325 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>LH87</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	2777	<3	<u>12</u> <input type="checkbox"/>
<u>T</u> Phase-cut		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	3137	<3	<u>31</u> <input type="checkbox"/>
<u>D</u> DALI		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	3207	<3	
<u>P</u> Dimmer on board			<u>WW</u>	3000	>80	3898	<3	
<u>H</u> Bluetooth			<u>NN</u>	4000	>80	4054	<3	


LED nominal lumen

25 W Warm Dimming COB LED Lumen delivered up to 1100 lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>D</u> DALI	<u>LH86</u> Precision	<u>B</u> 25° Narrow	<u>DT</u>	1700-3000	>95	100-2500	<4	<u>12</u> <input type="checkbox"/>
<u>P</u> Dimmer on board								<u>31</u> <input type="checkbox"/>
<u>H</u> Bluetooth								

LED nominal lumen

Ø 75 mm | Performance



Code example:

0 . **LH93** **B** . **HC** **12**

Accessories: p.455
 Rail/Carril : p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

12 W COBLED Lumen delivered up to 1800 lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LH93 Performance	B 12° Narrow	HC	3000	>98	1323	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	1491	<2	31
D DALI		H 48° Wide	HQ	3000	>90	1533	<2	
P Dimmer on board		K - Without optics	WW	3000	>80	1859	<3	
H Bluetooth			NN	4000	>80	1920	<3	

LED nominal lumen

17 W COBLED Lumen delivered up to 2480 lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LH94 Performance	B 12° Narrow	HC	3000	>98	1834	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	2067	<2	31
D DALI		H 48° Wide	HQ	3000	>90	2122	<2	
P Dimmer on board		K - Without optics	WW	3000	>80	2582	<3	
H Bluetooth			NN	4000	>80	2665	<3	

LED nominal lumen

24 W COBLED Lumen delivered up to 3550 lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LH96 Performance	B 12° Narrow	HC	3000	>98	2476	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	2792	<2	31
D DALI		H 48° Wide	HQ	3000	>90	2860	<2	
P Dimmer on board		K - Without optics	WW	3000	>80	3487	<3	
H Bluetooth			NN	4000	>80	3602	<3	

LED nominal lumen

28 W COBLED Lumen delivered up to 3770 lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LH97 Performance	B 12° Narrow	HC	3000	>98	2777	<2	12
T Phase-cut		E 24° Medium	HW	2700	>90	3137	<2	31
D DALI		H 48° Wide	HQ	3000	>90	3207	<2	
P Dimmer on board		K - Without optics	WW	3000	>80	3898	<3	
H Bluetooth			NN	4000	>80	4054	<3	

LED nominal lumen


Ø 75 mm | Precision | Accessories

Optiques interchangeables IOS/ Ópticas intercambiables IOS



Description
Precision - Faisceau étroit /
Precision - Haz de luz estrecho
(12°-12W, 17W, 24W, 28W)

Code
0.35130.0000



Description
Precision - Faisceau moyen/
Precision - Haz de luz medio
(24°-12W, 17W, 24W, 28W)

Code
0.35131.0000

Non applicable aux références / No para códigos: **NH84A / LH86B.DT**

Non applicable aux références / No para códigos: **NH84A / LH86B.DT**

Accessoires pour optique/ Accesorios de las ópticas



Description
Filtres en verre 1 mm/
Filtros en cristal de 1 mm

Code
0.26404.00


Finishes

4A	Red
5A	Green
6A	Blue
7A	Pink
8A	Yellow
9A	Orange



Description
Grille en nid d'abeilles, maille fine/
Rejilla alveolar de textura tupida

Code
0.26444.0000



Description
Grille en nid d'abeilles, maille large/
Rejilla alveolar de textura ancha

Code
0.26452.0000



Description
Lames pour gel coloré (2 pièces)/
Plaquetas de cristal para gel colorado
(2 piezas)

Code
0.26412.0000



Description
Lentille pour faisceau elliptique/
Lente para haz de luz elliptico

Code
0.26458.0000



Description
Filtre sélectif 3000K - 2700K /
Filtro selector 3000K - 2700K

Code
0.26561.0000




Description
Lentille opale/
Lente opalescente

Code
0.26464.0000




Description
Filtre sélectif 2700K - 2500K /
Filtro selector 2700K - 2500K

Code
0.26420.0000



Description
Lentille diffusante/
Lente difusora

Code
0.26472.0000




Description
Filtre sélectif 2700K - 2200K /
Filtro selector 2700K - 2200K

Code
0.26428.0000




Description
Grille en croix/
Rejilla cruciforme

Code
0.26478.0000



Description
Filtre sélectif 2700K - 2000K /
Filtro selector 2700K - 2000K

Code
0.26436.0000



Description
Volets coupe-flux/
Aletas antideslumbrantes

Code
0.26486.0000



Description
Filtre sélectif 3000K - 3600K /
Filtro selector 3000K - 3600K

Code
0.26569.0000



Description
Cône 45° wall washer/
Cono 45° wall washer

Code
0.26490.00

Finishes

12	White
31	Black









Description
Filtre sélectif 3000K - 4000K /
Filtro selector 3000K - 4000K
























Code
0.26577.0000

Ø 75 mm | Performance | Accessories




Optiques interchangeables IOS/ Ópticas intercambiables IOS

		Description Performance - Faisceau étroit/ Performance - Haz de luz estrecho (12°-12W, 17W, 24W, 28W)	Code 0.35150.0000			Description Performance - Faisceau large/ Performance - Haz de luz ancho (48°-12W, 17W, 24W, 28W)	Code 0.35152.0000
		Description Performance - Faisceau moyen/ Performance - Haz de luz medio (24°-12W, 17W, 24W, 28W)	Code 0.35151.0000				

Accessoires pour optique/ Accesorios de las ópticas

	Description Filtres en verre 1 mm/ Filtros en cristal de 1 mm	Code 0.26405.00	Finishes 4A  5A  6A  7A  8A  9A 		Description Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	Code 0.26578.0000	
	Description Lames pour gel coloré (2 pièces)/ Plaquetas de cristal para gel colorado (2 piezas)	Code 0.26413.0000			Description Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida	Code 0.26445.0000	
	Description Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	Code 0.26562.0000			Description Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha	Code 0.26453.0000	
	Description Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	Code 0.26421.0000			Description Lentille pour faisceau elliptique/ Lente para haz de luz elíptico	Code 0.26494.0000	
	Description Filtre sélectif 2700K - 2200K / Filtro selector 2700K - 2200K	Code 0.26429.0000			Description Lentille opale/ Lente opalescente	Code 0.26465.0000	
	Description Filtre sélectif 2700K - 2000K / Filtro selector 2700K - 2000K	Code 0.26437.0000			Description Lentille diffusante/ Lente difusora	Code 0.26473.0000	
	Description Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	Code 0.26570.0000			Description Grille en croix / Rejilla cruciforme	Code 0.26482.0000	
					Description Cône 45° wall washer/ Cono 45° wall washer	Code 0.26498.00	Finishes 12  31 

Ø 95 mm | Precision



Code example:
0 . MH83 B . HC 12

Accessories: p.458
 Rail/Carril: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

12 W COB LED Lumen delivered up to 1690lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>MH83</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1323	<3	<u>12</u> <input type="checkbox"/>
<u>T</u> Phase-cut		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	1491	<3	<u>31</u> <input type="checkbox"/>
<u>D</u> DALI		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	1533	<3	
<u>P</u> Dimmer on board			<u>WW</u>	3000	>80	1859	<3	
<u>H</u> Bluetooth			<u>NN</u>	4000	>80	1920	<3	

LED nominal lumen

17 W COB LED Lumen delivered up to 1510lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>PH84</u> Precision	<u>A</u> 7° Very narrow	<u>HC</u>	3000	>98	1700	<2	<u>12</u> <input type="checkbox"/>
<u>T</u> Phase-cut			<u>HW</u>	2700	>90	1870	<2	<u>31</u> <input type="checkbox"/>
<u>D</u> DALI			<u>HQ</u>	3000	>90	1920	<2	
<u>P</u> Dimmer on board			<u>WW</u>	3000	>80	2320	<3	
<u>H</u> Bluetooth			<u>NN</u>	4000	>80	2400	<3	

LED nominal lumen

17 W COB LED Lumen delivered up to 2350lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>MH84</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	1834	<3	<u>12</u> <input type="checkbox"/>
<u>T</u> Phase-cut		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	2067	<3	<u>31</u> <input type="checkbox"/>
<u>D</u> DALI		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	2122	<3	
<u>P</u> Dimmer on board			<u>WW</u>	3000	>80	2582	<3	
<u>H</u> Bluetooth			<u>NN</u>	4000	>80	2665	<3	

LED nominal lumen

24 W COB LED Lumen delivered up to 3170lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>MH86</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	2476	<3	<u>12</u> <input type="checkbox"/>
<u>T</u> Phase-cut		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	2792	<3	<u>31</u> <input type="checkbox"/>
<u>D</u> DALI		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	2860	<3	
<u>P</u> Dimmer on board			<u>WW</u>	3000	>80	3487	<3	
<u>H</u> Bluetooth			<u>NN</u>	4000	>80	3602	<3	

LED nominal lumen

33 W COB LED Lumen delivered up to 4130lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>MH88</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	3142	<3	<u>12</u> <input type="checkbox"/>
<u>D</u> DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	3635	<3	<u>31</u> <input type="checkbox"/>
<u>P</u> Dimmer on board		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	3735	<3	
<u>H</u> Bluetooth			<u>WW</u>	3000	>80	4510	<3	
			<u>NN</u>	4000	>80	4695	<3	

LED nominal lumen

37 W COB LED Lumen delivered up to 4476lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On-Off	<u>MH89</u> Precision	<u>B</u> 12° Narrow	<u>HC</u>	3000	>98	3473	<3	<u>12</u> <input type="checkbox"/>
<u>D</u> DALI		<u>E</u> 24° Medium	<u>HW</u>	2700	>90	3940	<3	<u>31</u> <input type="checkbox"/>
<u>P</u> Dimmer on board		<u>K</u> - Without optics	<u>HQ</u>	3000	>90	4000	<3	
<u>H</u> Bluetooth			<u>WW</u>	3000	>80	4880	<3	
			<u>NN</u>	4000	>80	5090	<3	


LED nominal lumen

33 W Warm Dimming COB LED Lumen delivered up to 1520lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>D</u> DALI	<u>MH88</u> Precision	<u>B</u> 25° Narrow	<u>DT</u>	1700-3000	>95	100-3100	<4	<u>12</u> <input type="checkbox"/>
<u>P</u> Dimmer on board								<u>31</u> <input type="checkbox"/>
<u>H</u> Bluetooth								

LED nominal lumen

Ø 95 mm | Performance



Code example:

Ø . **MH93** . **B** . **HC** . **12**

Accessories: p.459
 Rail/Carril : p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

12 W COB LED Lumen delivered up to 1800 lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	MH93 Performance	B 10° Narrow	HC	3000	>98	1323	<3	12
T Phase-cut		E 20° Medium	HW	2700	>90	1491	<3	31
D DALI		H 31° Wide	HQ	3000	>90	1533	<3	
P Dimmer on board		K - Without optics	WW	3000	>80	1859	<3	
H Bluetooth		NN	4000	>80	1920	<3		

LED nominal lumen

17 W COB LED Lumen delivered up to 2500 lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	MH94 Performance	B 10° Narrow	HC	3000	>98	1834	<3	12
T Phase-cut		E 20° Medium	HW	2700	>90	2067	<3	31
D DALI		H 31° Wide	HQ	3000	>90	2122	<3	
P Dimmer on board		K - Without optics	WW	3000	>80	2582	<3	
H Bluetooth		NN	4000	>80	2665	<3		

LED nominal lumen

24 W COB LED Lumen delivered up to 3300 lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	MH96 Performance	B 10° Narrow	HC	3000	>98	2476	<3	12
T Phase-cut		E 20° Medium	HW	2700	>90	2792	<3	31
D DALI		H 31° Wide	HQ	3000	>90	2860	<3	
P Dimmer on board		K - Without optics	WW	3000	>80	3487	<3	
H Bluetooth		NN	4000	>80	3602	<3		

LED nominal lumen

33 W COB LED Lumen delivered up to 4110 lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	MH98 Performance	B 10° Narrow	HC	3000	>98	3142	<3	12
D DALI		E 20° Medium	HW	2700	>90	3635	<3	31
P Dimmer on board		H 31° Wide	HQ	3000	>90	3735	<3	
H Bluetooth		K - Without optics	WW	3000	>80	4510	<3	
		NN	4000	>80	4695	<3		

LED nominal lumen

37 W COB LED Lumen delivered up to 4530 lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	MH99 Performance	B 10° Narrow	HC	3000	>98	3473	<3	12
D DALI		E 20° Medium	HW	2700	>90	3940	<3	31
P Dimmer on board		H 31° Wide	HQ	3000	>90	4000	<3	
H Bluetooth		K - Without optics	WW	3000	>80	4880	<3	
		NN	4000	>80	5090	<3		

LED nominal lumen


Ø 95 mm | Accessories

Optiques interchangeables IOS/ Ópticas intercambiables IOS



Description
Precision - Faisceau étroit /
Precision - Haz de luz estrecho
(12°-12W, 17W, 24W, 33W, 37W)

Code
0.35135.0000



Description
Precision - Faisceau moyen /
Precision - Haz de luz medio
(24°-12W, 17W, 24W, 33W, 37W)

Code
0.35136.0000

Non applicable aux références / No para códigos: PH84A / MH88B.DT

Non applicable aux références / No para códigos: PH84A / MH88B.DT

Accessoires pour optique / Accesorios de las ópticas



Description
Filtres en verre 1 mm /
Filtros en cristal de 1 mm

Code
0.26406.00


Finishes

4A	Red
5A	Green
6A	Blue
7A	Pink
8A	Yellow
9A	Orange



Description
Grille en nid d'abeilles, maille fine /
Rejilla alveolar de textura tupida

Code
0.26446.0000



Description
Grille en nid d'abeilles, maille large /
Rejilla alveolar de textura ancha

Code
0.26454.0000



Description
Lames pour gel coloré (2 pièces) /
Plaquetas de cristal para gel colorado
(2 piezas)

Code
0.26414.0000



Description
Lentille pour faisceau elliptique /
Lente para haz de luz elliptico

Code
0.26459.0000



Description
Filtre sélectif 3000K - 2700K /
Filtro selector 3000K - 2700K

Code
0.26563.0000




Description
Lentille opale /
Lente opalescente

Code
0.26466.0000




Description
Filtre sélectif 2700K - 2500K /
Filtro selector 2700K - 2500K

Code
0.26422.0000



Description
Lentille diffusante /
Lente difusora

Code
0.26474.0000




Description
Filtre sélectif 2700K - 2200K /
Filtro selector 2700K - 2200K

Code
0.26430.0000



Description
Grille en croix /
Rejilla cruciforme

Code
0.26479.0000



Description
Filtre sélectif 2700K - 2000K /
Filtro selector 2700K - 2000K

Code
0.26438.0000



Description
Volets coupe-flux /
Aletas antideslumbrantes

Code
0.26487.0000



Description
Filtre sélectif 3000K - 3600K /
Filtro selector 3000K - 3600K

Code
0.26571.0000



Description
Cône 45° wall washer /
Cono 45° wall washer

Code
0.26491.00

Finishes

12	White
31	Black









Description
Filtre sélectif 3000K - 4000K /
Filtro selector 3000K - 4000K
























Code
0.26579.0000

Ø 95 mm | Performance | Accessories

Optiques interchangeables IOS/
Ópticas intercambiables IOS

		Description Performance - Faisceau étroit / Performance - Haz de luz estrecho (10°-12W, 17W, 24W, 33W, 37W)	Code 0.35155.0000			Description Performance - Faisceau large / Performance - Haz de luz ancho (31°-12W, 17W, 24W, 33W, 37W)	Code 0.35157.0000
		Description Performance - Faisceau moyen / Performance - Haz de luz medio (20°-12W, 17W, 24W, 33W, 37W)	Code 0.35156.0000				

Accessoires pour optique/
Accesorios de las ópticas

	Description Filtres en verre 1 mm / Filtros en cristal de 1 mm	Code 0.26407.00	Finishes 4A  5A  6A  7A  8A  9A 		Description Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	Code 0.26580.0000	
	Description Lames pour gel coloré (2 pièces) / Plaquetas de cristal para gel colorado (2 piezas)	Code 0.26415.0000			Description Grille en nid d'abeilles, maille fine / Rejilla alveolar de textura tupida	Code 0.26447.0000	
	Description Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	Code 0.26564.0000			Description Grille en nid d'abeilles, maille large / Rejilla alveolar de textura ancha	Code 0.26455.0000	
	Description Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	Code 0.26423.0000			Description Lentille pour faisceau elliptique / Lente para haz de luz elíptico	Code 0.26495.0000	
	Description Filtre sélectif 2700K - 2200K / Filtro selector 2700K - 2200K	Code 0.26431.0000			Description Lentille opale / Lente opalescente	Code 0.26467.0000	
	Description Filtre sélectif 2700K - 2000K / Filtro selector 2700K - 2000K	Code 0.26439.0000			Description Lentille diffusante / Lente difusora	Code 0.26475.0000	
	Description Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	Code 0.26572.0000			Description Grille en croix / Rejilla cruciforme	Code 0.26483.0000	
					Description Cône 45° wall washer / Cono 45° wall washer	Code 0.26491.00	Finishes 12  31 




—

Yori Slot


— Yori Slot

FR Yori Slot est le résultat d'exigences de conception spécifiques où la flexibilité d'utilisation de l'appareil est portée à l'extrême. Le projecteur est doté d'un bras orientable supplémentaire qui relie la tête de l'appareil au reste du corps d'éclairage. Dans le cas d'installations dissimulées dans des corniches et des éléments architecturaux très étroits, le bras permet d'orienter le projecteur dans des directions opposées, tout en maintenant l'alignement des parties visibles du corps de l'appareil.

ES Yori Slot nace de específicas exigencias proyectuales que requieren una extrema flexibilidad de utilizo del aparato. El proyector cuenta con un brazo orientable adicional que conecta la cabeza del aparato con la parte restante del cuerpo iluminante. En las ranuras y en los detalles arquitectónicos similares, el brazo permite orientar el proyector en direcciones opuestas manteniendo siempre las partes visibles del cuerpo del aparato alineadas.


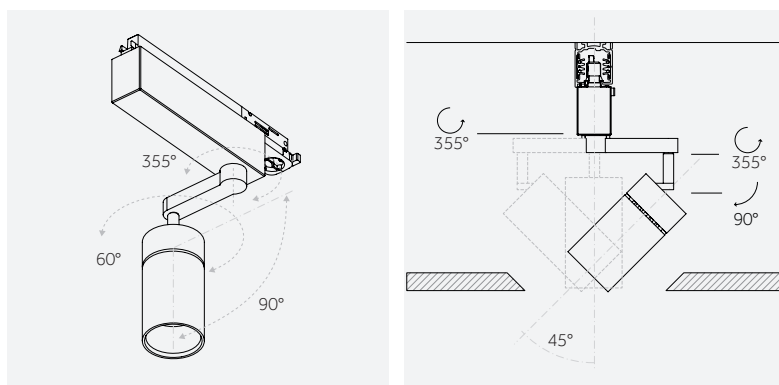


FR Orientation de Yori Slot
ES Orientabilidad Yori Slot

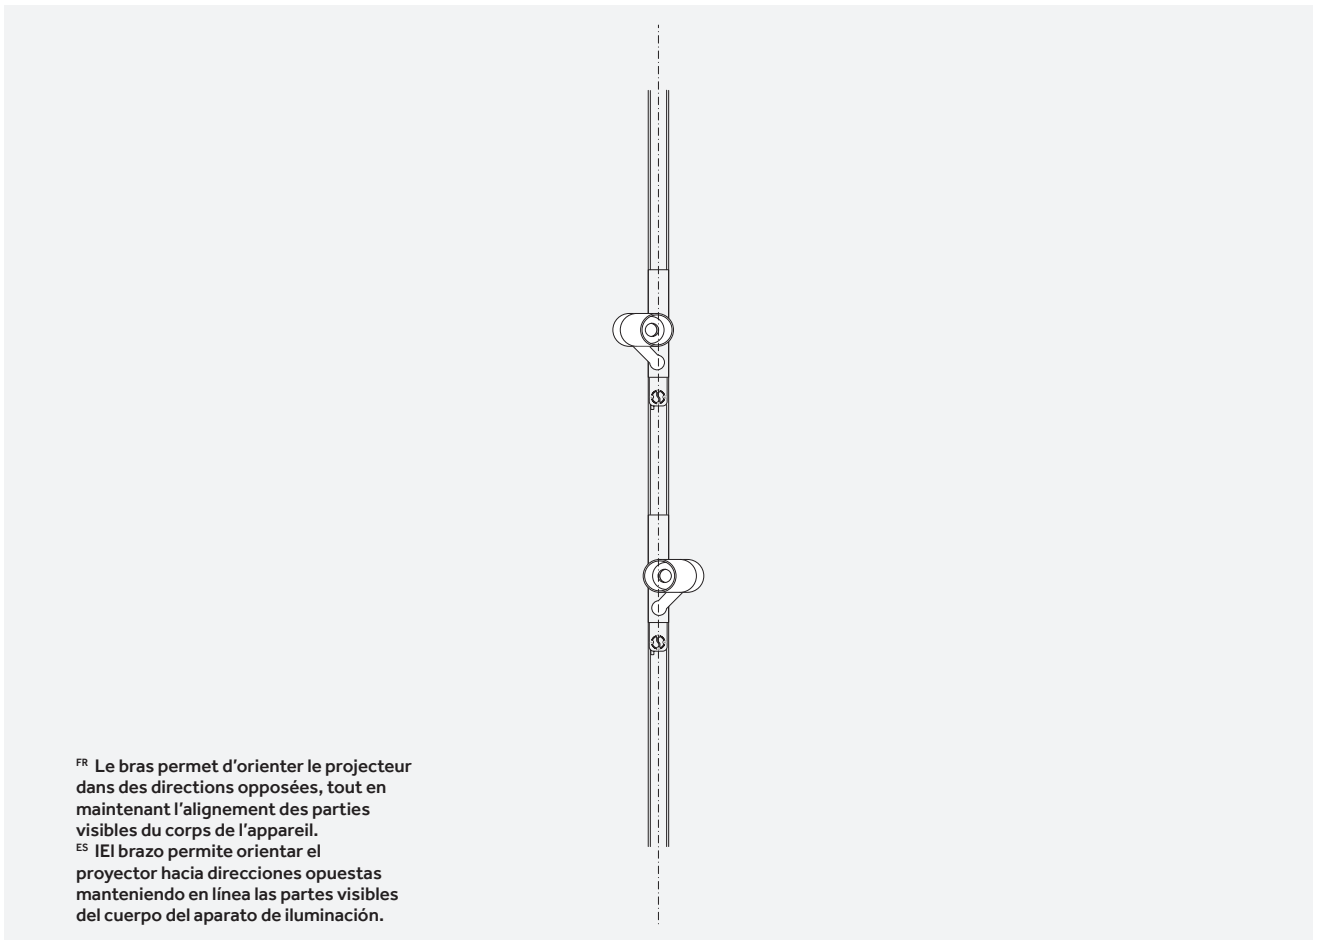


FR Le bras permet d'orienter le projecteur dans des directions opposées, tout en maintenant l'alignement des parties visibles du corps de l'appareil.
 ES El brazo permite orientar el proyector hacia direcciones opuestas manteniendo en línea las partes visibles del cuerpo del aparato de iluminación.

Ø 43 mm | Precision



Phase-cut / Dali / Dimmer on board



Code example:
0 . FL71 A . HW 31

Accessories: p.466
 Rail/Carril: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

4W POWERLED Lumen delivered up to 435 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	FL71 Precision	A 7° Verynarrow	HW	2700	>90	410	<3	31
T Phase-cut		B 11° Narrow	HQ	3000	>90	415	<3	
D DALI		E 23° Medium	WW	3000	>80	485	<3	
P Dimmer on board		H 40° Wide	NN	4000	>80	530	<3	



LED nominal lumen

9W POWERLED Lumen delivered up to 750 lm / Lumen maintenance: L90 B10=50,000h



Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	FL72 Precision	A 7° Verynarrow	HW	2700	>90	725	<3	31
T Phase-cut		B 11° Narrow	HQ	3000	>90	730	<3	
D DALI		E 23° Medium	WW	3000	>80	845	<3	
P Dimmer on board		H 40° Wide	NN	4000	>80	940	<3	

LED nominal lumen

Ø 43 mm | Performance



Phase-cut / Dali / Dimmer on board

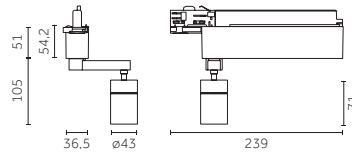

Code example:

O . **FL81** **B** . **HW** **31**

Accessories: p.467
 Rail/Carril : p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

4W POWER LED

Lumen delivered up to 450 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	FL81 Performance	B 6° Narrow	HW	2700	>90	410	<3	31
T Phase-cut		E 18° Medium	HQ	3000	>90	415	<3	
D DALI		H 36° Wide	WW	3000	>80	485	<3	
P Dimmer on board			NN	4000	>80	530	<3	

LED nominal lumen

9W POWER LED

Lumen delivered up to 780 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	FL82 Performance	B 6° Narrow	HW	2700	>90	725	<3	31
T Phase-cut		E 18° Medium	HQ	3000	>90	730	<3	
D DALI		H 36° Wide	WW	3000	>80	845	<3	
P Dimmer on board			NN	4000	>80	940	<3	

LED nominal lumen



Ø 43 mm | Precision | Accessories

Accessoires pour optique/
Accesorios de las ópticas

Image	Description	Code	Finishes		Image	Description	Code	Finishes	
			4A	5A				12	31
	Filtres en verre 1 mm/ Filtros en cristal de 1 mm	0.26400.00	4A	5A		Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida	0.26440.0000		
			6A	7A		Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha	0.26448.0000		
			8A	9A		Lentille pour faisceau elliptique/ Lente para haz de luz elíptico	0.26456.0000		
	Lames pour gel coloré (2 pièces)/ Plaquetas de cristal para gel colorado (2 piezas)	0.26408.0000				Lentille opale/ Lente opalescente	0.26460.0000		
	Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	0.26557.0000				Lentille diffusante/ Lente difusora	0.26468.0000		
	Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	0.26416.0000				Grille en croix/ Rejilla cruciforme	0.26476.0000		
	Filtre sélectif 2700K - 2200K / Filtro selector 2700K - 2200K	0.26424.0000				Volets coupe-flux/ Aletas antideslumbrantes	0.26484.0000		
	Filtre sélectif 2700K - 2000K / Filtro selector 2700K - 2000K	0.26432.0000				Cône 45° wall washer/ Cono 45° wall washer	0.26488.00	12	31
	Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	0.26565.0000				Cylindre court/ Cilindro corto	0.26556.00	12	31
	Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	0.26573.0000							

Ø 43 mm | Performance | Accessories

Accessoires pour optique/ Accesorios de las ópticas




Description
Filtres en verre 1 mm/
Filtros en cristal de 1 mm

Code
0.26401.00

Finishes

4A	Red
5A	Green
6A	Blue
7A	Pink
8A	Yellow
9A	Orange



Description
Filtre sélectif 3000K - 4000K /
Filtro selector 3000K - 4000K

Code
0.26574.0000



Description
Lames pour gel coloré (2 pièces)/
Plaquetas de cristal para gel colorado
(2 piezas)

Code
0.26409.0000




Description
Grille en nid d'abeilles, maille fine/
Rejilla alveolar de textura tupida

Code
0.26441.0000



Description
Filtre sélectif 3000K - 2700K /
Filtro selector 3000K - 2700K

Code
0.26558.0000




Description
Grille en nid d'abeilles, maille large/
Rejilla alveolar de textura ancha

Code
0.26449.0000




Description
Filtre sélectif 2700K - 2500K /
Filtro selector 2700K - 2500K

Code
0.26417.0000



Description
Lentille pour faisceau elliptique/
Lente para haz de luz elíptico

Code
0.26492.0000




Description
Filtre sélectif 2700K - 2200K /
Filtro selector 2700K - 2200K

Code
0.26425.0000




Description
Lentille opale/
Lente opalescente

Code
0.26461.0000



Description
Filtre sélectif 2700K - 2000K /
Filtro selector 2700K - 2000K

Code
0.26433.0000



Description
Lentille diffusante/
Lente difusora

Code
0.26469.0000



Description
Grille en croix /
Rejilla cruciforme

Code
0.26480.0000



Description
Filtre sélectif 3000K - 3600K /
Filtro selector 3000K - 3600K

Code
0.26566.0000



Description
Cône 45° wall washer /
Cono 45° wall washer



Code
0.26496.00

Finishes

12	White
31	Black

Ø 60 mm | Precision

Risk 1 0.75 IP20 850° CE CB EAC



Code example:

O . ML72 B . HC 31

Accessories: p.470
 Rail/Carril: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

9 W POWERLED Lumen delivered up to 770 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	ML72 Precision	A 8° Very narrow	HW	2700	>90	725	<3	31
T Phase-cut			HQ	3000	>90	730	<3	
D DALI			WW	3000	>80	845	<3	
P Dimmer on board			NN	4000	>80	940	<3	

LED nominal lumen

9 W COBLED Lumen delivered up to 1115 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	GL72 Precision	B 12° Narrow	HC	3000	>98	960	<2	31
T Phase-cut		E 20° Medium	HW	2700	>90	1050	<2	
D DALI		K - Without optics	HQ	3000	>90	1100	<2	
P Dimmer on board			WW	3000	>80	1300	<3	
			NN	4000	>80	1360	<3	

LED nominal lumen

12 W COBLED Lumen delivered up to 1455 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	GL73 Precision	B 12° Narrow	HC	3000	>98	1250	<2	31
T Phase-cut		E 20° Medium	HW	2700	>90	1370	<2	
D DALI		K - Without optics	HQ	3000	>90	1420	<2	
P Dimmer on board			WW	3000	>80	1700	<3	
			NN	4000	>80	1775	<3	




LED nominal lumen

17 W COBLED Lumen delivered up to 1970 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	GL74 Precision	B 12° Narrow	HC	3000	>98	1700	<3	31
T Phase-cut		E 20° Medium	HW	2700	>90	1870	<3	
D DALI		K - Without optics	HQ	3000	>90	1920	<3	
P Dimmer on board			WW	3000	>80	2320	<3	
			NN	4000	>80	2400	<3	

LED nominal lumen

Ø 60 mm | Performance



Code example:

O . **GL82** **B** . **HC** **31**

Accessories: p.471
 Rail/Carril : p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

9W COBLED Lumen delivered up to 1200lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	GL82 Performance	B 13° Narrow	HC	3000	>98	960	<2	31
T Phase-cut		E 24° Medium	HW	2700	>90	1050	<2	
D DALI		H 40° Wide	HQ	3000	>90	1100	<2	
P Dimmer on board		K - Without optics	WW	3000	>80	1300	<3	
			NN	4000	>80	1360	<3	

LED nominal lumen

12W COBLED Lumen delivered up to 1560lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	GL83 Performance	B 13° Narrow	HC	3000	>98	1250	<2	31
T Phase-cut		E 24° Medium	HW	2700	>90	1370	<2	
D DALI		H 40° Wide	HQ	3000	>90	1420	<2	
P Dimmer on board		K - Without optics	WW	3000	>80	1700	<3	
			NN	4000	>80	1775	<3	


LED nominal lumen

17W COBLED Lumen delivered up to 2110lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	GL84 Performance	B 13° Narrow	HC	3000	>98	1700	<2	31
T Phase-cut		E 24° Medium	HW	2700	>90	1870	<2	
D DALI		H 40° Wide	HQ	3000	>90	1920	<2	
P Dimmer on board		K - Without optics	WW	3000	>80	2320	<3	
			NN	4000	>80	2400	<3	

LED nominal lumen

Ø 60 mm | Precision | Accessories

Optiques interchangeables IOS/
Ópticas intercambiables IOS

Description
Precision - Faisceau étroit /
Precision - Haz de luz estrecho
(12°-9W, 12W, 17W)

Code
0.35125.0000




Description
Precision - Faisceau moyen/
Precision - Haz de luz medio
(20°-9W, 12W, 17W)

Code
0.35126.0000

Non applicable aux références / No para códigos: **ML72A**

Non applicable aux références / No para códigos: **ML72A**

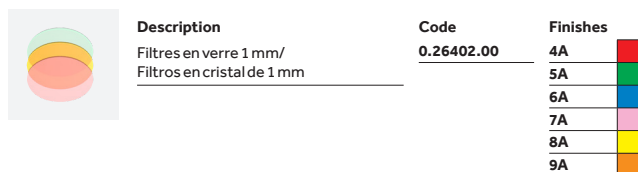
Accessoires pour optique/
Accesorios de las ópticas

Description
Filtres en verre 1 mm/
Filtros en cristal de 1 mm

Code
0.26402.00

Finishes

4A	Red
5A	Green
6A	Blue
7A	Pink
8A	Yellow
9A	Orange




Description
Grille en nid d'abeilles, maille fine/
Rejilla alveolar de textura tupida

Code
0.26442.0000




Description
Grille en nid d'abeilles, maille large/
Rejilla alveolar de textura ancha

Code
0.26450.0000




Description
Lames pour gel coloré (2 pièces)/
Plaquetas de cristal para gel colorado
(2 piezas)

Code
0.26410.0000




Description
Lentille pour faisceau elliptique/
Lente para haz de luz elíptico

Code
0.26457.0000




Description
Filtre sélectif 3000K - 2700K /
Filtro selector 3000K - 2700K

Code
0.26559.0000




Description
Lentille opale/
Lente opalescente

Code
0.26462.0000




Description
Filtre sélectif 2700K - 2500K /
Filtro selector 2700K - 2500K

Code
0.26418.0000




Description
Lentille diffusante/
Lente difusora

Code
0.26470.0000




Description
Filtre sélectif 2700K - 2200K/
Filtro selector 2700K - 2200K

Code
0.26426.0000




Description
Grille en croix/
Rejilla cruciforme

Code
0.26477.0000




Description
Filtre sélectif 2700K - 2000K/
Filtro selector 2700K - 2000K

Code
0.26434.0000




Description
Volets coupe-flux/
Aletas antideslumbrantes

Code
0.26485.0000



Description
Filtre sélectif 3000K - 3600K /
Filtro selector 3000K - 3600K

Code
0.26567.0000




Description
Cône 45° wall washer/
Cono 45° wall washer

Code
0.26489.00


Finishes

12	White
31	Black

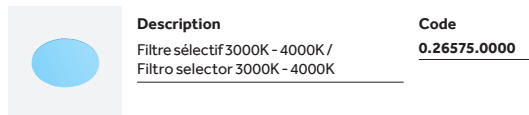

Description
Filtre sélectif 3000K - 4000K /
Filtro selector 3000K - 4000K

Code
0.26575.0000


Projecteur cadreur/
Contorneador de luz

Description
Projecteur cadreur, cadre de lumière - carré/
Contorneador de luz, contorno de luz - cuadrado

Code
0.26651.00

Finishes

21	Black
----	-------



Description
Projecteur cadreur, cadre de lumière - rond/
Contorneador de luz, contorno de luz - redondo







Code
0.26650.00

Finishes
























21	Black
----	-------

Ø 60 mm | Performance | Accessories







Optiques interchangeables IOS/ Ópticas intercambiables IOS

		Description Performance - Faisceau étroit/ Performance - Haz de luz estrecho (13°-9W, 12W, 17W)	Code 0.35145.0000			Description Performance - Faisceau large/ Performance - Haz de luz ancho (40°-9W, 12W, 17W)	Code 0.35147.0000
		Description Performance - Faisceau moyen/ Performance - Haz de luz medio (24°-9W, 12W, 17W)	Code 0.35146.0000				

Accessoires pour optique/ Accesorios de las ópticas



	Description Filtres en verre 1 mm/ Filtros en cristal de 1 mm	Code 0.26403.00	Finishes 4A  5A  6A  7A  8A  9A 		Description Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	Code 0.26576.0000	
	Description Lames pour gel coloré (2 pièces)/ Plaquetas de cristal para gel colorado (2 piezas)	Code 0.26411.0000			Description Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida	Code 0.26443.0000	
	Description Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	Code 0.26560.0000			Description Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha	Code 0.26451.0000	
	Description Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	Code 0.26419.0000			Description Lentille pour faisceau elliptique/ Lente para haz de luz elíptico	Code 0.26493.0000	
	Description Filtre sélectif 2700K - 2200K / Filtro selector 2700K - 2200K	Code 0.26427.0000			Description Lentille opale/ Lente opalescente	Code 0.26463.0000	
	Description Filtre sélectif 2700K - 2000K / Filtro selector 2700K - 2000K	Code 0.26435.0000			Description Lentille diffusante/ Lente difusora	Code 0.26471.0000	
	Description Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	Code 0.26568.0000			Description Grille en croix/ Rejilla cruciforme	Code 0.26481.0000	
					Description Cône 45° wall washer/ Cono 45° wall washer	Code 0.26497.00	Finishes 12  31 

Projecteur cadreur/ Contorneador de luz

		Description Projecteur cadreur, cadre de lumière - carré/ Contorneador de luz, contorno de luz - cuadrado	Code 0.26651.00	Finishes 21 
		Description Projecteur cadreur, cadre de lumière - rond/ Contorneador de luz, contorno de luz - redondo	Code 0.26650.00	Finishes 21 

Ø 75 mm | Precision

Risk 1 1.05 IP20 850° CE CB EAC



Code example:

0 . LL73 B . HC 31

Accessories: p.474
 Rail/Carril: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

12 W COB LED Lumen delivered up to 1575 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	LL73 Precision	B 12° Narrow	HC	3000	>98	1323	<2	31
T Phase-cut		E 24° Medium	HW	2700	>90	1491	<2	
D DALI		K - Without optics	HQ	3000	>90	1533	<2	
P Dimmer on board			WW	3000	>80	1859	<3	
			NN	4000	>80	1920	<3	

LED nominal lumen

17 W COB LED Lumen delivered up to 1465 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	NL74 Precision	A 7° Verynarrow	HC	3000	>98	1700	<2	31
T Phase-cut			HW	2700	>90	1870	<2	
D DALI			HQ	3000	>90	1920	<2	
P Dimmer on board			WW	3000	>80	2320	<3	
			NN	4000	>80	2400	<3	

LED nominal lumen

17 W COB LED Lumen delivered up to 2190 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	LL74 Precision	B 12° Narrow	HC	3000	>98	1834	<2	31
T Phase-cut		E 24° Medium	HW	2700	>90	2067	<2	
D DALI		K - Without optics	HQ	3000	>90	2122	<2	
P Dimmer on board			WW	3000	>80	2582	<3	
			NN	4000	>80	2665	<3	

LED nominal lumen

24 W COB LED Lumen delivered up to 2955 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	LL76 Precision	B 12° Narrow	HC	3000	>98	2476	<3	31
T Phase-cut		E 24° Medium	HW	2700	>90	2792	<3	
D DALI		K - Without optics	HQ	3000	>90	2860	<3	
P Dimmer on board			WW	3000	>80	3487	<3	
			NN	4000	>80	3602	<3	




LED nominal lumen

28 W COB LED Lumen delivered up to 3325 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	LL77 Precision	B 12° Narrow	HC	3000	>98	2777	<3	31
T Phase-cut		E 24° Medium	HW	2700	>90	3137	<3	
D DALI		K - Without optics	HQ	3000	>90	3207	<3	
P Dimmer on board			WW	3000	>80	3898	<3	
			NN	4000	>80	4054	<3	

LED nominal lumen

Ø 75 mm | Performance



Code example:

O . **LL83** **B** . **HC** **31**

Accessories: p.475
 Rail/Carril : p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

12 W COBLED Lumen delivered up to 1800 lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	LL83 Performance	B 12° Narrow	HC	3000	>98	1323	<3	31
T Phase-cut		E 24° Medium	HW	2700	>90	1491	<3	
D DALI		H 48° Wide	HQ	3000	>90	1533	<3	
P Dimmer on board		K - Without optics	WW	3000	>80	1859	<3	
			NN	4000	>80	1920	<3	

LED nominal lumen

17 W COBLED Lumen delivered up to 2480 lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	LL84 Performance	B 12° Narrow	HC	3000	>98	1834	<3	31
T Phase-cut		E 24° Medium	HW	2700	>90	2067	<3	
D DALI		H 48° Wide	HQ	3000	>90	2122	<3	
P Dimmer on board		K - Without optics	WW	3000	>80	2582	<3	
			NN	4000	>80	2665	<3	

LED nominal lumen

24 W COBLED Lumen delivered up to 3550 lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	LL86 Performance	B 12° Narrow	HC	3000	>98	2476	<3	31
T Phase-cut		E 24° Medium	HW	2700	>90	2792	<3	
D DALI		H 48° Wide	HQ	3000	>90	2860	<3	
P Dimmer on board		K - Without optics	WW	3000	>80	3487	<3	
			NN	4000	>80	3602	<3	

LED nominal lumen


28 W COBLED Lumen delivered up to 3770 lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	LL87 Performance	B 12° Narrow	HC	3000	>98	2777	<3	31
D DALI		E 24° Medium	HW	2700	>90	3137	<3	
P Dimmer on board		H 48° Wide	HQ	3000	>90	3207	<3	
		K - Without optics	WW	3000	>80	3898	<3	
			NN	4000	>80	4054	<3	

LED nominal lumen

Ø 75 mm | Precision | Accessories


Optiques interchangeables IOS/ Ópticas intercambiables IOS



Description
Precision - Faisceau étroit /
Precision - Haz de luz estrecho
(12°-12W, 17W, 24W, 28W)

Code
0.35130.0000

Non applicable aux références /No para códigos: **NL74A**



Description
Precision - Faisceau moyen/
Precision - Haz de luz medio
(24°-12W, 17W, 24W, 28W)

Code
0.35131.0000

Non applicable aux références /No para códigos: **NL74A**



Accessoires pour optique/ Accesorios de las ópticas



Description
Filtres en verre 1 mm/
Filtros en cristal de 1 mm


Code
0.26404.00

Finishes



Description
Grille en nid d'abeilles, maille fine/
Rejilla alveolar de textura tupida

Code
0.26444.0000



Description
Grille en nid d'abeilles, maille large/
Rejilla alveolar de textura ancha

Code
0.26452.0000



Description
Lames pour gel coloré (2 pièces)/
Plaquetas de cristal para gel colorado
(2 piezas)

Code
0.26412.0000



Description
Lentille pour faisceau elliptique/
Lente para haz de luz elíptico

Code
0.26458.0000



Description
Filtre sélectif 3000K - 2700K /
Filtro selector 3000K - 2700K

Code
0.26561.0000




Description
Lentille opale/
Lente opalescente

Code
0.26464.0000




Description
Filtre sélectif 2700K - 2500K /
Filtro selector 2700K - 2500K

Code
0.26420.0000



Description
Lentille diffusante/
Lente difusora

Code
0.26472.0000



Description
Filtre sélectif 2700K - 2200K /
Filtro selector 2700K - 2200K

Code
0.26428.0000



Description
Grille en croix/
Rejilla cruciforme

Code
0.26478.0000



Description
Filtre sélectif 2700K - 2000K /
Filtro selector 2700K - 2000K

Code
0.26436.0000



Description
Volets coupe-flux/
Aletas antideslumbrantes

Code
0.26486.0000



Description
Filtre sélectif 3000K - 3600K /
Filtro selector 3000K - 3600K

Code
0.26569.0000



Description
Cône 45° wall washer/
Cono 45° wall washer

Code
0.26490.00

Finishes

12

31









Description
Filtre sélectif 3000K - 4000K /
Filtro selector 3000K - 4000K
























Code
0.26577.0000

Ø 75 mm | Performance | Accessories

Optiques interchangeables IOS/ Ópticas intercambiables IOS

		Description Performance - Faisceau étroit/ Performance - Haz de luz estrecho (12°-12W, 17W, 24W, 28W)	Code 0.35150.0000			Description Performance - Faisceau large/ Performance - Haz de luz ancho (48°-12W, 17W, 24W, 28W)	Code 0.35152.0000
		Description Performance - Faisceau moyen/ Performance - Haz de luz medio (24°-12W, 17W, 24W, 28W)	Code 0.35151.0000				

Accessoires pour optique/ Accesorios de las ópticas

	Description Filtres en verre 1 mm/ Filtros en cristal de 1 mm	Code 0.26405.00	Finishes 4A  5A  6A  7A  8A  9A 		Description Filtre sélectif 3000K - 4000K / Filtro selector 3000K - 4000K	Code 0.26578.0000	
	Description Lames pour gel coloré (2 pièces)/ Plaquetas de cristal para gel colorado (2 piezas)	Code 0.26413.0000			Description Grille en nid d'abeilles, maille fine/ Rejilla alveolar de textura tupida	Code 0.26445.0000	
	Description Filtre sélectif 3000K - 2700K / Filtro selector 3000K - 2700K	Code 0.26562.0000			Description Grille en nid d'abeilles, maille large/ Rejilla alveolar de textura ancha	Code 0.26453.0000	
	Description Filtre sélectif 2700K - 2500K / Filtro selector 2700K - 2500K	Code 0.26421.0000			Description Lentille pour faisceau elliptique/ Lente para haz de luz elíptico	Code 0.26494.0000	
	Description Filtre sélectif 2700K - 2200K / Filtro selector 2700K - 2200K	Code 0.26429.0000			Description Lentille opale/ Lente opalescente	Code 0.26465.0000	
	Description Filtre sélectif 2700K - 2000K / Filtro selector 2700K - 2000K	Code 0.26437.0000			Description Lentille diffusante/ Lente difusora	Code 0.26473.0000	
	Description Filtre sélectif 3000K - 3600K / Filtro selector 3000K - 3600K	Code 0.26570.0000			Description Grille en croix / Rejilla cruciforme	Code 0.26482.0000	
					Description Cône 45° wall washer/ Cono 45° wall washer	Code 0.26498.00	Finishes 12  31 



—

Yori

Zoom+

Lightshaper

— Yori Zoom+Lightshaper


FR Une solution d'éclairage extraordinaire, Yori Zoom+Lightshaper réunit des prestations élevées et une flexibilité hors pair dans un seul appareil. Grâce aux cinq lentilles à l'intérieur du corps en aluminium, il est possible de régler facilement le faisceau lumineux (Zoom), la dimension des cadres (Diaphragme) et leur définition (Mise au point). Parfaitement intégré au projecteur Yori, il est disponible pour des cadres de lumière carrés et ronds. Zoom+Lightshaper est également disponible en tant qu'accessoire.

ES Yori Zoom+Lightshaper, una solución luminotécnica extraordinaria, reúne en un único aparato elevadas prestaciones y flexibilidad. Gracias a las cinco lentes en el interior del cuerpo de aluminio, es posible regular fácilmente el haz de luz (Zoom), la dimensión de los contornos (Diafragma) y su definición (Focus). Integrado perfectamente con el proyector Yori, los modelos disponibles son para crear contornos de luz cuadrados y redondos. Zoom+Lightshaper se encuentra disponible incluso como accesorio.



FR Yori Zoom+Lightshaper permet de définir des cadres de lumière ronds et carrés en fonction des exigences.

ES Yori Zoom+Lightshaper permite definir contornos de luz redondos y cuadrados según cada exigencia.

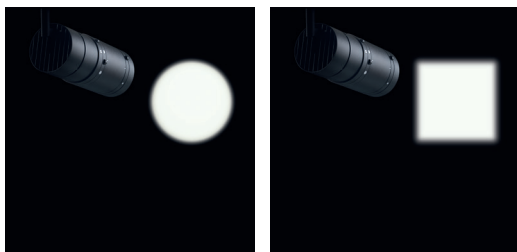

FR Cadre de lumière rond
ES Contorno de luz redondo

FR Cadre de lumière carré
ES Contorno de luz cuadrado

33W 3000K CRI > 80		○		○		○		○		○		○	
	Dist. (m)	Ø (m)	E _m (lux)	Ø (m)	E _m (lux)	Ø (m)	E _m (lux)	Ø (m)	E _m (lux)	Ø (m)	E _m (lux)	Ø (m)	E _m (lux)
	1	0,08	15377	0,13	14751	0,19	12391	0,23	5758	0,28	3847	0,34	1567
	2	0,17	3844	0,27	3688	0,38	3098	0,46	1439	0,56	962	0,68	392
	3	0,25	1709	0,40	1639	0,57	1377	0,69	640	0,84	427	1,01	174
	4	0,33	961	0,54	922	0,75	774	0,92	360	1,12	240	1,35	98
	5	0,42	615	0,67	590	0,94	496	1,15	230	1,40	154	1,69	63

FR Cadre de lumière rond
ES Contorno de luz redondo



33W 3000K CRI > 80		□		□		□	
	Dist. (m)	m	E _m (lux)	m	E _m (lux)	m	E _m (lux)
	1	0,08	4819	0,20	4059	0,32	1670
	2	0,16	1205	0,40	1015	0,63	418
	3	0,24	535	0,61	451	0,95	186
	4	0,32	301	0,81	254	1,26	104
	5	0,40	193	1,01	162	1,58	67

FR Cadre de lumière carré
ES Contorno de luz cuadrado



481

Rond /Redonda



Code example:


P . DF98 0 . HW 12

Accessories: p.483
 Rail/Carril: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

33 W		COB LED		Lumen maintenance: L80 B10=50,000h					
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
P Dimmer on board	DF98 Light shape - round	0 Without optics	HC	3000	>98	3142	<3	12	
			HW	2700	>90	3635	<3	31	
			HQ	3000	>90	3735	<3		
			WW	3000	>80	4510	<3		
			NN	4000	>80	4695	<3		
LED nominal lumen									

37 W		COB LED		Lumen maintenance: L80 B10=50,000h					
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
P Dimmer on board	DF99 Light shape - round	0 Without optics	HC	3000	>98	3473	<3	12	
			HW	2700	>90	3940	<3	31	
			HQ	3000	>90	4000	<3		
			WW	3000	>80	4880	<3		
			NN	4000	>80	5090	<3		
LED nominal lumen									

Carré/Cuadrada



Code example:

P . FF98 0 . HW 12


Accessories: p.483
 Rail/Carril: p.707
 Finishes: p.380
 Photometric data:
 www.reggiani.net

33 W		COB LED		Lumen maintenance: L80 B10=50,000h					
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
P Dimmer on board	FF98 Light shape - square	0 Without optics	HC	3000	>98	3142	<3	12	
			HW	2700	>90	3635	<3	31	
			HQ	3000	>90	3735	<3		
			WW	3000	>80	4510	<3		
			NN	4000	>80	4695	<3		
LED nominal lumen									

37 W		COB LED		Lumen maintenance: L80 B10=50,000h					
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
P Dimmer on board	FF99 Light shape - square	0 Without optics	HC	3000	>98	3473	<3	12	
			HW	2700	>90	3940	<3	31	
			HQ	3000	>90	4000	<3		
			WW	3000	>80	4880	<3		
			NN	4000	>80	5090	<3		
LED nominal lumen									

Accessories

Accessoires pour optique/ Accesorios de las ópticas



Description


Zoom réglable entre 7° et 20°, cadre de lumière rond/
Zoom regulable (desde 7° hasta 20°), contorno de luz -redondo

Code

0.25455.00

Finishes

12
31



Description


Zoom réglable entre 7° et 20°, cadre de lumière carré/
Zoom regulable (desde 7° hasta 20°), contorno de luz -cuadrado

Code

0.25456.00

Finishes

12
31



Description

Support pour filtres colorés et sélectifs/
Soporte para filtros colorados y selectores

Code

0.25457.0000



Description

Lentille elliptique/
Lente elíptica

Code

0.25458.0000