



Linea Luce Slim

Linea Luce Slim

www.reggiani.net

#theilluminationcollective





765

Linea Luce Slim

EN Linea Luce Slim is a range of linear luminaires with a minimal, elegant design, excellent performance and incredible versatility. Featuring aluminium profiles with three different recess depths, Low, Medium and High, Linea Luce Slim is a perfect fit for a wide range of interior architectural settings. The High version of Linea Luce Slim offers three different light beams: narrow, medium and wide.

IT Linea Luce Slim è una gamma di apparecchi lineari dal design minimale ed elegante, dalle performance eccellenti e dalla incredibile versatilità applicativa. Disponibile con profili in alluminio con tre differenti profondità di incasso, Low, Medium e High, Linea Luce Slim può essere integrato in una vasta gamma di contesti architettonici per interni. Nella versione High, Linea Luce Slim vanta 3 differenti fasci di luce: stretto, medio e largo.



Overview

Application:	Surface
Light source:	LOW POWER LED
Watt:	3 W - 54 W
Kelvin:	2700 K, 3000 K, 4000 K
Lumen:	355 lm - 6995 lm
CRI:	>85
SDCM:	<3
IP:	40
Control options:	On/Off, Dimm 1-10V, DALI

Available for North America: visit www.reggianiusa.com/
Disponibile per Nord America: visita www.reggianiusa.com


Versions/ Versioni	 Linea Luce Slim Low Linea Luce Slim Medium Linea Luce Slim High
Finishes/ Finiture	 00 Aluminum/ Alluminio
Beams/ Fasci	 Very narrow/ Molto stretto Wide/ Largo Very wide/ Molto largo

Sizes and tech. specifications/ Misure e info tecniche			
	Low	Medium	High
Linea Luce Slim			
Lenghts/ Lunghezze	366,5 mm 716,5 mm 1066,5 mm 1416,5 mm p.774	203 mm 404 mm 604 mm 1206 mm 2406 mm p.776	203 mm 404 mm 604 mm 1206 mm 2406 mm p.778
Beam width/ Apertura cono di luce	97°	88°	7°, 59°, 88°
Light source/ Sorgente luminosa	LOW POWER LED 3 W, 6 W, 9 W, 12 W 355 lm - 1560 lm L70 B50=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >85	LOW POWER LED 4,5 W, 9 W, 13,5 W, 18 W, 27 W, 54 W 528 lm - 6995 lm L70 B50=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >85	LOW POWER LED 4,5 W, 9 W, 13,5 W, 18 W, 27 W, 54 W 528 lm - 6995 lm L70 B50=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >85


Accessories/ Accessori			
	 Spring clip for surface mounting/ Clip per ancoraggio a superficie		
Linea Luce Slim Medium, Linea Luce Slim High only	 End covers/ Testate di chiusura	 Coupler for continuous line installation/ Giunto per fila continua	 Universal joint/ Snodo orientabile

Diffuser


Low

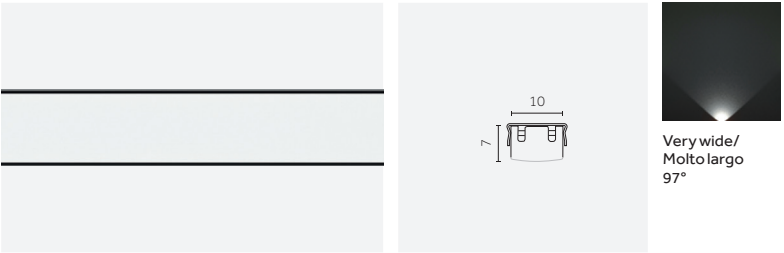

Medium

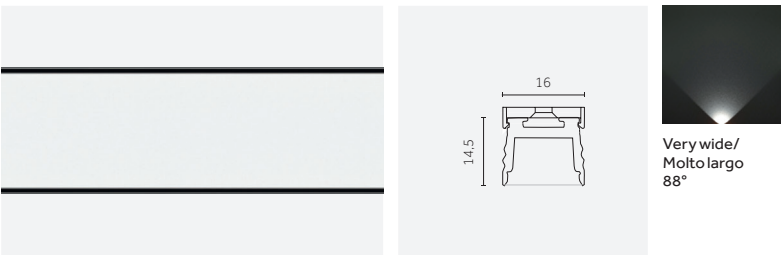

High

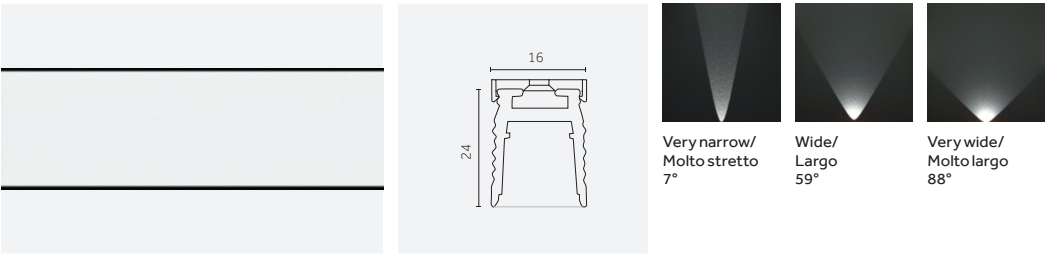


LED

LOW POWER LED



2700 K, 3000 K, 4000 K
SDCM<3
CRI>85

L70B50=50,000h

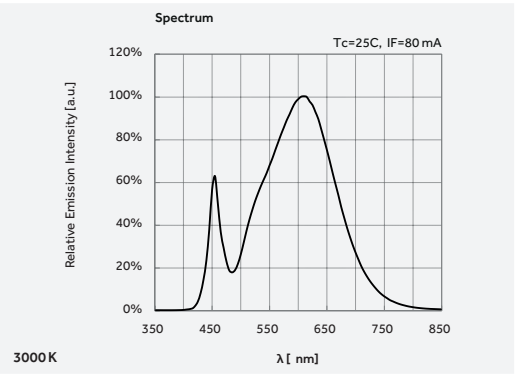

Up to
130 lm/W

RG 0
Photobiological risk 0
(IEC TR 62778)

^{EN} Accessories for continuous line installation are available for the Medium and High versions of Linea Luce Slim; the maximum distance between the end LED and single driver is 10 metres.

^{IT} Per le due versioni Medium e High di Linea Luce Slim sono disponibili gli opportuni accessori per l'installazione in linea continua; la lunghezza massima raggiungibile tra l'ultimo LED e un singolo driver è di 10m.




^{EN} Coupler for continuous line installation

^{IT} Giunto per fila continua

^{EN} End Cap

^{IT} Testata di chiusura



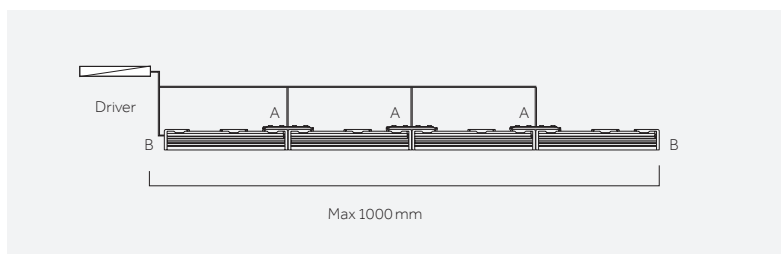


^{EN} Continuous line

^{IT} Linea continua



Low



Code example:
0 . 31700 . HW 00

Accessories: p.775
Drivers: p.775
Photometric data:
www.reggiani.net

Notes:
Spring clip for surface mounting
included/ Clip per ancoraggio a
superficie incluso.

3 W		LOW POWER LED				Lumen maintenance: L70 B10=50,000h					
Driver		Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes
0	Not included	31700	366,5 mm	0.04	97° Very wide	HW	2700	>85	355	<3	00 
						WW	3000	>85	370	<3	
						NN	4000	>85	390	<3	
LED nominal lumen											


6W		LOW POWER LED				Lumen maintenance: L70 B10=50,000h					
Driver		Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes
0	Not included	31701	716,5 mm	0.075	97° Very wide	HW	2700	>85	710	<3	00 
						WW	3000	>85	740	<3	
						NN	4000	>85	780	<3	
LED nominal lumen											

9 W		LOW POWER LED				Lumen maintenance: L70 B10=50,000h					
Driver		Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes
0	Not included	31702	1066,5 mm	0.11	97° Very wide	HW	2700	>85	1066	<3	00 
						WW	3000	>85	1110	<3	
						NN	4000	>85	1170	<3	
LED nominal lumen											

12 W		LOW POWER LED				Lumen maintenance: L70 B10=50,000h					
Driver		Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes
0	Not included	31703	1416,5 mm	0.15	97° Very wide	HW	2700	>85	1421	<3	00
						WW	3000	>85	1480	<3	
						NN	4000	>85	1560	<3	
LED nominal lumen											

Low | Accessories

Mounting accessories/ Accessori montaggio



Description

Spring clip for surface mounting/
Clip per ancoraggio a superficie

Code

0.31705.0000

Low | Electrical Devices

Driver/ Alimentazioni

20 W LOW POWER LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Max.distance	Cable section
On/Off	0.31710.0000	20		56 mm	220/240 Vac 50/60 Hz 12Vcc	12 Vcc	5 m	1.5 mm ²

Other devices/ Altri dispositivi

Type	Code	
Dimm 1-10V	0.31561.0000	Control device Dimm 1-10V to install between driver and LED 12/24V - max 120W/ Dispositivo di controllo Dimm 1-10V da installare tra driver e LED 12/24V - max 120W
DALI Switch Dim	0.31560.0000	DALI/SWITCH DIM device to install between driver and LED 12/24V - max 120W/ Dispositivo DALI/SWITCH DIM da installare tra driver e LED 12/24V - max 120W



Medium



Code example:
0 . 31721 . HW 00

Accessories: p.777
Drivers: p.777
Photometric data:
www.reggiani.net

Notes:
Spring clip for surface mounting included/ Clip per ancoraggio a superficie incluso.



4,5 W	LOW POWER LED					Lumen maintenance: L70 B10=50,000h					
Driver	Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes	
0 Notincluded	31721	203 mm	0.06	88° Very wide	HW	2700	>85	528	<3	00 	
					WW	3000	>85	550	<3		
					NN	4000	>85	585	<3		
LED nominal lumen											

9 W	LOW POWER LED					Lumen maintenance: L70 B10=50,000h					
Driver	Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes	
0 Notincluded	31725	404 mm	0.12	88° Very wide	HW	2700	>85	1066	<3	00 	
					WW	3000	>85	1110	<3		
					NN	4000	>85	1170	<3		
LED nominal lumen											

13,5 W	LOW POWER LED					Lumen maintenance: L70 B10=50,000h					
Driver	Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes	
0 Notincluded	31726	604 mm	0.20	88° Very wide	HW	2700	>85	1584	<3	00 	
					WW	3000	>85	1650	<3		
					NN	4000	>85	1755	<3		
LED nominal lumen											



18 W	LOW POWER LED					Lumen maintenance: L70 B10=50,000h					
Driver	Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes	
0 Notincluded	31727	804 mm	0.28	88° Very wide	HW	2700	>85	2112	<3	00 	
					WW	3000	>85	2200	<3		
					NN	4000	>85	2330	<3		
LED nominal lumen											

27 W	LOW POWER LED					Lumen maintenance: L70 B10=50,000h					
Driver	Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes	
0 Notincluded	31728	1206 mm	0.40	88° Very wide	HW	2700	>85	3168	<3	00 	
					WW	3000	>85	3300	<3		
					NN	4000	>85	3500	<3		
LED nominal lumen											

54 W	LOW POWER LED					Lumen maintenance: L70 B10=50,000h					
Driver	Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes	
0 Notincluded	31729	2404 mm	0.76	88° Very wide	HW	2700	>85	6336	<3	00 	
					WW	3000	>85	6600	<3		
					NN	4000	>85	6995	<3		
LED nominal lumen											

Medium | Accessories

Mounting accessories/ Accessori montaggio

		Description End covers/ Testate di chiusura	Code 0.31714.0000
		Description Coupler for continuous line installation/ Giunto per fila continua	Code 0.31717.0000
		Description Spring clip for surface mounting/ Clip per ancoraggio a superficie	Code 0.31735.0000
		Description Universal joint/ Snodo orientabile	Code 0.31736.0000

Medium | Electrical Devices

Driver/ Alimentazioni

20 W LOW POWER LED								
Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Max.distance	Cable section
On/Off	0.31550.0000	20		56 mm	220/240 Vac 50/60 Hz 24Vcc	24 Vcc	10 m	1.5 mm ²
100 W LOW POWER LED								
Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Max.distance	Cable section
On/Off	0.31555.0000	96		56 mm	220/240 Vac 50/60 Hz 24Vcc	24 Vcc	10 m	1.5 mm ²

Other devices/ Altri dispositivi

Type	Code	
Dimm 1-10V	0.31561.0000	Control device Dimm 1-10V to install between driver and LED 12/24V - max 120W/ Dispositivo di controllo Dimm 1-10V da installare tra driver e LED 12/24V - max 120W
DALI Switch Dim	0.31560.0000	DALI/SWITCH DIM device to install between driver and LED 12/24V - max 120W/ Dispositivo DALI/SWITCH DIM da installare tra driver e LED 12/24V - max 120W



High



Code example:
0 . 31761 . HW 00

Accessories: p.779
Drivers: p.779
Photometric data:
www.reggiani.net


Notes:
Spring clip for surface mounting included/ Clip per ancoraggio a superficie incluso.

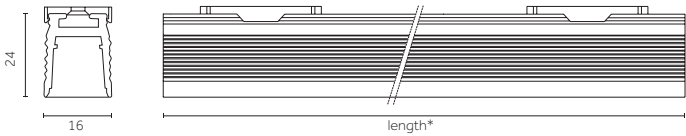

4,5 W		LOW POWER LED				Lumen maintenance: L70 B10=50,000h					
Driver	Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes	
0 Notincluded	31761	203 mm	0.08	7° Very narrow	HW	2700	>85	528	<3	00	
	31751	203 mm	0.08	59° Wide	WW	3000	>85	550	<3		
	31741	203 mm	0.08	88° Very wide	NN	4000	>85	585	<3		
LED nominal lumen											
9 W		LOW POWER LED				Lumen maintenance: L70 B10=50,000h					
Driver	Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes	
0 Notincluded	31765	404 mm	0.16	7° Very narrow	HW	2700	>85	1066	<3	00	
	31755	404 mm	0.16	59° Wide	WW	3000	>85	1110	<3		
	31745	404 mm	0.16	88° Very wide	NN	4000	>85	1170	<3		
LED nominal lumen											
13,5 W		LOW POWER LED				Lumen maintenance: L70 B10=50,000h					
Driver	Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes	
0 Notincluded	31766	604 mm	0.26	7° Very narrow	HW	2700	>85	1584	<3	00	
	31756	604 mm	0.26	59° Wide	WW	3000	>85	1650	<3		
	31746	604 mm	0.26	88° Very wide	NN	4000	>85	1755	<3		
LED nominal lumen											
18 W		LOW POWER LED				Lumen maintenance: L70 B10=50,000h					
Driver	Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes	
0 Notincluded	31767	804 mm	0.39	7° Very narrow	HW	2700	>85	2112	<3	00	
	31757	804 mm	0.39	59° Wide	WW	3000	>85	2200	<3		
	31747	804 mm	0.39	88° Very wide	NN	4000	>85	2330	<3		
LED nominal lumen											
27 W		LOW POWER LED				Lumen maintenance: L70 B10=50,000h					
Driver	Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes	
0 Notincluded	31768	1206 mm	0.55	7° Very narrow	HW	2700	>85	3168	<3	00	
	31758	1206 mm	0.55	59° Wide	WW	3000	>85	3300	<3		
	31748	1206 mm	0.55	88° Very wide	NN	4000	>85	3500	<3		
LED nominal lumen											
54 W		LOW POWER LED				Lumen maintenance: L70 B10=50,000h					
Driver	Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes	
0 Notincluded	31769	2406 mm	0.96	7° Very narrow	HW	2700	>85	6336	<3	00	
	31759	2406 mm	0.96	59° Wide	WW	3000	>85	6600	<3		
	31749	2406 mm	0.96	88° Very wide	NN	4000	>85	6995	<3		
LED nominal lumen											

High | Accessories


Mounting accessories/ Accessori montaggio


Description

End covers/
Testate di chiusura

Code

0.31715.0000


Description

Coupler to mount luminaires in sequence/
Giunto per fila continua

Code

0.31716.0000


Description

Spring clip for surface mounting/
Clip per ancoraggio a superficie

Code

0.31735.0000


Description

Additional spring clip for cove mounting/
Snodo orientabile

Code

0.31736.0000

High | Electrical Devices

Driver/ Alimentazioni

20 W LOW POWER LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Max.distance	Cable section
On/Off	0.31550.0000	20		56 mm	220/240 Vac 50/60 Hz 24Vcc	24 Vcc	10 m	1.5 mm ²

100 W LOW POWER LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Max.distance	Cable section
On/Off	0.31555.0000	96		56 mm	220/240 Vac 50/60 Hz 24Vcc	24 Vcc	10 m	1.5 mm ²

Other devices/ Altri dispositivi

Type	Code	
Dimm 1-10V	0.31561.0000	Control device Dimm 1-10V to install between driver and LED 12/24V - max 120W/ Dispositivo di controllo Dimm 1-10V da installare tra driver e LED 12/24V - max 120W
DALI Switch Dim	0.31560.0000	DALI/SWITCH DIM device to install between driver and LED 12/24V - max 120W/ Dispositivo DALI/SWITCH DIM da installare tra driver e LED 12/24V - max 120W