



Linea Luce Slim

Linea Luce Slim

www.reggiani.net

#theilluminationcollective





765

Linea Luce Slim

FR Linea Luce Slim est une gamme d'appareils linéaires aux lignes minimalistes et élégantes, aux performances exceptionnelles et aux applications polyvalentes incroyables. Disponible avec des profils en aluminium et trois profondeurs d'encastrement différentes Low, Medium et High, Linea Luce Slim peut s'intégrer dans une vaste gamme d'espaces architecturaux d'intérieur. Dans la version High, Linea Luce Slim comporte 3 faisceaux lumineux : étroit, moyen et large.

ES Linea Luce Slim es una serie de aparatos de iluminación en línea de diseño minimalista y elegante, de excelente rendimiento e increíble versatilidad aplicativa. Disponible con perfiles de aluminio y en tres diferentes profundidades de empotramiento (Low, Medium, High), Linea Luce Slim se adapta a una gran variedad de entornos arquitectónicos de interior. El modelo alto dispone de 3 diferentes haces de luz: estrecho, medio y ancho.



Overview

Application:	Surface
Light source:	LOW POWER LED
Watt:	3 W - 54 W
Kelvin:	2700 K, 3000 K, 4000 K
Lumen:	355 lm - 6995 lm
CRI:	>85
SDCM:	<3
IP:	40
Control options:	On/Off, Dimm 1-10V, DALI

Disponible pour l'Amérique du Nord : rendez-vous sur www.reggianiusa.com/
 Disponible para América del Norte: consulte la página www.reggianiusa.com



Versions/ Modelos	 Linea Luce Slim Low Linea Luce Slim Medium Linea Luce Slim High
Finitions/ Acabados	 00 Aluminium / Aluminio
Faisceaux/ Haces de luz	 Très étroit/ Muy estrecho Large/ Ancho Très large/ Muy ancho

Dimensions et données techniques/ Dimensiones e información técnica			
	Low	Medium	High
Linea Luce Slim			
Longueurs/ Longitudes	366,5 mm 716,5 mm 1066,5 mm 1416,5 mm p.774	203 mm 404 mm 604 mm 1206 mm 2406 mm p.776	203 mm 404 mm 604 mm 1206 mm 2406 mm p.778
Ouverture du faisceau lumineux/ Amplitud del haz de luz	97°	88°	7°, 59°, 88°
Source lumineuse/ Fuente luminosa	LOW POWER LED 3 W, 6 W, 9 W, 12 W 355 lm - 1560 lm L70 B50=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >85	LOW POWER LED 4,5 W, 9 W, 13,5 W, 18 W, 27 W, 54 W 528 lm - 6995 lm L70 B50=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >85	LOW POWER LED 4,5 W, 9 W, 13,5 W, 18 W, 27 W, 54 W 528 lm - 6995 lm L70 B50=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >85

Accessoires/ Accesorios			
			
	Clips de montage pour l'ancrage en surface/ Clip para fijación de superficie		
Linea Luce Slim Medium, Linea Luce Slim High only			
	Têtes de fermeture/ Tapas de cierre	Raccord pour installation en ligne continue/ Unión para modelo en línea continua	Joint de cardan pour l'orientation/ Articulación orientable




Diffuser

Low






Très large/
Muy ancho
97°

Medium

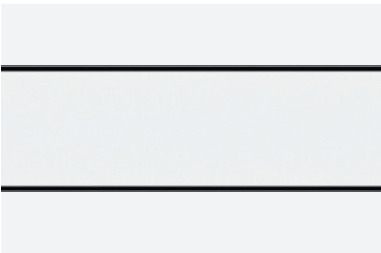


Très large/
Muy ancho
88°


High

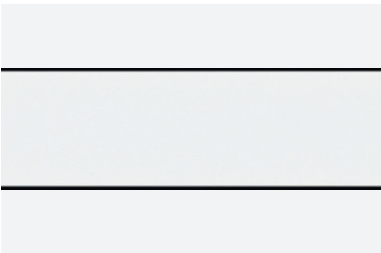

Très étroit/
Muy estrecho
7°




Large/
Ancho
59°



Très large/
Muy ancho
88°


LED

LOW POWER LED



2700 K, 3000 K, 4000 K
SDCM<3
CRI>85

L70B50=50,000h

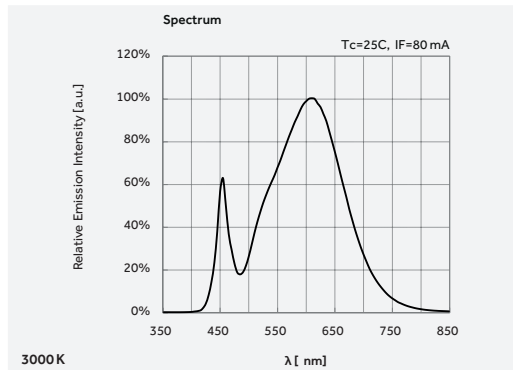

Up to
130 lm/W

RG 0
Photobiological risk 0
(IEC TR 62778)


FR Les deux versions Medium et High de Linea Luce Slim disposent d'accessoires prévus à cet effet pour l'installation en ligne continue ; la longueur maximale pouvant être atteinte entre le dernier LED et un driver est de 10 m.

ES Para la instalación en línea continua de los dos modelos "Medium" y "High" de Linea Luce Slim, se suministran los específicos accesorios. La longitud máxima entre el último LED y un único driver puede ser de 10 m.



FR Raccord pour installation en ligne continue
ES Unión para modelo en línea continua




FR Tête de fermeture
ES Tapa de cierre

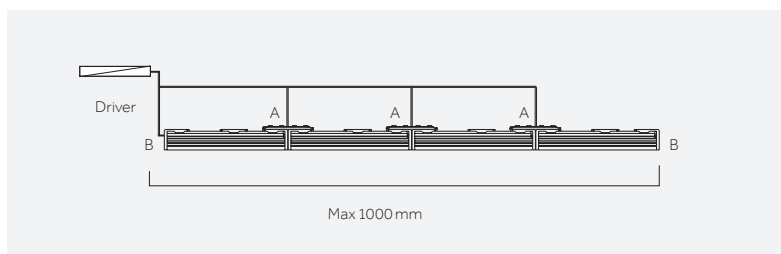

FR En ligne continue
ES Modelo en línea continua



Low



Code example:
0 . 31700 . HW 00

Accessories: p.775
Drivers: p.775
Photometric data:
www.reggiani.net

Notes:
Clips de montage pour l'ancrage
en surface inclus/ Clip para
fijación de superficie incluido.

3 W		LOW POWER LED				Lumen maintenance: L70 B10=50,000h					
Driver		Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes
0	Not included	31700	366,5 mm	0.04	97° Very wide	HW	2700	>85	355	<3	00 
						WW	3000	>85	370	<3	
						NN	4000	>85	390	<3	
LED nominal lumen											


6W		LOW POWER LED				Lumen maintenance: L70 B10=50,000h					
Driver		Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes
0 Notincluded		31701	716,5 mm	0.075	97° Very wide	HW	2700	>85	710	<3	00 
						WW	3000	>85	740	<3	
						NN	4000	>85	780	<3	
LED nominal lumen											

9W		LOW POWER LED				Lumen maintenance: L70 B10=50,000h					
Driver		Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes
0 Not included		31702	1066,5 mm	0.11	97° Very wide	HW	2700	>85	1066	<3	00 
						WW	3000	>85	1110	<3	
						NN	4000	>85	1170	<3	
LED nominal lumen											

12 W	LOW POWER LED					Lumen maintenance: L70 B10=50,000h					
Driver		Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes
0	Not included	31703	1416,5 mm	0.15	97° Very wide	HW	2700	>85	1421	<3	00 
						WW	3000	>85	1480	<3	
						NN	4000	>85	1560	<3	
LED nominal lumen											

Low | Accessories

Accessoires de montage/ Accesorios de montaje



Description

Clips de montage pour l'ancrage en surface/
Clip para fijación de superficie

Code

0.31705.0000

Low | Electrical Devices

Platines d'alimentation/ Drivers


20 W LOW POWER LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Max.distance	Cable section
On/Off	0.31710.0000	20		56 mm	220/240 Vac 50/60 Hz 12Vcc	12 Vcc	5 m	1.5 mm ²

Autres dispositifs/ Otros dispositivos

Type	Code	
Dimm 1-10V	0.31561.0000	Dispositif de contrôle Grad. 1-10 V à installer entre le driver et le module LED 12/24 V - max 120 W/ Sistema de control regulable 1-10V a instalar entre el driver y el LED de 12/24V - máx. 120W
DALI Switch Dim	0.31560.0000	Dispositif DALI/SWITCH DIM à installer entre le driver et le module LED 12/24 V - max 120 W/ Sistema de control DALI/SWITCH DIM a instalar entre el driver y el LED de 12/24V - máx. 120W



Medium



Code example:
0 . 31721 . HW 00

Accessories: p.777
Drivers: p.777
Photometric data:
www.reggiani.net

Notes:
Clips de montage pour l'ancrage
en surface inclus/ Clip para
fijación de superficie incluido.



4,5 W		LOW POWER LED				Lumen maintenance: L70 B10=50,000h					
Driver		Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes
0	Notincluded	31721	203 mm	0.06	88° Very wide	HW	2700	>85	528	<3	00 
						WW	3000	>85	550	<3	
						NN	4000	>85	585	<3	
LED nominal lumen											

9W		LOW POWER LED				Lumen maintenance: L70 B10=50,000h					
Driver		Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes
0	Notincluded	31725	404 mm	0.12	88° Very wide	HW	2700	>85	1066	<3	00 
						WW	3000	>85	1110	<3	
						NN	4000	>85	1170	<3	
LED nominal lumen											

13,5W		LOW POWER LED				Lumen maintenance: L70 B10=50,000h					
Driver	Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes	
0 Notincluded	31726	604 mm	0.20	88° Very wide	HW	2700	>85	1584	<3	00 	
					WW	3000	>85	1650	<3		
					NN	4000	>85	1755	<3		
LED nominal lumen											

18 W	LOW POWER LED					Lumen maintenance: L70 B10=50,000h					
Driver	Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes	
0 Not included	31727	804 mm	0.28	88° Very wide	HW	2700	>85	2112	<3	00 	
					WW	3000	>85	2200	<3		
					NN	4000	>85	2330	<3		
LED nominal lumen											

27 W		LOW POWER LED					Lumen maintenance: L70 B10=50,000h				
Driver	Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes	
0 Not included	31728	1206 mm	0.40	88° Very wide	HW	2700	>85	3168	<3	00 	
					WW	3000	>85	3300	<3		
					NN	4000	>85	3500	<3		
LED nominal lumen											

54 W		LOW POWER LED					Lumen maintenance: L70 B10=50,000h				
Driver		Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes
0 Notincluded		31729	2404 mm	0.76	88° Very wide	HW	2700	>85	6336	<3	00 
						WW	3000	>85	6600	<3	
						NN	4000	>85	6995	<3	
LED nominal lumen											

Medium | Accessories

Accessoires de montage/ Accesorios de montaje




Description

Têtes de fermeture/
Tapas de cierre

Code

0.31714.0000



Description

Raccord pour installation en ligne continue/
Unión para modelo en línea continua

Code

0.31717.0000



Description

Clips de montage pour l'ancrage en surface/
Clip para fijación de superficie

Code

0.31735.0000



Description

Joint de cardan pour l'orientation/
Articulación orientable

Code

0.31736.0000

Medium | Electrical Devices

Platines d'alimentation/ Drivers

20 W LOW POWER LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Max.distance	Cable section
On/Off	0.31550.0000	20		56 mm	220/240 Vac 50/60 Hz 24Vcc	24 Vcc	10 m	1.5 mm ²

100 W LOW POWER LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Max.distance	Cable section
On/Off	0.31555.0000	96		56 mm	220/240 Vac 50/60 Hz 24Vcc	24 Vcc	10 m	1.5 mm ²

Autres dispositifs/ Otros dispositivos

Type	Code	
Dimm 1-10V	0.31561.0000	Dispositif de contrôle Grad. 1-10 V à installer entre le driver et le module LED 12/24 V - max 120 W/ Sistema de control regulable 1-10V a instalar entre el driver y el LED de 12/24V - máx. 120W
DALI Switch Dim	0.31560.0000	Dispositif DALI/SWITCH DIM à installer entre le driver et le module LED 12/24 V - max 120 W/ Sistema de control DALI/SWITCH DIM a instalar entre el driver y el LED de 12/24V - máx. 120W



High



Code example:
0 . 31761 . HW 00

Accessories: p.779
Drivers: p.779
Photometric data:
www.reggiani.net


Notes:
Clips de montage pour l'ancrage
en surface inclus/ Clip para
fijación de superficie incluido.

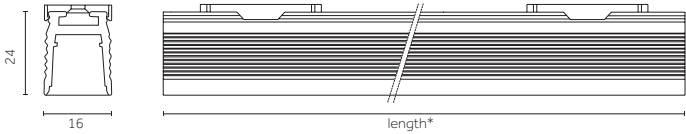

4,5 W		LOW POWER LED				Lumen maintenance: L70 B10=50,000h					
Driver	Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes	
0 Notincluded	31761	203 mm	0.08	7° Very narrow	HW	2700	>85	528	<3	00	
	31751	203 mm	0.08	59° Wide	WW	3000	>85	550	<3		
	31741	203 mm	0.08	88° Very wide	NN	4000	>85	585	<3		
LED nominal lumen											
9 W		LOW POWER LED				Lumen maintenance: L70 B10=50,000h					
Driver	Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes	
0 Notincluded	31765	404 mm	0.16	7° Very narrow	HW	2700	>85	1066	<3	00	
	31755	404 mm	0.16	59° Wide	WW	3000	>85	1110	<3		
	31745	404 mm	0.16	88° Very wide	NN	4000	>85	1170	<3		
LED nominal lumen											
13,5 W		LOW POWER LED				Lumen maintenance: L70 B10=50,000h					
Driver	Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes	
0 Notincluded	31766	604 mm	0.26	7° Very narrow	HW	2700	>85	1584	<3	00	
	31756	604 mm	0.26	59° Wide	WW	3000	>85	1650	<3		
	31746	604 mm	0.26	88° Very wide	NN	4000	>85	1755	<3		
LED nominal lumen											
18 W		LOW POWER LED				Lumen maintenance: L70 B10=50,000h					
Driver	Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes	
0 Notincluded	31767	804 mm	0.39	7° Very narrow	HW	2700	>85	2112	<3	00	
	31757	804 mm	0.39	59° Wide	WW	3000	>85	2200	<3		
	31747	804 mm	0.39	88° Very wide	NN	4000	>85	2330	<3		
LED nominal lumen											
27 W		LOW POWER LED				Lumen maintenance: L70 B10=50,000h					
Driver	Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes	
0 Notincluded	31768	1206 mm	0.55	7° Very narrow	HW	2700	>85	3168	<3	00	
	31758	1206 mm	0.55	59° Wide	WW	3000	>85	3300	<3		
	31748	1206 mm	0.55	88° Very wide	NN	4000	>85	3500	<3		
LED nominal lumen											
54 W		LOW POWER LED				Lumen maintenance: L70 B10=50,000h					
Driver	Version	*Length	Weight kg	Light beam	LED	K	CRI	lm	SDCM	Finishes	
0 Notincluded	31769	2406 mm	0.96	7° Very narrow	HW	2700	>85	6336	<3	00	
	31759	2406 mm	0.96	59° Wide	WW	3000	>85	6600	<3		
	31749	2406 mm	0.96	88° Very wide	NN	4000	>85	6995	<3		
LED nominal lumen											


High | Accessories

Accessoires de montage/ Accesorios de montaje



Description
Têtes de fermeture/
Tapas de cierre

Code
0.31715.0000



Description
Raccord pour installation en ligne continue/
Unión para modelo en línea continua

Code
0.31716.0000



Description
Clips de montage pour l'ancrage en surface/
Clip para fijación de superficie

Code
0.31735.0000



Description
Raccord pour installation en ligne continue/
Articulación orientable

Code
0.31736.0000

High | Electrical Devices

Platines d'alimentation/ Drivers

20 W LOW POWER LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Max.distance	Cable section
On/Off	0.31550.0000	20		56 mm	220/240 Vac 50/60 Hz 24Vcc	24 Vcc	10 m	1.5 mm ²

100 W LOW POWER LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Max.distance	Cable section
On/Off	0.31555.0000	96		56 mm	220/240 Vac 50/60 Hz 24Vcc	24 Vcc	10 m	1.5 mm ²

Autres dispositifs/ Otros dispositivos

Type	Code	
Dimm 1-10V	0.31561.0000	Dispositif de contrôle Grad. 1-10 V à installer entre le driver et le module LED 12/24 V - max 120 W/ Sistema de control regulable 1-10V a instalar entre el driver y el LED de 12/24V - máx. 120W
DALI Switch Dim	0.31560.0000	Dispositif DALI/SWITCH DIM à installer entre le driver et le module LED 12/24 V - max 120 W/ Sistema de control DALI/SWITCH DIM a instalar entre el driver y el LED de 12/24V - máx. 120W