



Yori range:



Yori



372 Yori Linear



719 Yori Surface/Pendant 860

# Yori Wall









# Yori Wall

**EN** A family of wall mounted luminaires that can naturally transform residential and hospitality interiors and seamlessly blend in with the architecture. Yori Wall comes in three basic sizes but its incredible flexibility really makes it stand out, along with the extensive range of high-end finishes, the interchangeable optics and the direct and direct-indirect lighting versions.





**IT** Una famiglia di apparecchi da parete in grado di trasformare gli interni residenziali e alberghieri integrandosi in modo naturale nello spazio architettonico. Proposto in tre dimensioni, Yori Wall si distingue per la straordinaria versatilità applicativa, per le molteplici finiture esclusive, il sistema di ottiche intercambiabili e le versioni per illuminazione diretta e diretta-indiretta.







## Overview

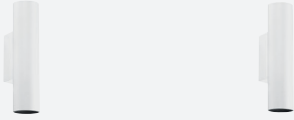Application:	Wall
Light source:	Power LED , COB LED
Watt:	3,5 W - 24 W
Kelvin:	2700 K, 3000 K, 4000 K
Lumen:	141 lm - 3602 lm
CRI:	>80, >90
SDCM:	<2, <3
IP:	20
Control options:	On/Off, Phase-cut, Dimm 1-10V, DALI
Technologies:	Bluetooth
















<b>Versions/ Versioni</b>				
<b>Finishes/ Finiture</b>				
<b>Beams/ Fasci</b>	<b>Direct Light</b>			
<b>Yori Wall Single emission</b>				
<b>Yori Wall Dual emission</b>				

Sizes and tech. specifications/ Misure e info tecniche			
	Ø 35 mm	Ø 60 mm	Ø 95 mm
Yori Wall Single Emission	  Ø 35x210 mm p.818	  Ø 60x250 mm p.820	  Ø 95x395 mm p.822
Yori Wall Dual Emission	  Ø 35x210 mm p.818	  Ø 60x250 mm p.820	  Ø 95x395 mm p.822
Beam width/ Apertura cono di luce	8°, 22°	12°, 20°	12°, 24°
Light source/ Sorgente luminosa	<b>POWER LED</b> 3,5 W, 2+2 W 310 lm - 415 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <3 CRI >80, CRI >90	<b>COB LED</b> 9 W, 5+5 W 1050 lm - 1360 lm L80 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <2, <3 CRI >80, CRI >90	<b>COB LED</b> 25 W, 12+12 W 2792 lm - 3602 lm L80 B10=50,000h 2700 K, 3000 K, 4000 K SDCM <2, <3 CRI >80, CRI >90




<p>Accessories/ Accessori</p> <p>Decorative accessories/ Accessori decorativi</p> <p>Optical accessories/ Accessori ottiche</p>	  <p>Cylinder, solid version/ Cilindro, versione piena</p> <p>Cylinder, hollow version/ Cilindro versione cava</p>	
    <p>Glass filter 1 mm/ Filtro vetro 1 mm</p> <p>Colored Gel Slides/ Vetrini per gel colorato</p> <p>Selective filter/ Filtro selettivo</p> <p>Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta</p>     <p>Wide texture honeycomb louvre/ Griglia alveolare a maglia larga</p> <p>Elliptical beam lens/ Lente per fascio ellittico</p> <p>Opal lens/ Lente opale</p> <p>Spread lens/ Lente diffondente</p>  <p>Cross blade louvre/ Griglia a croce</p>		


## Precision Ø35 mm




Precision for Yori Wall Ø35

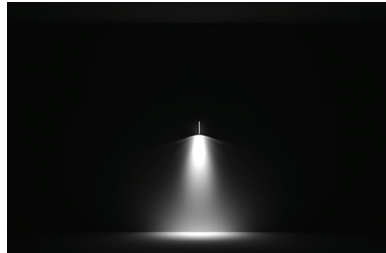


LED: 3,5 W/22°/3000 K (HQ)

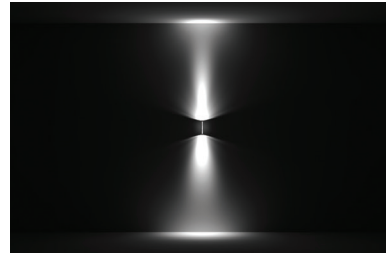

LED: 2+2 W/22°+22°/3000 K (HQ)




Narrow/  
Stretto  
B 8°




Medium/  
Medio  
E 22°


## Precision Ø60 mm




Precision for Yori Wall Ø60

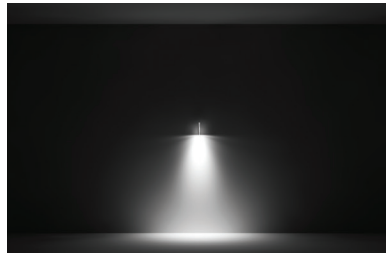


LED: 9 W/12°/3000 K (HQ)

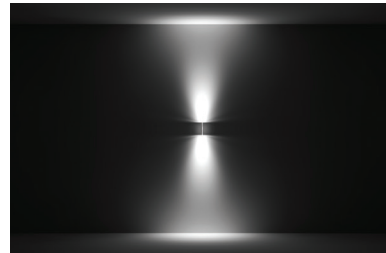

LED: 5+5 W/12°+12°/3000 K (HQ)




Narrow/  
Stretto  
B 12°




Medium/  
Medio  
E 20°


## Precision Ø95 mm




Precision for Yori Wall Ø95

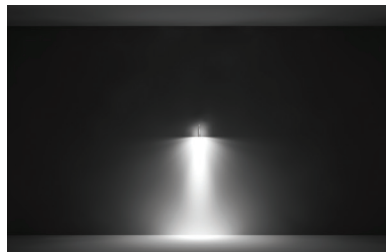


LED: 25 W/12°/3000 K (HQ)

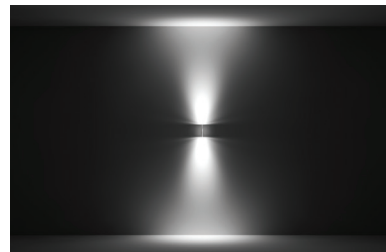

LED: 12+12 W/12°+12°/3000 K (HQ)




Narrow/  
Stretto  
B 12°



Medium/  
Medio  
E 24°

## LED

### COB




2700 K, 3000 K, 4000 K  
SDCM <2, <3  
CRI>80, CRI > 90


TM 30  
Rf: 90, Rg: 100  
(3000 K, CRI>90)

L80 B10=50,000h  
Ta: 25°  
Tc: 85°  
~9.000hr  
Lm Maintenance: 98%  
(Source: LM80 test report)

Note:  
Yori Wall Ø 35 (POWERLED)

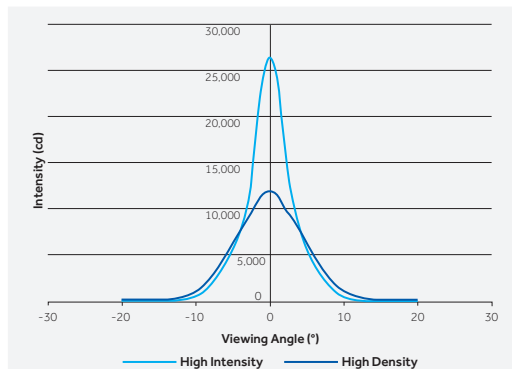

<sup>EN</sup> COB LEDs and POWER LED are distinguished by excellent luminous intensity in the smaller sizes now available on the market. This feature means these light sources can be integrated into very compact luminaires with unique performance, very high peak beam intensity (candela) and delivered lumens of 150 lm to 4000 lm. These light sources are characterised by lumen maintenance at high operating temperatures due to improved efficacy at high temperatures and better optical stability over time.

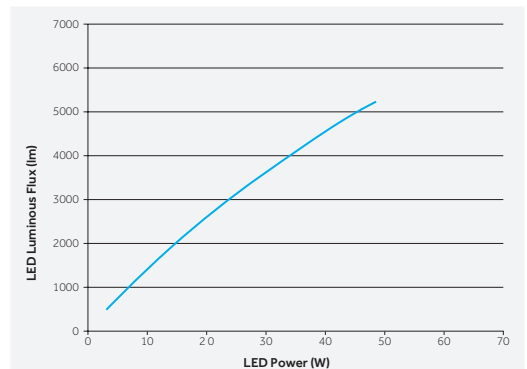

<sup>IT</sup> I COB LED e POWER LED sono caratterizzati un'eccellente intensità luminosa nelle dimensioni più ridotte ora disponibili sul mercato, questa caratteristica consente l'integrazione di queste sorgenti in prodotti dalle dimensioni molto contenute con performance uniche, picchi di intensità in candele molto elevate e lumen delivered da 150 lm fino a 4000 lm. Queste sorgenti sono caratterizzate da un mantenimento costante nel tempo del livello di lumen ad alte temperature di utilizzo grazie ad una migliore efficienza ad alte temperature e ad migliore stabilità ottica nel corso del tempo.



EN The wide range of special finishes, available as standard for Yori Wall, makes this luminaire extremely versatile and suitable for application in settings with different styles.

IT L'ampia selezione di finiture speciali, disponibili come standard per Yori Wall, permette una grande flessibilità di utilizzo dell'apparecchio in ambienti caratterizzati da stili differenti.



EN Embossed matt white  
IT Bianco opaco gofrato



EN Royal matt white  
IT Royal bianco opaco



EN Embossed matt black  
IT Nero opaco gofrato



EN Royal matt black  
IT Royal nero opaco




EN Chrome plated  
IT Cromo




EN Brushed aluminium  
IT Alluminio spazzolato



EN Brushed gold  
IT Oro spazzolato



EN Brushed antiqued bronze  
IT Bronzo anticato spazzolato

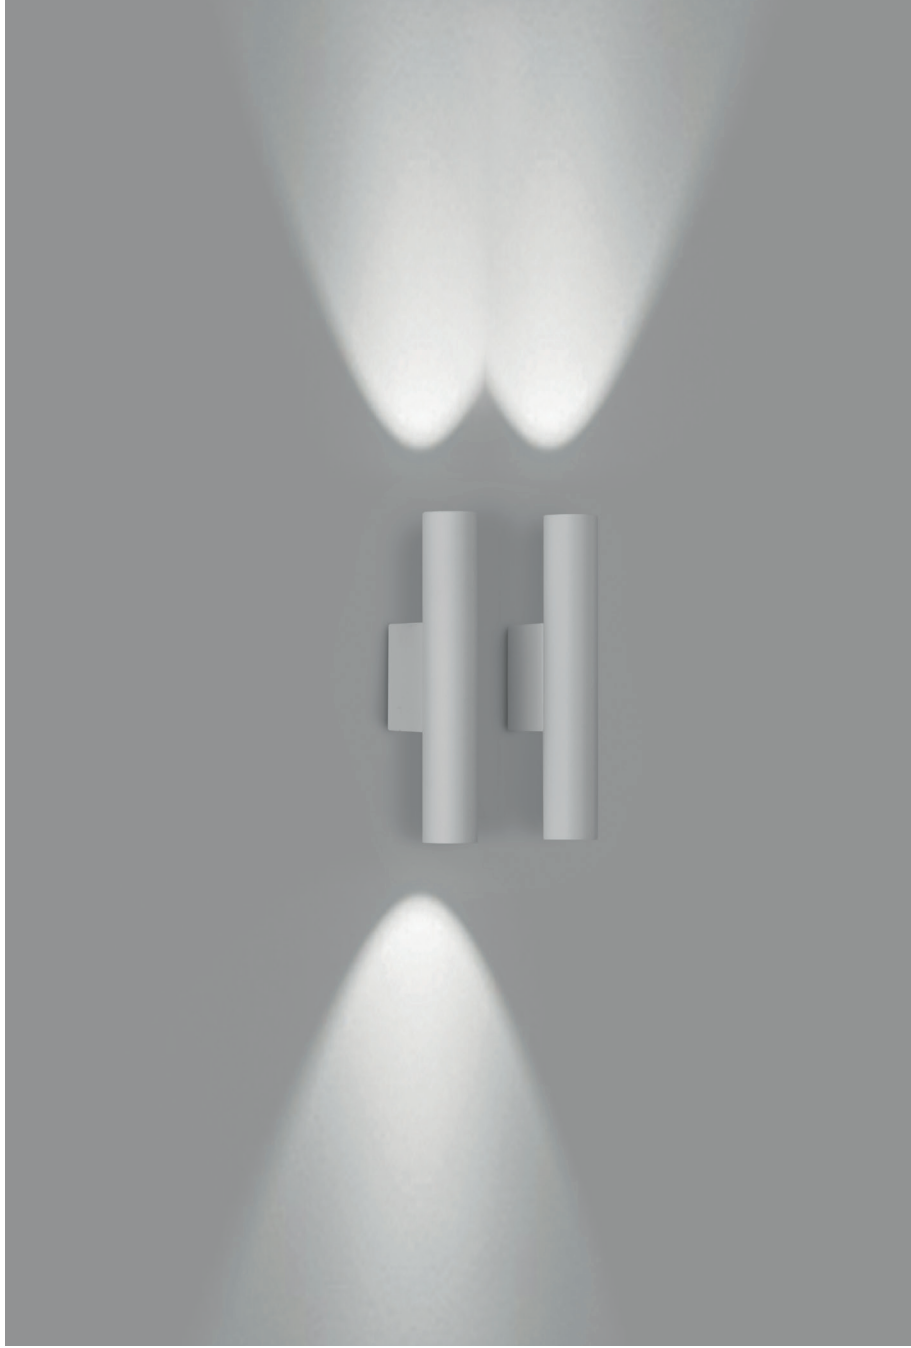

EN The optional solid and hollow decorative cylinders guarantee soft, diffused lighting to enable suggestive, elegant applications.


IT I cilindri decorativi pieni e vuoti, disponibili come accessori, garantiscono un effetto luce morbido e diffuso, consentendo applicazioni suggestive ed eleganti.




EN Hollow opal cylinder  
IT Cilindro opale cavo

EN Solid opal cylinder  
IT Cilindro opale pieno

Diameter/ Diámetro	Length/ Lunghezza	
	Hollow opal cylinder/ Cilindro opale cavo	Solid opal cylinder/ Cilindro opale pieno
Ø 35 mm		
Ø 60 mm		
Ø 95 mm		

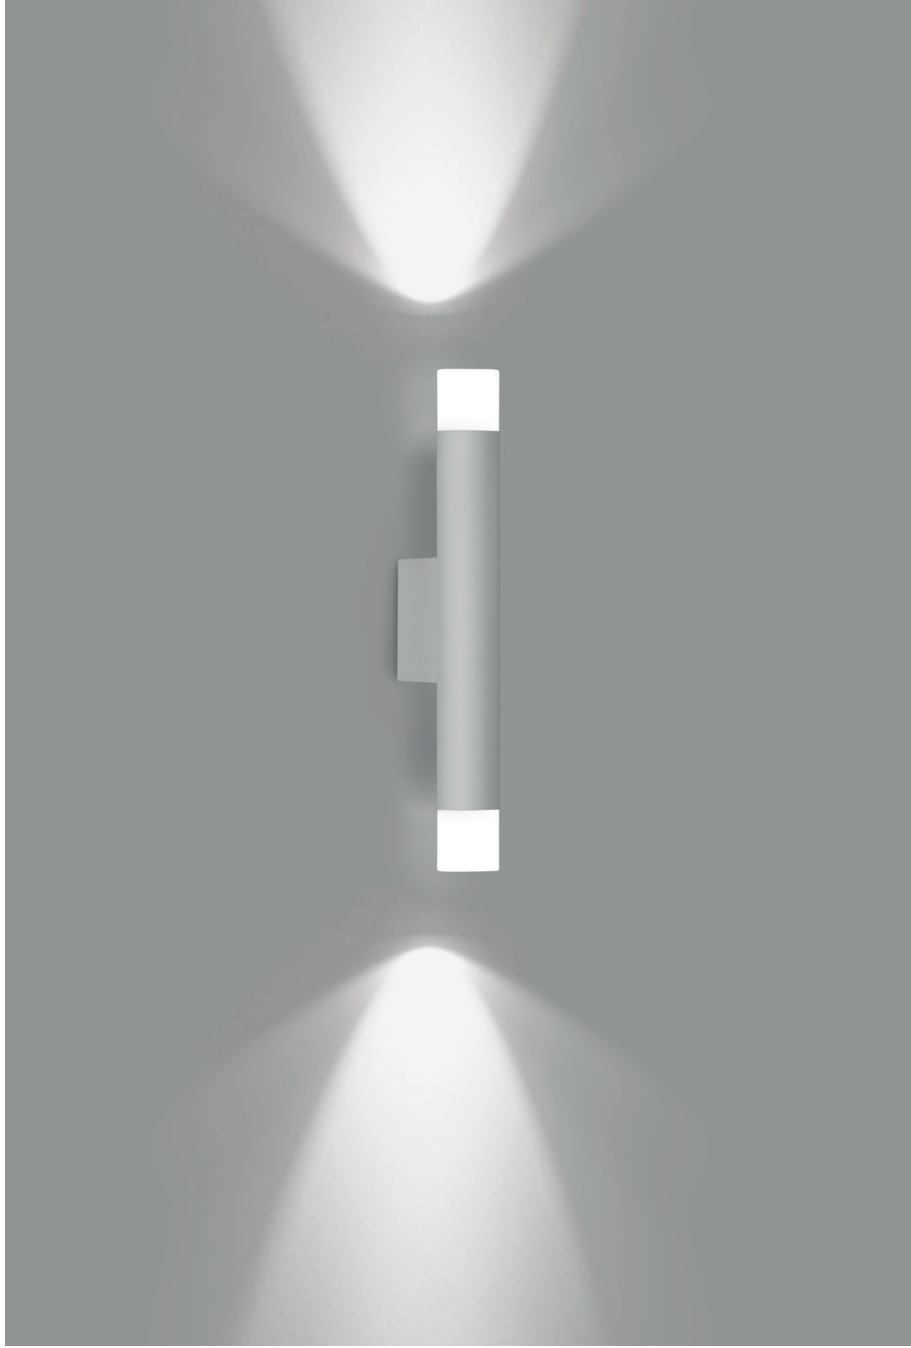

Ø 35 mm | Single emission



Code example:  
0 . LF80 B . HW 12


Accessories: p.819  
 Finishes: p.810  
 Photometric data:  
 www.reggiani.net

**3,5 W POWERLED**

Lumen delivered up to 310lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On/Off	<u>LF80</u> Single emission	<u>B</u> 8° Narrow	<u>HW</u>	2700	>90	310	<3	<u>12</u>
<b>Onrequest (remote)</b>		<u>E</u> 22° Medium	<u>HQ</u>	3000	>90	315	<3	<u>C0</u>
<u>T</u> Phase-cut			<u>WW</u>	3000	>80	380	<3	<u>31</u>
<u>V</u> Dimm 1-10V			<u>NN</u>	4000	>80	415	<3	<u>B0</u>
<u>D</u> DALI			LED nominal lumen					
<u>H</u> Bluetooth								<u>L0</u>
								<u>E0</u>
								<u>O1</u>
								<u>M0</u>

Ø 35 mm | Dual emission



Code example:  
0 . MF81 B . HW 12

Accessories: p.819  
 Finishes: p.810  
 Photometric data:  
 www.reggiani.net

**2+2 W POWERLED**


Lumen delivered up to 160+160lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On/Off	<u>MF81</u> Dual emission	<u>B</u> 8° Narrow	<u>HW</u>	2700	>90	141+141	<3	<u>12</u>
<b>Onrequest (remote)</b>		<u>E</u> 22° Medium	<u>HQ</u>	3000	>90	150+150	<3	<u>C0</u>
<u>T</u> Phase-cut			<u>WW</u>	3000	>80	185+185	<3	<u>31</u>
<u>V</u> Dimm 1-10V			<u>NN</u>	4000	>80	203+203	<3	<u>B0</u>
<u>D</u> DALI			LED nominal lumen					
<u>H</u> Bluetooth								<u>L0</u>
								<u>E0</u>
								<u>O1</u>
								<u>M0</u>




## Accessories

### Decorative accessories/ Accessori decorativi




**Description**  
Cylinder, solid version (Ø 35 mm, h 35 mm)/  
Cilindro versione piena (Ø 35 mm, h 35 mm)

**Code**  
0.26042.00




**Description**  
Cylinder, solid version (Ø 35 mm, h 70 mm)/  
Cilindro versione piena (Ø 35 mm, h 70 mm)

**Code**  
0.26043.00



**Description**  
Cylinder, hollow version (Ø 35 mm, h 35 mm)/  
Cilindro versione cava (Ø 35 mm, h 35 mm)

**Code**  
0.26044.00




**Description**  
Cylinder, hollow version (Ø 35 mm, h 70 mm)/  
Cilindro versione cava (Ø 35 mm, h 70 mm)

**Code**  
0.26045.00

## Ø 60 mm | Single emission

Risk 1 0.66 IP20 850° CE CB EAC



Code example:

0 . NF82 B . HW 12

Accessories: p.821  
 Finishes: p.810  
 Photometric data:  
 www.reggiani.net


**9W COB LED**

Lumen delivered up to 1115 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On/Off	NF82 Single emission	B 12° Narrow	HW	2700	>90	1050	<2	12
<b>Onrequest (remote)</b>		E 20° Medium	HQ	3000	>90	1100	<2	CO
T Phase-cut		K - Without optics	WW	3000	>80	1300	<3	31
V Dimm 1-10V			NN	4000	>80	1360	<3	BO
D DALI			LED nominal lumen					LO
H Bluetooth								EO
								O1
								MO

## Ø 60 mm | Dual emission

Risk 1 0.66 IP20 850° CE CB EAC



Code example:

0 . PF82 B . HW 12

Accessories: p.821  
 Finishes: p.810  
 Photometric data:  
 www.reggiani.net

**5+5W COB LED**

Lumen delivered up to 720+720lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On/Off	PF82 Dual emission	B 12° Narrow	HW	2700	>90	633+633	<2	12
<b>Onrequest (remote)</b>		E 20° Medium	HQ	3000	>90	688+688	<2	CO
T Phase-cut		K - Without optics	WW	3000	>80	810+810	<3	31
V Dimm 1-10V			NN	4000	>80	900+900	<3	BO
D DALI			LED nominal lumen					LO
H Bluetooth								EO
								O1
								MO

## Accessories


### Interchangeable IOS optics/ Ottiche intercambiabili IOS


**Description**

Precision - Narrow beam (12°)/  
Precision - Fascio stretto (12°)  
(12°-9W)

**Code**

**0.35125.0000**



**Description**

Precision - Medium beam (20°)/  
Precision - Fascio medio (20°)  
(20°-9W)

**Code**

**0.35126.0000**

### Decorative accessories/ Accessori decorativi


**Description**

Cylinder, hollow version (Ø 60 mm, h 40 mm)/  
Cilindro versione cava (Ø 60 mm, h 40 mm)

**Code**

**0.26046.0000**

### Optical accessories/ Accessori ottiche


**Description**

Glass filter 1 mm/  
Filtro vetro 1 mm

**Code**

**0.26402.00**

**Finishes**

4A	
5A	
6A	
7A	
8A	
9A	


**Description**

Selective filter 3000K - 4000K/  
Filtro selettivo 3000K - 4000K

**Code**

**0.26575.0000**


**Description**

Dense texture honeycomb louvre/  
Griglia alveolare a maglia fitta

**Code**


**0.26442.0000**


**Description**

Colored Gel Slides (2 pieces)/  
Vetrini per gel colorato (2 pezzi)/

**Code**

**0.26410.0000**


**Description**

Wide texture honeycomb louvre/  
Griglia alveolare a maglia larga

**Code**

**0.26450.0000**


**Description**

Selective filter 3000K - 2700K/  
Filtro selettivo 3000K - 2700K

**Code**

**0.26559.0000**


**Description**

Elliptical beam lens/  
Lente per fascio ellittico

**Code**

**0.26457.0000**


**Description**

Selective filter 2700K - 2500K/  
Filtro selettivo 2700K - 2500K

**Code**


**0.26418.0000**


**Description**

Opal lens/  
Lente opale

**Code**


**0.26462.0000**


**Description**

Selective filter 2700K - 2200K/  
Filtro selettivo 2700K - 2200K

**Code**


**0.26426.0000**


**Description**

Spread lens/  
Lente diffondente

**Code**

**0.26470.0000**


**Description**

Selective filter 2700K - 2000K/  
Filtro selettivo 2700K - 2000K

**Code**

**0.26434.0000**


**Description**

Cross blade louvre/  
Griglia a croce

**Code**

**0.26477.0000**



**Description**

Selective filter 3000K - 3600K/  
Filtro selettivo 3000K - 3600K

**Code**

**0.26567.0000**

## Ø 95 mm | Single emission




Code example:  
0 . RF86 D . HW 12

Accessories: p.823  
 Finishes: p.810  
 Photometric data:  
 www.reggiani.net

25 W COB LED		Lumen delivered up to 2800lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On/Off	<u>RF86</u> Single emission	<u>B</u> 12° Narrow	<u>HW</u>	2700	>90	2792	<2	<u>12</u>
<u>D</u> DALI		<u>E</u> 24° Medium	<u>HQ</u>	3000	>90	2860	<2	<u>C0</u>
		<u>K</u> - Without optics	<u>WW</u>	3000	>80	3487	<3	<u>31</u>
			<u>NN</u>	4000	>80	3602	<3	<u>B0</u>
			LED nominal lumen					<u>L0</u>
								<u>E0</u>
								<u>O1</u>
								<u>M0</u>

## Ø 95 mm | Dual emission



Code example:  
0 . TF86 B . HW 12

Accessories: p.823  
 Finishes: p.810  
 Photometric data:  
 www.reggiani.net

12+12 W COB LED		Lumen delivered up to 1540+1540lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<u>0</u> On/Off	<u>TF86</u> Dual emission	<u>B</u> 12° Narrow	<u>HW</u>	2700	>90	1491+1491	<2	<u>12</u>
<u>D</u> DALI		<u>E</u> 24° Medium	<u>HQ</u>	3000	>90	1533+ 1533	<2	<u>C0</u>
		<u>K</u> - Without optics	<u>WW</u>	3000	>80	1860+ 1860	<3	<u>31</u>
			<u>NN</u>	4000	>80	1920+ 1920	<3	<u>B0</u>
			LED nominal lumen					<u>L0</u>
								<u>E0</u>
								<u>O1</u>
								<u>M0</u>


## Accessories

### Interchangeable IOS optics/ Ottiche intercambiabili IOS



**Description**  
Precision - Narrow beam  
Precision - Fascio stretto  
(12°-25W)


**Code**  
**0.35135.0000**



**Description**  
Precision - Medium beam/  
Precision - Fascio medio  
(24°-25W)

**Code**  
**0.35136.0000**

### Decorative accessories/ Accessori decorativi



**Description**  
Cylinder, hollow version (Ø 95 mm, h 60 mm)/  
Cilindro versione cava (Ø 95 mm, h 60 mm)

**Code**  
**0.26047.0000**

### Optical accessories/ Accessori ottiche



**Description**  
Glass filter 1 mm/  
Filtro vetro 1 mm

**Code**  
**0.26406.00**

#### Finishes

4A	Red
5A	Blue
6A	Green
7A	Pink
8A	Yellow
9A	Orange



**Description**  
Selective filter 3000K - 4000K/  
Filtro selettivo 3000K - 4000K

**Code**  
**0.26579.0000**




**Description**  
Dense texture honeycomb louvre/  
Griglia alveolare a maglia fitta

**Code**  
**0.26446.0000**



**Description**  
Colored Gel Slides (2 pieces)/  
Vetrini per gel colorato (2 pezzi)/

**Code**  
**0.26414.0000**



**Description**  
Wide texture honeycomb louvre/  
Griglia alveolare a maglia larga

**Code**  
**0.26454.0000**



**Description**  
Selective filter 3000K - 2700K /  
Filtro selettivo 3000K - 2700K

**Code**  
**0.26563.0000**



**Description**  
Elliptical beam lens/  
Lente per fascio ellittico

**Code**  
**0.26459.0000**




**Description**  
Selective filter 2700K - 2500K /  
Filtro selettivo 2700K - 2500K

**Code**  
**0.26422.0000**




**Description**  
Opal lens/  
Lente opale

**Code**  
**0.26466.0000**




**Description**  
Selective filter 2700K - 2200K /  
Filtro selettivo 2700K - 2200K

**Code**  
**0.26430.0000**



**Description**  
Spread lens/  
Lente diffondente

**Code**  
**0.26474.0000**



**Description**  
Selective filter 2700K - 2000K /  
Filtro selettivo 2700K - 2000K

**Code**  
**0.26438.0000**



**Description**  
Cross blade louvre/  
Griglia a croce

**Code**  
**0.26479.0000**



**Description**  
Selective filter 3000K - 3600K /  
Filtro selettivo 3000K - 3600K

**Code**  
**0.26571.0000**