

Quality light for the outdoors: complete your project with the right landscape lighting. Advanced technology meets discreet design.

YORI IP66

2.0

Reggiani

Reggiani

Contents

Yori IP66	15
Yori IP66 Surface/Pendant	59
Yori IP66 Wall	79
Finishes	95

It's time to g

go outdoors

EN Yori IP66 is the brand new system of lighting products for your landscape projects. The Yori projectors family has evolved and widened, now with IP66 rating. Advanced technology meets discreet design, quality light for the outdoors.

IT Yori IP66 è il nuovo sistema di prodotti di illuminazione per i tuoi progetti landscape. La famiglia di proiettori Yori si è evoluta e allargata, ed è ora disponibile in IP66. Tecnologia all'avanguardia in un design pulito e minimale, luce di qualità per gli ambienti esterni.



Yori IP66





Ecofriendly

^{EN} Developed for the outdoors, with attention to the environment.


In compliance with the Eco-Design Regulation (EU) 2024/1781, the light source of Yori IP66 and its power supply unit can be separated to guarantee the repairability of the product in case of failure and/or replacement of components to allow for any upgrades where more efficient or otherwise better options become available in the near future. Furthermore, the anodization treatment that the aluminium undergoes is an environmentally friendly process, not using dangerous or carcinogenic substances such as heavy metals or solvents. The coating is mainly composed of aluminium oxide, an inert and non-hazardous material.


^{IT} Sviluppato per gli esterni, con attenzione all'ambiente.


In ottemperanza alla normativa Eco-Design Regolamento (UE) 2024/1781 la sorgente luminosa di Yori IP66 e la sua unità di alimentazione, sono separabili per garantire la riparabilità del prodotto in caso di guasto e/o sostituibili per consentire l'eventuale aggiornamento/implementazione del prodotto, laddove componenti più efficienti o comunque migliori siano disponibili in un prossimo futuro.

Inoltre, il trattamento di anodizzazione che subisce l'alluminio è un processo rispettoso dell'ambiente, non utilizzando sostanze pericolose o cancerogene quali metalli pesanti o solventi. Il rivestimento è composto prevalentemente da ossido di alluminio, materiale inerte e non pericoloso.



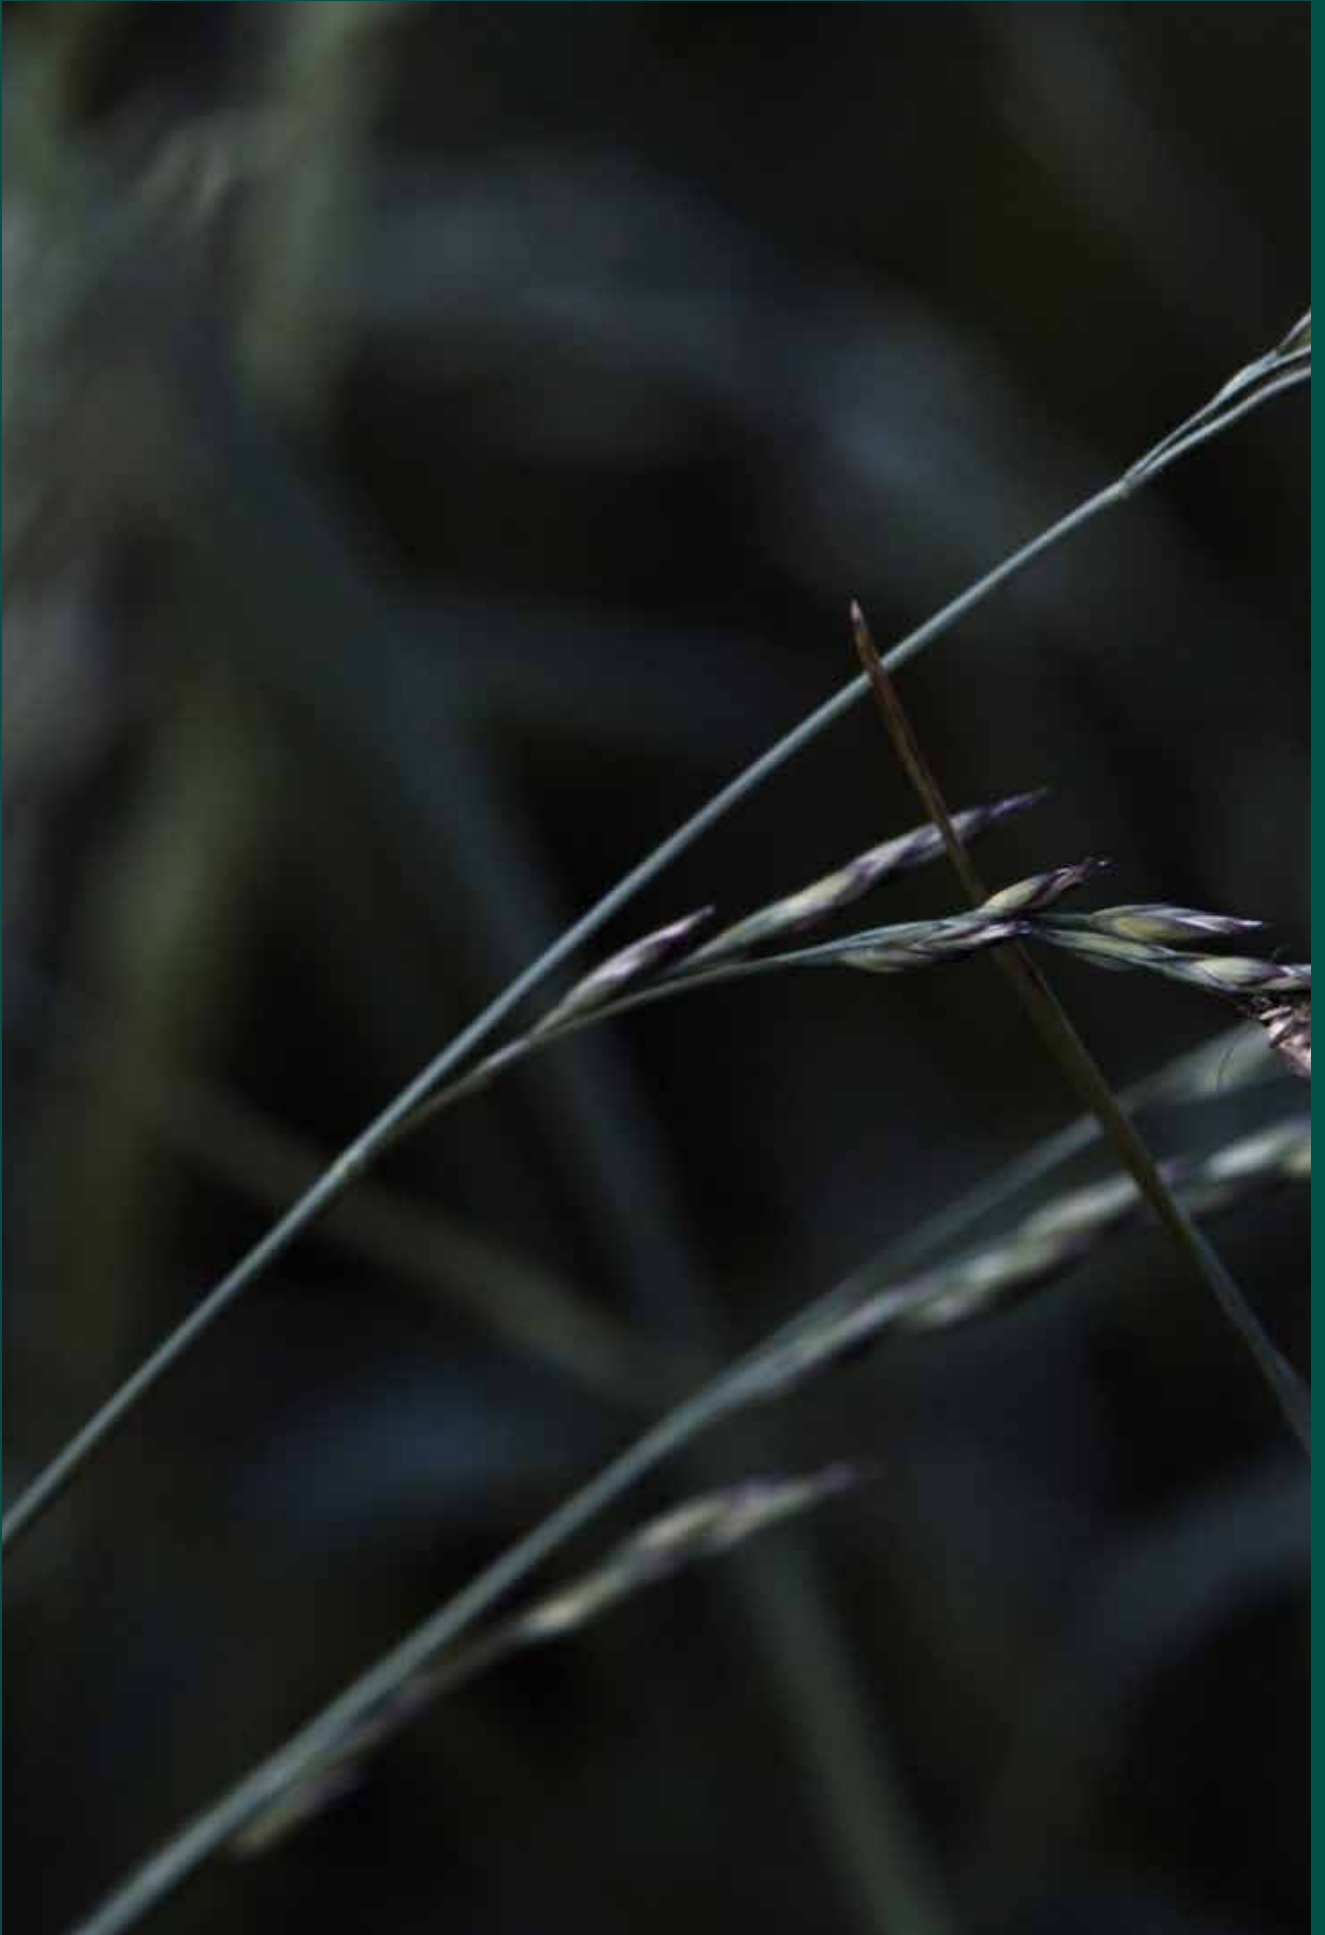


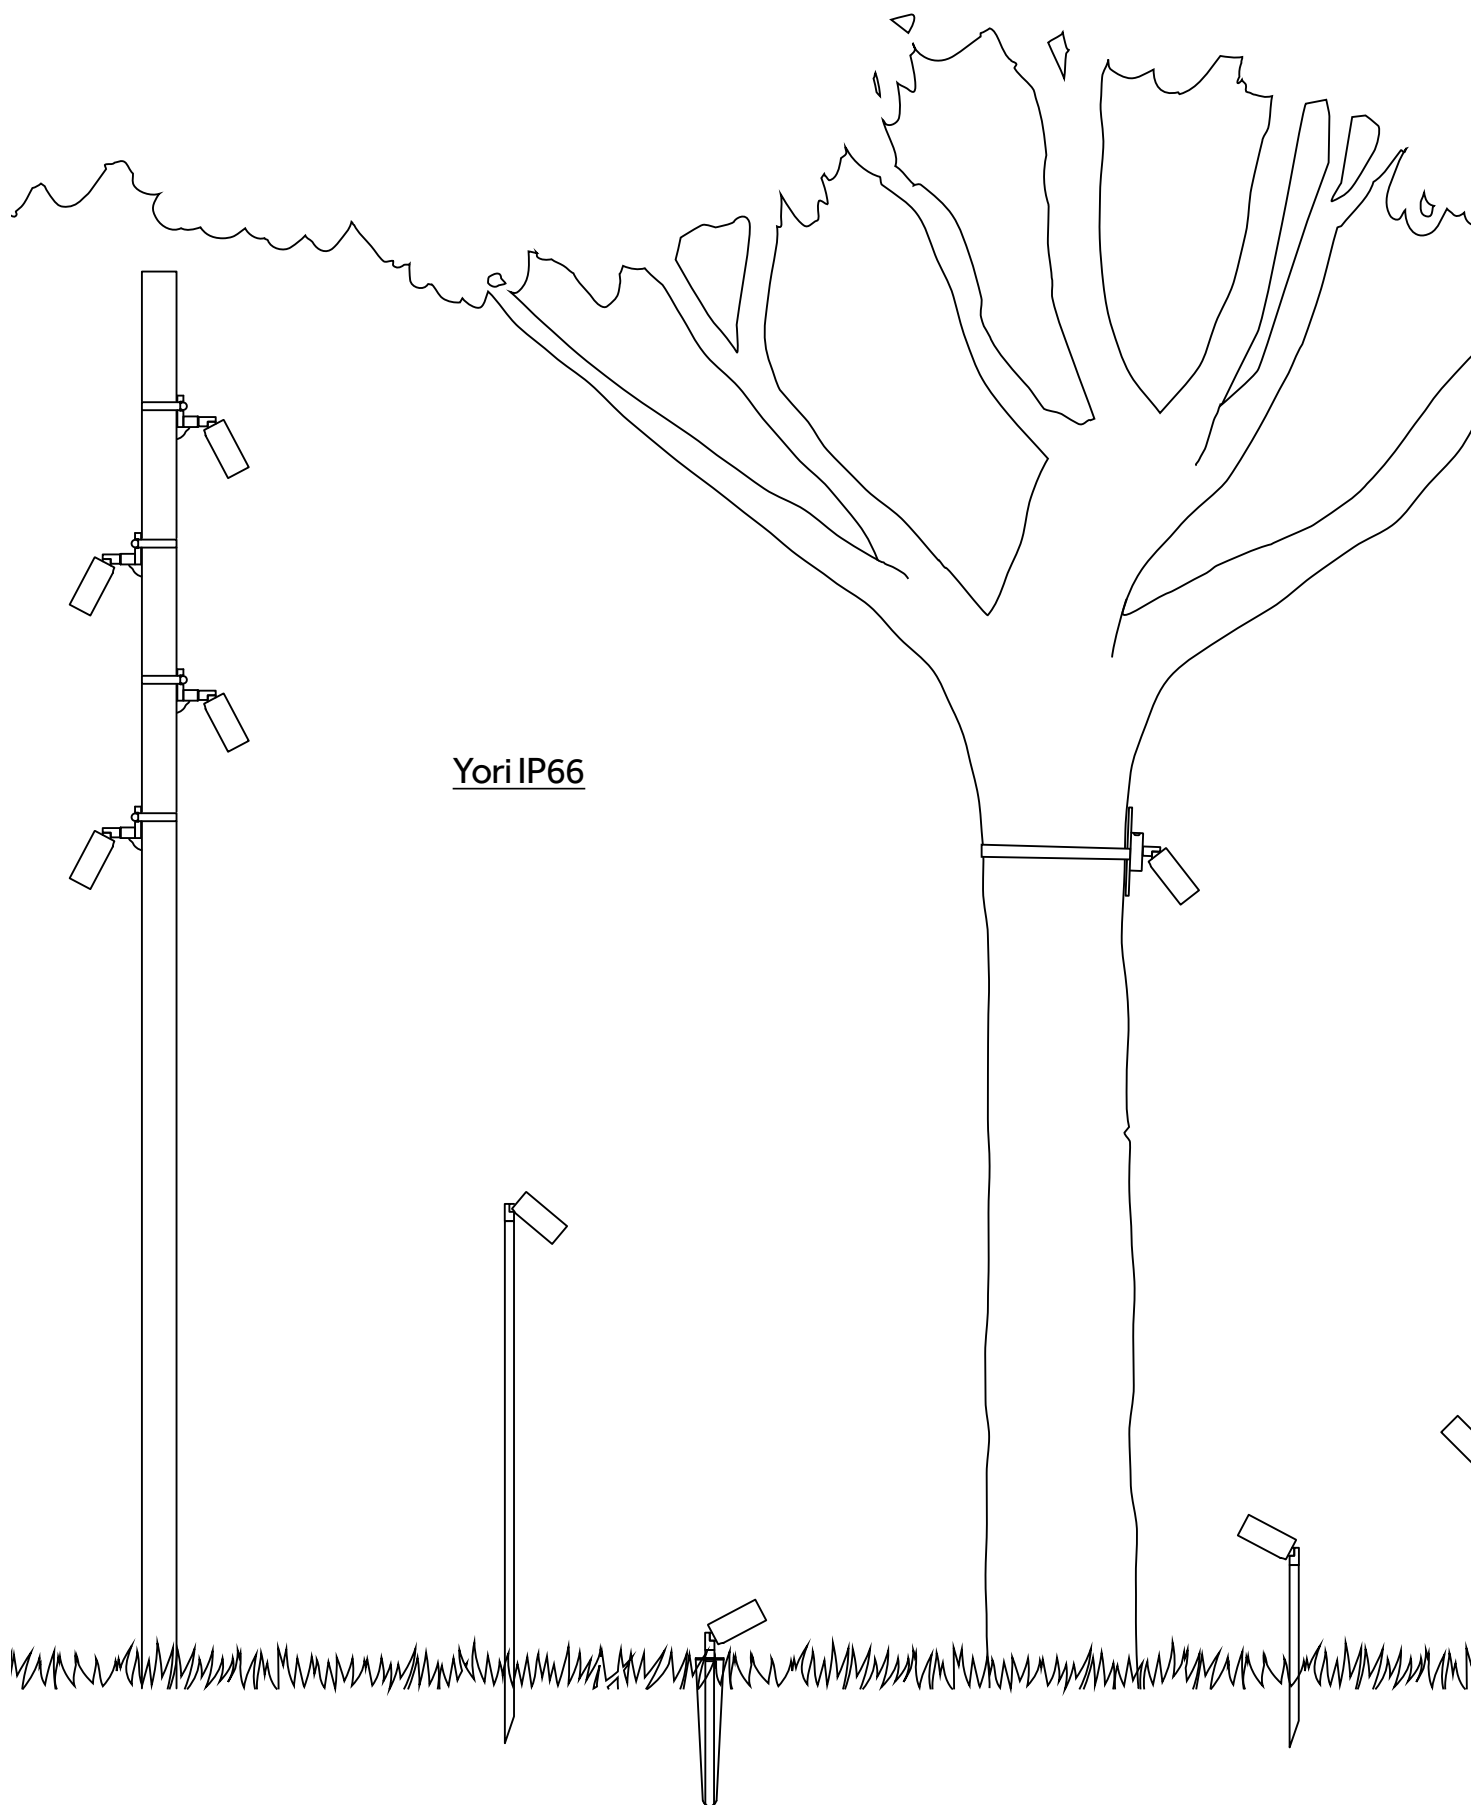

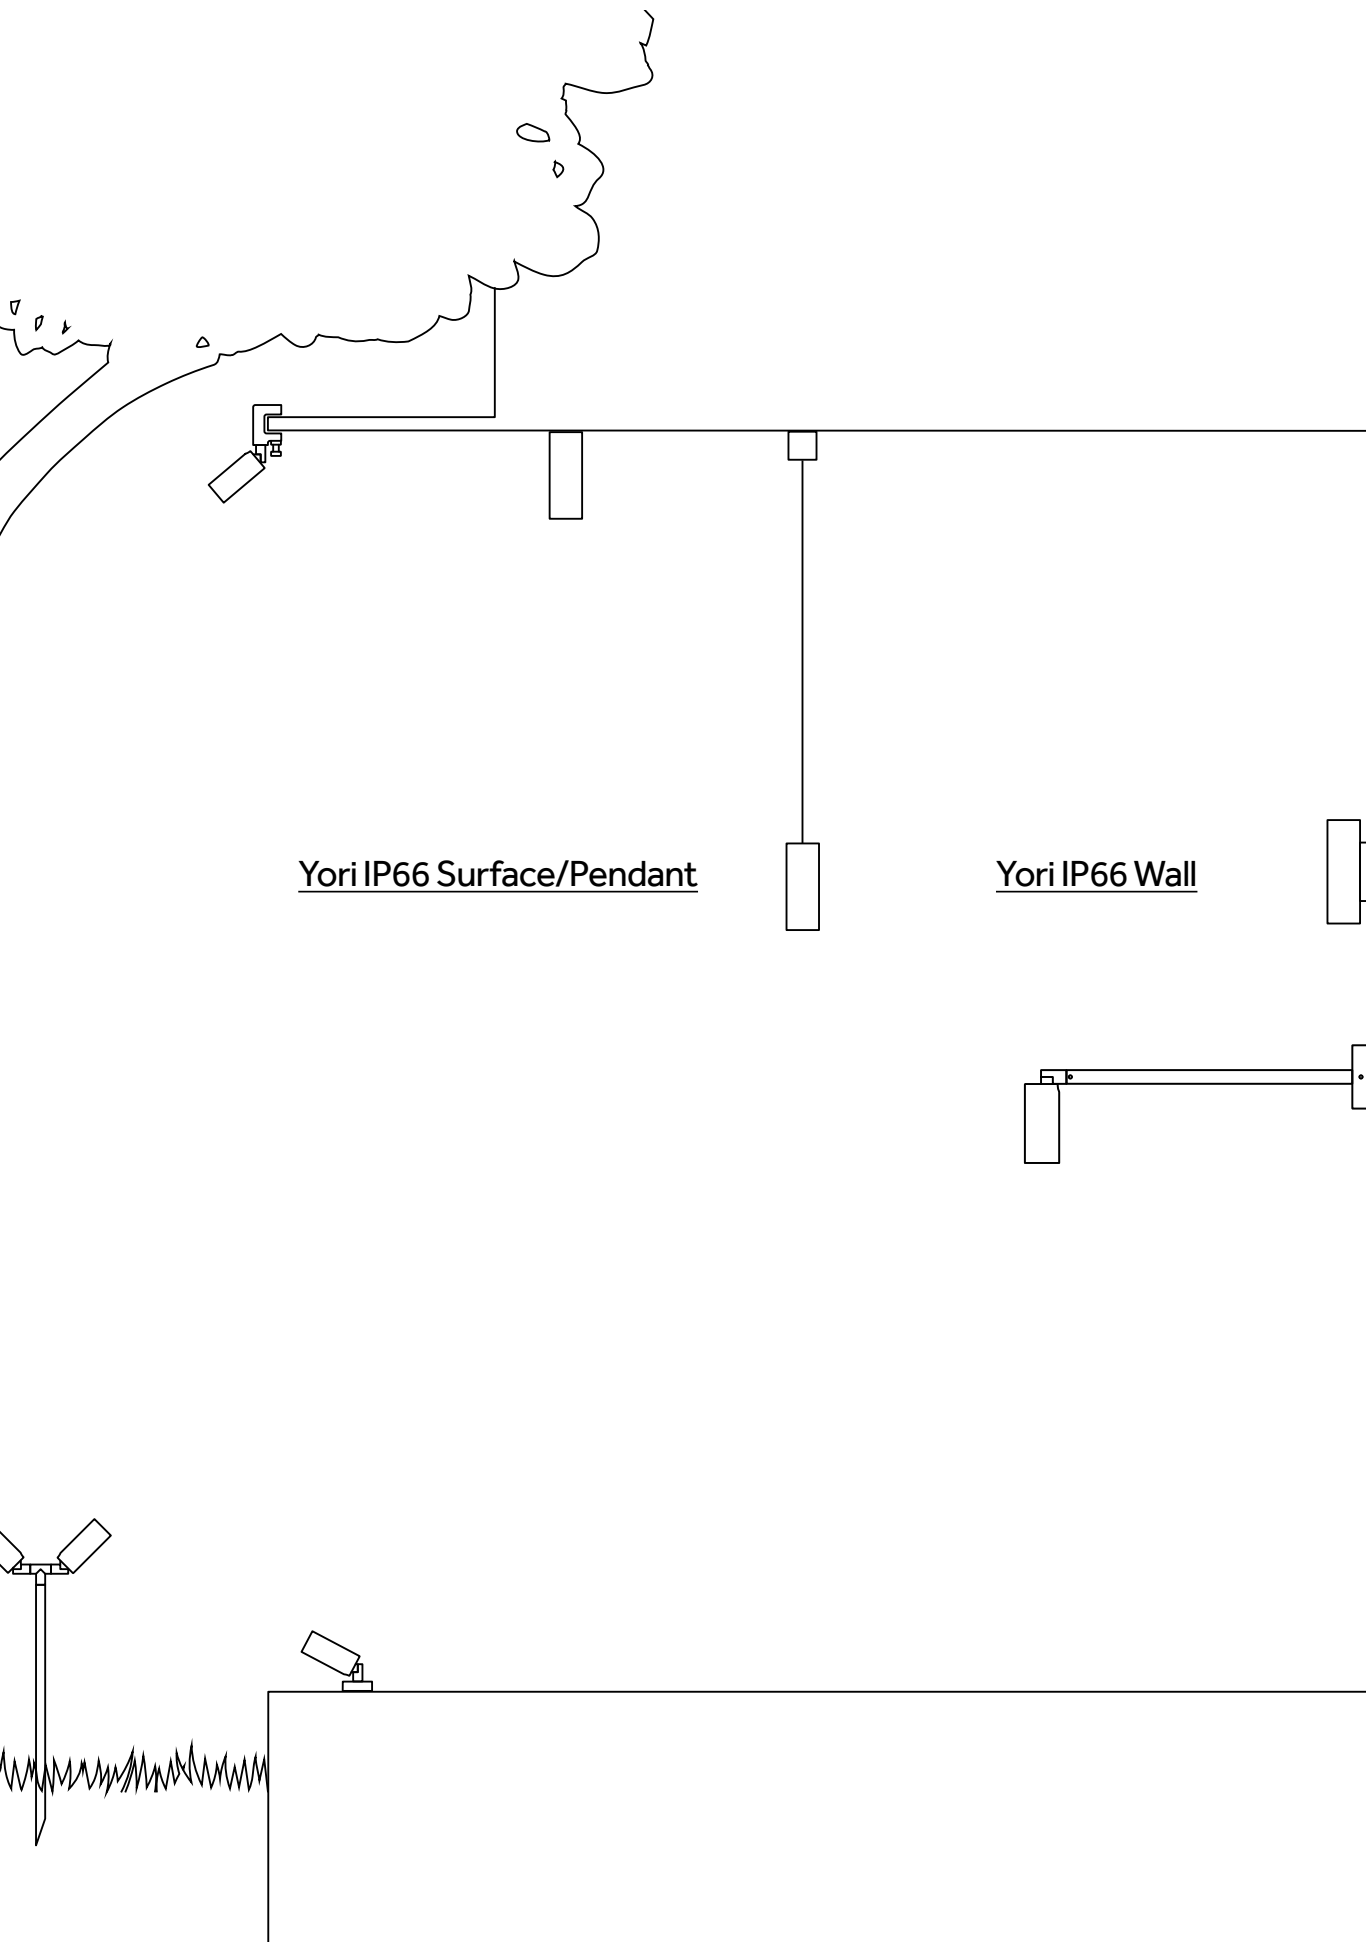

Yori IP66


Yori IP66

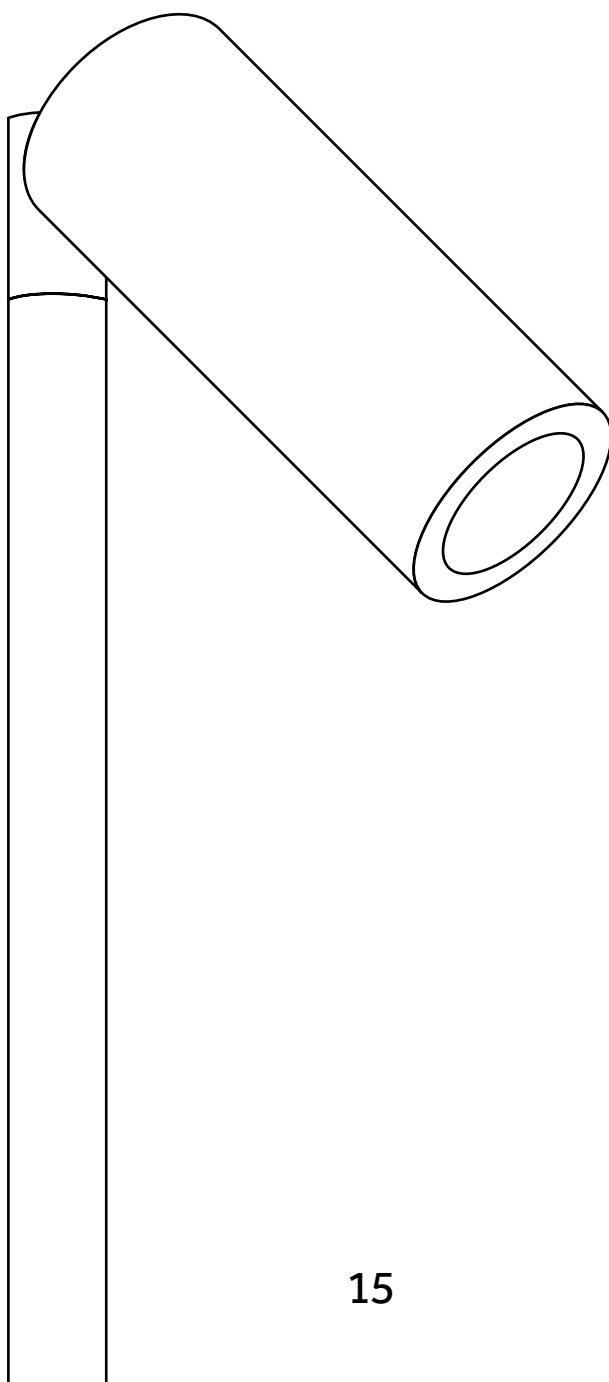




EN Designed to fulfill any requirement in high-end landscape contemporary projects, Yori IP66 is the outdoor version of our Yori projector. Minimal, elegant design, sophisticated finishes and a wide selection of accessories, beautifully integrate the product range into any project.


IT Progettato per soddisfare qualsiasi esigenza in progetti landscape contemporanei di fascia alta, Yori IP66 è la versione per esterni del nostro proiettore Yori. Design minimale ed elegante e finiture sofisticate, integrano magnificamente la gamma in qualsiasi progetto. L'ampia gamma di accessori rende Yori IP66 estremamente versatile e adatto a diversi ambienti e dettagli architettonici.



Versions/ Versioni				
Yori IP66	 Ø45 Ø60			
Finishes/ Finiture If not specified, the product is made of aluminium/ Se non specificato, il prodotto è in alluminio	 8C Raw anodized/ Anodizzato naturale  4B Matte white/ Bianco opaco  8E Stainless steel (AISI 316)/ Acciaio inox (AISI 316)  8D Black anodized/ Anodizzato nero  8F Antiqued bronze (solid brass)/ Bronzo anticato (ottone massiccio)  9M Antiqued bronze/ Bronzo anticato  9N Olive green/ Verde oliva  9P Corten/ Corten  Copper/ Rame  Champagne anodized/ Anodizzato champagne  Titanium/ Titanio			
Adjustability/ Orientabilità Finishes upon request (minimum quantity required)/ Finiture su richiesta (quantitativo minimo richiesto)	 Horizontal axis/ Asse orizzontale  Vertical axis/ Asse verticale			
IP / IK	66 / 07			
Control systems	On/Off; DALI; 1-10V			
Insulation class				
Certifications	CE UK ENEC			

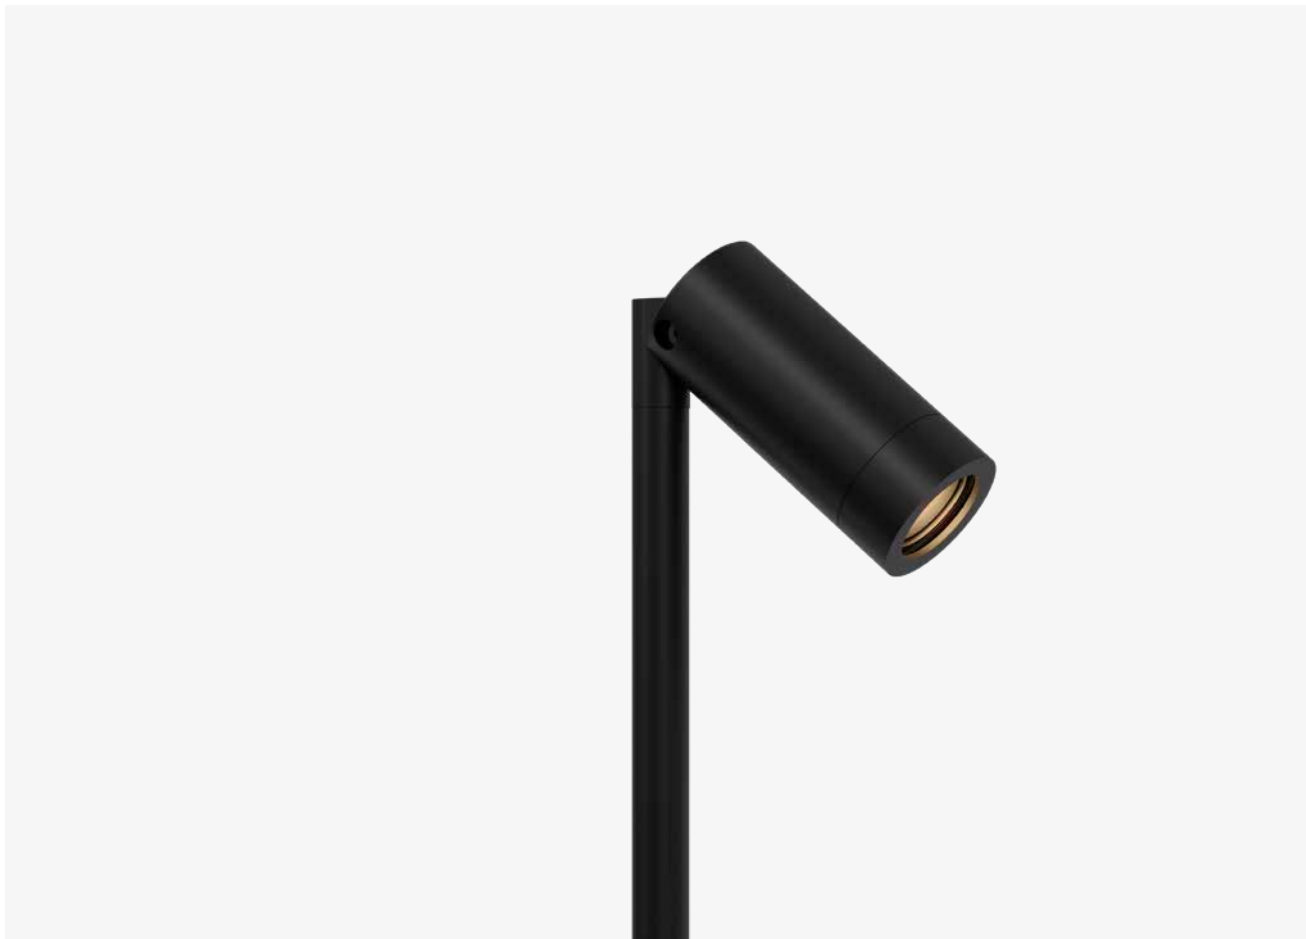

	Ø 45 mm	Ø 60 mm
Yori IP66	 p.46	 p.46
	10°; 12°; 27°; 32°; 15°x65°; 65°x15°	10°; 16°; 24°; 35°; 34°x60°; 60°x34°
Light source/ Sorgente luminosa	 POWER LED 3 W; 4,5 W 200 lm - 327 lm L80 B10=50,000 h 2700 K; 3000 K; 4000 K SDCM <3 CRI >90	 POWER LED 4,5 W; 9 W; 12 W 397 lm - 1106 lm L80 B10=50,000 h 2700 K; 3000 K; 4000 K SDCM <3 CRI >90  Warm Dimming COB LED 6 W 445 lm L70 B10=50,000 h 1800 K - 3000 K SDCM <3 CRI >90

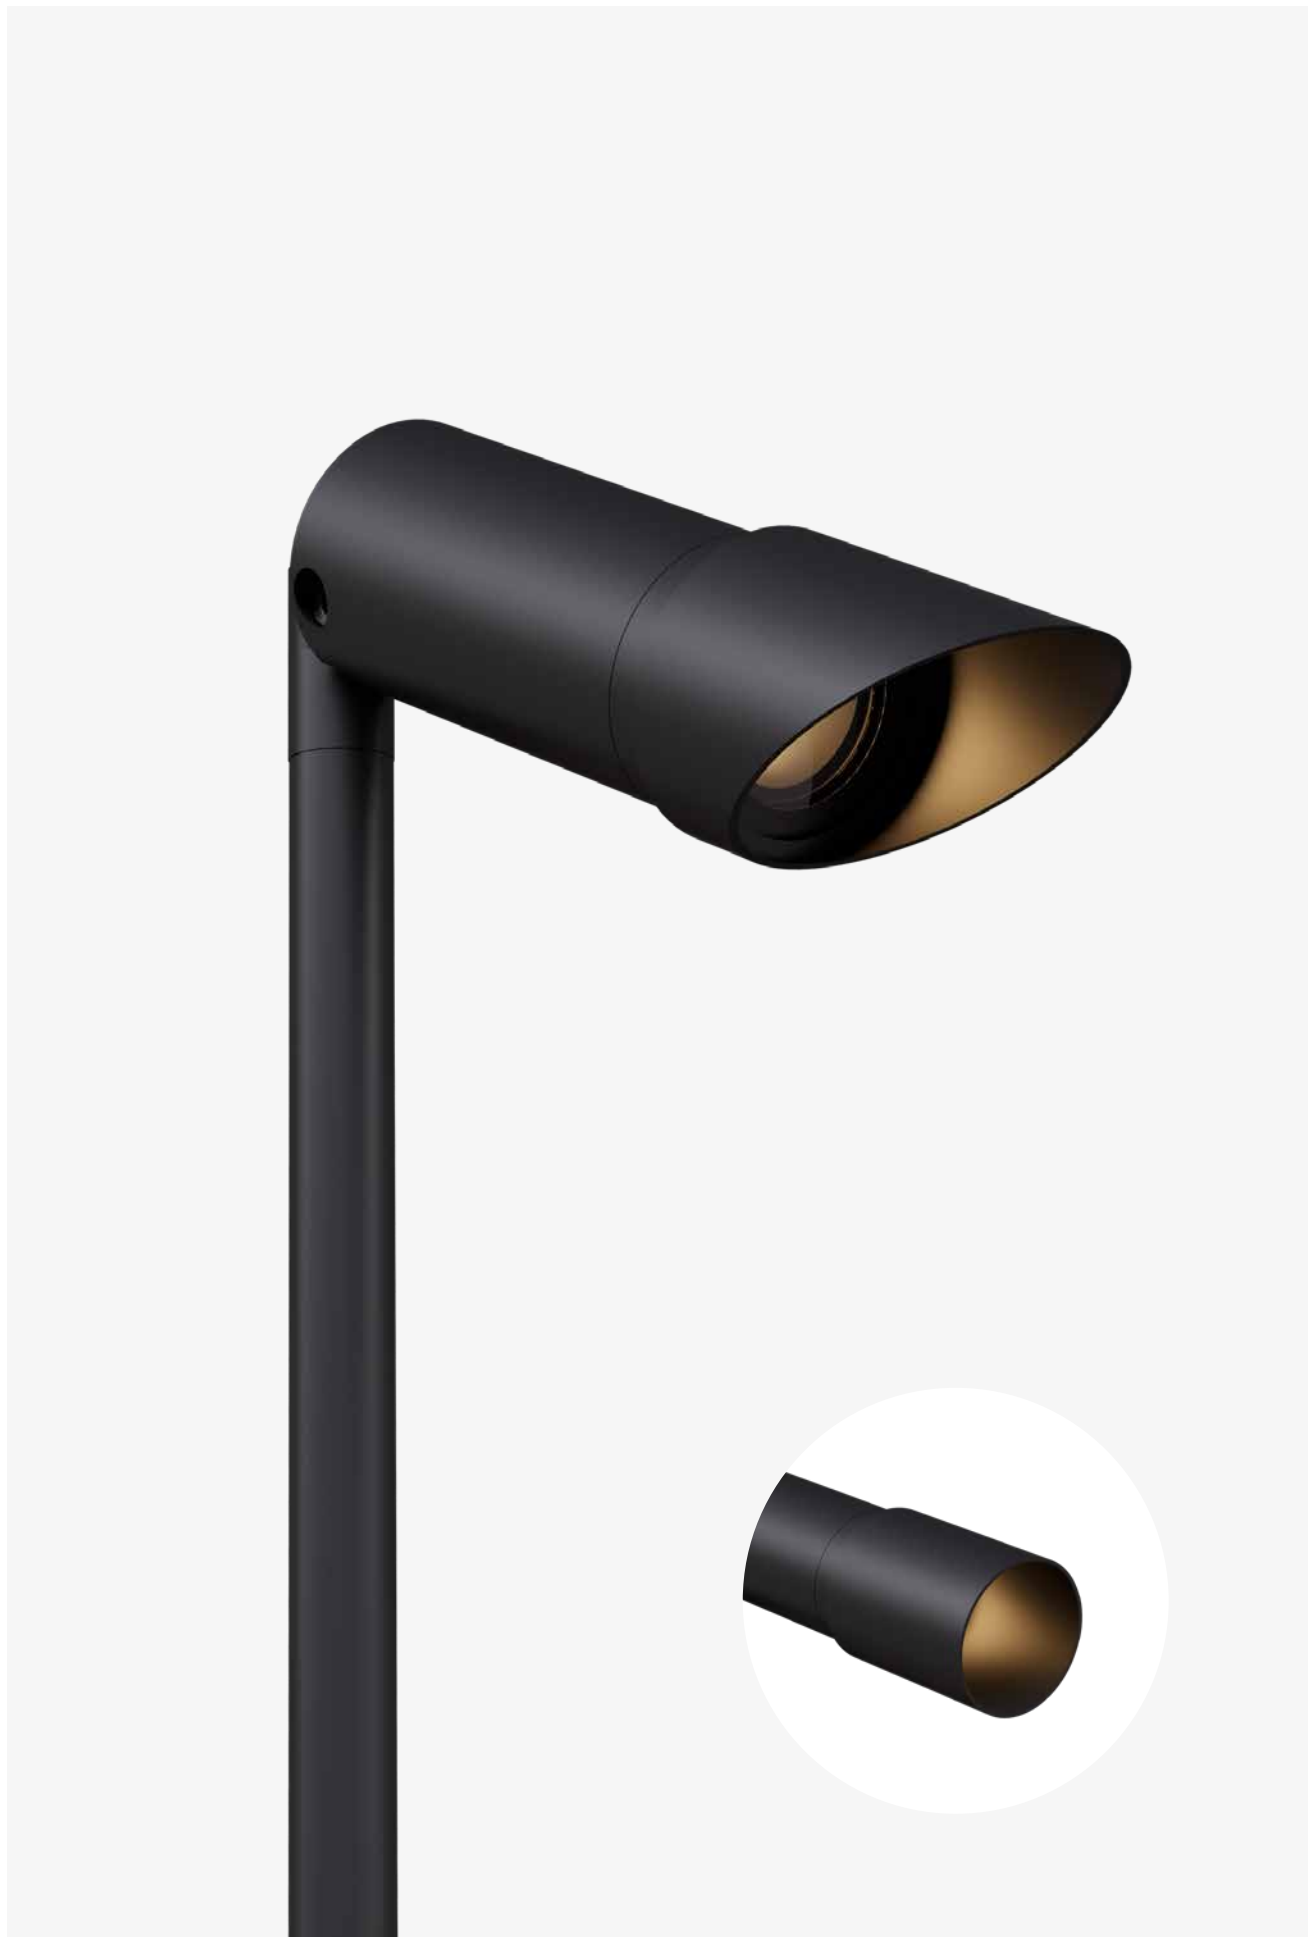


EN Yori IP66 has two alternative snoots: a cylindrical snoot for an even more controlled light beam and a 45° snoot, to minimize upward light spillage.

IT Yori IP66 dispone, come accessori, di due snoot alternativi: cilindrico per un fascio di luce ancora più controllato e snoot a 45° per ridurre al minimo lo spillage luminoso verso l'alto.




EN Snoot 45° (Ø45)
IT Snoot 45° (Ø45)

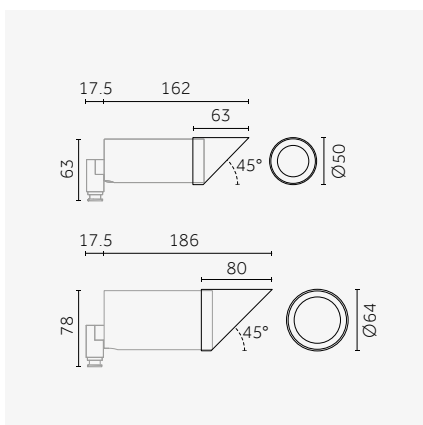


EN Snoot 45° available for Ø45 and Ø60 version
IT Snoot 45° disponibile nelle versioni Ø45 e Ø60



EN Snoot (Ø45)
IT Snoot (Ø45)

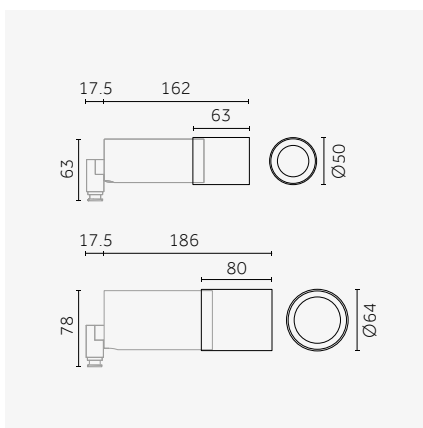

EN Snoot available for Ø45 and Ø60 version
IT Snoot disponibile nelle versioni Ø45 e Ø60

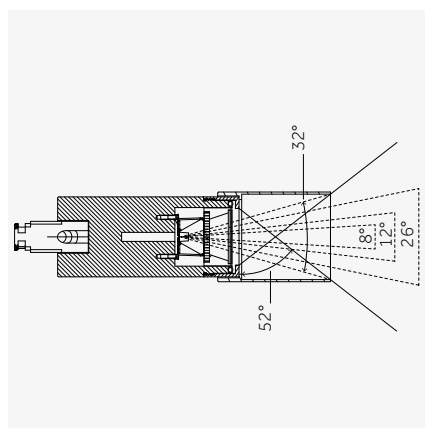

Place it (almost) wherever you want

EN Complete Yori IP66 with the accessory that best suits your project. Its universal "lock-hinge" allows you to adapt both projectors (Ø45 or Ø60) to a wide range of fixing accessories, from the stakes to the tree strap.

IT Completa Yori IP66 con l'accessorio migliore per il tuo progetto. La sua "cerniera di bloccaggio" universale consente di adattare entrambi i proiettori (Ø45 o Ø60) ad un'ampia gamma di accessori di fissaggio, dai picchetti alla cinghia per alberi.




Ø45



Ø60



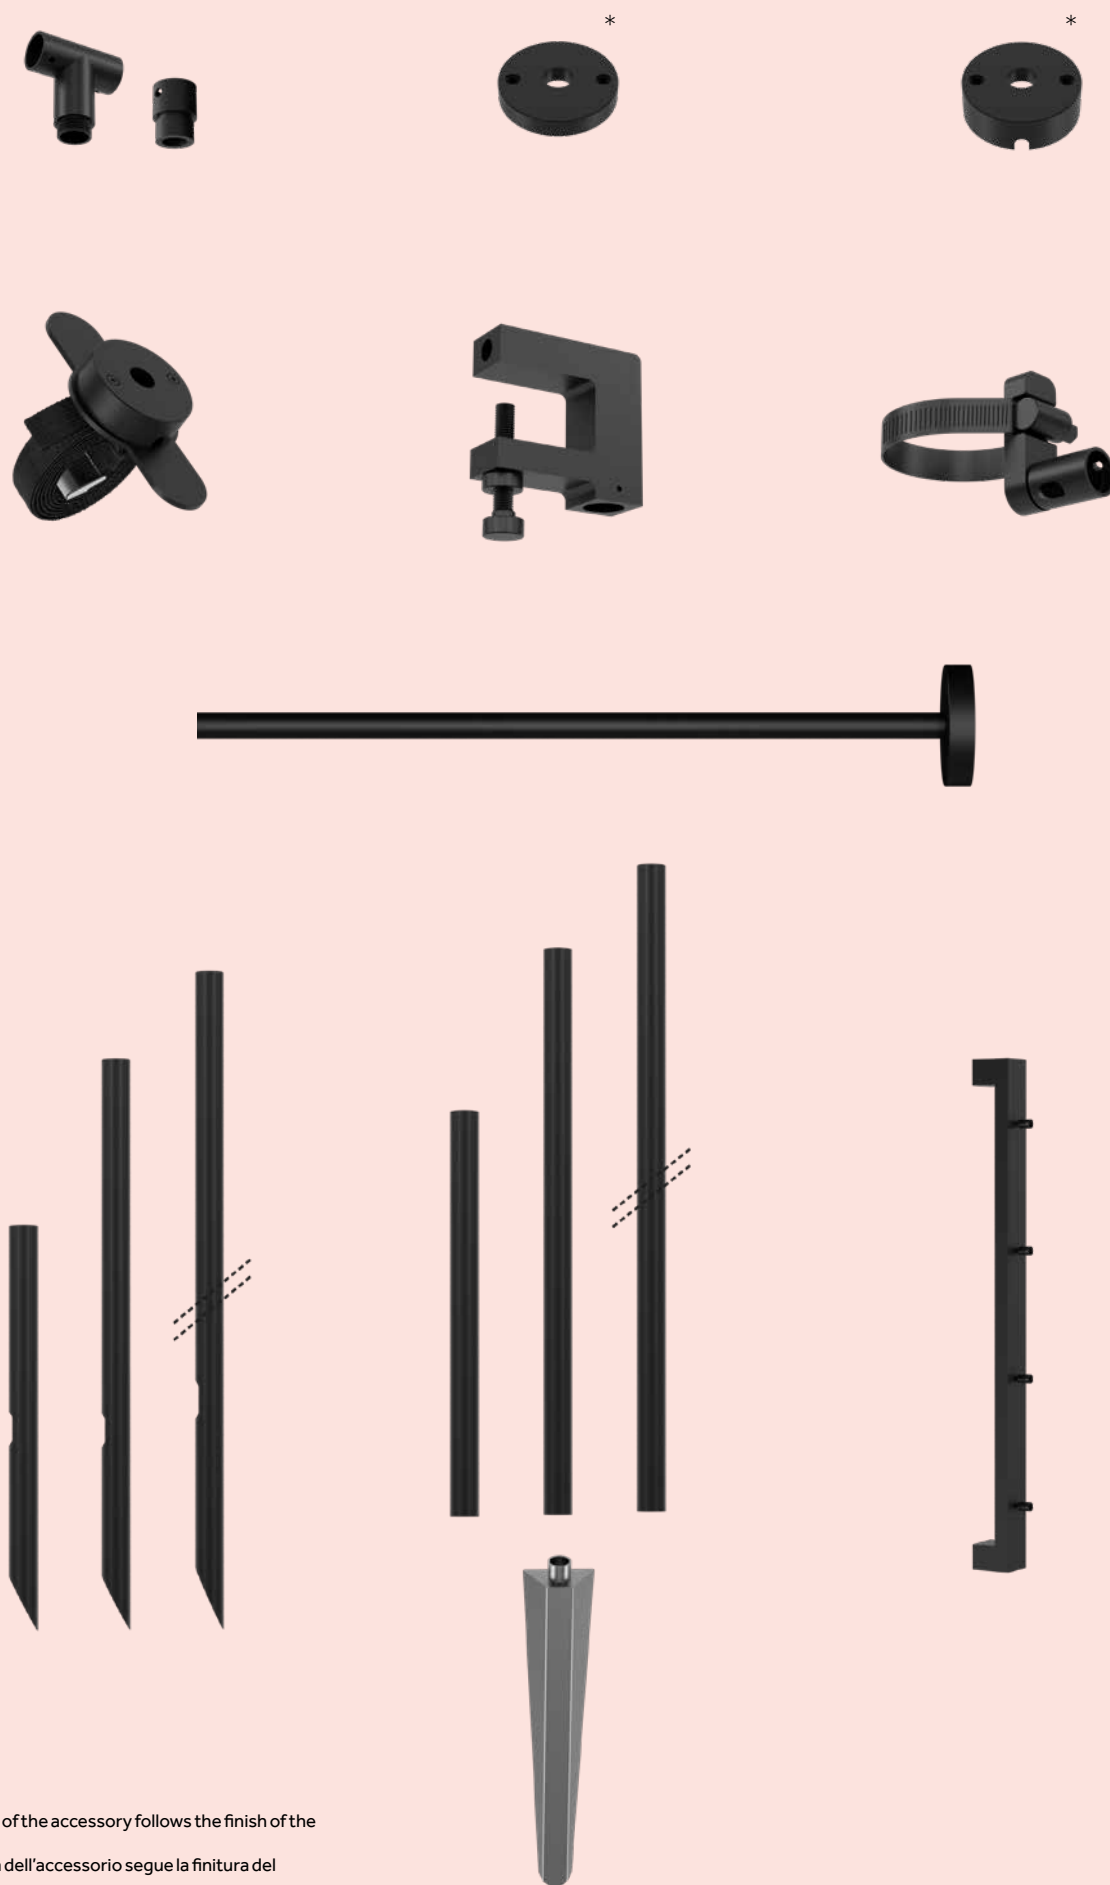


* ^{EN} The finish of the accessory follows the finish of the product.
 * ^{IT} La finitura dell'accessorio segue la finitura del prodotto.




EN A wide range of spikes for ground applications. The version with anti-rotation is ideal for walkways and gardens, guaranteeing stability and preventing any movement due to external agents.

IT Ampia gamma di picchetti per applicazioni a terra. La versione con antirotazione, ideale per camminamenti e giardini, impedisce eventuali spostamenti e rotazioni dovuti ad agenti esterni.

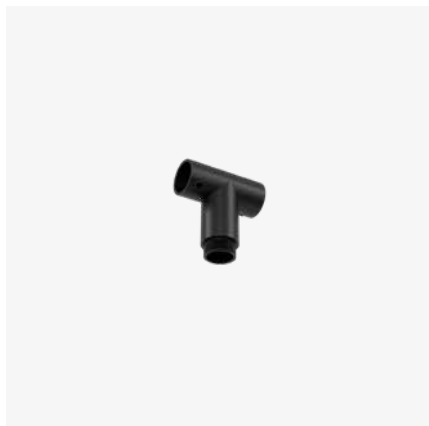


EN Double head for projectors

IT Testa doppia per proiettori

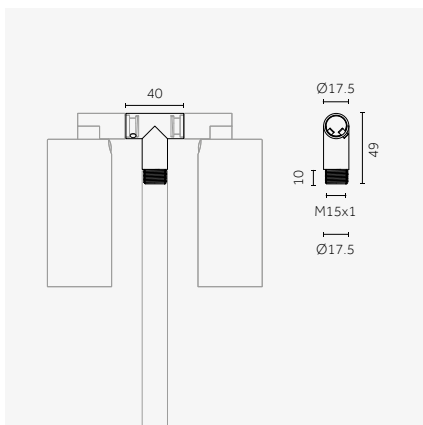


■ 8D Black anodized/
Anodizzato nero

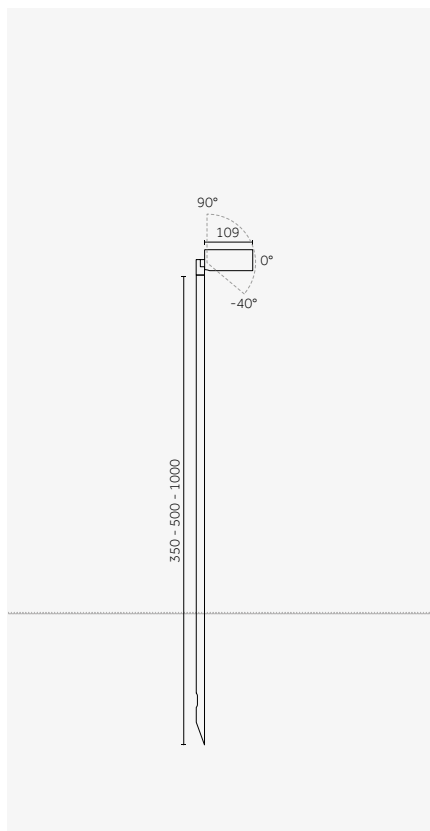


EN Spike (350, 500, 1000 mm)

IT Picchetto (350, 500, 1000 mm)

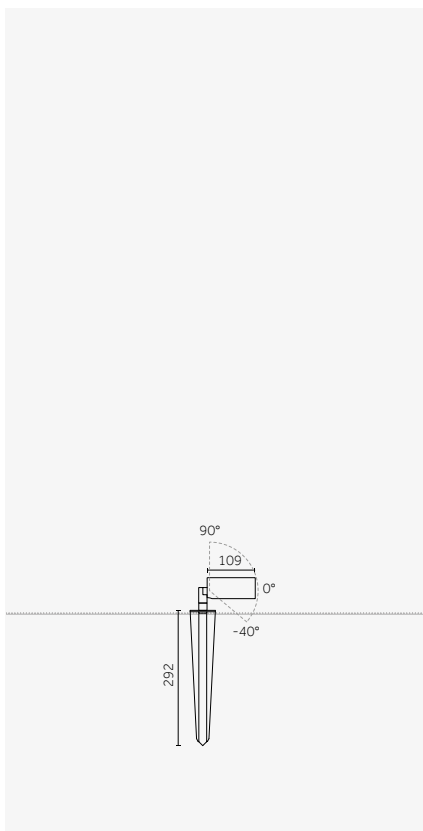




EN Antirotation

IT Antirotazione

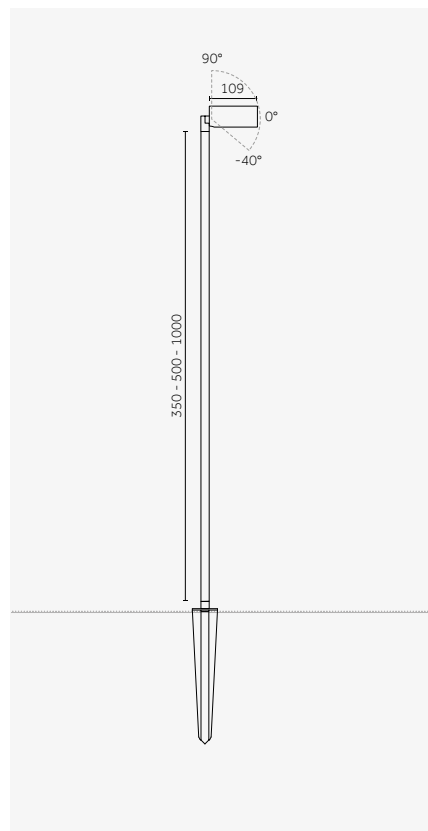

EN Antirotation + tubular (350, 500, 1000 mm)

IT Antirotazione + tubolare (350, 500, 1000 mm)

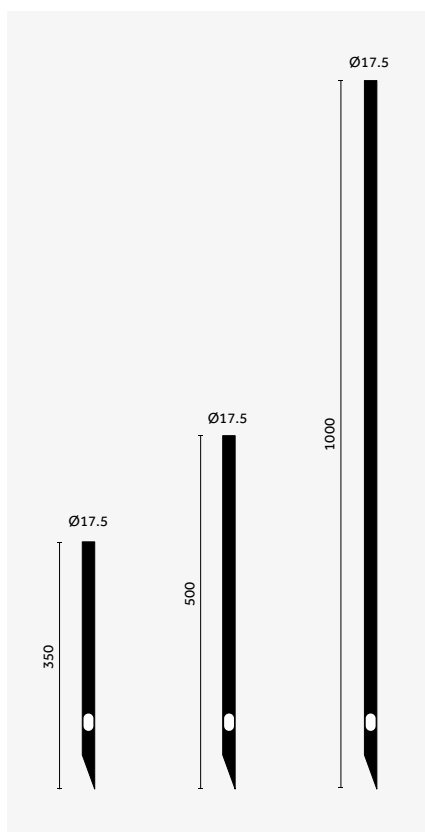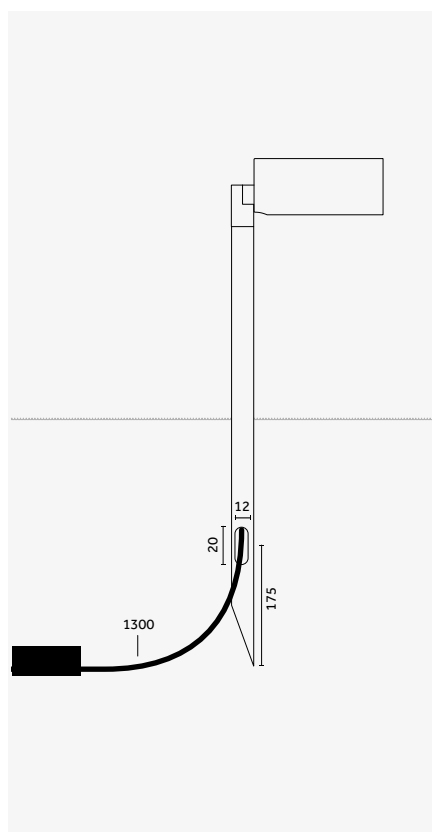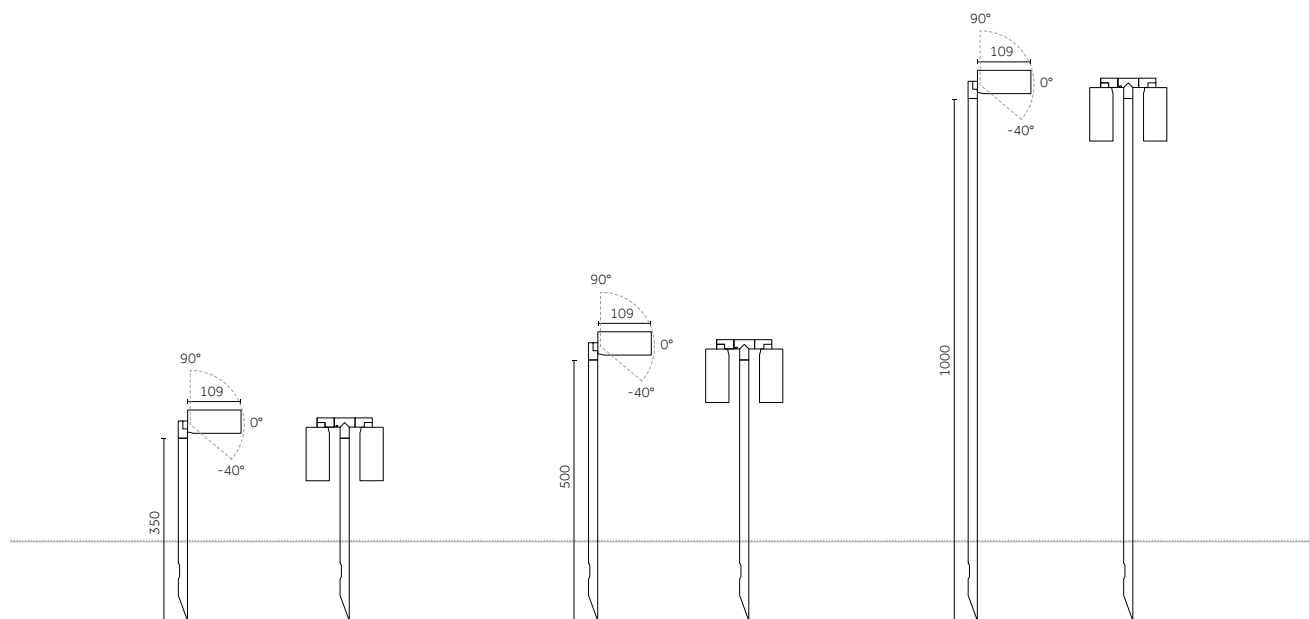



EN Cable length: 1,3m - Driver and connectors: p.52-55
IT Lunghezza cavo: 1,3m - Driver e connettori: p.52-55

EN Spike gamma
IT Gamma di picchetti


EN
IT

Antirotation and tubolars Antirrotazione e tubolari


Yori IP66

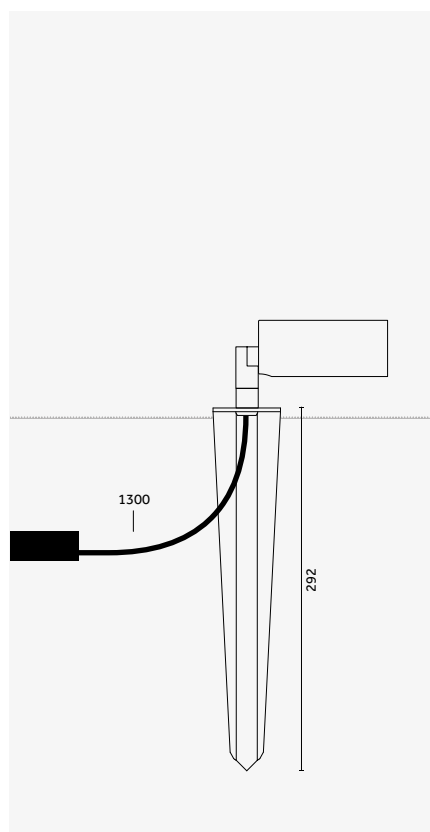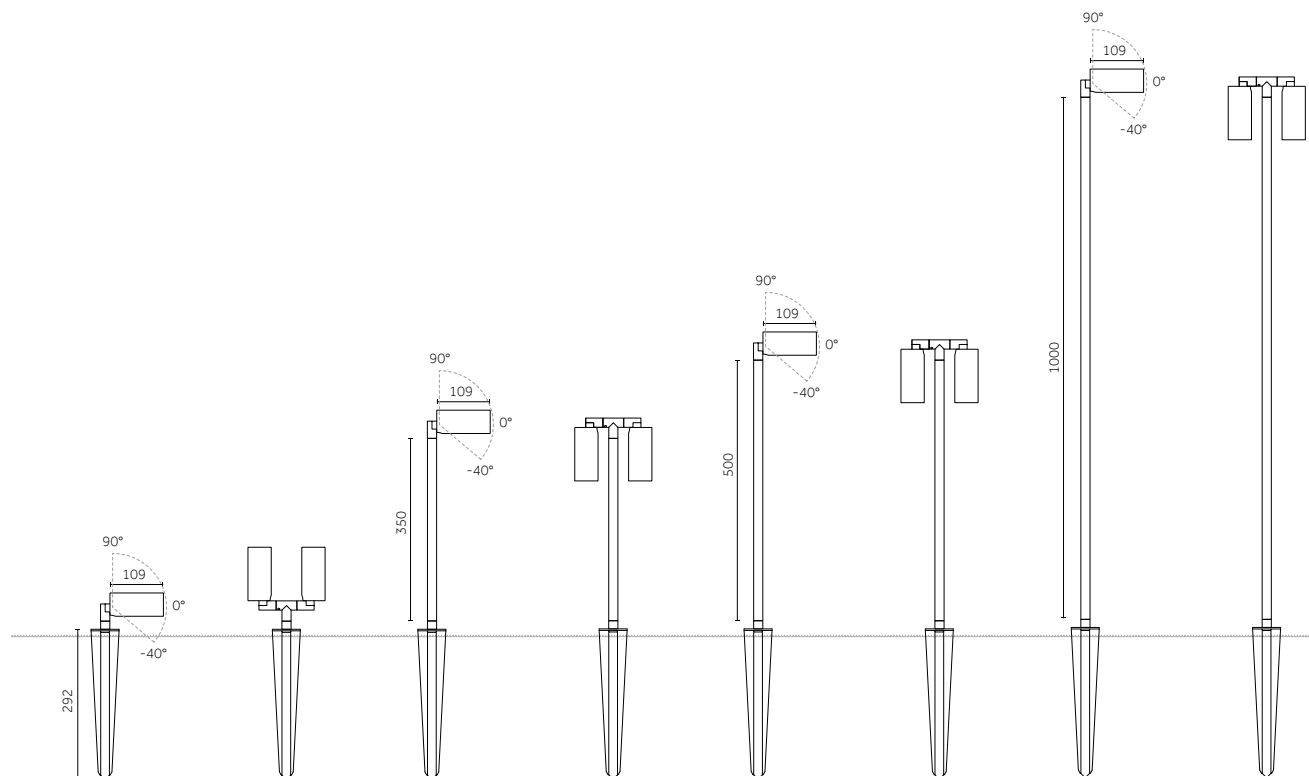

EN Cable length: 1,3m - Driver and connectors: p.52-55
IT Lunghezza cavo: 1,3m - Driver e connettori: p.52-55

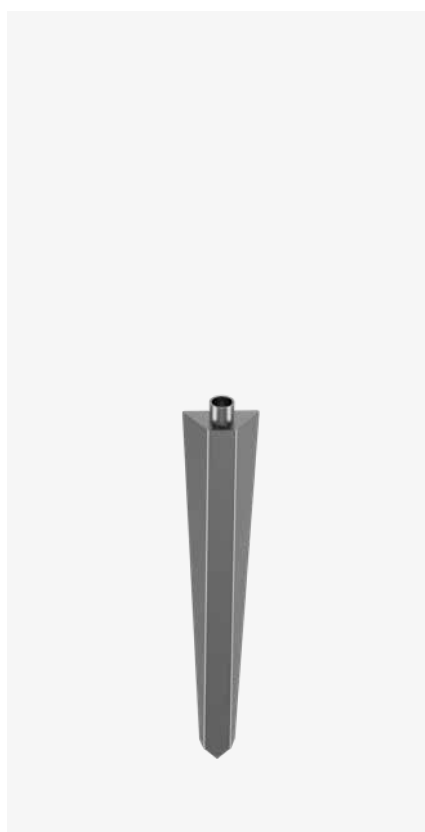

EN Antirotation
IT Antirrotazione

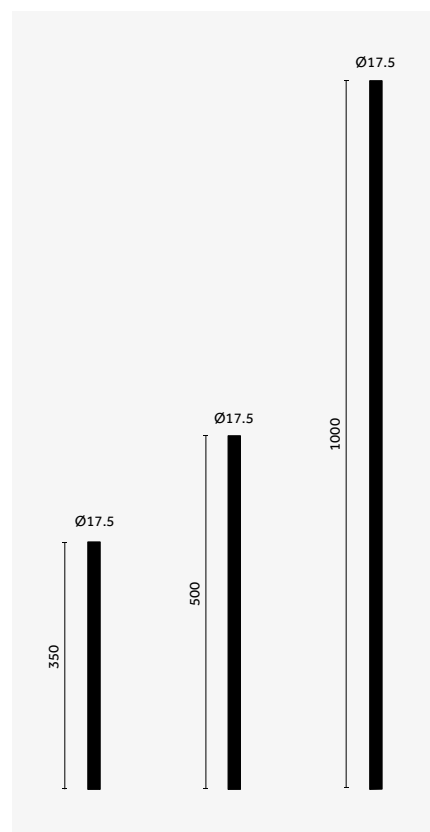




EN Tubolars in 3 different heights
IT Tubolari in 3 diverse altezze



^{EN} Total cable protection thanks to the inner built-in groove.
^{IT} Totale protezione del cavo grazie allo slot interno.



^{EN} Side slot to allow negative adjustment: -40° from the horizontal plane
^{IT} Fessura laterale per permettere orientamento negativo: -40° sull'asse orizzontale

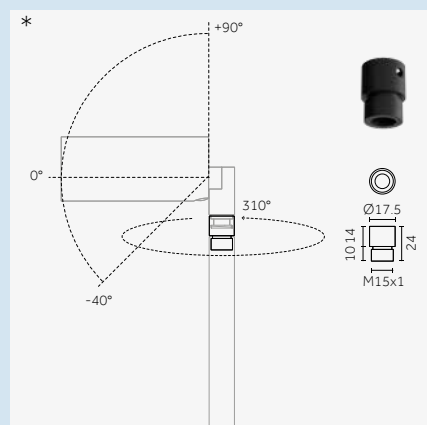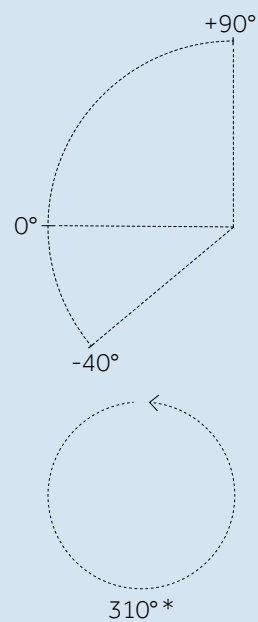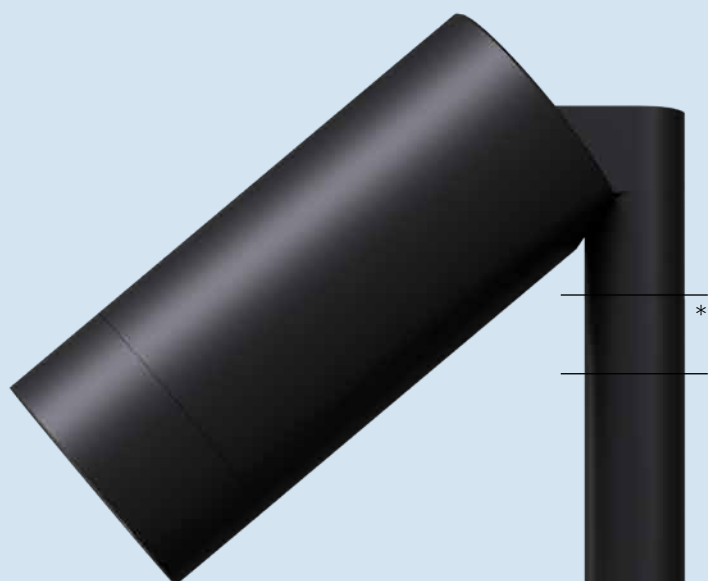



^{EN} Accessory: single head for spike mounting, with 310° rotation.

^{IT} Accessorio: testa singola per picchetto, con rotazione di 310°





EN Two different bases available for surface mountings. A standard base with rear cable entry and a base with side cable entry for rigid materials or not pierceable surfaces.

IT Disponibili due diverse basi per il montaggio a superficie. Base standard con ingresso cavi posteriore e base per ingresso cavi laterale per materiali rigidi o superfici non perforabili.

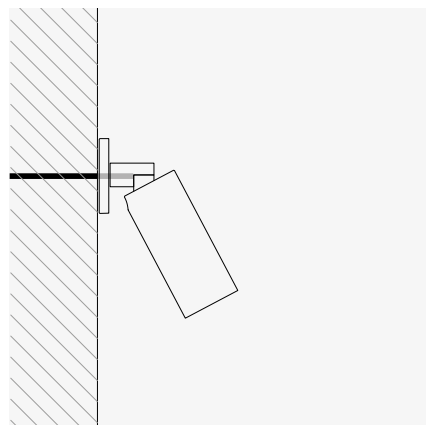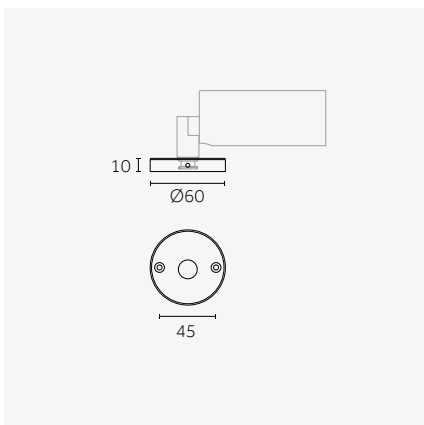

EN Base with rear cable entry

IT Basetta per cablaggio con entrata posteriore

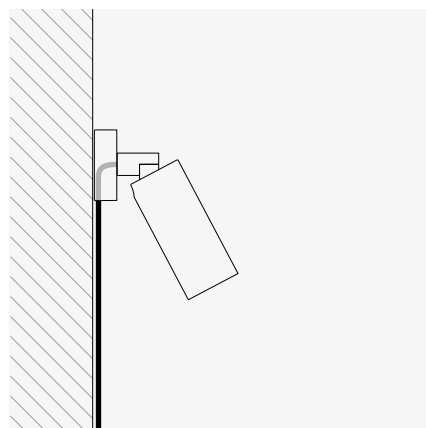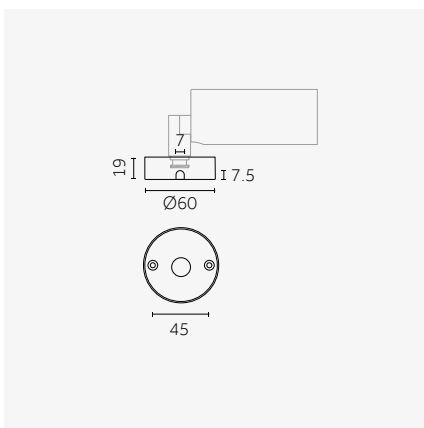

EN Base with side cable entry

IT Basetta per cablaggio con entrata laterale

- 8C Raw anodized/
Anodizzato naturale
- 48 Matte white/
Bianco opaco
- 8D Black anodized/
Anodizzato nero
- 8F Antiqued bronze (solid brass)/
Bronzo anticato (ottone massiccio)

- 8E Stainless steel (AISI 316)/
Acciaio inox (AISI 316)
- 9M Antiqued bronze/
Bronzo anticato
- 9N Olive green/
Verde oliva
- 9P Corten/
Corten

Finishes: upon request/
Finiture: su richiesta



- Copper/
Rame
- Champagne anodized/
Anodizzato champagne
- Titanium/
Titanio

EN If not specified, accessories are made of aluminium
IT Se non specificato, gli accessori sono in alluminio




EN Clamp for beams and structural bars with thicknesses up to 27mm.
Feed-through cable integrated in the clamp for clean fixing.

IT Clamp per fissaggio a travi e barre strutturali con spessori fino a 27mm.
Cavo di alimentazione passante e integrato nel morsetto per un'installazione pulita.

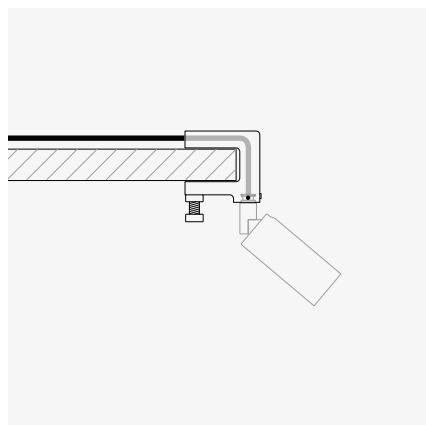
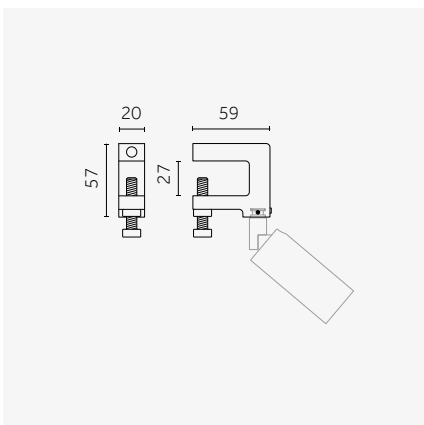


EN Beam clamp
IT Clamp per travi

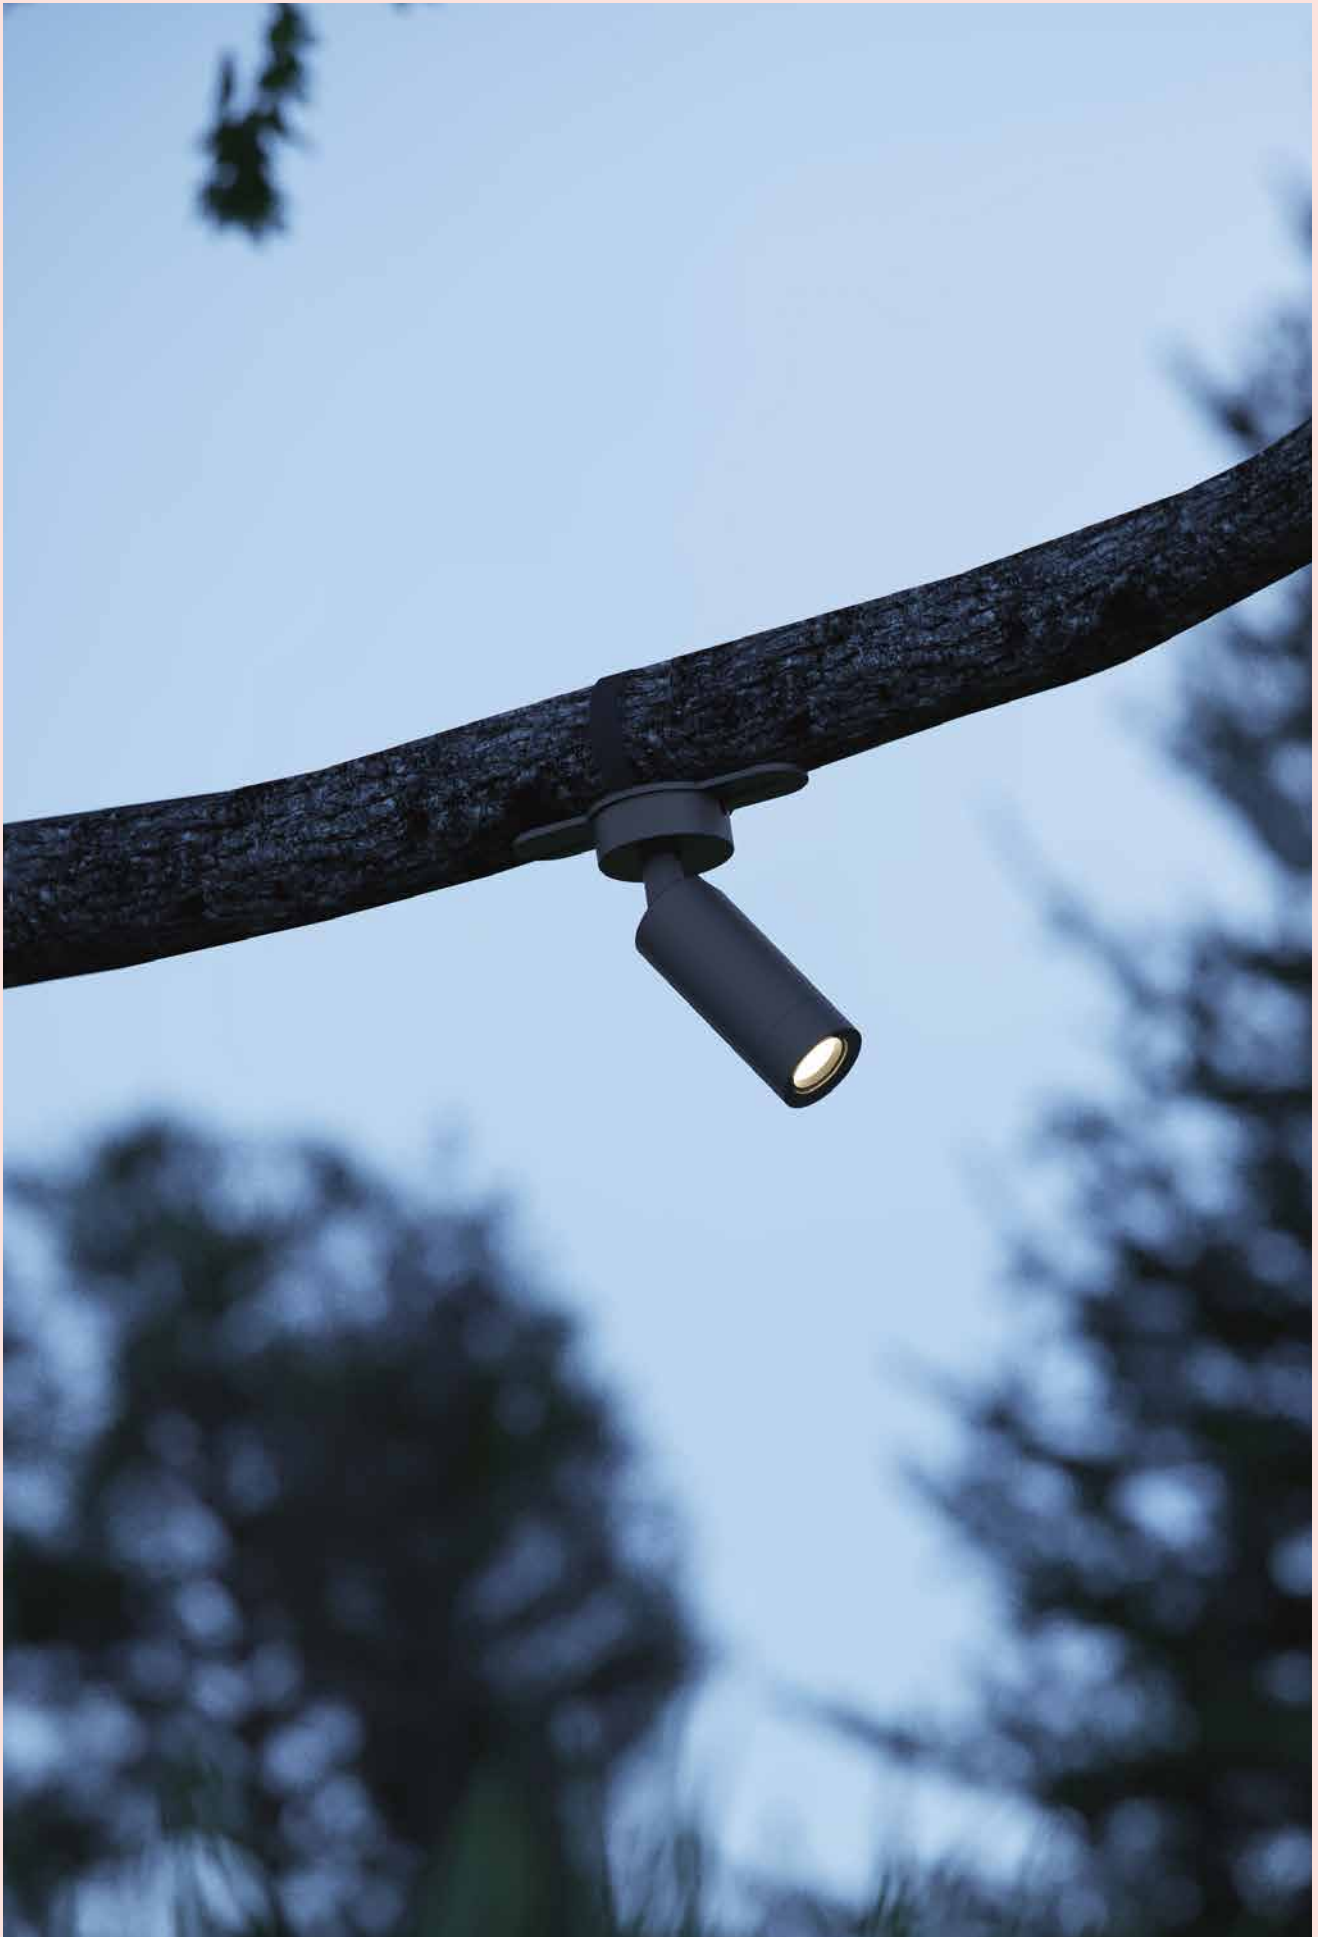


EN Accessory for fixing Yori IP66 to tree branches/trunks, with an elongated base to ensure complete stability and precise aiming.

IT Accessorio per fissaggio a rami/tronchi d'albero, con base allungata per garantire completa stabilità e puntamenti precisi.

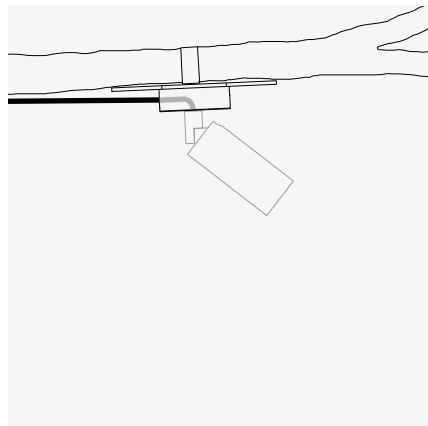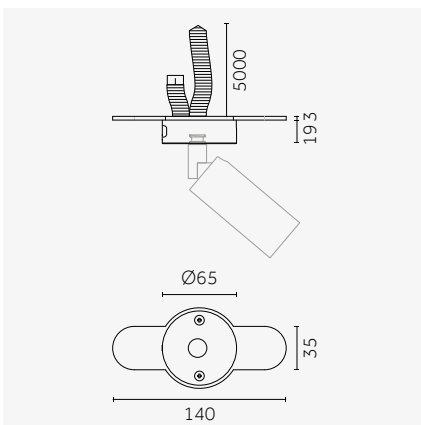

EN Tree strap with side cable entry.

IT Fascia per rami con passaggio cavo laterale.

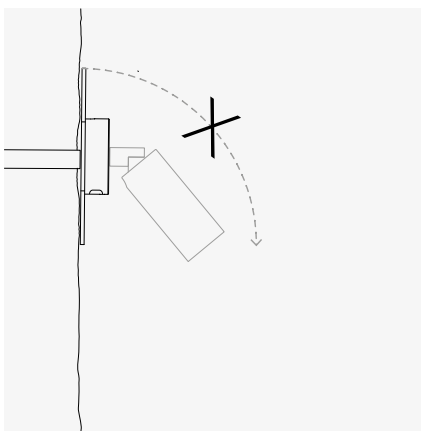

EN The elongated base guarantees stability and reduces the torsion / moment effect created by the weight of the product

IT La basetta allungata garantisce stabilità e riduce l'effetto torsione/momento creato dal peso del prodotto

8D Black anodized/
Anodizzato nero





■ 8D Black anodized/
Anodizzato nero

^{EN} The "tube clamp" accessory, thanks to the extendable stainless steel clamp, allows the mounting of Yori IP66 on structural pipes of different diameters (from Ø15 to Ø70).

^{IT} L'accessorio "tube clamp", grazie alla sua fascetta in acciaio inox allungabile, permette il montaggio di Yori IP66 su tubi strutturali di diversi diametri (da Ø15 a Ø70).




^{EN} Tube clamp
^{IT} Clamp per tubi

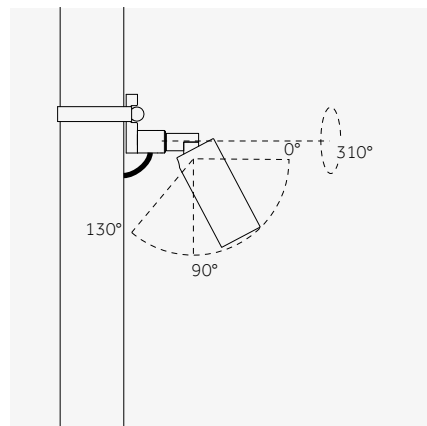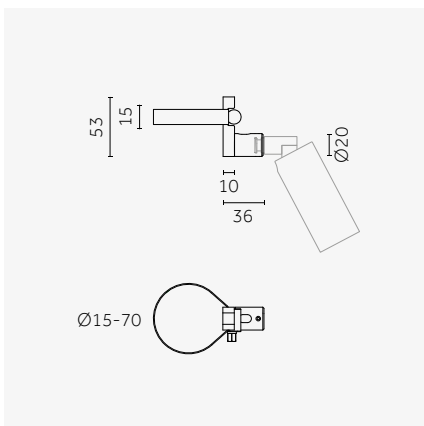

^{EN} Adjustability (0-130°) on horizontal axis and 310° on vertical axis
^{IT} Orientabilità (0-130°) su asse orizzontale e 310° su asse verticale








^{EN} Create your cluster by tube clamps.
^{IT} Crea il tuo cluster usando una serie di clamp.

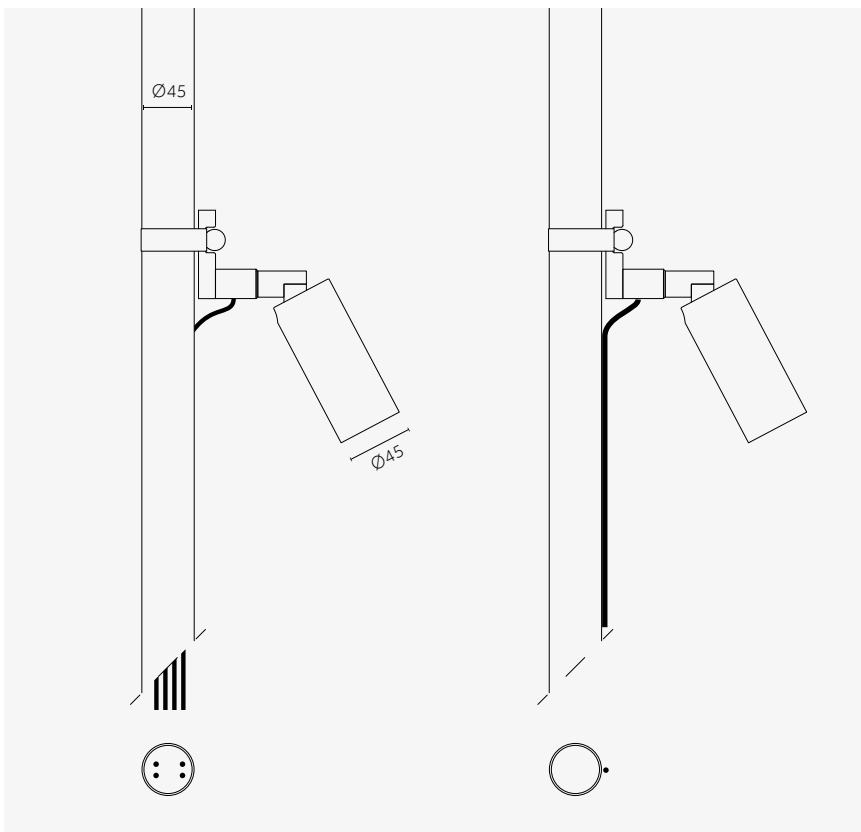

EN The cluster bar, allows a practical and elegant fixing of 4 projectors. Designed for a "clean" integration of the rear wiring, it is the ideal solution for installations on historic buildings or to highlight details of contemporary architecture.

IT La barra per cluster, permette un fissaggio pratico ed elegante di 4 proiettori. Studiata per una integrazione "pulita" dei cablaggi posteriori, è la soluzione ideale per installazioni su edifici storici o dettagli di architettura contemporanea.

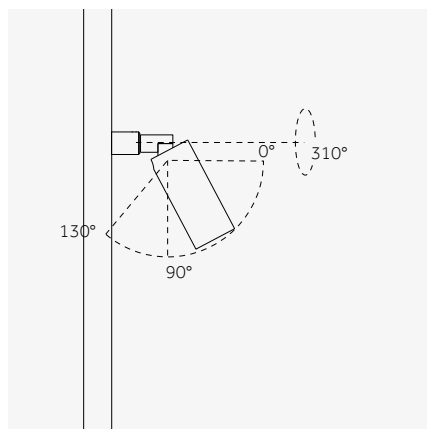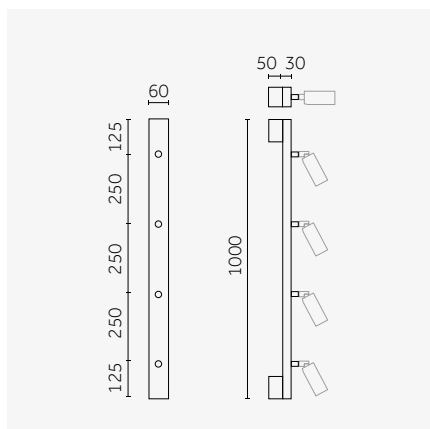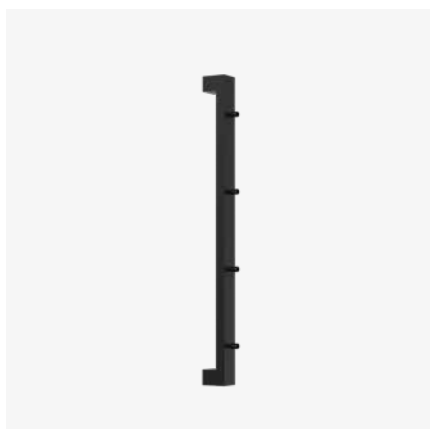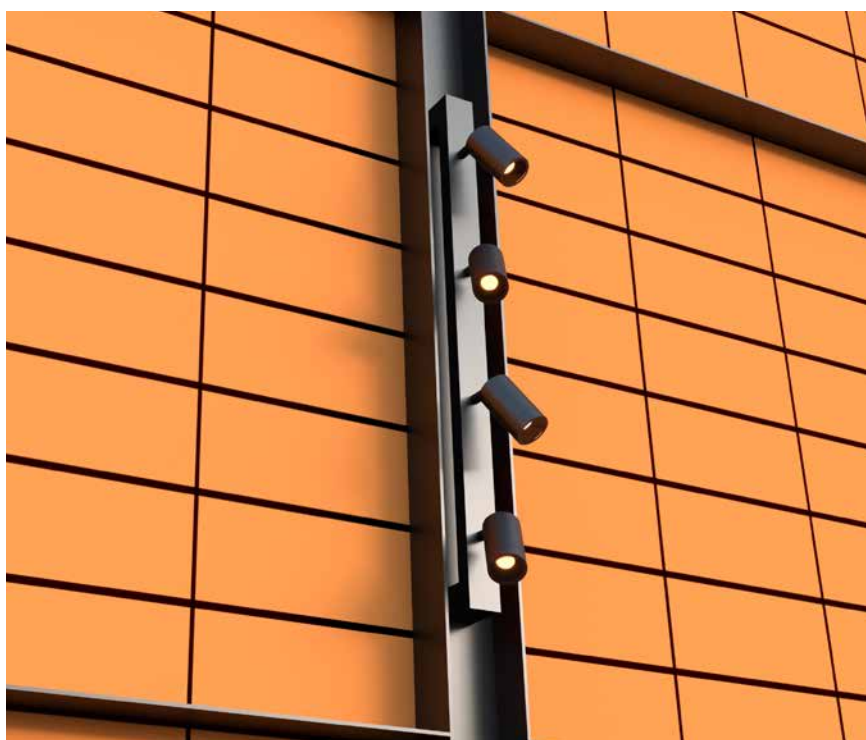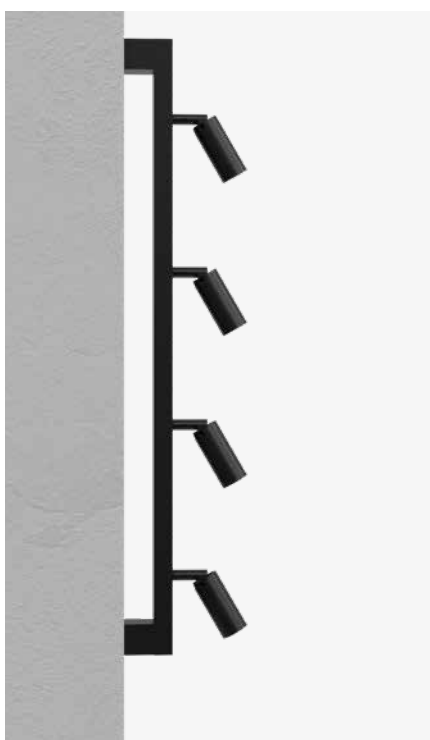

EN Cluster bar (custom length on request)

IT Barra per cluster (lunghezza custom su richiesta)



EN Adjustability (0-130°) on horizontal axis and 310° on vertical axis

IT Orientabilità (0-130°) su asse orizzontale e 310° su asse verticale

8D Black anodized/
Anodizzato nero


EN Wall-mounted arm for illuminating surfaces, signs, and architectural elements. It allows for simple, functional installation while enabling precise positioning of the light beam.

IT Braccio da parete per l'illuminazione di superfici, insegne ed elementi architettonici. Consente un'installazione semplice e funzionale, garantendo un posizionamento preciso del fascio luminoso.

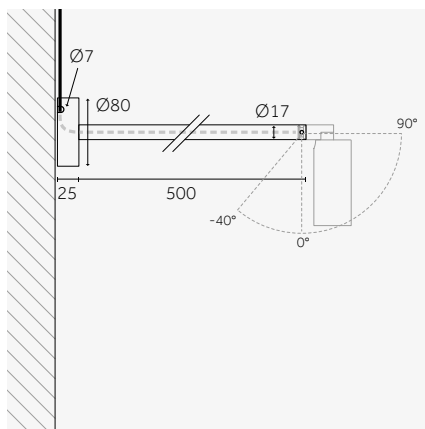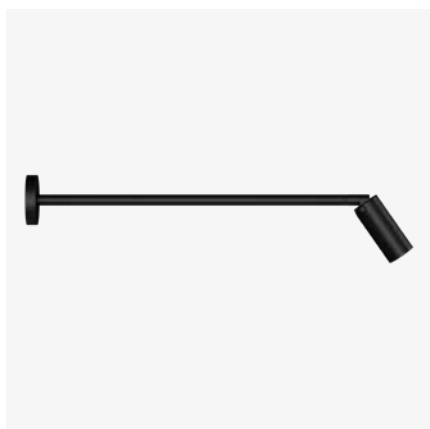

EN Wall-mounting arm with a base plate prepared for wiring and side cable entry.

IT Braccio per fissaggio a parete con basetta predisposta per il cablaggio e ingresso laterale.

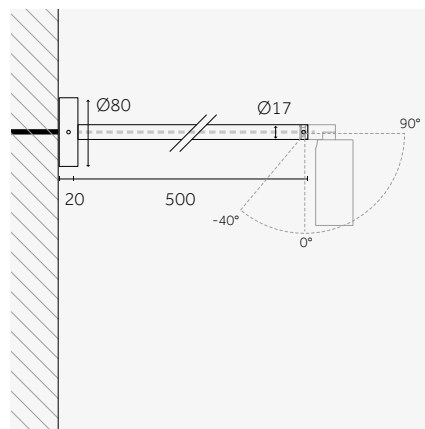

EN Wall-mounting arm with a base plate prepared for wiring and rear cable entry

IT Braccio per fissaggio a parete con basetta predisposta per il cablaggio e ingresso posteriore

■ 8D Black anodized/
Anodizzato nero

A quality light

^{EN} LED with CRI>90 making the whole range suitable for high-end applications. (CRI>80 on request for very high efficacy solutions).

^{IT} LED con CRI>90 disponibile per tutto il sistema, per garantire luce di qualità. (CRI>80 on request for very high efficacy solutions).

^{EN} Dark sky "compliant". No spillage of light above horizontal axis when the projector head is parallel to floor level. Very narrow beam allows for maximum glare control.

^{IT} Dark sky "compliant". Nessuna dispersione di luce sopra l'asse orizzontale quando la testa del proiettore è parallela al livello del pavimento. Il fascio molto stretto permette un controllo massimo dell'abbagliamento.







^{EN} Optic is positioned further back from external protective glass to allow maximum glare control regardless of the use of any accessory.

^{IT} Lottica arretrata rispetto al vetro di protezione esterno consente alto controllo dell'abbaglio anche senza alcun accessorio.

EN Precision lenses offer quality distribution of light and smooth edge beams in line with the standard Yori optics. The wide range of color temperatures with CRI >90 ensure high quality light and consistency between internal and outdoor spaces.

IT Le lenti ad alta precisione offrono una distribuzione di qualità della luce e fasci puliti, in linea con le tipiche ottiche Yori. L'ampia gamma di temperature di colore con CRI >90 garantisce luce di alta qualità e coerenza tra spazi interni ed esterni.

EN Optics
IT Ottiche

	A	B	E	H	M	N
Ø 45						
	10°	12°	27°	32°	15°x65°	65°x15°
Ø 60						
	11°	16°	24°	35°	34°x60°	60°x34°

EN Coloured temperature
IT Temperatura colore


			
2700K (CRI>90)	3000K (CRI>90)	4000K (CRI>90)	Warm Dimming 1800-3000K

^{EN} Yori IP66 is also available with different integrated accessories: selective filters to modify the color temperature of the LED to colored filters for optional light effects. Spread lens, honeycomb and anti-glare screens complete the range.

^{IT} Yori IP66 è disponibile anche con differenti accessori integrati: dai filtri selettivi per variare la temperatura colore del LED ai filtri colorati per opzionali effetti di luce. Lente diffondente, schermi alveolari e antiglare completano la gamma.



^{EN} Coloured filters
^{IT} Filtri colorati

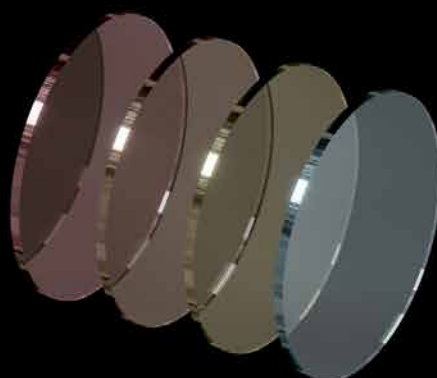

^{EN} Possibility to order Yori IP66 with two internal accessories.


^{IT} Possibilità di ordinare Yori IP66 con due accessori interni.



^{EN} The accessories are pre-mounted at the factory, see p. 50 to discover how to order your Yori IP66 with accessories.

^{IT} Gli accessori sono pre-montanti in fabbrica, vedi p. 50 per scoprire come ordinare il tuo Yori IP66 con accessori.

^{EN} Selective filters
^{IT} Filtri selettivi

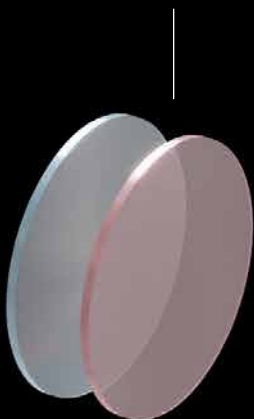



^{EN} Honeycomb and spread lens
^{IT} Griglia alveolare e lente diffondente



^{EN} Antiglare
^{IT} Antiglare



Ø 45 mm

Risk 1  0.36 | (8F) 0.99 | IP66 | IK07 |   850°  

Code example:

X . BR00 A . HW 8C

Finishes: p. 95-97

Electrical devices: p. 52


Photometric data:

www.reggiani.net

3 W POWER LED		Lumen maintenance: L80 B10=50,000 h / SDCM >3						
Driver	Version	Optics	LED	K	CRI	lm delivered up to:	Efficacy up to:	Finishes
X Not included Constant voltage (Vdc)	BR00	A 10° Very narrow	HW	2700	>90	200 lm	80 lm/W	8C
		B 12° Narrow	HQ	3000	>90	215 lm	85 lm/W	8D
		E 27° Medium	HN	4000	>90	244 lm	95 lm/W	8F
		H 32° Wide						48
		M 15°x65° Elliptical						8E
		N 65°x15° Elliptical						9M
								9N
								9P

4,5 W POWER LED		Lumen maintenance: L80 B10=50,000 h / SDCM >3						
Driver	Version	Optics	LED	K	CRI	lm delivered up to:	Efficacy up to:	Finishes
X Not included Constant voltage (Vdc)	BR01	B 12° Narrow	HW	2700	>90	304 lm	80 lm/W	8C
		E 27° Medium	HQ	3000	>90	327 lm	85 lm/W	8D
		H 32° Wide	HN	4000	>90	327 lm	85 lm/W	8F
		M 15°x65° Elliptical						48
		N 65°x15° Elliptical						8E
								9M
								9N
								9P

Ø 60 mm

Risk 1  0.57 | (8F) 1.68 | IP66 | IK07 |   850°  

Code example:

X . CR01 A . HW 8C

Finishes: p. 95-97

Electrical devices: p. 53-54

Photometric data:


www.reggiani.net

4,5 W POWER LED		Lumen maintenance: L80 B10=50,000 h / SDCM >3						
Driver	Version	Optics	LED	K	CRI	lm delivered up to:	Efficacy up to:	Finishes
X Not included Constant voltage (Vdc)	CR01	A 10° Very narrow	HW	2700	>90	397 lm	105 lm/W	8C
		B 16° Narrow	HQ	3000	>90	427 lm	110 lm/W	8D
		E 24° Medium	HN	4000	>90	461 lm	120 lm/W	8F
		H 35° Wide						48
		M 34°x60° Elliptical						8E
		N 60°x34° Elliptical						9M
								9N
								9P

9 W POWER LED		Lumen maintenance: L80 B10=50,000 h / SDCM >3						
Driver	Version	Optics	LED	K	CRI	lm delivered up to:	Efficacy up to:	Finishes
X Not included Constant voltage (Vdc)	CR02	A 10° Very narrow	HW	2700	>90	727 lm	95 lm/W	8C
		B 16° Narrow	HQ	3000	>90	782 lm	100 lm/W	8D
		E 24° Medium	HN	4000	>90	845 lm	105 lm/W	8F
		H 35° Wide						48
		M 34°x60° Elliptical						8E
		N 60°x34° Elliptical						9M
								9N
								9P

12 W		POWER LED		Lumen maintenance: L80 B10=50,000 h / SDCM >3					
Driver	Version	Optics	LED	K	CRI	lm delivered up to:	Efficacy up to:	Finishes	
X Not included Constant voltage (Vdc)	CR03	A 10° Very narrow	HW	2700	>90	952 lm	95 lm/W	8C	
		B 16° Narrow	HQ	3000	>90	1024 lm	100 lm/W	8D	
		E 24° Medium	HN	4000	>90	1106 lm	105 lm/W	48	
		H 35° Wide						9M	
		M 34°x60° Elliptical						9N	
		N 60°x34° Elliptical						9P	
6 W		Warm Dimming COB LED		Lumen maintenance: L70 B10=50,000 h / SDCM >3					
Driver	Version	Optics	LED	K	CRI	lm delivered up to:	Efficacy up to:	Finishes	
X Not included Constant current (mA)	CR0D	E 22° Medium	DT	1800-3000	>90	445 lm	75 lm/W	8C	
		H 34° Wide						8D	
								8F	
								48	
								8E	
								9M	
								9N	
								9P	

Ø 45 mm | Accessories



Description


Ø 45 mm Snoot 45°/
Ø 45 mm Snoot 45°

Code

0.27404.00

Finishes

8D



Description

Ø 45 mm Snoot/
Ø 45 mm Snoot


Code

0.27405.00

Finishes

8D

Ø 60 mm | Accessories



Description


Ø 60 mm Snoot 45°/
Ø 60 mm Snoot 45°

Code

0.27406.00

Finishes

8D



Description

Ø 60 mm Snoot/
Ø 60 mm Snoot


Code

0.27407.00

Finishes

8D


Ø 45 mm | Ø 60 mm | Accessories



Description
Double head for spike/
Testa doppia per picchetto

Code
0.27402.00


Finishes
8D



Description
Single head for spike mounting, with 310° rotation/
Testa singola per picchetto, con rotazione di 310°

Code
0.27434.00


Finishes
8D



Description
Spike 350 mm/
Picchetto 350 mm

Code
0.27411.00


Finishes
8D



Description
Spike 500 mm/
Picchetto 500 mm

Code
0.27412.00


Finishes
8D



Description
Spike 1000 mm/
Picchetto 1000 mm

Code
0.27413.00

Finishes
8D



Description
Pole 350 mm/
Tubolare 350 mm

Code
0.27420.00

Finishes
8D



Description
Pole 500 mm/
Tubolare 500 mm

Code
0.27421.00


Finishes
8D



Description
Pole 1000 mm/
Tubolare 1000 mm


Code
0.27422.00

Finishes
8D



Description
Antirotation spike/
Picchetto antirotazione

Code
0.27414.0000




Description

Base/
Base

Code
0.27410.00

Finishes

8C
8D
8F
48
8E
9M
9N
9P




Description

Base with side cable entry/
Base con entrata cavo laterale

Code
0.27415.00

Finishes

8C
8D
8F
48
8E
9M
9N
9P




Description

Beam clamp/
Clamp per travi

Code
0.27403.00

Finishes

8D




Description

Tube clamp/
Clamp per tubi

Code
0.27401.00

Finishes

8D





Description

Tree strap/
Fascia per rami

Code
0.27417.00

Finishes


8D



Description
Metal bar for cluster fixing (4X)/
Barra metallica per fissaggio in cluster (4X)
*Special finish/
Finitura speciale

Code
0.27418.00


Finishes
8D



Description
Wall-mounting arm with a base plate prepared for wiring and rear cable entry/
Braccio per fissaggio a parete con basetta predisposta per il cablaggio e ingresso posteriore

Code
0.27455.00

Finishes
8D



Description
Wall-mounting arm with a base plate prepared for wiring and side cable entry/
Braccio per fissaggio a parete con basetta predisposta per il cablaggio e ingresso laterale

Code
0.27456.00

Finishes
8D

Internal accessories

EN Internal accessories are pre-mounted at the factory.

To specify Yori IP66 with an internal accessory:

- choose your product;
- choose one internal accessory;
- add the accessory code to the end of the product code.

IT Gli accessori interni sono integrati nel prodotto.

Per ordinare Yori IP66 con un accessorio interno:

- scegli il tuo prodotto;
- scegli un accessorio interno;
- aggiungi il codice accessorio alla fine del codice prodotto.



Examples:

Product code:

X.BR00A.HW8D

X.BR00A.HW8D

Accessory code:

.20K (Selective filter 2700-2000 K)

.S (Spread lens)

Product with accessory:

X.BR00A.HW8D.**.20K**

X.BR00A.HW8D.**.S**

EN To order two accessories select:

- one selective or colored filter (ie .20K);
- one honeycomb and accessories (ie .H);
- add the two codes to the end of the product code.

IT Per ordinare due accessori selezionare:

- un filtro selettivo o colorato (es. .20K);
- una griglia alveolare e accessori (es. .H);
- aggiungere i due codici alla fine del codice prodotto.



Example:

Product code:

X.BR00A.HW8D

(Yori IP66)

Accessory 1:

.20K

(Selective filter 2700-2000 K)

Accessory 2:

H

(Honeycomb)

Product with 2 accessories:

X.BR00A.HW8D.**.20KH**

Ø 45 mm | Ø 60 mm | Internal accessories

Selective and colored filters/ Filtri selettivi e colorati



Description	Code
Selective filter 2700-2000 K/ Filtro selettivo 2700-2000 K	<u>.20K</u>



Description	Code
Selective filter 2700-2200K/ Filtro selettivo 2700-2200K	<u>.22K</u>



Description	Code
Selective filter 2700-2500 K/ Filtro selettivo 2700-2500 K	<u>.25K</u>



Description	Code
Selective filter 3000-3500 K/ Filtro selettivo 3000-3500 K	<u>.35K</u>



Description	Code
Colored glass filter red/ Filtro colorato rosso	<u>.4A*</u>
*(On request)/ *(Su richiesta)	



Description	Code
Colored glass filter blue/ Filtro colorato blu	<u>.6A*</u>
*(On request)/ *(Su richiesta)	

Lens and accessories/ Lenti e accessori



Description	Code
Spread lens/ Lente diffondente	<u>.S</u>



Description	Code
Honeycomb/ Griglia alveolare	<u>.H</u>



Description	Code
Antiglare/ Antiglare	<u>.A</u>
Available only for Ø60mm/ Disponibile solo per Ø60mm	

Electrical devices

Ø45 mm | Electrical devices

Driver/ Alimentazioni

3 W POWER LED

Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
On/Off	0.30524.0000	14 W		67	220-240 Vac / 50/60 Hz	24 Vdc	Max: 3	See table: p. 57	See table: p. 57
On/Off	0.30525.0000	60 W		67	220-240 Vac / 0/0/50/60 Hz	24 Vdc	Max: 16	See table: p. 57	See table: p. 57
On/Off	0.30534.0000	100 W		67	220-240 Vac / 0/0/50/60 Hz	24 Vdc	Max: 27	See table: p. 57	See table: p. 57
On/Off	0.30526.0000	160 W		67	220-240 Vac / 0/0/50/60 Hz	24 Vdc	Max: 45	See table: p. 57	See table: p. 57
DALI	D.30524.0000	30 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 8	See table: p. 57	See table: p. 57
DALI	D.30525.0000	60 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 17	See table: p. 57	See table: p. 57
DALI	D.30534.0000	100 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 27	See table: p. 57	See table: p. 57
DALI	D.30526.0000	160 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 45	See table: p. 57	See table: p. 57

4,5 W POWER LED

Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
On/Off	0.30524.0000	14 W		67	220-240 Vac / 50/60 Hz	24 Vdc	Max: 2	See table: p. 57	See table: p. 57
On/Off	0.30525.0000	60 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 11	See table: p. 57	See table: p. 57
On/Off	0.30534.0000	100 W		67	220-240 Vac / 0/0/50/60 Hz	24 Vdc	Max: 18	See table: p. 57	See table: p. 57
On/Off	0.30526.0000	160 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 30	See table: p. 57	See table: p. 57
DALI	D.30524.0000	30 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 5	See table: p. 57	See table: p. 57
DALI	D.30525.0000	60 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 11	See table: p. 57	See table: p. 57
DALI	D.30534.0000	100 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 18	See table: p. 57	See table: p. 57
DALI	D.30526.0000	160 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 30	See table: p. 57	See table: p. 57

Dimmer 0-10V/ Dimmer 0-10V

3 W POWER LED

Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
Dimm 1-10V	Y.30826.0-10	150 W		20	24 Vdc	24 Vdc	Max: 40	See table: p. 57	See table: p. 57

4,5 W POWER LED

Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
Dimm 1-10V	Y.30826.0-10	150 W		20	24 Vdc	24 Vdc	Max: 28	See table: p. 57	See table: p. 57

Ø60 mm | Electrical devices

Driver/ Alimentazioni

4,5 W POWERLED									
Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
On/Off	0.30524.0000	14 W		67	220-240 Vac / 50/60 Hz	24 Vdc	Max: 2	See table: p. 57	See table: p. 57
On/Off	0.30525.0000	60 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 11	See table: p. 57	See table: p. 57
On/Off	0.30534.0000	100 W		67	220-240 Vac / 0/0/50/60 Hz	24 Vdc	Max: 18	See table: p. 57	See table: p. 57
On/Off	0.30526.0000	160 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 30	See table: p. 57	See table: p. 57
DALI	D.30524.0000	30 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 5	See table: p. 57	See table: p. 57
DALI	D.30525.0000	60 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 11	See table: p. 57	See table: p. 57
DALI	D.30534.0000	100 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 18	See table: p. 57	See table: p. 57
DALI	D.30526.0000	160 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 30	See table: p. 57	See table: p. 57
9 W POWERLED									
Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
On/Off	0.30524.0000	14 W		67	220-240 Vac / 50/60 Hz	24 Vdc	Max: 1	See table: p. 57	See table: p. 57
On/Off	0.30525.0000	60 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 5	See table: p. 57	See table: p. 57
On/Off	0.30534.0000	100 W		67	220-240 Vac / 0/0/50/60 Hz	24 Vdc	Max: 9	See table: p. 57	See table: p. 57
On/Off	0.30526.0000	160 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 15	See table: p. 57	See table: p. 57
DALI	D.30524.0000	30 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 2	See table: p. 57	See table: p. 57
DALI	D.30525.0000	60 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 5	See table: p. 57	See table: p. 57
DALI	D.30534.0000	100 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 9	See table: p. 57	See table: p. 57
DALI	D.30526.0000	160 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 14	See table: p. 57	See table: p. 57
12 W POWERLED									
Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
On/Off	0.30524.0000	14 W		67	220-240 Vac / 50/60 Hz	24 Vdc	Max: 1	See table: p. 57	See table: p. 57
On/Off	0.30525.0000	60 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 4	See table: p. 57	See table: p. 57
On/Off	0.30534.0000	100 W		67	220-240 Vac / 0/0/50/60 Hz	24 Vdc	Max: 7	See table: p. 57	See table: p. 57
On/Off	0.30526.0000	160 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 11	See table: p. 57	See table: p. 57
DALI	D.30524.0000	30 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 2	See table: p. 57	See table: p. 57
DALI	D.30525.0000	60 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 4	See table: p. 57	See table: p. 57
DALI	D.30534.0000	100 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 7	See table: p. 57	See table: p. 57
DALI	D.30526.0000	160 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 11	See table: p. 57	See table: p. 57
6 W Warm Dimming COB LED									
Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
DALI	D.30527.0000	15 W		68	110-240V / 0/50/60 Hz	350 mA	Max: 2	See table: p. 57	See table: p. 57

Ø60 mm | Electrical devices


Dimmer 0-10V/
Dimmer 0-10V

4,5 W POWER LED									
Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
Dimm 1-10V	Y.30826.0-10	150 W		20	24 Vdc	24 Vdc	Max: 28	See table: p. 57	See table: p. 57

9 W POWER LED									
Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
Dimm 1-10V	Y.30826.0-10	150 W		20	24 Vdc	24 Vdc	Max: 14	See table: p. 57	See table: p. 57


12 W POWER LED									
Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
Dimm 1-10V	Y.30826.0-10	150 W		20	24 Vdc	24 Vdc	Max: 10	See table: p. 57	See table: p. 57

Ø 45 mm | Ø 60 mm | Cables and connectors




Description
Cable 0,5 mmq 5 m/
Cavo 0,5 mmq 5 m

Code
0.27450.0000




Description
Cable 0,5 mmq 10 m/
Cavo 0,5 mmq 10 m

Code
0.27451.0000




Description
Cable 0,5 mmq 15 m/
Cavo 0,5 mmq 15 m

Code
0.27452.0000




Description
Cable 0,5 mmq 20 m/
Cavo 0,5 mmq 20 m

Code
0.27453.0000




Description
Cable 0,5 mmq 25 m/
Cavo 0,5 mmq 25 m

Code
0.27454.0000




Description
Cable connector 0,5 mmq (2 way)/
Connettore per cavo 0,5 mmq (2 vie)

Code
0.27440.0000




Description
Cable connector 0,5 mmq (3 way) T/
Connettore per cavo 0,5 mmq (3 vie) T

Code
0.27441.0000




Description
Cable connector 2,5 mmq (2 way)/
Connettore per cavo 2,5 mmq (2 vie)

Code
0.27430.0000




Description
Cable connector 2,5 mmq (3 way) T/
Connettore per cavo 2,5 mmq (3 vie) T

Code
0.27431.0000




Description
Cable connector 2,5 mmq (3 way) Y/
Connettore per cavo 2,5 mmq (3 vie) Y

Code
0.27432.0000




Description
Cable connector 2,5 mmq (4 way)/
Connettore per cavo 2,5 mmq (4 vie)

Code
0.27433.0000




Description
Cable connector 4 mmq (2 way)/
Connettore per cavo 4 mmq (2 vie)

Code
0.27447.0000



Description
Cable connector 4 mmq (3 way) T/
Connettore per cavo 4 mmq (3 vie) T

Code
0.27448.0000



Description
Cable connector 4 mmq (4 way)/
Connettore per cavo 4 mmq (4 vie)

Code
0.27449.0000

Wiring examples


Loop in loop out/
Loop in loop out/

Code Driver	Watt	Cable section	Cable length max
0.30524.0000	14 W	0,5 mmq	15 m
		1,5 mmq	35 m
		2,5 mmq	50 m
		4 mmq	100 m
0.30525.0000	60 W	0,5 mmq	5 m
		1,5 mmq	10 m
		2,5 mmq	20 m
		4 mmq	40 m
0.30534.0000	100 W	0,5 mmq	5 m
		1,5 mmq	10 m
		2,5 mmq	20 m
		4 mmq	40 m
0.30526.0000	160 W	0,5 mmq	—
		1,5 mmq	5 m
		2,5 mmq	7,5 m
		4 mmq	17,5 m

Code Dimmer	Watt	Cable section	Cable length max
D.30524.0000	30 W	0,5 mmq	15 m
		1,5 mmq	35 m
		2,5 mmq	50 m
		4 mmq	100 m
D.30525.0000	60 W	0,5 mmq	5 m
		1,5 mmq	10 m
		2,5 mmq	20 m
		4 mmq	40 m
D.30534.0000	100 W	0,5 mmq	5 m
		1,5 mmq	10 m
		2,5 mmq	20 m
		4 mmq	40 m
D.30526.0000	160 W	0,5 mmq	—
		1,5 mmq	5 m
		2,5 mmq	7,5 m
		4 mmq	17,5 m

Notes:

Recommended cable section in relation to the voltage drop/
Sezione del cavo consigliata in rapporto alla caduta di tensione

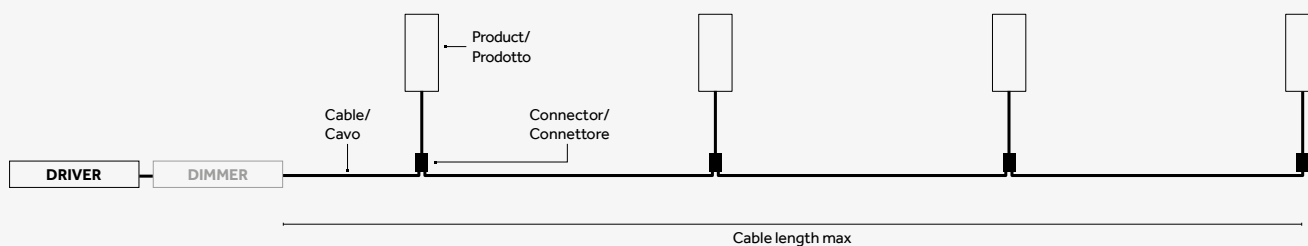


With central driver/ Con driver centrale/

Total product consumption (Watt)

Cable section	Yori IP66 Ø45mm	
	3 W	4,5 W
0,5 mmq	Max 60 m	Max 40 m
1,5 mmq	Max 160 m	Max 110 m
2,5 mmq	Max 500 m	Max 325 m
4 mmq	Max 750 m	Max 550 m



	Yori IP66 Ø60mm		
	4,5 W	9 W	12 W
	Max 40 m	Max 25 m	Max 15 m
	Max 110 m	Max 70 m	Max 50 m
	Max 325 m	Max 200 m	Max 125 m
	Max 550 m	Max 325 m	Max 200 m

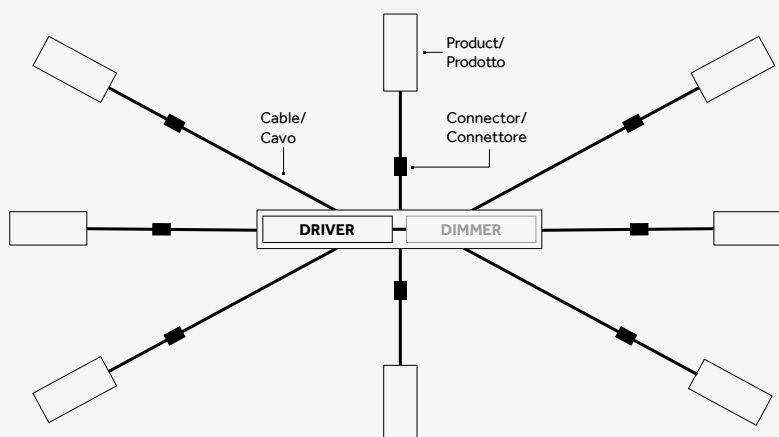

Yori IP66

Surface/Pendant

Yori IP66 Surface/Pendant

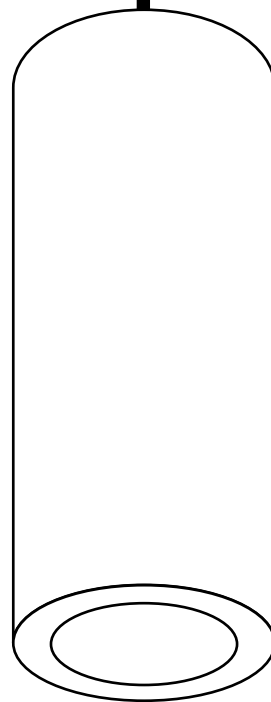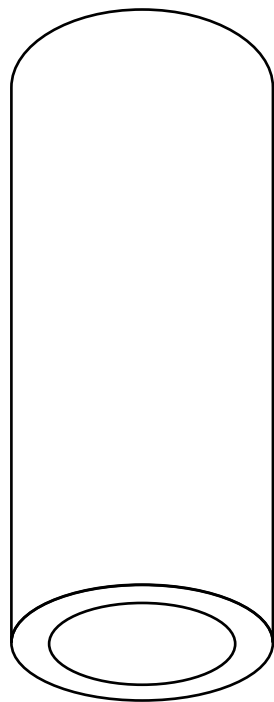

EN Yori IP66 Surface/Pendant is the outdoor version of the standard indoor Yori Surface/Pendant. With a large selection of finishes and excellent performances, it's the ideal solution for high-end exterior projects. Its wide range of optics and color temperatures (CRI>90) guarantees total consistency between interior and exterior spaces.

IT Yori IP66 Surface/Pendant è la versione per esterni della gamma Yori. Con eccellenti prestazioni illuminotecniche e un'incredibile varietà di finiture è la soluzione ideale per aree esterne high-end. L'ampia gamma di ottiche e temperature di colore (CRI>90) garantiscono totale coerenza tra gli ambienti (interni/esterni).



Versions/ Versioni				
Yori IP66 Surface/Pendant				
	Ø45	Ø60		
Finishes/ Finiture If not specified, the product is made of aluminium/ Se non specificato, il prodotto è in alluminio				
	8C Raw anodized/ Anodizzato naturale	4B Matte white/ Bianco opaco	8D Black anodized/ Anodizzato nero	8F Antiqued bronze (solid brass)/ Bronzo anticato (ottone massiccio)
				
	8E Stainless steel (AISI 316)/ Acciaio inox (AISI 316)	9M Antiqued bronze/ Bronzo anticato	9N Olive green/ Verde oliva	9P Corten/ Corten
Finishes upon request (minimum quantity required)/ Finiture su richiesta (quantitativo minimo richiesto)				
	Copper/ Rame	Champagne anodized/ Anodizzato champagne	Titanium/ Titanio	
IP / IK	66 / 07			
Control systems	On/Off; DALI; 1-10V			
Insulation class				
Certifications	CE UK ENEC			




	Ø 45 mm	Ø 60 mm
Yori IP66 Surface / Pendant	 p.66	 p.66
△	10°; 12°; 27°; 32°; 15°x65°; 65°x15°	10°; 16°; 24°; 35°; 34°x60°; 60°x34°
Light source/ Sorgente luminosa	● POWER LED 3 W; 4,5 W 200 lm - 327 lm L80 B10=50,000 h 2700 K; 3000 K; 4000 K SDCM <3 CRI >90	● POWER LED 4,5 W; 9 W; 12 W 397 lm - 1106 lm L80 B10=50,000 h 2700 K; 3000 K; 4000 K SDCM <3 CRI >90 ● Warm Dimming COB LED 6 W 445 lm L70 B10=50,000 h 1800 K - 3000 K SDCM <3 CRI >90

Make it pendant



EN Transform Yori Surface in a suspension thanks to the pendant accessories.
Available for both versions, Ø45 and Ø60mm in all finishes. *The (Ø60) stainless steel
version features a steel support cable to ensure maximum stability.


IT Trasforma Yori Surface in una sospensione grazie agli appositi accessori di
pendinamento, disponibili sia per la versione Ø45 che Ø60 e nell'intera gamma di
finiture. *La versione in acciaio inox (Ø60) presenta un cavo di supporto in acciaio per
garantire totale stabilità.

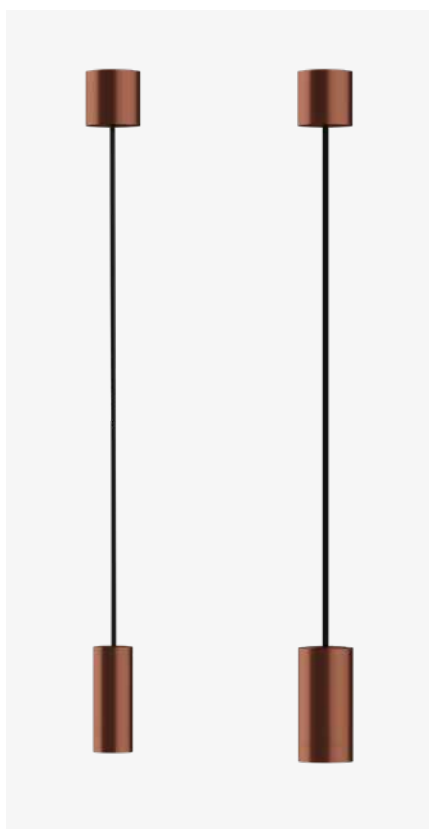


EN Yori Surface Ø45 with pendant accessory
IT Yori Surface Ø45 con accessorio pendant



EN Pendant base with stainless steel (AISI 316) support
cable for Yori Surface
IT Rosone con cavo metallico di sostegno per Yori
Surface in acciaio inox (AISI 316)

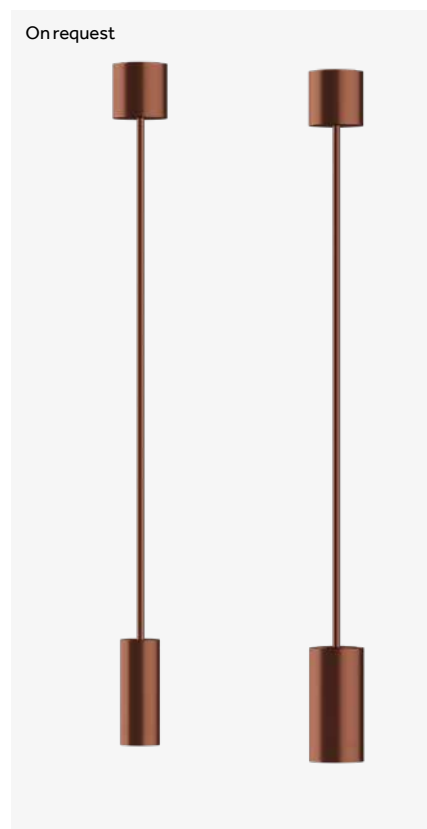


EN Rod fixing on request
IT Tige di fissaggio su richiesta

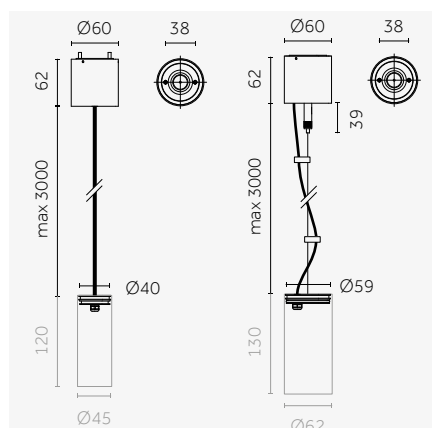

EN Pendant base standard
IT Rosone standard



EN Dettaglio su attacco cavo di sostegno
IT Detail on the steel cable connection

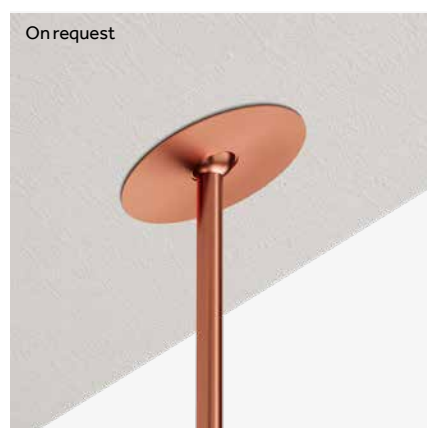

EN Accessory with rigid rod for sloped ceilings,
available upon request
IT Accessorio con tige rigida per soffitti inclinati,
disponibile su richiesta

Ø45mm



8C

48

8D

8E

9M

9N

9P

Finishes: upon request/
Finiture: su richiesta

- 8C** Raw anodized/
Anodizzato naturale
- 48** Matte white/
Bianco opaco
- 8D** Black anodized/
Anodizzato nero
- 8E** Stainless steel (AISI 316)/
Acciaio inox (AISI 316)


- 9M** Antiqued bronze/
Bronzo anticato
- 9N** Olive green/
Verde oliva
- 9P** Corten/
Corten

- Copper/**
Rame
- Champagne anodized/**
Anodizzato champagne
- Titanium/**
Titanio

^{EN} If not specified, accessories are made of aluminium

^{IT} Se non specificato, gli accessori sono in alluminio

Ø60mm

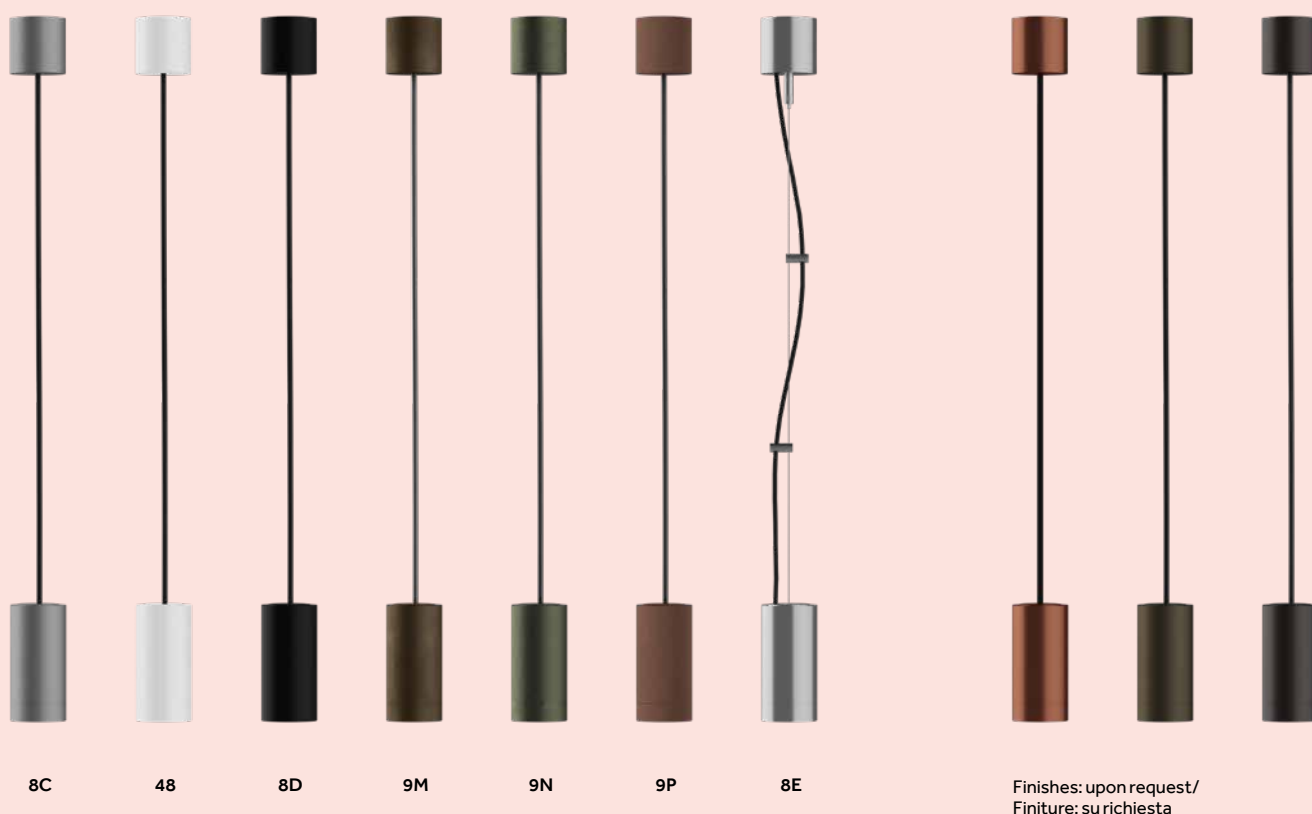

Finishes: upon request/
Finiture: su richiesta

8C Raw anodized/
Anodizzato naturale

48 Matte white/
Bianco opaco

8D Black anodized/
Anodizzato nero

8E Stainless steel (AISI 316)/
Acciaio inox (AISI 316)

9M Antiqued bronze/
Bronzo anticato

9N Olive green/
Verde oliva

9P Corten/
Corten

Copper/
Rame

Champagne anodized/
Anodizzato champagne


Titanium/
Titanio

^{EN} If not specified, accessories are made of aluminium

^{IT} Se non specificato, gli accessori sono in alluminio

Ø 45 mm

Risk 1 0.42 | (8F) 1.18 IP66 IK07 850°



Code example:

X . GR00 A . HW 8C

Finishes: p. 95-97

Electrical devices: p. 72

Photometric data:

www.reggiani.net

3 W POWER LED

Lumen maintenance: L80 B10=50,000 h / SDCM >3

Driver	Version	Optics	LED	K	CRI	lm delivered up to:	Efficacy up to:	Finishes
X Not included	GR00	A 10° Very narrow	HW	2700	>90	200 lm	80 lm/W	8C
Constant voltage (Vdc)		B 12° Narrow	HQ	3000	>90	215 lm	85 lm/W	8D
		E 27° Medium	HN	4000	>90	244 lm	95 lm/W	8F
		H 32° Wide						48
		M 15°x65° Elliptical						8E
								9M
								9N
								9P

4,5 W POWER LED

Lumen maintenance: L80 B10=50,000 h / SDCM >3

Driver	Version	Optics	LED	K	CRI	lm delivered up to:	Efficacy up to:	Finishes
X Not included	GR01	B 12° Narrow	HW	2700	>90	304 lm	80 lm/W	8C
Constant voltage (Vdc)		E 27° Medium	HQ	3000	>90	327 lm	85 lm/W	8D
		H 32° Wide	HN	4000	>90	327 lm	85 lm/W	8F
		M 15°x65° Elliptical						48
								8E
								9M
								9N
								9P

Ø 60 mm

Risk 1 0.63 | (8F) 1.77 IP66 IK07 850°



Code example:

X . FR01 A . HW 8C

Finishes: p. 95-97

Electrical devices: p. 73-74

Photometric data:

www.reggiani.net

4,5 W POWER LED

Lumen maintenance: L80 B10=50,000 h / SDCM >3

Driver	Version	Optics	LED	K	CRI	lm delivered up to:	Efficacy up to:	Finishes
X Not included	FR01	A 10° Very narrow	HW	2700	>90	397 lm	105 lm/W	8C
Constant voltage (Vdc)		B 16° Narrow	HQ	3000	>90	427 lm	110 lm/W	8D
		E 24° Medium	HN	4000	>90	461 lm	120 lm/W	8F
		H 35° Wide						48
		M 34°x60° Elliptical						8E
								9M
								9N
								9P

9 W POWER LED


Lumen maintenance: L80 B10=50,000 h / SDCM >3

Driver	Version	Optics	LED	K	CRI	lm delivered up to:	Efficacy up to:	Finishes
X Not included	FR02	A 10° Very narrow	HW	2700	>90	727 lm	95 lm/W	8C
Constant voltage (Vdc)		B 16° Narrow	HQ	3000	>90	782 lm	100 lm/W	8D
		E 24° Medium	HN	4000	>90	845 lm	105 lm/W	8F
		H 35° Wide						48
		M 34°x60° Elliptical						8E
								9M
								9N
								9P

12 W		POWER LED		Lumen maintenance: L80 B10=50,000 h / SDCM >3					
Driver	Version	Optics	LED	K	CRI	lm delivered up to:	Efficacy up to:	Finishes	
X Not included	FR03	A 10° Very narrow	HW	2700	>90	952 lm	95 lm/W	8C	
Constant voltage (Vdc)		B 16° Narrow	HQ	3000	>90	1024 lm	100 lm/W	8D	
		E 24° Medium	HN	4000	>90	1106 lm	105 lm/W	48	
		H 35° Wide						9M	
		M 34°x60° Elliptical						9N	
								9P	

6 W		Warm Dimming COB LED		Lumen maintenance: L70 B10=50,000 h / SDCM >3					
Driver	Version	Optics	LED	K	CRI	lm delivered up to:	Efficacy up to:	Finishes	
X Not included	FR0D	E 22° Medium	DT	1800-3000	>90	445 lm	75 lm/W	8C	
Constant current (mA)		H 34° Wide						8D	
								8F	
								48	
								8E	
								9M	
								9N	
								9P	

Ø 45 mm | Accessories



Description

Pendant accessories/
Accessorio pendant


*Special finishes/
Finiture speciali

Code
0.27416.00

Finishes

8C	
8D	
48	
8E	
9M	
9N	
9P	
9P	

Ø 60 mm | Accessories



Description


Pendant accessories/
Accessorio pendant

*Special finishes/
Finiture speciali

Code
0.27424.00

Finishes

8C	
8D	
48	
9M	
9N	
9P	



Description

Pendant accessories with steel cable/
Accessorio Pendant con cavo in acciaio

*Special finishes/
Finiture speciali

Code
0.27425.00

Finishes

8E	
-----------	--

Internal accessories

EN Internal accessories are pre-mounted at the factory.
To specify Yori IP66 Surface/Pendant with an internal accessory:

- choose your product;
- choose one internal accessory;
- add the accessory code to the end of the product code.

IT Gli accessori interni sono integrati nel prodotto.
Per ordinare Yori IP66 Surface/Pendant con un accessorio interno:

- scegli il tuo prodotto;
- scegli un accessorio interno;
- aggiungi il codice accessorio alla fine del codice prodotto.



Examples:

Product code:
X.GR00A.HW8D
X.GR00A.HW8D

Accessory code:
.20K (Selective filter 2700-2000 K)
.S (Spread lens)

Product with accessory:
X.GR00A.HW8D.20K
X.GR00A.HW8D.S

70

EN To order two accessories select:

- one selective or colored filter (ie .20K);
- one honeycomb and accessories (ie .H);
- add the two codes to the end of the product code.

IT Per ordinare due accessori selezionare:

- un filtro selettivo o colorato (es. .20K);
- una griglia alveolare e accessori (es. .H);
- aggiungere i due codici alla fine del codice prodotto.



Example:

Product code:
X.GR00A.HW8D
(Yori IP66 Surface/Pendant)

Accessory 1:
.20K
(Selective filter 2700-2000 K)

Accessory 2:
H
(Honeycomb)

Product with 2 accessories:
X.GR00A.HW8D.20KH

Ø 45 mm | Ø 60 mm | Internal accessories

Selective and colored filters/ Filtri selettivi e colorati



Description	Code
Selective filter 2700-2000 K/ Filtro selettivo 2700-2000 K	<u>.20K</u>



Selective filter 2700-2200K/ Filtro selettivo 2700-2200K	<u>.22K</u>
---	-------------



Description	Code
Selective filter 2700-2500 K/ Filtro selettivo 2700-2500 K	<u>.25K</u>



Selective filter 3000-3500 K/ Filtro selettivo 3000-3500 K	<u>.35K</u>
---	-------------



Description	Code
Colored glass filter red/ Filtro colorato rosso	<u>.4A*</u>
*(On request)/ *(Su richiesta)	



Colored glass filter blue/ Filtro colorato blu	<u>.6A*</u>
*(On request)/ *(Su richiesta)	

Lens and accessories/ Lenti e accessori



Description	Code
Spread lens/ Lente diffondente	<u>.S</u>



Description	Code
Honeycomb/ Griglia alveolare	<u>.H</u>



Description	Code
Antiglare/ Antiglare	<u>.A</u>
Available only for Ø60mm/ Disponibile solo per Ø60mm	

Electrical devices

Ø45 mm | Electrical devices

Driver/ Alimentazioni

3 W POWER LED

Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
On/Off	0.30524.0000	14 W		67	220-240 Vac / 50/60 Hz	24 Vdc	Max: 3	See table: p. 77	See table: p. 77
On/Off	0.30525.0000	60 W		67	220-240 Vac / 0/0/50/60 Hz	24 Vdc	Max: 16	See table: p. 77	See table: p. 77
On/Off	0.30534.0000	100 W		67	220-240 Vac / 0/0/50/60 Hz	24 Vdc	Max: 27	See table: p. 77	See table: p. 77
On/Off	0.30526.0000	160 W		67	220-240 Vac / 0/0/50/60 Hz	24 Vdc	Max: 45	See table: p. 77	See table: p. 77
DALI	D.30524.0000	30 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 8	See table: p. 77	See table: p. 77
DALI	D.30525.0000	60 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 17	See table: p. 77	See table: p. 77
DALI	D.30534.0000	100 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 27	See table: p. 77	See table: p. 77
DALI	D.30526.0000	160 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 45	See table: p. 77	See table: p. 77

4,5 W POWER LED

Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
On/Off	0.30524.0000	14 W		67	220-240 Vac / 50/60 Hz	24 Vdc	Max: 2	See table: p. 77	See table: p. 77
On/Off	0.30525.0000	60 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 11	See table: p. 77	See table: p. 77
On/Off	0.30534.0000	100 W		67	220-240 Vac / 0/0/50/60 Hz	24 Vdc	Max: 18	See table: p. 77	See table: p. 77
On/Off	0.30526.0000	160 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 30	See table: p. 77	See table: p. 77
DALI	D.30524.0000	30 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 5	See table: p. 77	See table: p. 77
DALI	D.30525.0000	60 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 11	See table: p. 77	See table: p. 77
DALI	D.30534.0000	100 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 18	See table: p. 77	See table: p. 77
DALI	D.30526.0000	160 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 30	See table: p. 77	See table: p. 77

Dimmer 0-10V/ Dimmer 0-10V

3 W POWER LED

Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
Dimm 1-10V	Y.30826.0-10	150 W		20	24 Vdc	24 Vdc	Max: 40	See table: p. 77	See table: p. 77

4,5 W POWER LED

Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
Dimm 1-10V	Y.30826.0-10	150 W		20	24 Vdc	24 Vdc	Max: 28	See table: p. 77	See table: p. 77

Ø60 mm | Electrical devices

Driver/ Alimentazioni

4,5 W POWERLED									
Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
On/Off	0.30524.0000	14 W		67	220-240 Vac / 50/60 Hz	24 Vdc	Max: 2	See table: p. 77	See table: p. 77
On/Off	0.30525.0000	60 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 11	See table: p. 77	See table: p. 77
On/Off	0.30534.0000	100 W		67	220-240 Vac / 0/0/50/60 Hz	24 Vdc	Max: 18	See table: p. 77	See table: p. 77
On/Off	0.30526.0000	160 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 30	See table: p. 77	See table: p. 77
DALI	D.30524.0000	30 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 5	See table: p. 77	See table: p. 77
DALI	D.30525.0000	60 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 11	See table: p. 77	See table: p. 77
DALI	D.30534.0000	100 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 18	See table: p. 77	See table: p. 77
DALI	D.30526.0000	160 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 30	See table: p. 77	See table: p. 77

9 W POWERLED									
Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
On/Off	0.30524.0000	14 W		67	220-240 Vac / 50/60 Hz	24 Vdc	Max: 1	See table: p. 77	See table: p. 77
On/Off	0.30525.0000	60 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 5	See table: p. 77	See table: p. 77
On/Off	0.30534.0000	100 W		67	220-240 Vac / 0/0/50/60 Hz	24 Vdc	Max: 9	See table: p. 77	See table: p. 77
On/Off	0.30526.0000	160 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 15	See table: p. 77	See table: p. 77
DALI	D.30524.0000	30 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 2	See table: p. 77	See table: p. 77
DALI	D.30525.0000	60 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 5	See table: p. 77	See table: p. 77
DALI	D.30534.0000	100 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 9	See table: p. 77	See table: p. 77
DALI	D.30526.0000	160 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 14	See table: p. 77	See table: p. 77

12 W POWERLED									
Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
On/Off	0.30524.0000	14 W		67	220-240 Vac / 50/60 Hz	24 Vdc	Max: 1	See table: p. 77	See table: p. 77
On/Off	0.30525.0000	60 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 4	See table: p. 77	See table: p. 77
On/Off	0.30534.0000	100 W		67	220-240 Vac / 0/0/50/60 Hz	24 Vdc	Max: 7	See table: p. 77	See table: p. 77
On/Off	0.30526.0000	160 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 11	See table: p. 77	See table: p. 77
DALI	D.30524.0000	30 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 2	See table: p. 77	See table: p. 77
DALI	D.30525.0000	60 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 4	See table: p. 77	See table: p. 77
DALI	D.30534.0000	100 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 7	See table: p. 77	See table: p. 77
DALI	D.30526.0000	160 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 11	See table: p. 77	See table: p. 77

6 W Warm Dimming COB LED									
Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
DALI	D.30527.0000	15 W		68	110-240V / 0/50/60 Hz	350 mA	Max: 2	See table: p. 77	See table: p. 77

Ø60 mm | Electrical devices


Dimmer 0-10V/
Dimmer 0-10V

4.5 W POWER LED									
Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
Dimm 1-10V	Y.30826.0-10	150 W		20	24 Vdc	24 Vdc	Max: 28	See table: p. 77	See table: p. 77

9 W POWER LED									
Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
Dimm 1-10V	Y.30826.0-10	150 W		20	24 Vdc	24 Vdc	Max: 14	See table: p. 77	See table: p. 77


12 W POWER LED									
Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
Dimm 1-10V	Y.30826.0-10	150 W		20	24 Vdc	24 Vdc	Max: 10	See table: p. 77	See table: p. 77

Ø 45 mm | Ø 60 mm | Cables and connectors




Description
Cable 0,5 mmq 5 m/
Cavo 0,5 mmq 5 m

Code
0.27450.0000




Description
Cable 0,5 mmq 10 m/
Cavo 0,5 mmq 10 m

Code
0.27451.0000




Description
Cable 0,5 mmq 15 m/
Cavo 0,5 mmq 15 m

Code
0.27452.0000




Description
Cable 0,5 mmq 20 m/
Cavo 0,5 mmq 20 m

Code
0.27453.0000




Description
Cable 0,5 mmq 25 m/
Cavo 0,5 mmq 25 m

Code
0.27454.0000




Description
Cable connector 0,5 mmq (2 way)/
Connettore per cavo 0,5 mmq (2 vie)

Code
0.27440.0000




Description
Cable connector 0,5 mmq (3 way) T/
Connettore per cavo 0,5 mmq (3 vie) T

Code
0.27441.0000




Description
Cable connector 2,5 mmq (2way)/
Connettore per cavo 2,5 mmq (2 vie)

Code
0.27430.0000




Description
Cable connector 2,5 mmq (3 way) T/
Connettore per cavo 2,5 mmq (3 vie) T

Code
0.27431.0000




Description
Cable connector 2,5 mmq (3 way) Y/
Connettore per cavo 2,5 mmq (3 vie) Y

Code
0.27432.0000




Description
Cable connector 2,5 mmq (4 way)/
Connettore per cavo 2,5 mmq (4 vie)

Code
0.27433.0000




Description
Cable connector 4 mmq (2 way)/
Connettore per cavo 4 mmq (2 vie)

Code
0.27447.0000



Description
Cable connector 4 mmq (3way) T/
Connettore per cavo 4 mmq (3 vie) T

Code
0.27448.0000



Description
Cable connector 4mmq (4 way)/
Connettore per cavo 4 mmq (4 vie)

Code
0.27449.0000

Wiring examples


Loop in loop out/
Loop in loop out/

Code Driver	Watt	Cable section	Cable length max
0.30524.0000	14 W	0,5 mmq	15 m
		1,5 mmq	35 m
		2,5 mmq	50 m
		4 mmq	100 m
0.30525.0000	60 W	0,5 mmq	5 m
		1,5 mmq	10 m
		2,5 mmq	20 m
		4 mmq	40 m
0.30534.0000	100 W	0,5 mmq	5 m
		1,5 mmq	10 m
		2,5 mmq	20 m
		4 mmq	40 m
0.30526.0000	160 W	0,5 mmq	—
		1,5 mmq	5 m
		2,5 mmq	7,5 m
		4 mmq	17,5 m

Code Dimmer	Watt	Cable section	Cable length max
D.30524.0000	30 W	0,5 mmq	15 m
		1,5 mmq	35 m
		2,5 mmq	50 m
		4 mmq	100 m
D.30525.0000	60 W	0,5 mmq	5 m
		1,5 mmq	10 m
		2,5 mmq	20 m
		4 mmq	40 m
D.30534.0000	100 W	0,5 mmq	5 m
		1,5 mmq	10 m
		2,5 mmq	20 m
		4 mmq	40 m
D.30526.0000	160 W	0,5 mmq	—
		1,5 mmq	5 m
		2,5 mmq	7,5 m
		4 mmq	17,5 m

Notes:

Recommended cable section in relation to the voltage drop/
Sezione del cavo consigliata in rapporto alla caduta di tensione

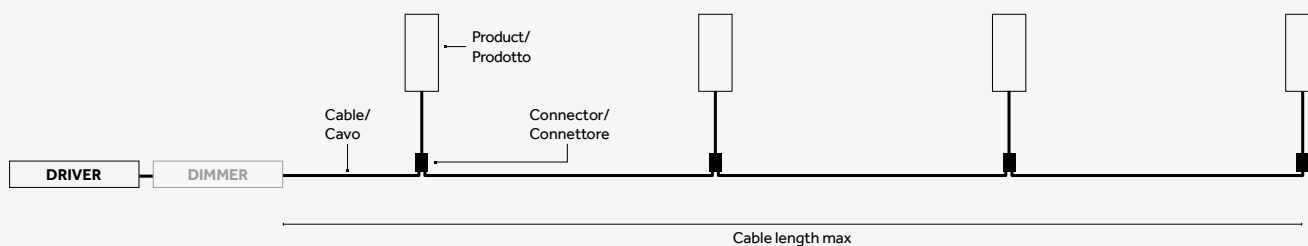


With central driver/
Con driver centrale/


Total product consumption (Watt)

Cable section	Yori IP66 Surface/Pendant Ø45mm	
	3 W	4,5 W
0,5 mmq	Max 60 m	Max 40 m
1,5 mmq	Max 160 m	Max 110 m
2,5 mmq	Max 500 m	Max 325 m
4 mmq	Max 750 m	Max 550 m

Yori IP66 Surface/Pendant Ø60mm		
4,5 W	9 W	12 W
Max 40 m	Max 25 m	Max 15 m
Max 110 m	Max 70 m	Max 50 m
Max 325 m	Max 200 m	Max 125 m
Max 550 m	Max 325 m	Max 200 m

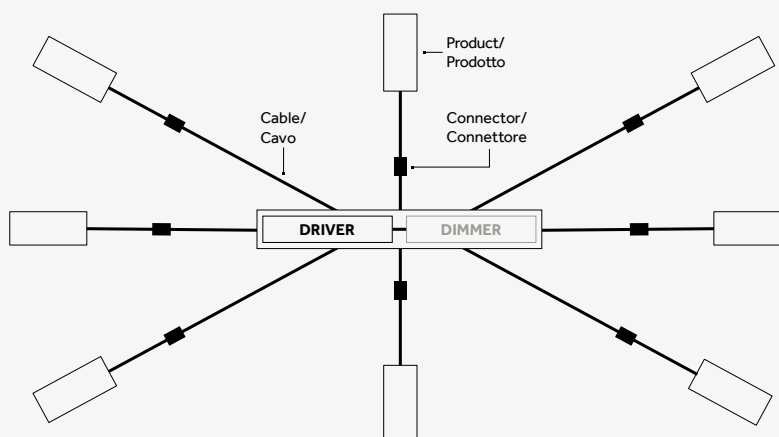


Yori IP66 Wall

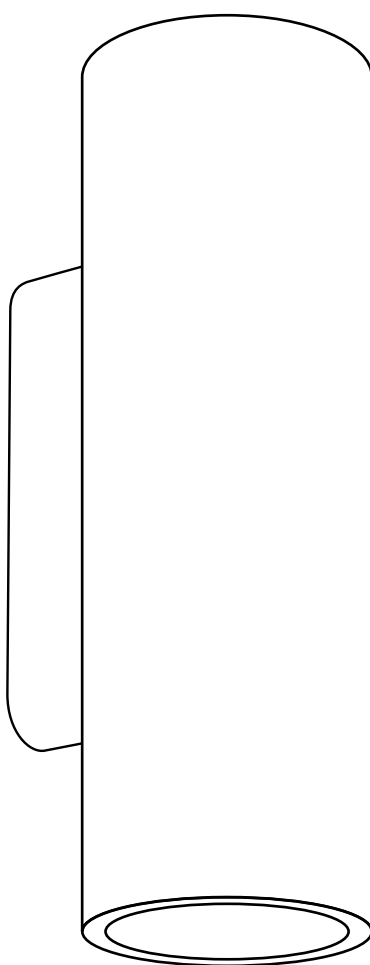




EN Yori IP66 Wall brings the versatility of the Yori system outdoors. Compact, elegant and available in a range of finishes, it delivers smooth, efficient light to enhance architecture with discretion. The range is completed by the mono version, offering even greater design freedom.

IT Yori IP66 Wall porta all'esterno la versatilità del sistema Yori. Compatto, elegante e disponibile in diverse finiture, offre una luce fluida ed efficiente per valorizzare l'architettura con discrezione. La gamma si completa con la versione solo mono, per una maggiore libertà progettuale.

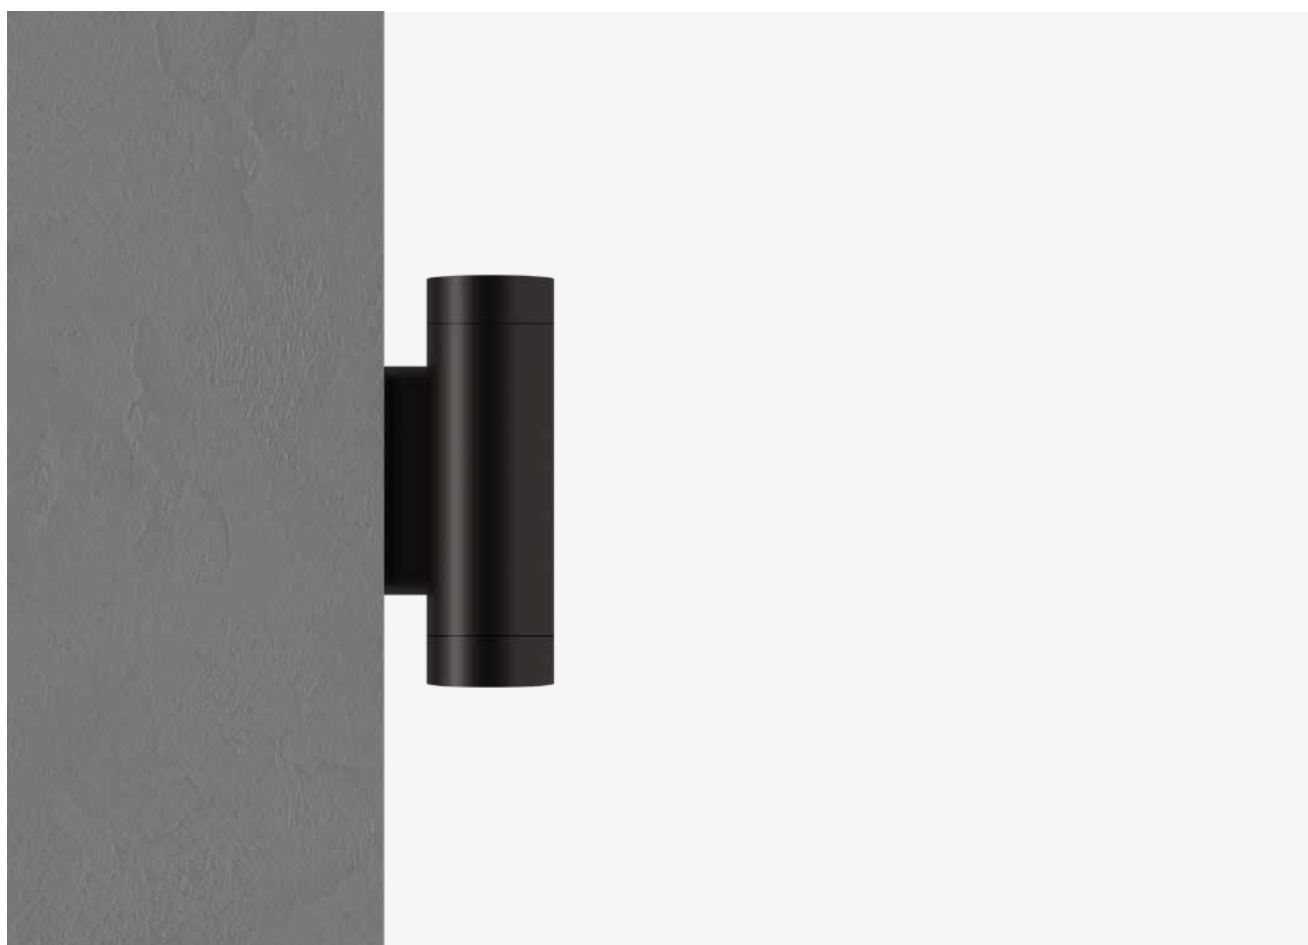


Versions/ Versioni				
Yori IP66 Wall	 Ø60			
Finishes/ Finiture If not specified, the product is made of aluminium/ Se non specificato, il prodotto è in alluminio	 8C Raw anodized/ Anodizzato naturale	 48 Matte white/ Bianco opaco	 8D Black anodized/ Anodizzato nero	 9N Olive green/ Verde oliva
Finishes upon request (minimum quantity required)/ Finiture su richiesta (quantitativo minimo richiesto)	 9M Antiqued bronze/ Bronzo anticato	 8F Antiqued bronze (solid brass)/ Bronzo anticato (ottone massiccio)	 9P Corten/ Corten	
	 Copper/ Rame	 Champagne anodized/ Anodizzato champagne	 Titanium/ Titanio	
IP / IK	66 / 07			
Control systems	On/Off, DALI, 1-10V			
Insulation class				
Certifications	CE UK ENEC			

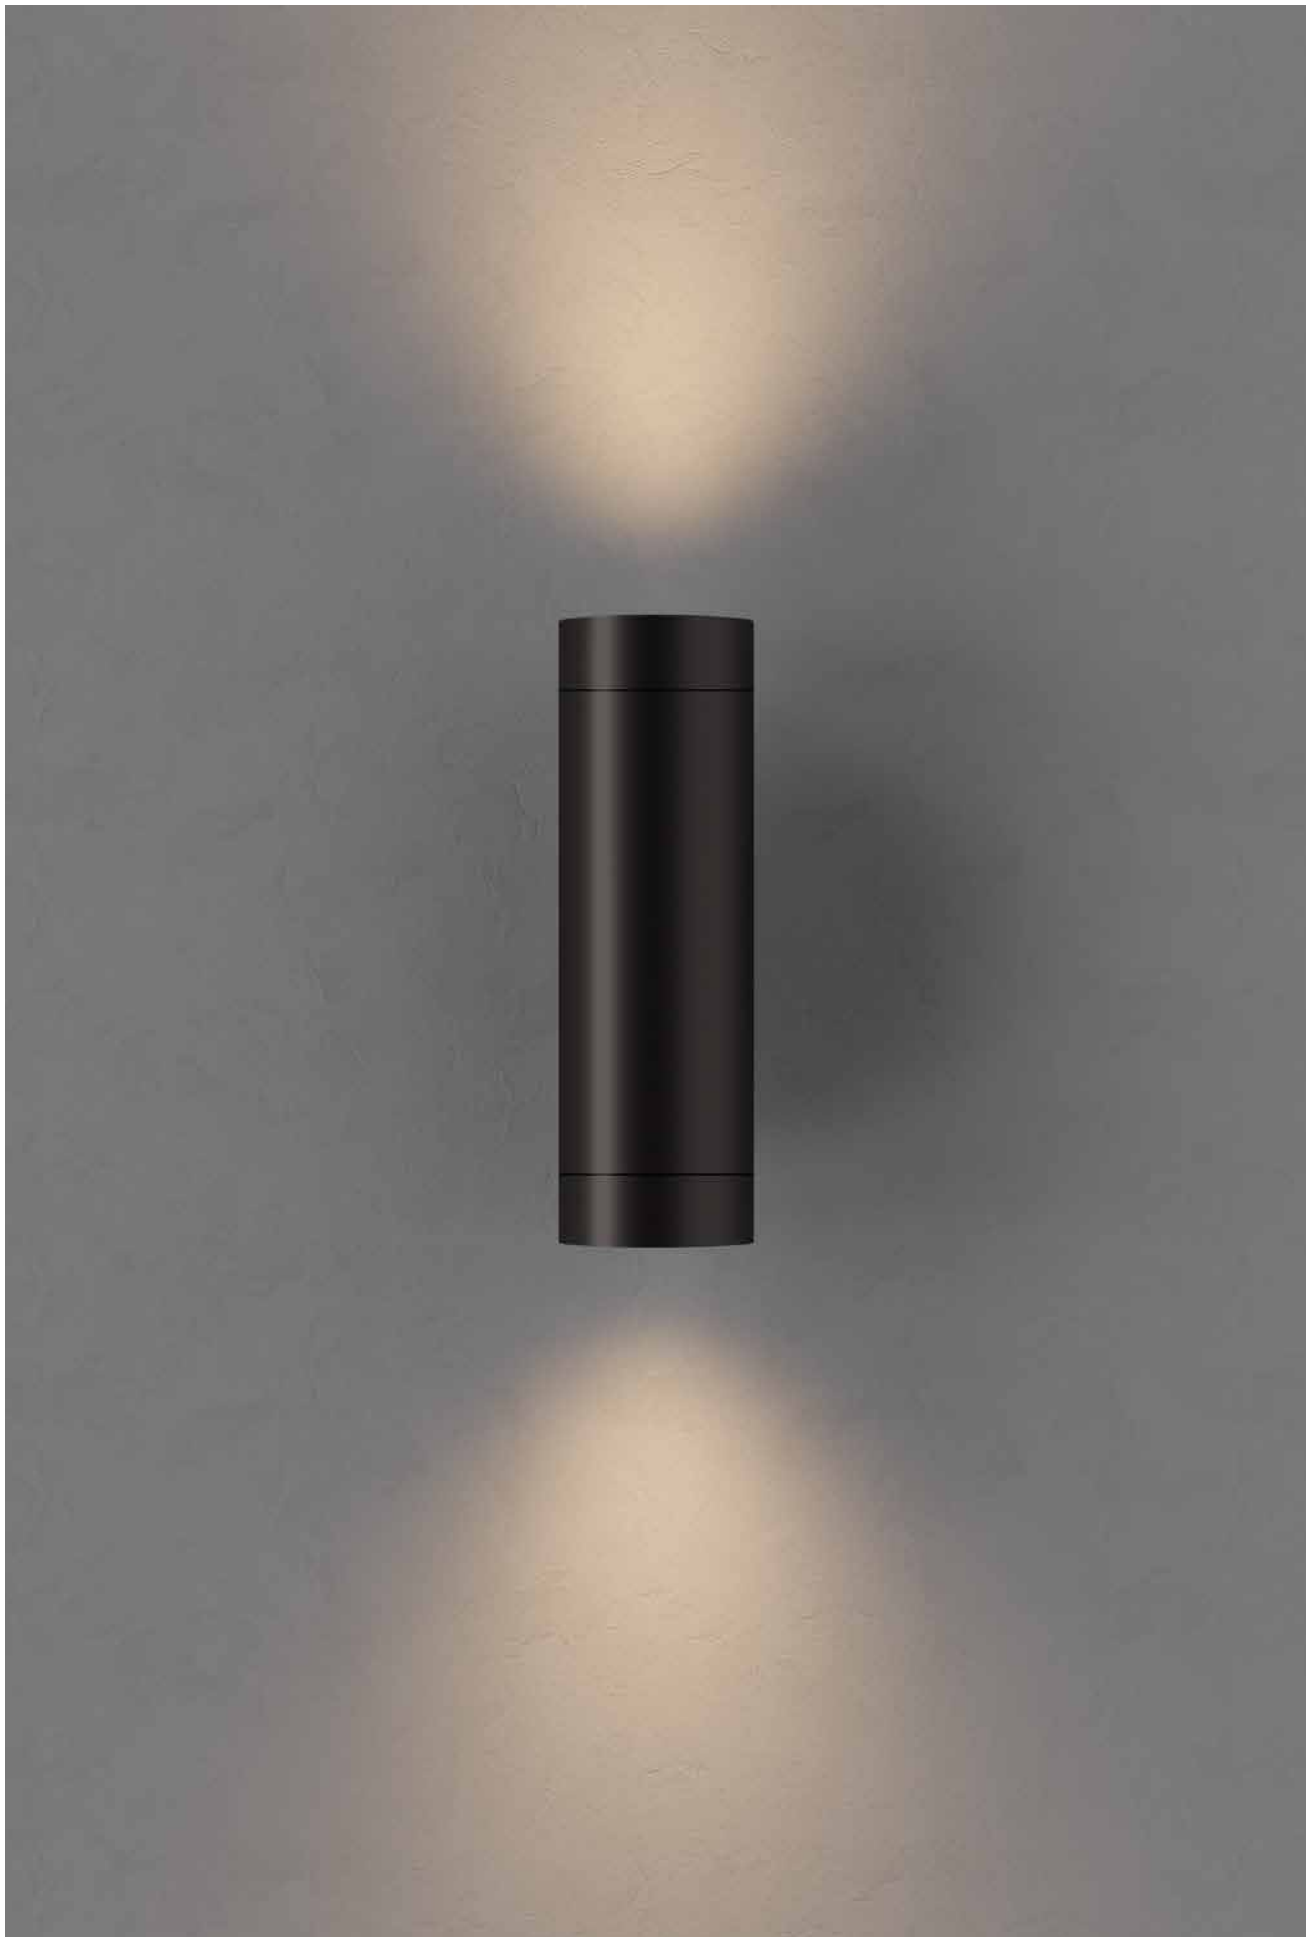

	Ø 60 mm (Mono)	Ø 60 mm (Double)
Yori IP66 Wall	 p. 80	 p. 80
	10°; 16°; 24°; 35°; 20°x50	10°; 16°; 24°; 35°; 20°x50
Light source/ Sorgente luminosa	 POWER LED 6 W; 12 W 468 lm - 1106 lm L80 B10=50,000 h 2700 K; 3000 K; 4000 K SDCM <3 CRI >90  Warm Dimming COB LED 6 W 445 lm L70 B10=50,000 h 1800 K - 3000 K SDCM <3 CRI >90	 POWER LED 6 W + 6 W 2x (467 lm - 543 lm) L80 B10=50,000 h 2700 K; 3000 K; 4000 K SDCM <3 CRI >90  Warm Dimming COB LED 6 W + 6 W 2x (794 lm) L70 B10=50,000 h 1800 K - 3000 K SDCM <3 CRI >90

Ø 60 mm (Mono)




Code example:
X - **LR01** **A** - **HW** **8C**
Finishes: p. 95-97
Electrical devices: p. 90
Photometric data:
www.reggiani.net

Risk 1 0.74 | (8F) 1.44 IP66 IK07 850° CE UK


6 W		POWER LED		Lumen maintenance: L80 B10=50,000 h / SDCM >3					
Driver	Version	Optics	LED	K	CRI	lm delivered up to:	Efficacy up to:	Finishes	
X Not included	LR01 Mono	A 10° Very narrow	HW	2700	>90	468 lm	91 lm/W	8C	
Constant voltage (Vdc)		B 16° Narrow	HQ	3000	>90	503 lm	98 lm/W	8D	
		E 24° Medium	HN	4000	>90	543 lm	106 lm/W	8F	
		H 35° Wide						48	
		M 34°x60° Elliptical						9M	
								9N	
								9P	

12 W		POWER LED		Lumen maintenance: L80 B10=50,000 h / SDCM >3					
Driver	Version	Optics	LED	K	CRI	lm delivered up to:	Efficacy up to:	Finishes	
X Not included	LR03 Mono	A 10° Very narrow	HW	2700	>90	952 lm	95 lm/W	8C	
Constant voltage (Vdc)		B 16° Narrow	HQ	3000	>90	1024 lm	100 lm/W	8D	
		E 24° Medium	HN	4000	>90	1106 lm	105 lm/W	48	
		H 35° Wide						9M	
		M 34°x60° Elliptical						9N	
								9P	

6 W		Warm Dimming COB LED		Lumen maintenance: L70 B10=50,000 h / SDCM >3					
Driver	Version	Optics	LED	K	CRI	lm delivered up to:	Efficacy up to:	Finishes	
X Not included	LR0D Mono	E 22° Medium	DT	1800-3000	>90	445 lm	75 lm/W	8C	
Constant current (mA)		H 34° Wide						8D	
								8F	
								48	
								9M	
								9N	
								9P	

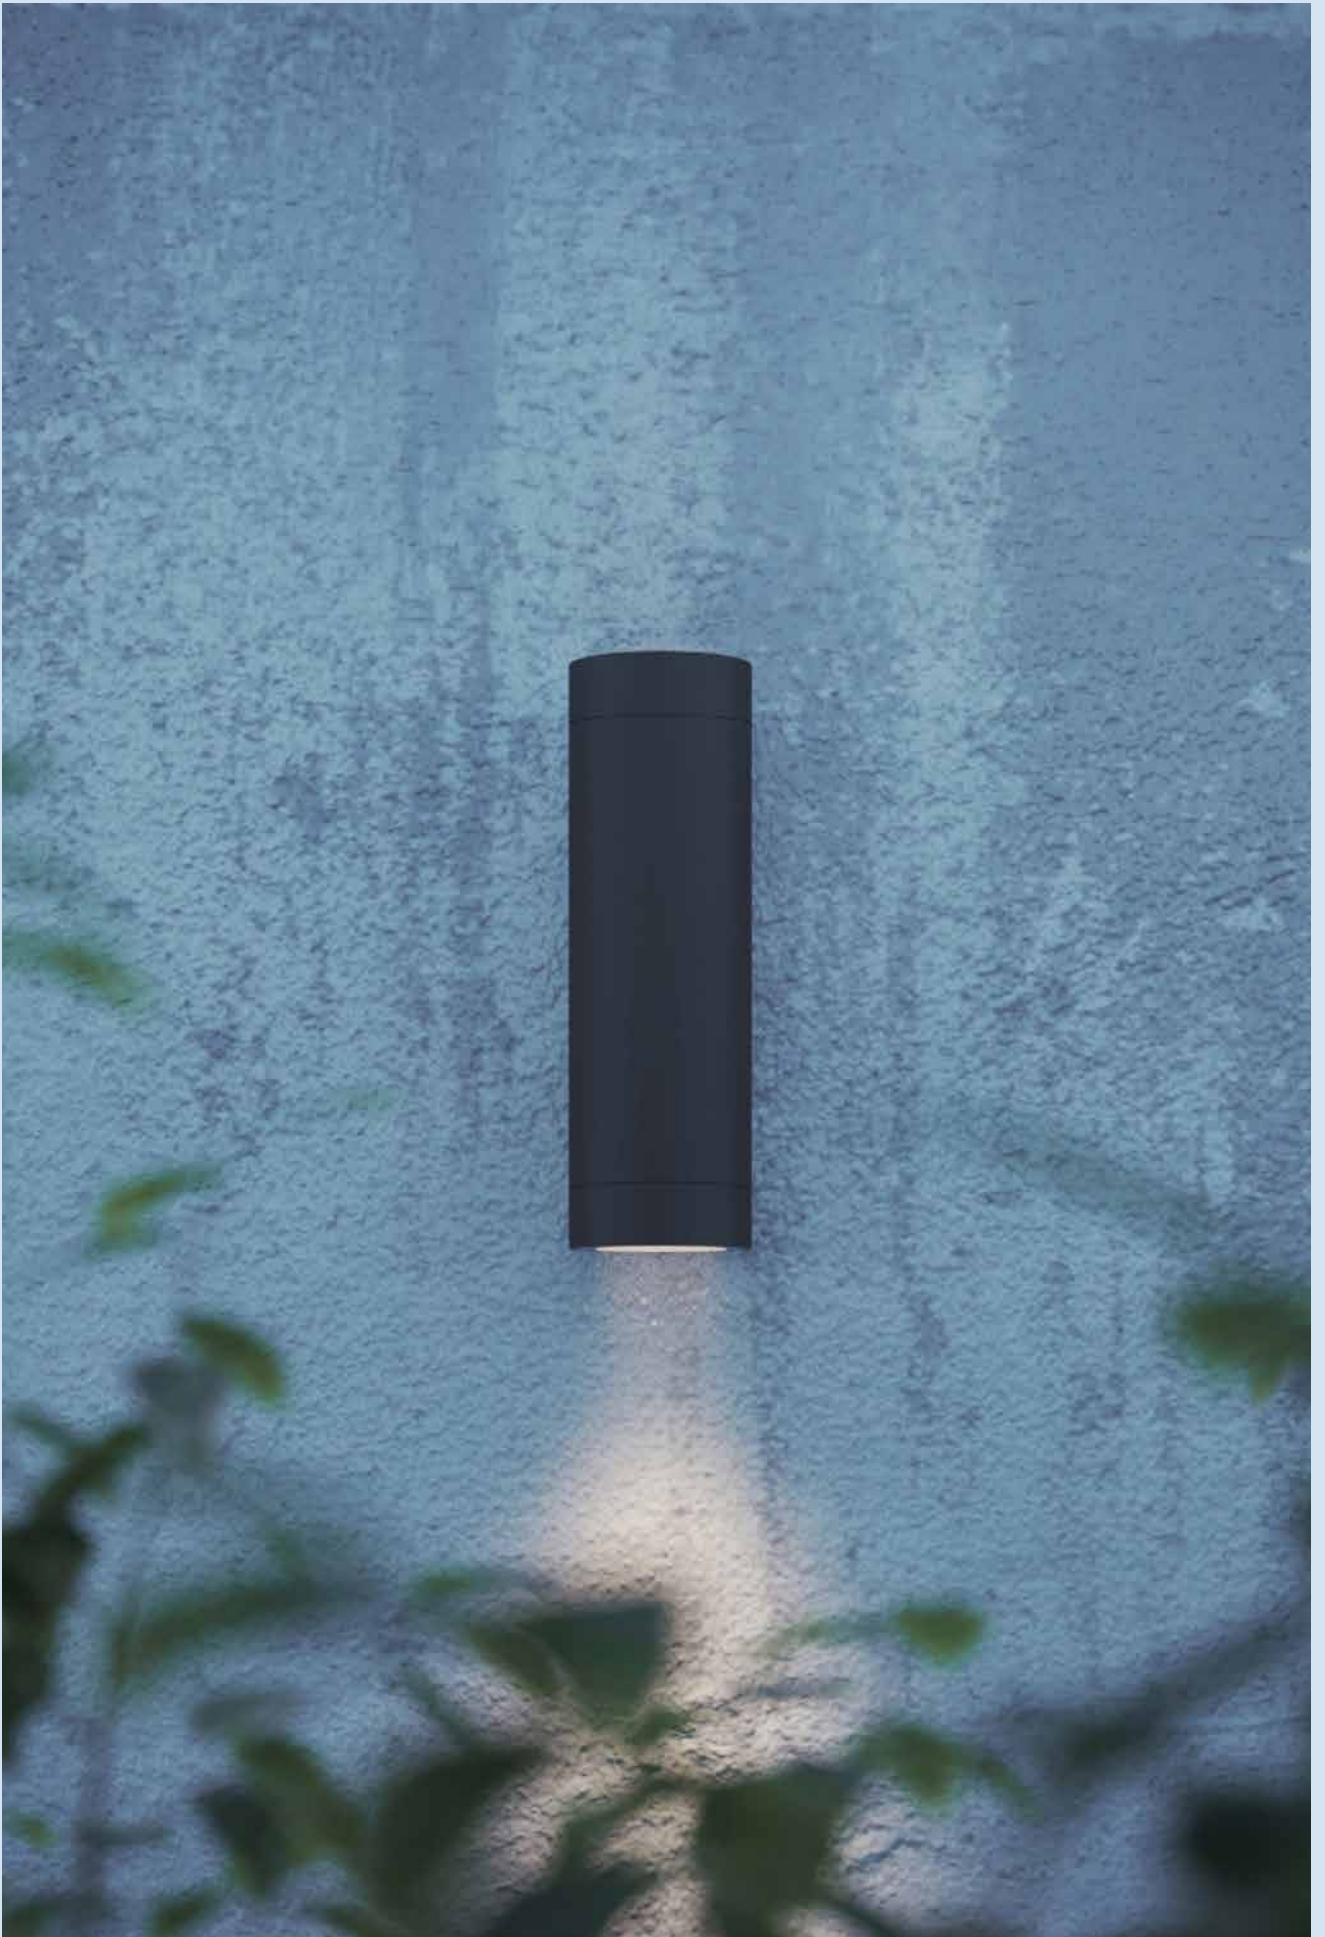

Ø 60 mm (Dual)




Risk 1 0.74 | (8F) 1.44 IP66 IK07 850° CE UK



Code example:
X - DR02 A - HW 8C
Finishes: p. 95-97
Electrical devices: p. 91
Photometric data:
www.reggiani.net

6+6 W		POWERLED						Lumen maintenance: L80 B10=50,000 h / SDCM >3		
Driver	Version	Optics	LED	K	CRI	lm delivered up to:	Efficacy up to:	Finishes		
X Not included Constant voltage (Vdc)	DR02 Dual	A 10° Very narrow	HW	2700	>90	2x (467 lm)	91 lm/W	8C		
		B 16° Narrow	HQ	3000	>90	2x (502 lm)	98 lm/W	8D		
		E 24° Medium	HN	4000	>90	2x (543 lm)	106 lm/W	8F		
		H 35° Wide						48		
		M 34°x60° Elliptical						9M		
								9N		
								9P		

6+6 W		Warm Dimming COB LED						Lumen maintenance: L70 B10=50,000 h / SDCM >3		
Driver	Version	Optics	LED	K	CRI	lm delivered up to:	Efficacy up to:	Finishes		
X Not included Constant current (mA)	DR0D Dual	E 22° Medium	DT	1800-3000	>90	2x (445)	70 lm/W	8C		
		H 34° Wide						8D		
								8F		
								48		
								9M		
								9N		
								9P		

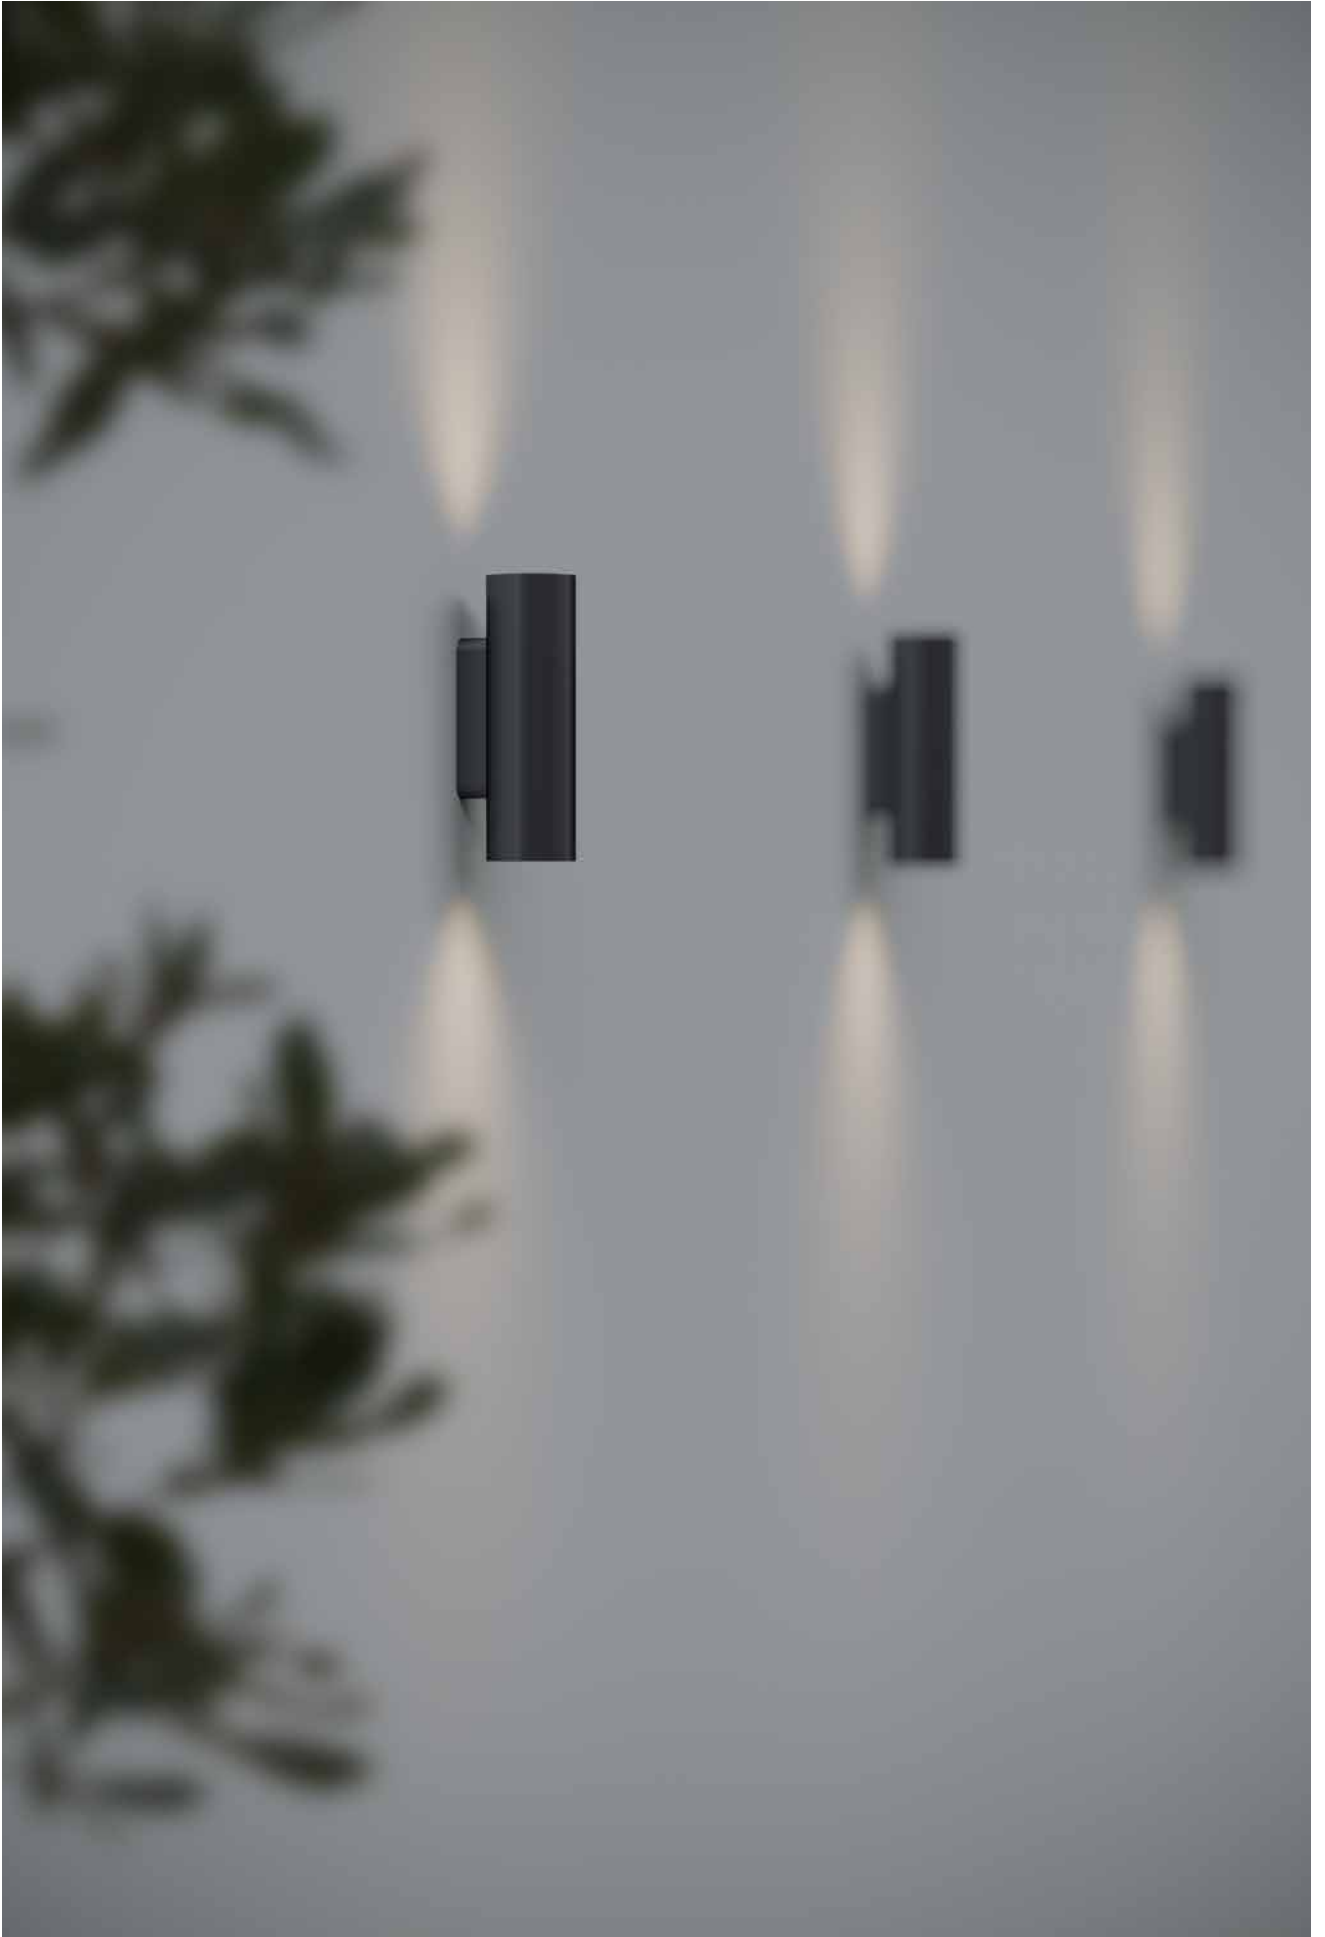

Yori IP66 Wall

Internal accessories

EN Internal accessories are pre-mounted at the factory.

To specify Yori IP66 Wall with an internal accessory:

- choose your product;
- choose one internal accessory;
- add the accessory code to the end of the product code.

IT Gli accessori interni sono integrati nel prodotto.

Per ordinare Yori IP66 Wall con un accessorio interno:

- scegli il tuo prodotto;
- scegli un accessorio interno;
- aggiungi il codice accessorio alla fine del codice prodotto.



Examples:

Product code:
X.DR01A.HW8D
X.DR01A.HW8D

Accessory code:
.20K (Selective filter 2700-2000 K)
.S (Spread lens)

Product with accessory:
X.DR01A.HW8D.**.20K**
X.DR01A.HW8D.**.S**

EN To order two accessories select:

- one selective or colored filter (ie .20K);
- one honeycomb and accessories (ie .H);
- add the two codes to the end of the product code.

IT Per ordinare due accessori selezionare:

- un filtro selettivo o colorato (es. .20K);
- una griglia alveolare e accessori (es. .H);
- aggiungere i due codici alla fine del codice prodotto.



Example:

Product code:
X.DR01A.HW8D
(Yori IP66 Wall)

Accessory 1:
.20K
(Selective filter 2700-2000 K)

Accessory 2:
H
(Honeycomb)

Product with 2 accessories:
X.DR01A.HW8D.**.20KH**

Ø 60 mm | Internal accessories

Selective and colored filters/ Filtri selettivi e colorati



Description	Code
Selective filter 2700-2000 K/ Filtro selettivo 2700-2000 K	<u>.20K</u>



Selective filter 2700-2200K/ Filtro selettivo 2700-2200K	<u>.22K</u>
---	-------------



Description	Code
Selective filter 2700-2500 K/ Filtro selettivo 2700-2500 K	<u>.25K</u>



Selective filter 3000-3500 K/ Filtro selettivo 3000-3500 K	<u>.35K</u>
---	-------------



Description	Code
Colored glass filter red/ Filtro colorato rosso	<u>.4A*</u>
*(On request)/ *(Su richiesta)	



Colored glass filter blue/ Filtro colorato blu	<u>.6A*</u>
*(On request)/ *(Su richiesta)	

Lens and accessories/ Lenti e accessori



Description	Code
Spread lens/ Lente diffondente	<u>.S</u>



Description	Code
Honeycomb/ Griglia alveolare	<u>.H</u>



Description	Code
Antiglare/ Antiglare	<u>.A</u>
Available only for Ø60mm/ Disponibile solo per Ø60mm	

Electrical devices

Ø60 mm (Mono) | Electrical devices

Driver/ Alimentazioni

6 W POWER LED

Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
On/Off	0.30524.0000	14 W		67	220-240 Vac / 50/60 Hz	24 Vdc	Max: 2	See table: p. 93	See table: p. 93
On/Off	0.30525.0000	60 W		67	220-240 Vac / 0/0/50/60 Hz	24 Vdc	Max: 8	See table: p. 93	See table: p. 93
On/Off	0.30534.0000	100 W		67	220-240 Vac / 0/0/50/60 Hz	24 Vdc	Max: 14	See table: p. 93	See table: p. 93
On/Off	0.30526.0000	160 W		67	220-240 Vac / 0/0/50/60 Hz	24 Vdc	Max: 22	See table: p. 93	See table: p. 93
DALI	D.30524.0000	30 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 5	See table: p. 93	See table: p. 93
DALI	D.30525.0000	60 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 11	See table: p. 93	See table: p. 93
DALI	D.30534.0000	100 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 14	See table: p. 93	See table: p. 93
DALI	D.30526.0000	160 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 30	See table: p. 93	See table: p. 93

12 W POWER LED

Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
On/Off	0.30524.0000	14 W		67	220-240 Vac / 50/60 Hz	24 Vdc	Max: 1	See table: p. 93	See table: p. 93
On/Off	0.30525.0000	60 W		67	220-240 Vac / 0/0/50/60 Hz	24 Vdc	Max: 4	See table: p. 93	See table: p. 93
On/Off	0.30534.0000	100 W		67	220-240 Vac / 0/0/50/60 Hz	24 Vdc	Max: 7	See table: p. 93	See table: p. 93
On/Off	0.30526.0000	160 W		67	220-240 Vac / 0/0/50/60 Hz	24 Vdc	Max: 11	See table: p. 93	See table: p. 93
DALI	D.30524.0000	30 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 2	See table: p. 93	See table: p. 93
DALI	D.30525.0000	60 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 4	See table: p. 93	See table: p. 93
DALI	D.30534.0000	100 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 7	See table: p. 93	See table: p. 93
DALI	D.30526.0000	160 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 11	See table: p. 93	See table: p. 93

6 W Warm Dimming COB LED

Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	mA	Connectable fixtures	Cable length max	Cable section
DALI	D.30527.0000	15 W		68	110-240V / 0/50/60 Hz	350	Max: 1	See table: p. 86	See table: p. 86

Dimmer 0-10V/ Dimmer 0-10V

6 W POWER LED

Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
Dimm 1-10V	Y.30826.0-10	150 W		20	24 Vdc	24 Vdc	Max: 28	See table: p. 93	See table: p. 93

12 W POWER LED

Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
Dimm 1-10V	Y.30826.0-10	150 W		20	24 Vdc	24 Vdc	Max: 10	See table: p. 93	See table: p. 93

Ø60 mm (Dual) | Electrical devices

Driver/ Alimentazioni


6+6 W POWER LED									
Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
On/Off	0.30524.0000	14 W		67	220-240 Vac / 50/60 Hz	24 Vdc	Max: 1	See table: p. 93	See table: p. 93
On/Off	0.30525.0000	60 W		67	220-240 Vac / 0/0/50/60 Hz	24 Vdc	Max: 4	See table: p. 93	See table: p. 93
On/Off	0.30534.0000	100 W		67	220-240 Vac / 0/0/50/60 Hz	24 Vdc	Max: 7	See table: p. 93	See table: p. 93
On/Off	0.30526.0000	160 W		67	220-240 Vac / 0/0/50/60 Hz	24 Vdc	Max: 12	See table: p. 93	See table: p. 93
DALI	D.30524.0000	30 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 2	See table: p. 93	See table: p. 93
DALI	D.30525.0000	60 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 5	See table: p. 93	See table: p. 93
DALI	D.30534.0000	100 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 7	See table: p. 93	See table: p. 93
DALI	D.30526.0000	160 W		67	220-240 Vac / 0/50/60 Hz	24 Vdc	Max: 15	See table: p. 93	See table: p. 93

6+6 W Warm Dimming COB LED									
Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	mA	Connectable fixtures	Cable length max	Cable section
DALI	D.30527.0000	15 W		68	110-240V / 0/50/60 Hz	350	Max: 1	See table: p. 93	See table: p. 93

Dimmer 0-10V/ Dimmer 0-10V


6+6 W POWER LED									
Type	Code	Watt	Size (mm)	IP	Tech. specification / Input	Output	Connectable fixtures	Cable length max	Cable section
Dimm 1-10V	Y.30826.0-10	150 W		20	24 Vdc	24 Vdc	Max: 8	See table: p. 93	See table: p. 93

Ø60 mm | Cables and connectors




Description
Cable 0,5 mmq 5 m/
Cavo 0,5 mmq 5 m

Code
0.27450.0000




Description
Cable 0,5 mmq 10 m/
Cavo 0,5 mmq 10 m

Code
0.27451.0000




Description
Cable 0,5 mmq 15 m/
Cavo 0,5 mmq 15 m

Code
0.27452.0000




Description
Cable 0,5 mmq 20 m/
Cavo 0,5 mmq 20 m

Code
0.27453.0000




Description
Cable 0,5 mmq 25 m/
Cavo 0,5 mmq 25 m

Code
0.27454.0000



Description
Cable connector 0,5 mmq (2 way)/
Connettore per cavo 0,5 mmq (2 vie)

Code
0.27440.0000




Description
Cable connector 0,5 mmq (3 way) T/
Connettore per cavo 0,5 mmq (3 vie) T

Code
0.27441.0000




Description
Cable connector 2,5 mmq (2 way)/
Connettore per cavo 2,5 mmq (2 vie)

Code
0.27430.0000




Description
Cable connector 2,5 mmq (3 way) T/
Connettore per cavo 2,5 mmq (3 vie) T

Code
0.27431.0000




Description
Cable connector 2,5 mmq (3 way) Y/
Connettore per cavo 2,5 mmq (3 vie) Y

Code
0.27432.0000




Description
Cable connector 2,5 mmq (4 way)/
Connettore per cavo 2,5 mmq (4 vie)

Code
0.27433.0000




Description
Cable connector 4 mmq (2 way)/
Connettore per cavo 4 mmq (2 vie)

Code
0.27447.0000



Description
Cable connector 4 mmq (3 way) T/
Connettore per cavo 4 mmq (3 vie) T

Code
0.27448.0000



Description
Cable connector 4 mmq (4 way)/
Connettore per cavo 4 mmq (4 vie)

Code
0.27449.0000

Wiring examples


Loop in loop out/
Loop in loop out/

Code Driver	Watt	Cable section	Cable length max
0.30524.0000	14 W	0,5 mmq	15 m
		1,5 mmq	35 m
		2,5 mmq	50 m
		4 mmq	100 m
0.30525.0000	60 W	0,5 mmq	5 m
		1,5 mmq	10 m
		2,5 mmq	20 m
		4 mmq	40 m
0.30534.0000	100 W	0,5 mmq	5 m
		1,5 mmq	10 m
		2,5 mmq	20 m
		4 mmq	40 m
0.30526.0000	160 W	0,5 mmq	—
		1,5 mmq	5 m
		2,5 mmq	7,5 m
		4 mmq	17,5 m

Code Dimmer	Watt	Cable section	Cable length max
D.30524.0000	30 W	0,5 mmq	15 m
		1,5 mmq	35 m
		2,5 mmq	50 m
		4 mmq	100 m
D.30525.0000	60 W	0,5 mmq	5 m
		1,5 mmq	10 m
		2,5 mmq	20 m
		4 mmq	40 m
D.30534.0000	100 W	0,5 mmq	5 m
		1,5 mmq	10 m
		2,5 mmq	20 m
		4 mmq	40 m
D.30526.0000	160 W	0,5 mmq	—
		1,5 mmq	5 m
		2,5 mmq	7,5 m
		4 mmq	17,5 m

Notes:


Recommended cable section in relation to the voltage drop/
Sezione del cavo consigliata in rapporto alla caduta di tensione

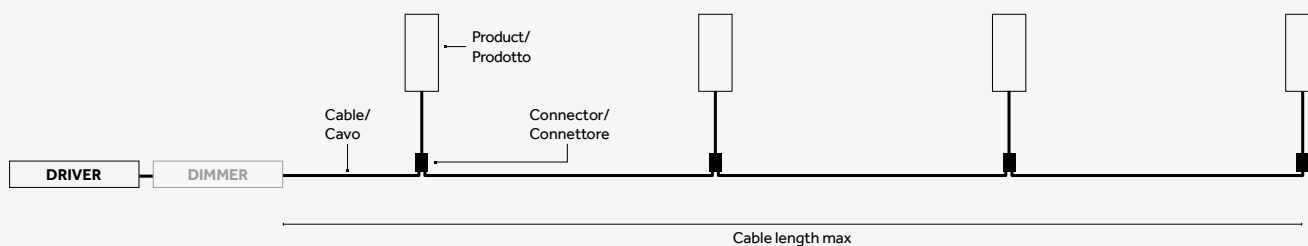

With central driver/ Con driver centrale/

Total product consumption (Watt)

Cable section	Yori IP66 Wall (Mono)		Yori IP66 Wall (Dual)
	6 W	12 W	6 W + 6 W
0,5 mmq	Max 40 m	Max 15 m	Max 15 m
1,5 mmq	Max 110 m	Max 50 m	Max 50 m
2,5 mmq	Max 325 m	Max 125 m	Max 150 m
4 mmq	Max 550 m	Max 200 m	Max 225 m

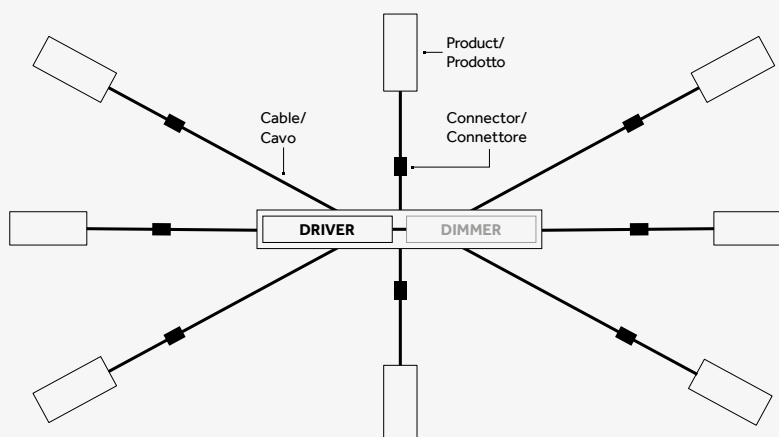



Finishes

^{EN} All products of the Yori IP66 range are machined from solid and are anodized or galvanized. The aluminium chosen for Yori IP66 is the 6026, a particular copper-free alloy with the ideal percentage of magnesium, guaranteeing maximum results in terms of corrosion resistance, surface hardness, wear/abrasion resistance and aesthetic durability: ideal for outdoor applications. In addition to the anodized aluminium versions, Yori IP66 is also available in solid brass and stainless steel (AISI 316).

^{IT} Tutti i prodotti della gamma Yori IP66 sono torniti dal pieno e anodizzati o galvanizzati. L'alluminio scelto per Yori IP66 è il 6026, una particolare lega priva di rame e con una percentuale di magnesio, che garantisce massimi risultati in termini di resistenza alla corrosione, durezza superficiale, resistenza all'usura/abrasione e durabilità estetica, quindi ideale per applicazioni all'esterno. Oltre alle versioni in alluminio anodizzato, Yori IP66 è disponibile anche in versione Ottone massiccio e Acciaio Inox (AISI 316).



8C Raw anodized/
Anodizzato naturale



48 Matte white/
Bianco opaco




8E Stainless steel (AISI 316)/
Acciaio inox (AISI 316)



9M Antiqued bronze/
Bronzo anticato



9N Olive green/
Verde oliva

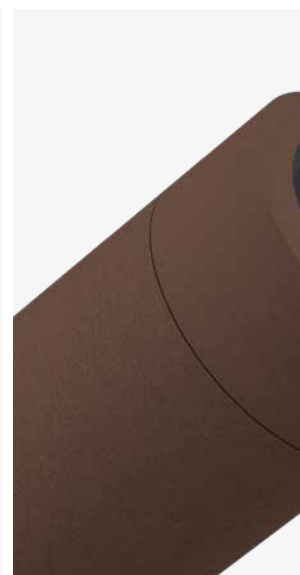

9P Corten/
Corten


Finishes upon request/
Finiture su richiesta



Copper/
Rame



Champagne (anodized aluminium)/
Anodizzato champagne

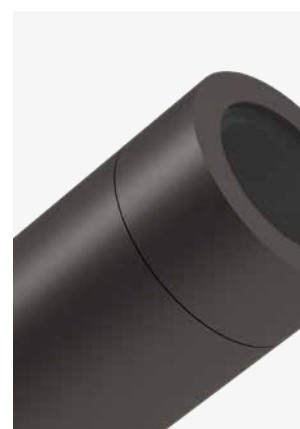

Titanium/
Titanio



■ **8D** Black anodized/
Anodizzato nero



■ **8F** Antiqued bronze (solid brass)/
Bronzo anticato (ottone massiccio)



Yori IP66 Ø45
Scale 1:1



^{EN} If not specified, the product is made of aluminium
^{IT} Se non specificato, il prodotto è in alluminio

Reggiani

©

2026

Reggiani Lighting Srl

All rights reserved

Art direction

Reggiani

Graphic design

Reggiani

Pictures

Reggiani

Lens visual

^{EN} Reggiani Lighting S.r.l reserves the right to make technical, design and size changes at any time, without prior notice.

Total or partial reproduction of this document is prohibited.

Luminaire sizes are given in millimetres.

All technical and design innovations are patented.

For photometric data and lumen output of the luminaires, visit www.reggiani.net

^{IT} Reggiani Lighting S.r.l si riserva la facoltà di effettuare in qualsiasi momento senza preavviso, variazioni tecniche, formali e dimensionali.

Sono vietate le riproduzioni anche parziali del presente documento.

Le dimensioni degli apparecchi sono espresse in millimetri. Tutte le innovazioni tecniche e formali sono coperte da brevetto.

Per i dati fotometrici e il lumen output degli apparecchi visitare www.reggiani.net

HEADQUARTERS

Reggiani Lighting Srl

Viale Monza 16

20845 Sovico (MB), Italy

T. (+39) 039 20711

contact@reggiani.net



Reggiani