

An ultra-miniaturized
system that
seamlessly fits into
every architectural
space. Shape your
ideal layout.

OUTLINE

24V System

Reggiani

Reggiani

Contents

Yori Outline 24V	17
Yori Outline 24V - Zoom	35
Yori Pendant Outline 24V	47
Incline Outline 24V - Adjustable	67
Linear Outline 24V	83
Track Outline 24V	91







EN Ultra-miniaturization, thin dimensions and minimal design: Outline is the new micro 24V track system that houses projectors, pendants and linear lighting solutions, in only 11mm.

IT Ultra miniaturizzazione, dimensioni ridotte e design minimale: Outline è il nuovo sistema a 24V che può ospitare proiettori, soluzioni di illuminazione a sospensione e lineari, in soli 11mm di larghezza.



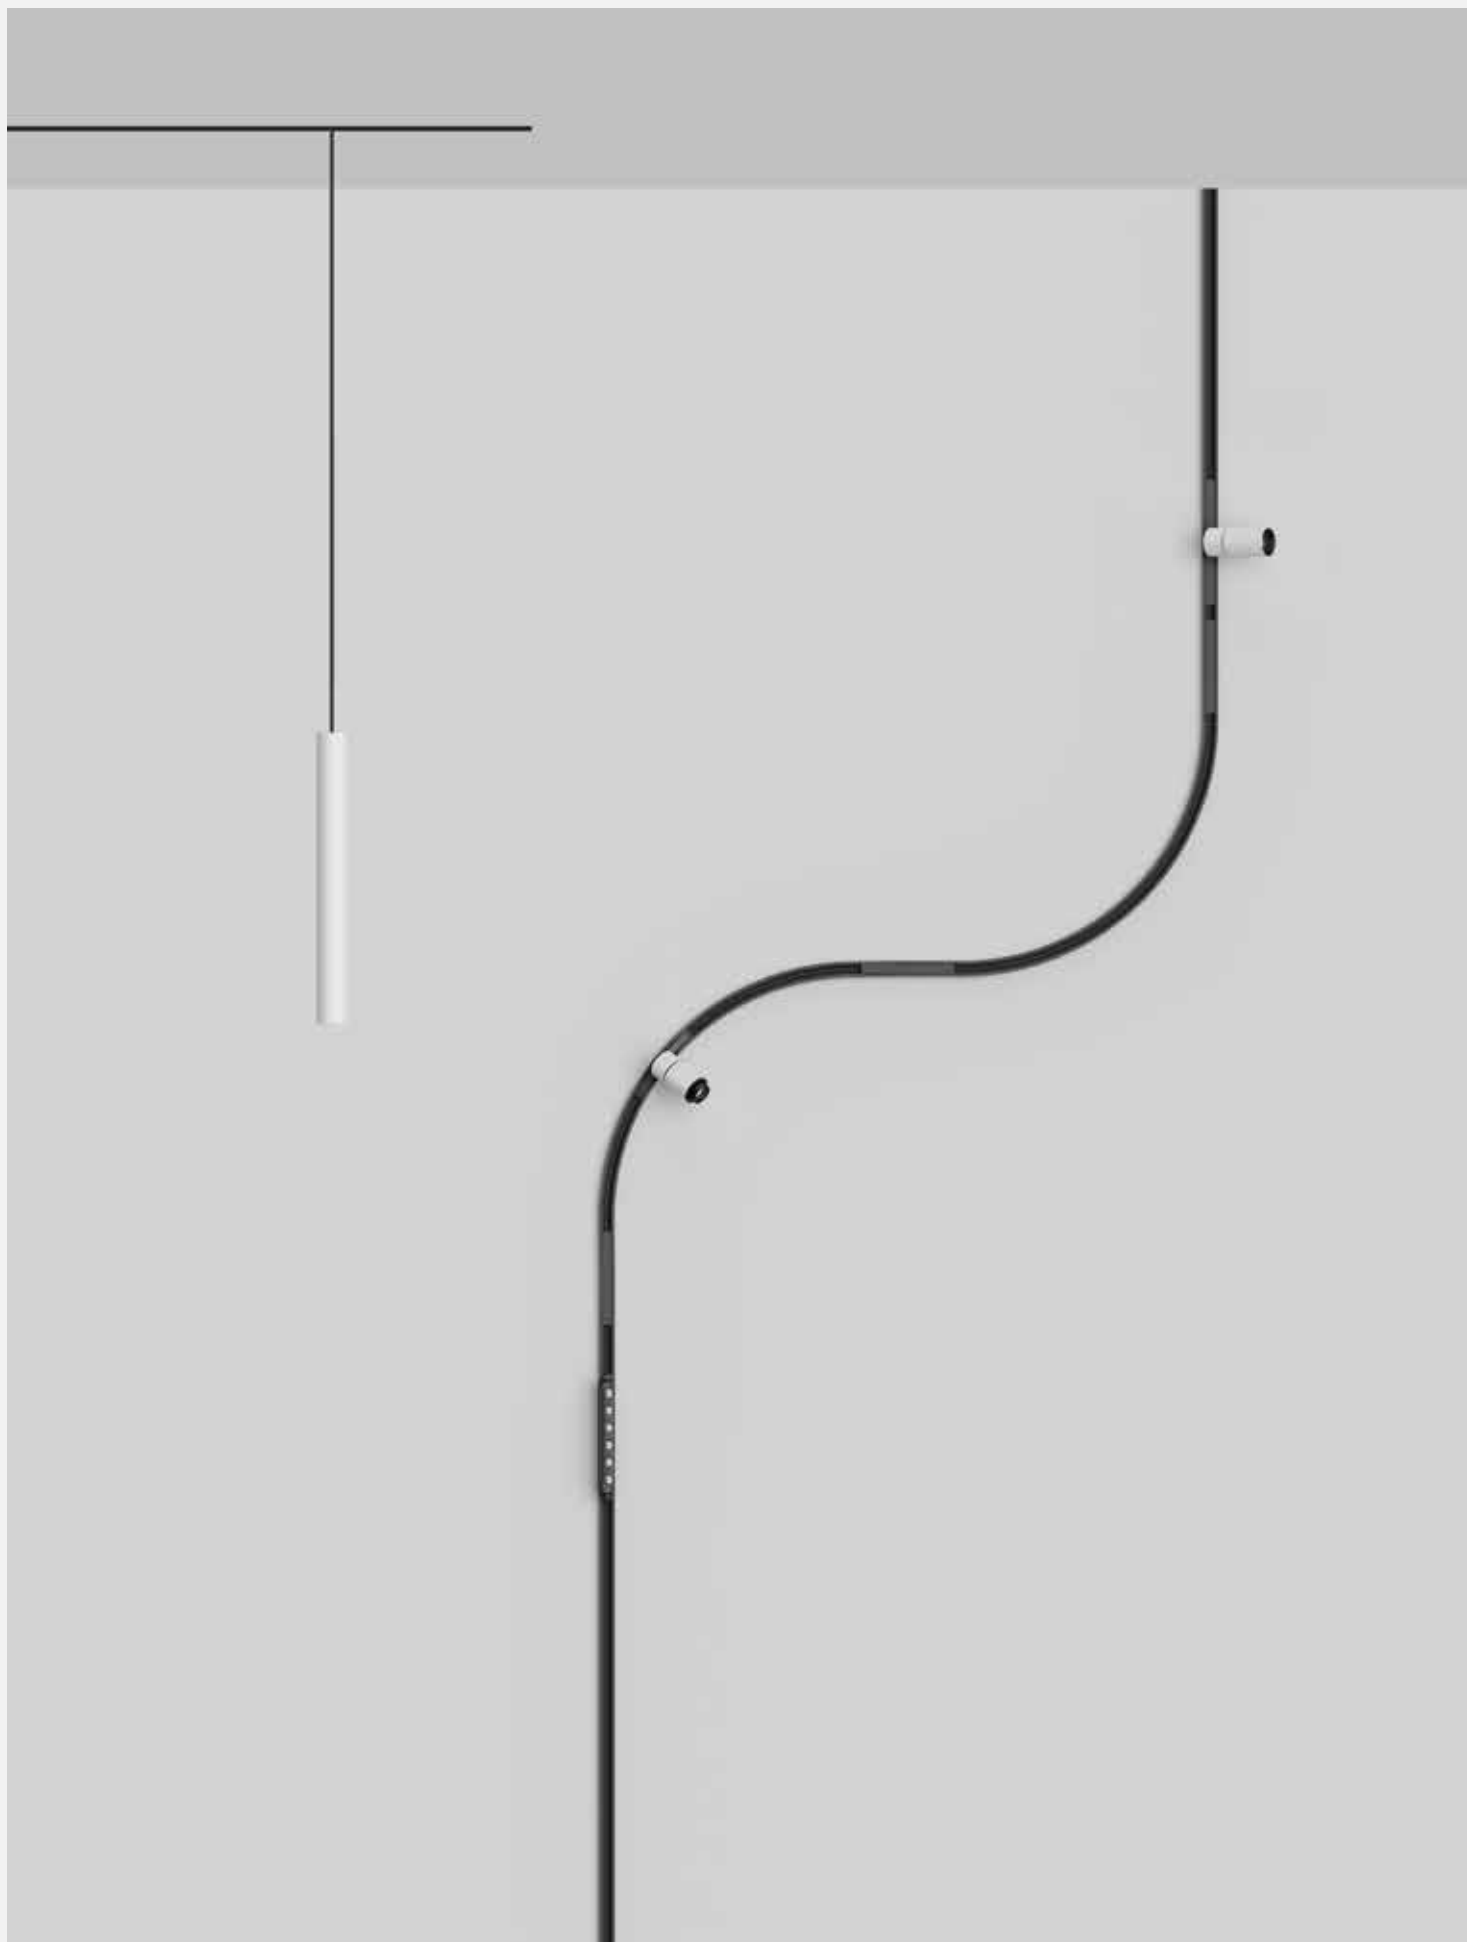

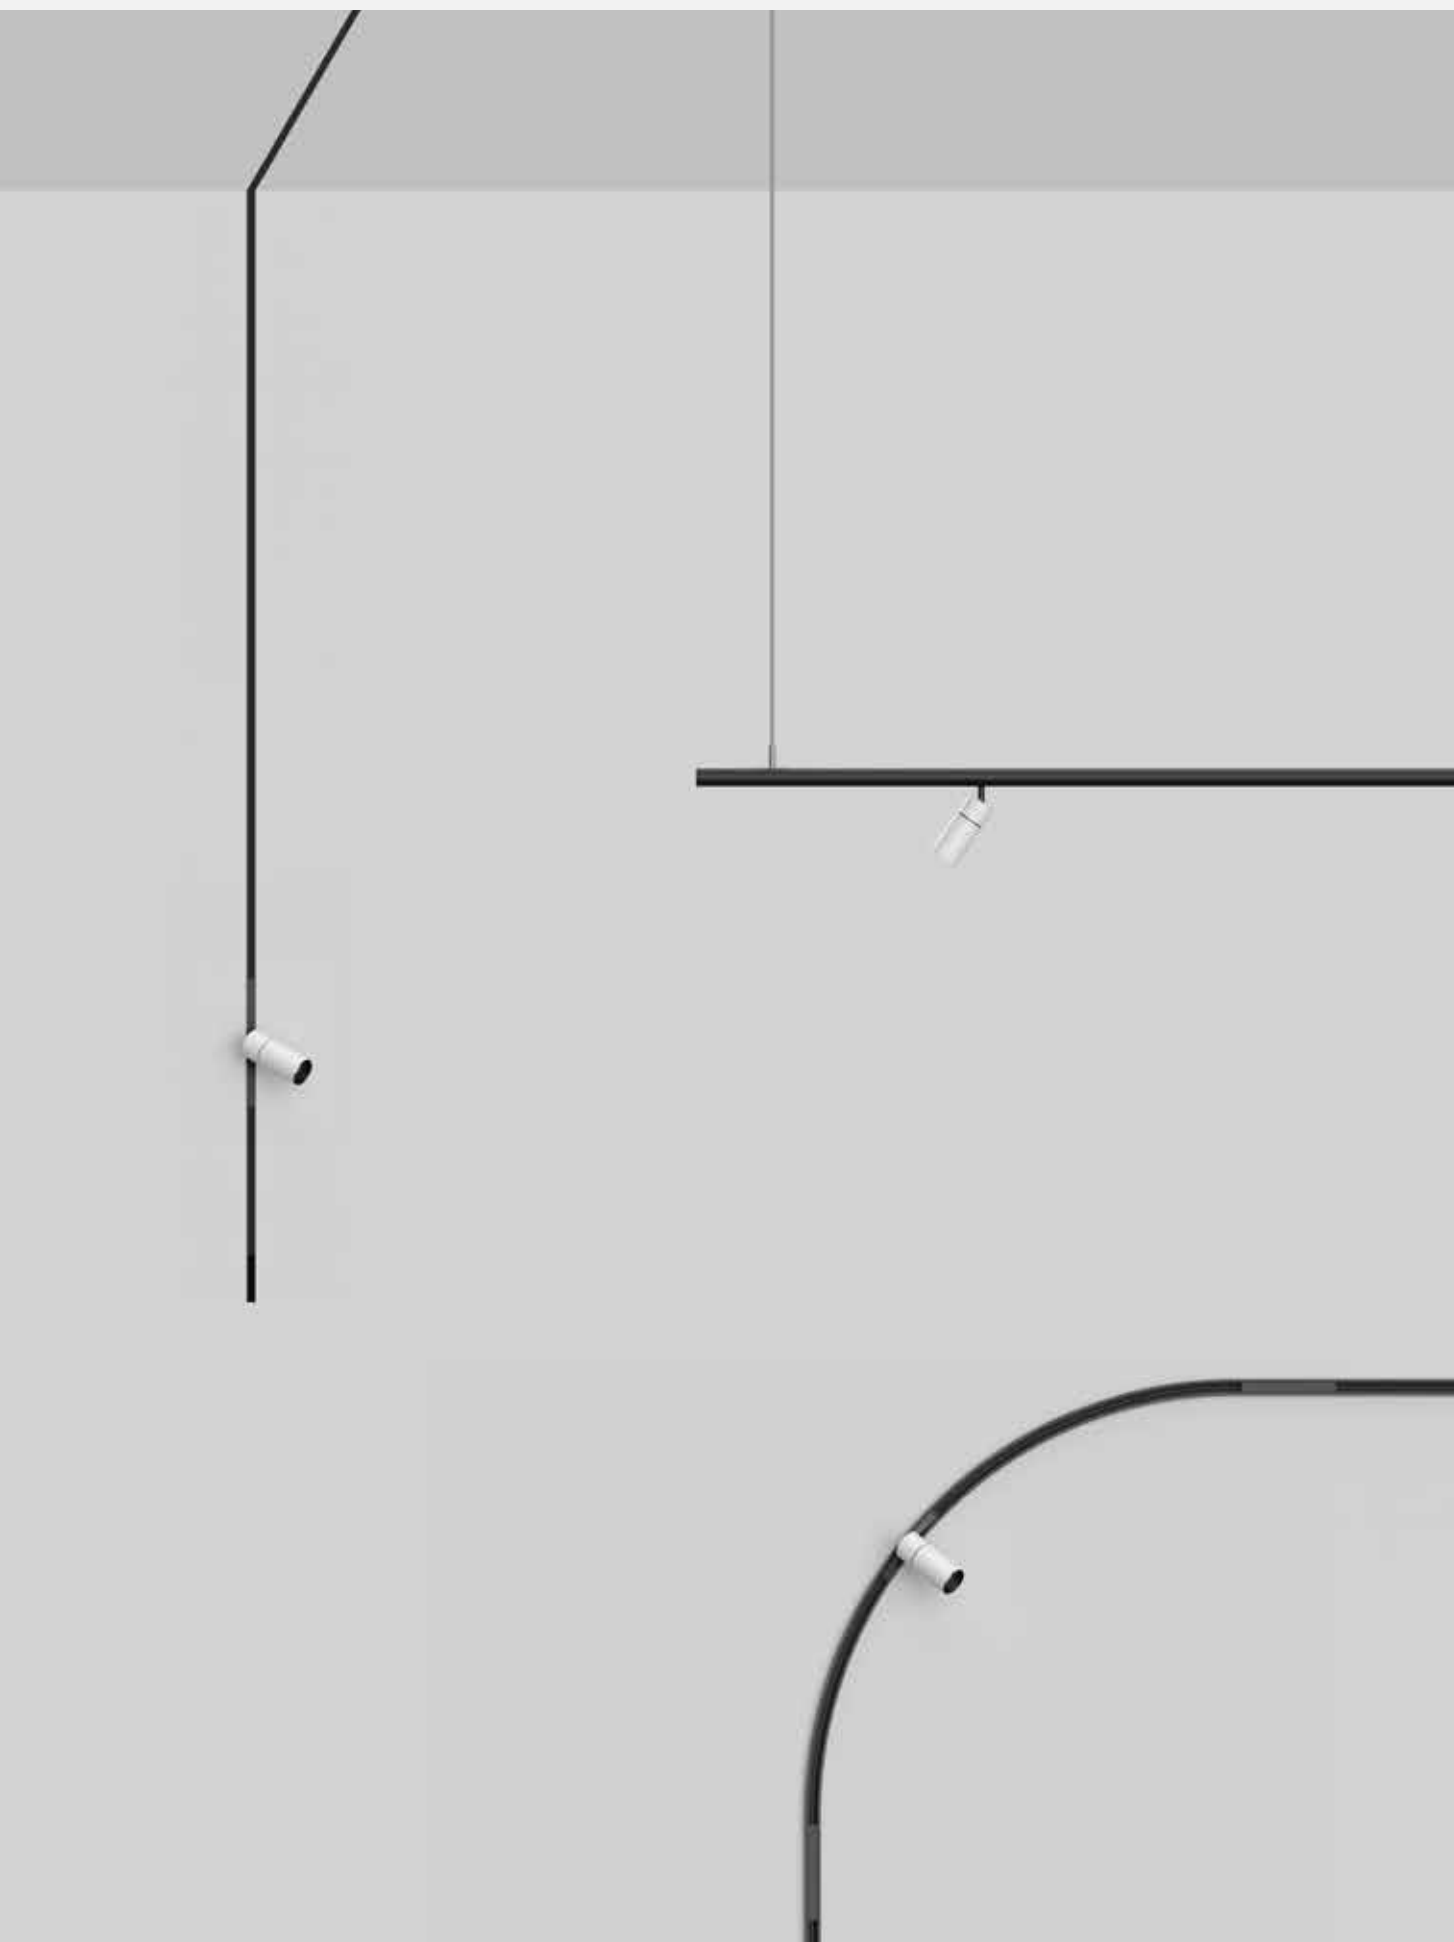










Yori Outline 24V

Choose your favourite





Yori Outline 24V
p.17



Yori Outline 24V - Zoom
p.35




Yori Pendant Outline 24V
p.47



Incline Outline 24V - Adjustable
p.67



Linear Outline 24V
p.83



Track Outline 24V
p.91






Yori Outline 24V









EN Yori Outline is an ultra-miniaturized, high performance projector specifically developed for Outline 24V system. The projector keeps the characteristics of minimal design, refined finishes and excellent lighting results typical of the Yori Family. Yori Outline 24V can be mounted on linear and curved segments, thanks to its 7mm adapter which disappears completely inside the track, giving extreme freedom of application. Yori Outline 24V is available in three color temperatures, 2700K, 3000K and 4000K, all with CRI>90 which assures excellent color rendition.

IT Yori Outline 24V è il proiettore ultra-miniaturizzato, ad elevate prestazioni, sviluppato specificatamente per il sistema Outline 24V. Il proiettore mantiene le caratteristiche di design minimale, finiture ricercate e risultati illuminotecnici eccellenti tipici della famiglia Yori. Yori Outline 24V può essere installato sia su segmenti lineari che curvi, grazie all'adattatore di 7mm che scompare completamente all'interno del binario. Questo permette un'estrema libertà di applicazione. Yori Outline 24V è disponibile in tre temperature colore, 2700K, 3000K e 4000K, e CRI>90 per garantire un'ottima resa cromatica.




Versions/ Versioni			
Yori Outline 24V			
	Yori Outline 24V	Yori Outline 24V - Curved	
Finishes/ Finiture			
	12 Embossed matte white/ Bianco opaco goffrato	31 Embossed matte black/ Nero opaco goffrato	
Special finishes/ Finiture speciali			
	01 Chrome/ Cromo	B0 Royal matte black/ Nero opaco royal	C0 Royal matte white/ Bianco opaco royal
			
	D0 Brushed brass/ Ottone spazzolato	E0 Brushed gold/ Oro spazzolato	L0 Antiqued brushed bronze/ Bronzo antico spazzolato
			
	M0 Brushed aluminium/ Alluminio spazzolato	N0 Brushed copper/ Rame spazzolato	T1 Anodized Bronze/ Bronzo Anodizzato
Adjustability/ Orientabilità			
	Horizontal axis/ Asse orizzontale	Vertical axis/ Asse verticale	
IP	20		
Control systems	On/Off, DALI		
Insulation class			
Certifications	  		

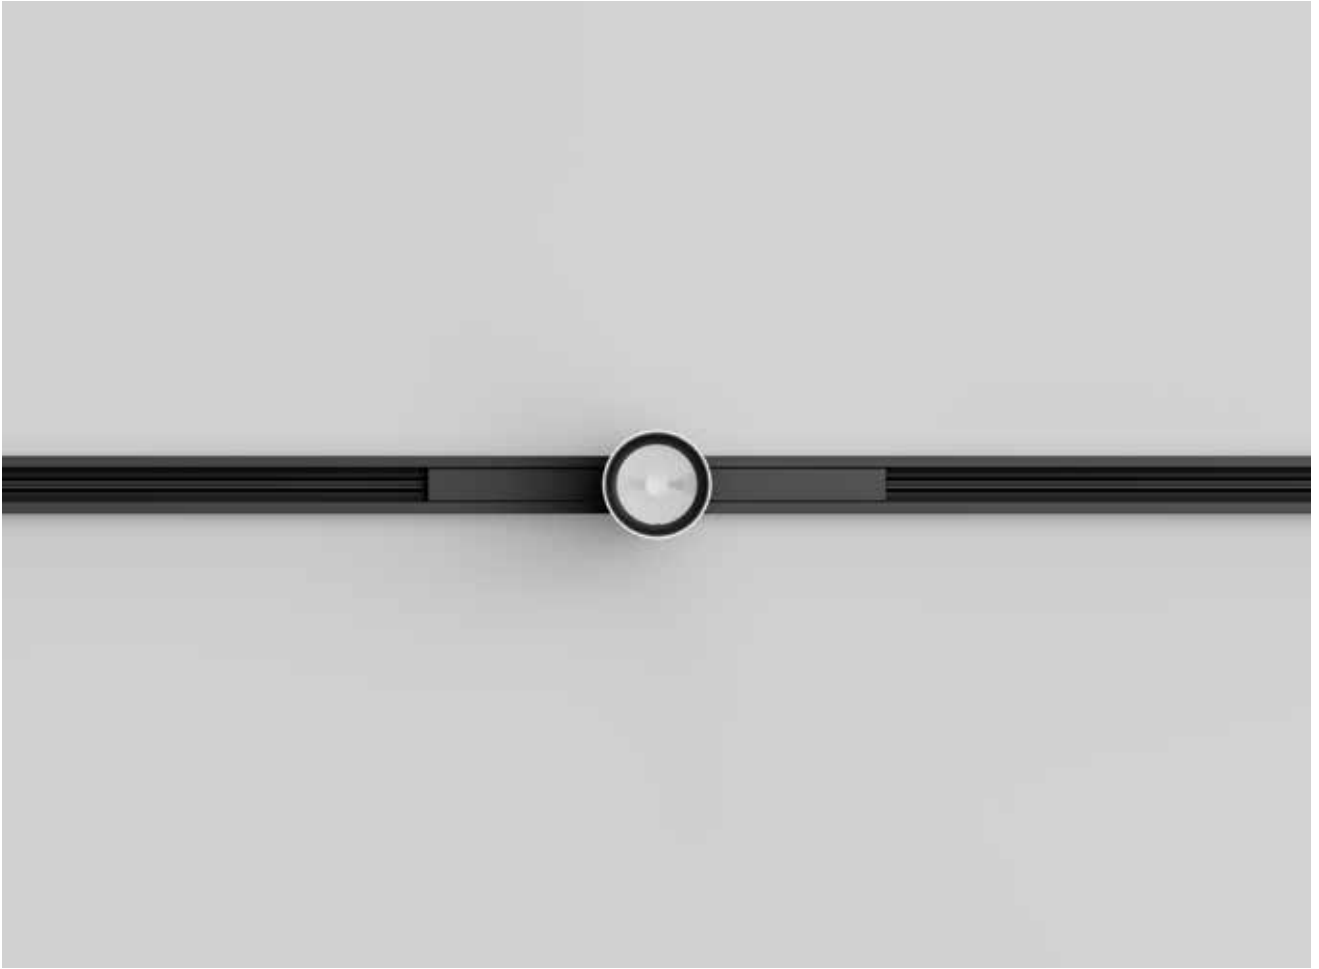

	Ø 22 mm	Ø 35 mm	Ø 43 mm
Yori Outline 24V	 p.28	 p.29	 p.30
Yori Outline 24V 2X	 p.28	 p.29	
Yori Outline 24V Curved	 p.28	 p.30	 p.31
	Narrow (10°) Medium (28°) Wide (33°)	Narrow (11°) Medium (26°) Wide (33°)	Very narrow (8°) Narrow (16°) Medium (23°) Wide (34°)
Light source/ Sorgente luminosa	POWER LED 2 W 245 lm - 286 lm L90 B10=50,000 h 2700 K; 3000 K; 4000 K SDCM <3 CRI >90 2000 K; 2200 K; 2500K; 3500K with accessories p.32	POWER LED 3,5 W; 7 W 357 lm - 722 lm L90 B10=50,000 h 2700 K; 3000 K; 4000 K SDCM <3 CRI >90 2000 K; 2200 K; 2500K; 3500K with accessories p.32-33	POWER LED 5 W; 9 W* 550 lm - 1186 lm L90 B10=50,000 h 2700 K; 3000 K; 4000 K SDCM <3 CRI >90 2000 K; 2200 K; 2500K; 3500K with accessories p.33 *On request: DT (Warm Dimming)

EN Ultra-miniaturization for a seamless result. The 10mm track height guarantees cleanliness and simplicity, providing the ability to imitate a recessed effect without complicated ceiling details.

IT Ultra miniturizzazione per un risultato impeccabile. L'altezza del binario di soli 10mm garantisce pulizia e semplicità: ciò permette di ricreare effetti ad incasso senza lavorare sul controsoffitto.

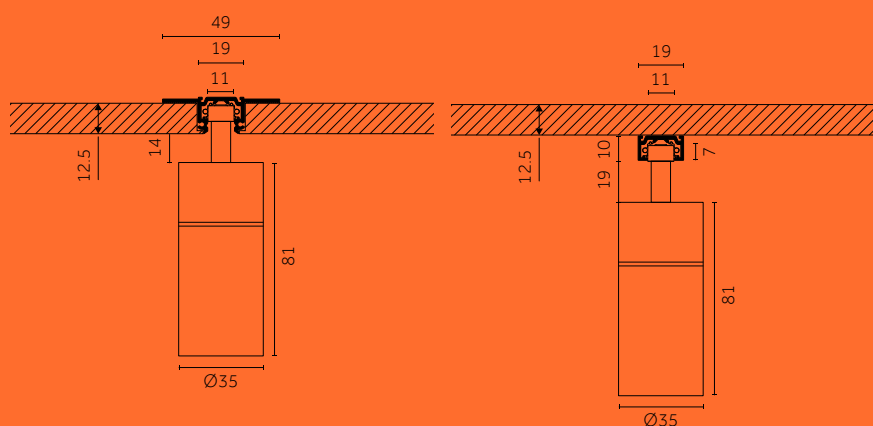


EN Yori Outline 24V mounted on recessed track.

IT Yori Outline 24V installato su binario ad incasso.

EN Yori Outline 24V mounted on surface track.

IT Yori Outline 24V installato su binario a superficie.

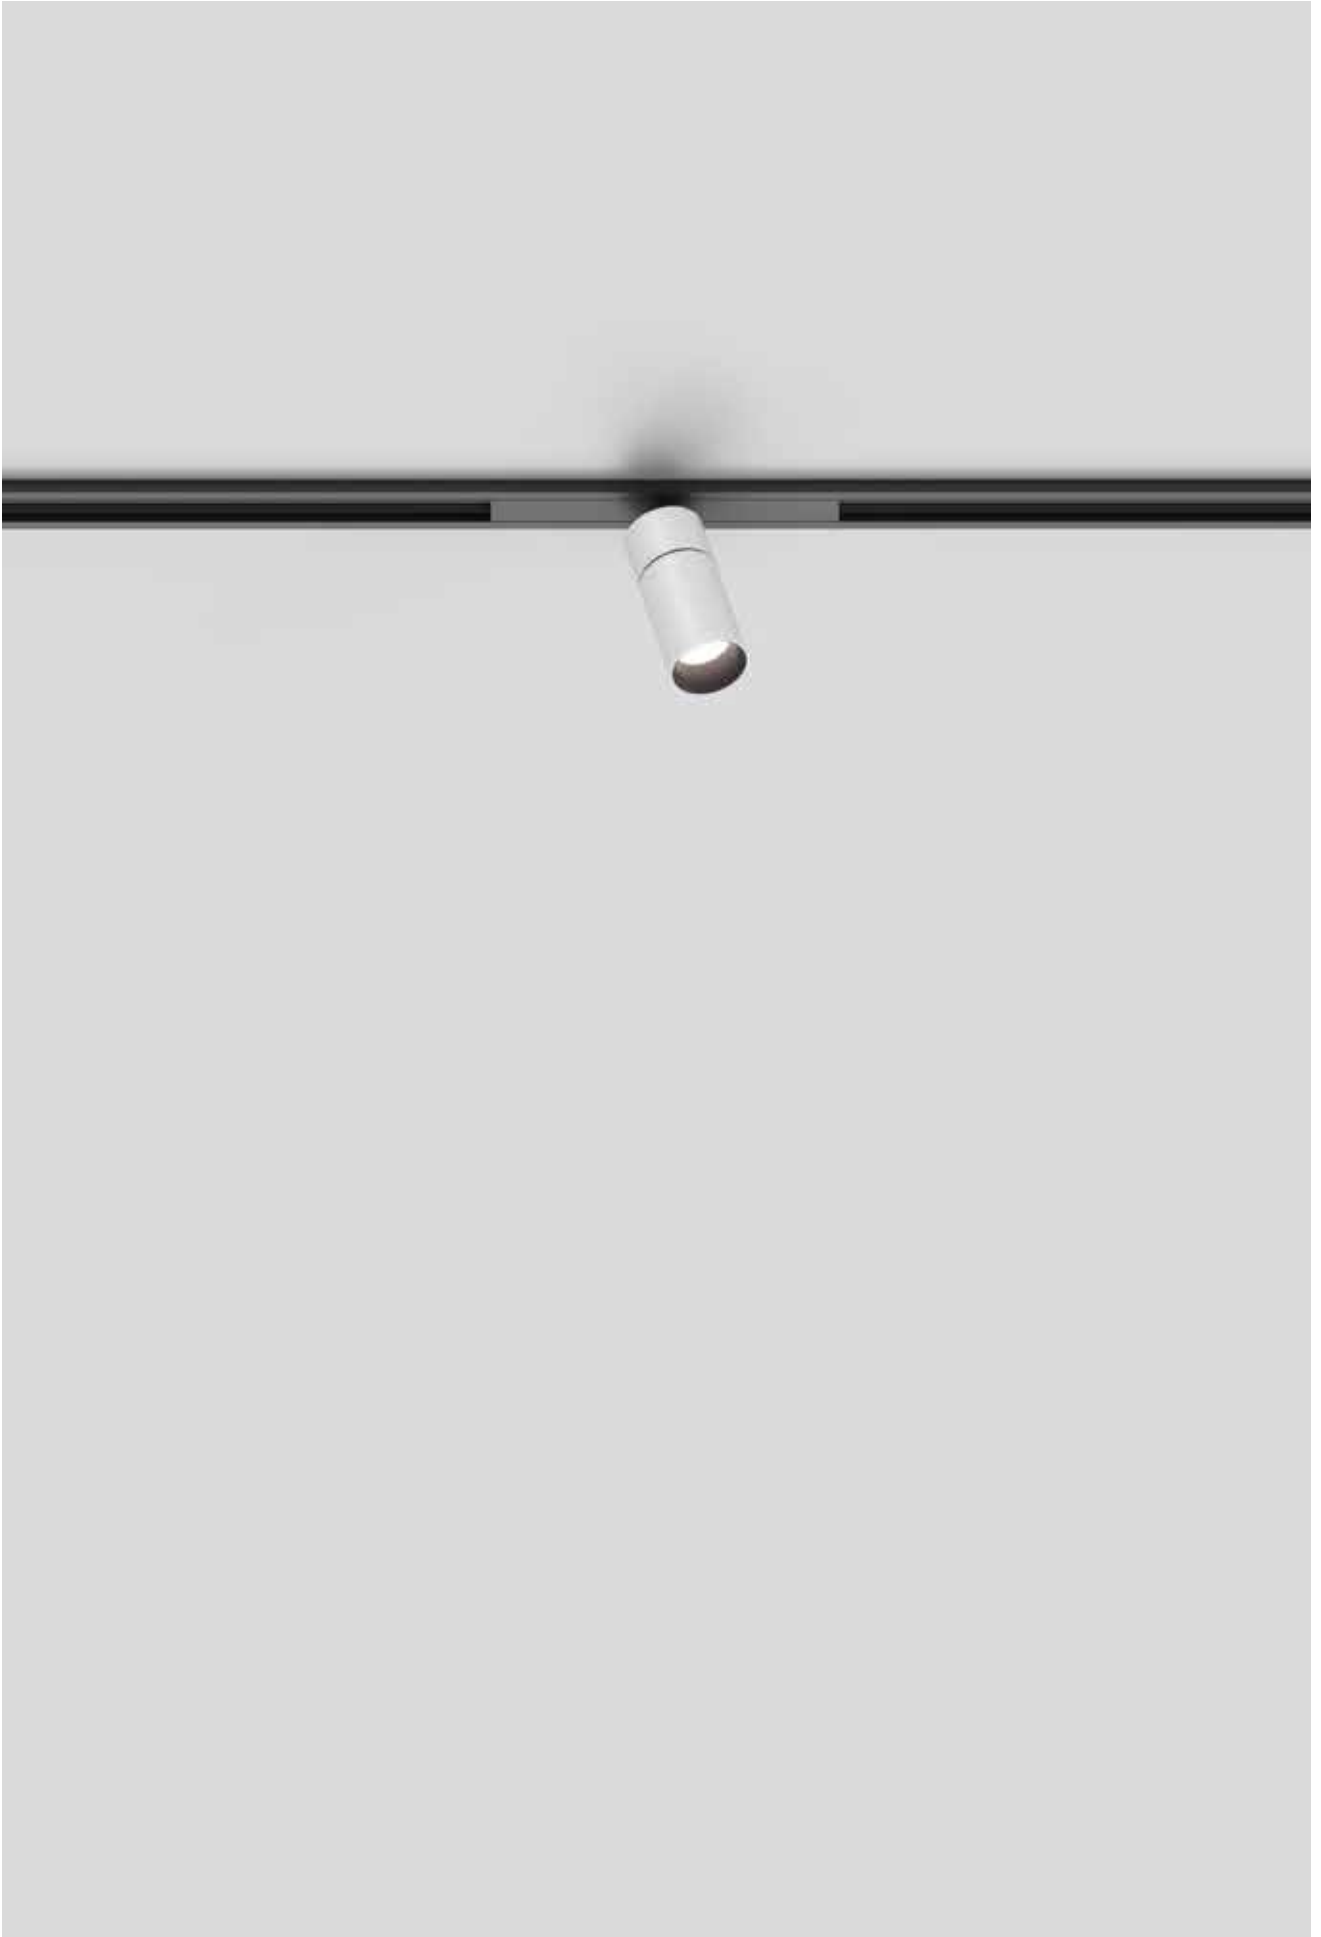


Play with the curves


EN To shape the ideal layout, the curved adapter, developed especially for our Outline system, allows the installation of Yori projectors on curved track. Choose between the 300mm and 500mm radii that best suits your configuration. Yori Outline 24V with curved adapter is available in Ø22mm, Ø35mm, Ø43mm.

IT Per permettere la creazione del layout ideale, l'adattatore curvo, sviluppato specificatamente per il sistema Outline, permette l'installazione del proiettore su binari curvi. Scegli il raggio che più si adatta alla tua configurazione (300mm, 500mm). Yori Outline 24V con adattatore curvo è disponibile per i diametri Ø22mm, Ø35mm, Ø43mm.




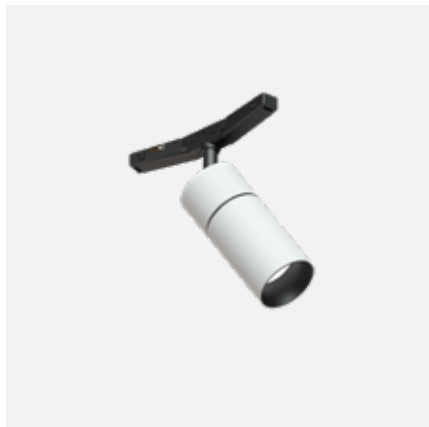


EN Curved adapter available for Yori Outline 24V.
IT Adattatore curvo disponibile per Yori Outline 24V.

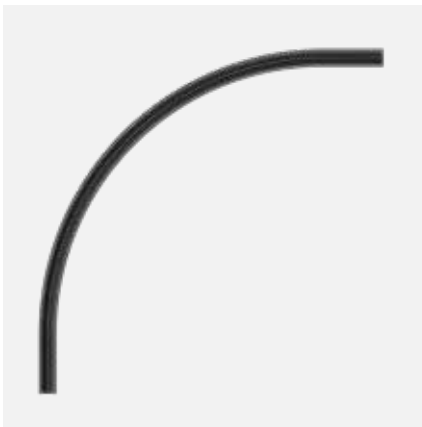


EN Curved section of the track.
IT Sezione curva del binario.

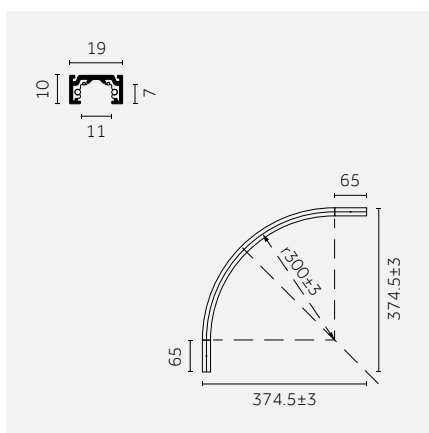

EN 300mm r curve.
IT Curva raggio 300mm.

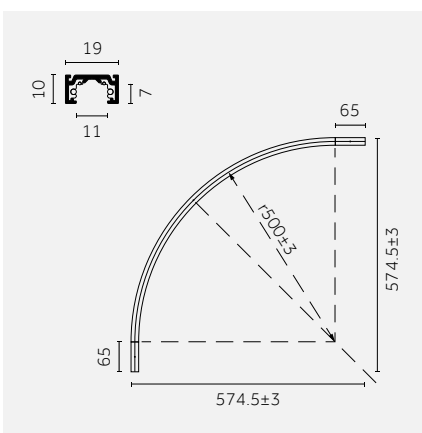

EN 500mm r curve.
IT Curva raggio 500mm.

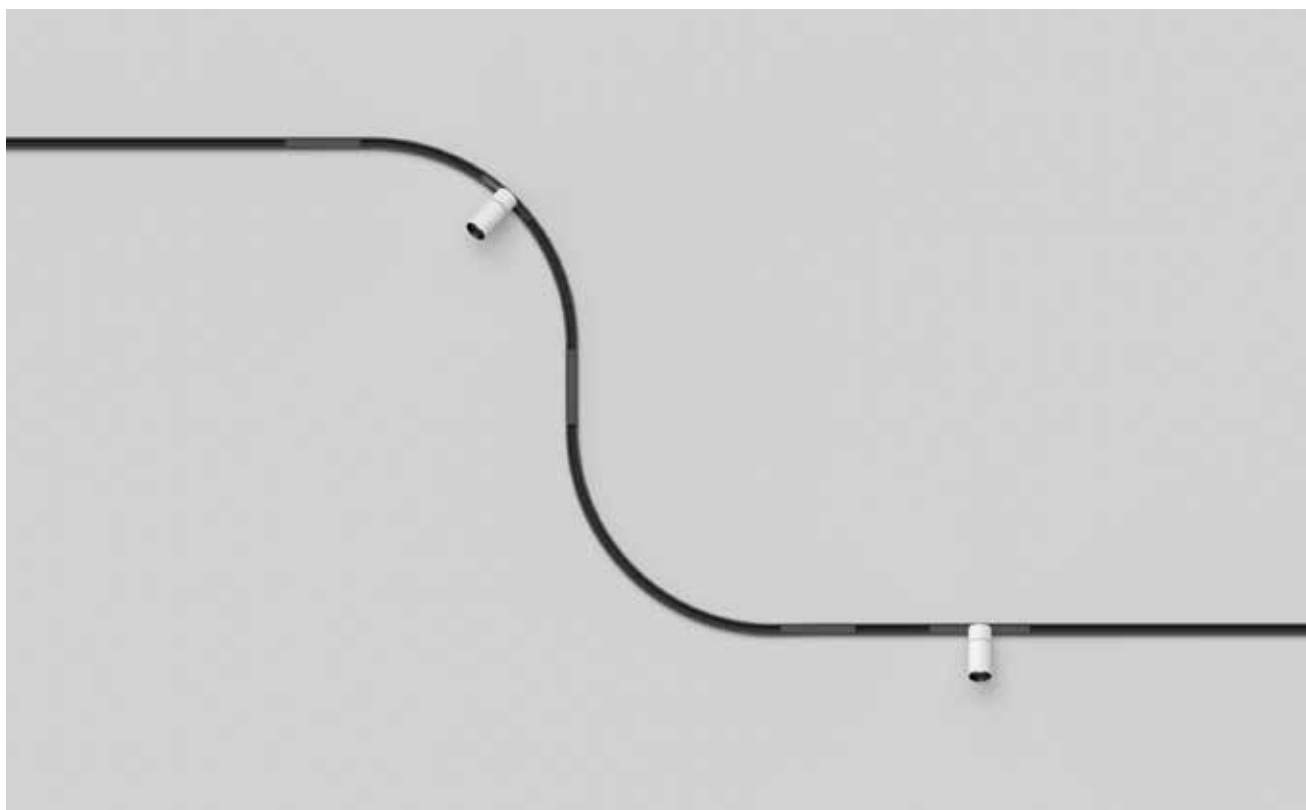

A quality light



^{EN} Optic is positioned further back from external protective glass to allow maximum glare control regardless of the use of any accessory.


^{IT} L'ottica arretrata rispetto al vetro di protezione esterno consente alto controllo dell'abbaglio anche senza alcun accessorio.

^{EN} LED with CRI>90 making the whole range suitable for high-end applications.

^{IT} LED con CRI>90 disponibile per tutto il sistema, per garantire luce di qualità.

EN Yori Outline 24V is available with a range of integrated accessories: from selective filters to modify the color temperature, to colored filters for optional light effects. Spread lens, honeycomb and anti-glare screens complete the range. The concentric circles antiglare accessory can be used on narrow beams light fixtures to reduce glare and focus the light beam.

IT Yori Outline 24V è disponibile con differenti accessori integrati: dai filtri selettivi per variare la temperatura colore, ai filtri colorati per opzionali effetti di luce. Lente diffondente, schermi alveolari e antiglare completano la gamma. L'accessorio antiglare a cerchi concentrici può essere utilizzato sui fasci stretti per ridurre l'abbagliamento e concentrare il fascio.

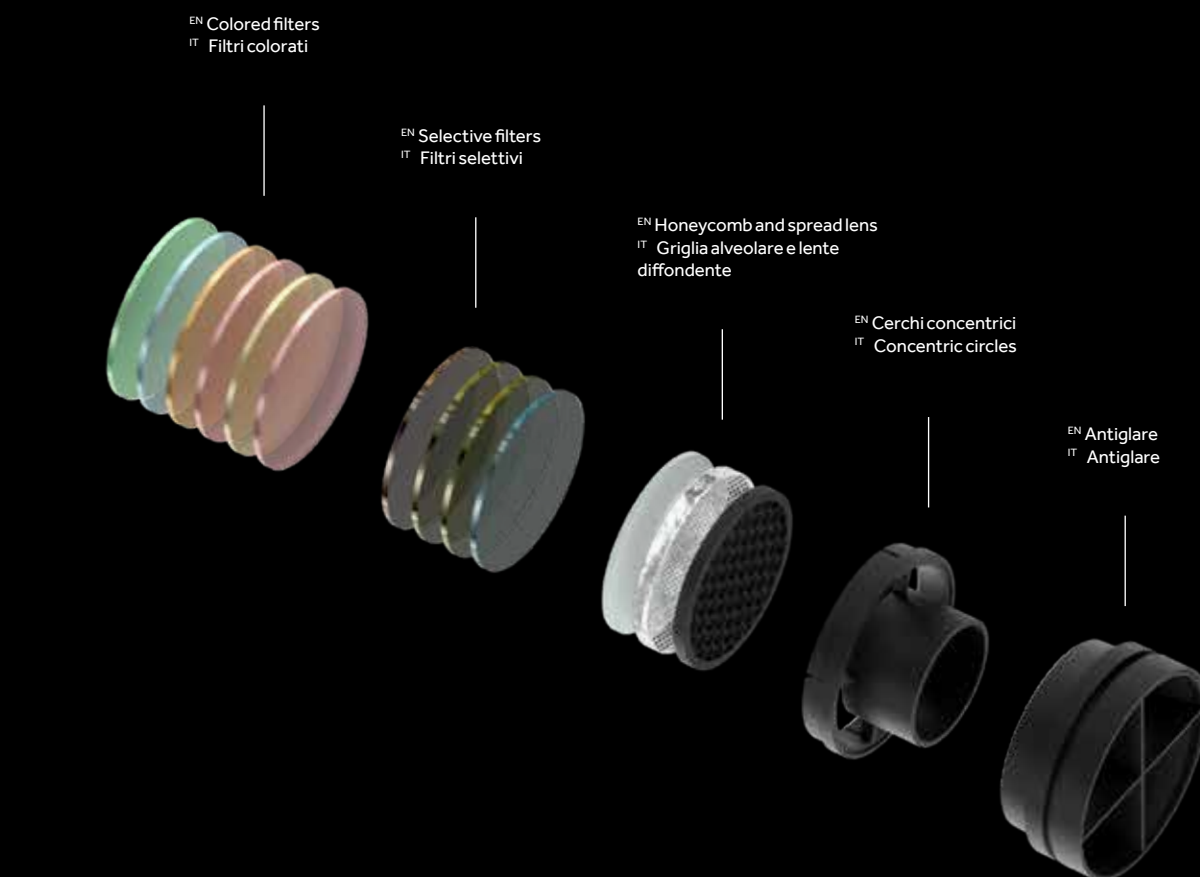


EN Yori with antiglare concentric circles accessory.
IT Yori con accessorio antiglare a cerchi concentrici.



EN The antiglare concentric circles accessory creates a focused light beam, ideal for shop windows.
IT L'accessorio antiglare a cerchi concentrici crea un fascio di luce concentrato, ideale per vetrine.

Ø 22 mm | Precision

Risk 1 0.05 IP20 850° CE UK CA



Code example:
0 - BS41 B - HW 12


Accessories: p. 32
Track Outline 24V: p.91-108
Finishes: p.56-57
Photometric data:
www.reggiani.net

Notes:
2000K; 2200K; 2500K; 3500K
with accessories p.32

2 W		POWER LED		Lumen delivered up to 87 lm / Lumen maintenance: L90 B10=50,000h									
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes					
0 On-Off	BS41 Standard	B 10° Narrow	HW	2700	>90	245	<3	12					
D DALI		E 28° Medium	HQ	3000	>90	264	<3	31					
		H 33° Wide	HN	4000	>90	286	<3	01					
			LED nominal lumen						B0				
									C0				
									D0				
									E0				
									L0				
									M0				
									N0				
									T1				

Ø 22 mm | Precision 2X

Risk 1 0.10 IP20 850° CE UK CA



Code example:
0 - FS41 B - HW 12



Accessories: p. 32
Track Outline 24V: p.91-108
Finishes: p.56-57
Photometric data:
www.reggiani.net

Notes:
2000K; 2200K; 2500K; 3500K
with accessories p.32

2x2 W		POWER LED		Lumen delivered up to 2x87 lm / Lumen maintenance: L90 B10=50,000h									
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes					
0 On-Off	FS41 Standard	B 10° Narrow	HW	2700	>90	2x245	<3	12					
D DALI		E 28° Medium	HQ	3000	>90	2x264	<3	31					
		H 33° Wide	HN	4000	>90	2x286	<3	01					
			LED nominal lumen						B0				
									C0				
									D0				
									E0				
									L0				
									M0				
									N0				
									T1				

Ø 22 mm | Precision Curved

Risk 1 0.05 IP20 850° CE UK CA




Code example:
0 - BS61 B - HW 12

Accessories: p. 32
Track Outline 24V: p.91-108
Finishes: p.56-57
Photometric data:
www.reggiani.net

Notes:
2000K; 2200K; 2500K; 3500K
with accessories p.32

2 W		POWER LED		Lumen delivered up to 87 lm / Lumen maintenance: L90 B10=50,000h									
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes					
0 On-Off	BS61 Curved	B 10° Narrow	HW	2700	>90	245	<3	12					
		E 28° Medium	HQ	3000	>90	264	<3	31					
		H 33° Wide	HN	4000	>90	286	<3	01					
			LED nominal lumen						B0				
									C0				
									D0				
									E0				
									L0				
									M0				
									N0				
									T1				

Ø 35 mm | Precision



Code example:

O . **LS41** . B . **HW** **12**

Accessories: p. 32-33

Track Outline 24V: p. 91-108

Finishes: p. 56-57

Photometric data:

www.reggiani.net

Notes:


2000 K; 2200 K; 2500 K; 3500 K
with accessories p. 32-33**3.5 W POWER LED** Lumen delivered up to 282 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	LS41 Standard	B 11° Narrow	HW	2700	>90	355	<3	12
D DALI		E 26° Medium	HQ	3000	>90	376	<3	31
		H 33° Wide	HN	4000	>90	405	<3	01
LED nominal lumen								B0
								C0
								D0
								E0
								L0
								M0
								N0
								T1

7 W POWER LED Lumen delivered up to 565 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	LS42 Standard	B 11° Narrow	HW	2700	>90	635	<3	12
D DALI		E 26° Medium	HQ	3000	>90	669	<3	31
		H 33° Wide	HN	4000	>90	720	<3	B0
LED nominal lumen								C0
								D0
								E0
								L0
								M0
								N0
								T1

Ø 35 mm | Precision 2X



Code example:

O . **HS42** . B . **HW** **12**

Accessories: p. 32-33

Track Outline 24V: p. 91-108

Finishes: p. 56-57

Photometric data:



www.reggiani.net

Notes:

2000 K; 2200 K; 2500 K; 3500 K
with accessories p. 32-33**2x3.5 W POWER LED** Lumen delivered up to 2x282 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
O On-Off	HS42 Standard	B 11° Narrow	HW	2700	>90	2x355	<3	12
D DALI		E 26° Medium	HQ	3000	>90	2x376	<3	31
		H 33° Wide	HN	4000	>90	2x405	<3	01
LED nominal lumen								B0
								C0
								D0
								E0
								L0
								M0
								N0
								T1

Ø 35 mm | Precision Curved



Code example:
0 - **LS61** - **B** - **HW** - **12**


Accessories: p. 32-33
Track Outline 24V: p.91-108
Finishes: p.56-57
Photometric data:
www.reggiani.net

Notes:
2000 K; 2200 K; 2500 K; 3500 K
with accessories p.32-33

3.5 W	POWER LED		Lumen delivered up to 282lm / Lumen maintenance: L90 B10=50,000h								
Driver		Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
0	On-Off	LS61	Curved	B	11° Narrow	HW	2700	>90	355	<3	12
				E	26° Medium	HQ	3000	>90	375	<3	31
				H	33° Wide	HN	4000	>90	405	<3	01
LED nominal lumen											
											B0
											C0
											D0
											E0
											L0
											M0
											N0
											T1

7 W	POWER LED		Lumen delivered up to 565lm / Lumen maintenance: L90 B10=50,000h									
Driver		Version	Optics	LED	K	CRI	lm	SDCM	Finishes			
0	On-Off	LS62	Curved	B	11°	Narrow	HW	2700	>90	635	<3	12
			E	26°	Medium	HQ	3000	>90	670	<3	31	
			H	33°	Wide	HN	4000	>90	720	<3	B0	
LED nominal lumen											C0	
											D0	
											E0	
											L0	
											M0	
											N0	
											T1	

Ø 43 mm | Precision



Code example:
0 - **MS42** - **A** - **HW** - **12**

Accessories: p. 33
Track Outline 24V: p.91-108
Finishes: p.56-57
Photometric data:
www.reggiani.net



Notes:
2000 K; 2200 K; 2500 K; 3500 K
with accessories p.33

5 W	POWER LED		Lumen delivered up to 535lm / Lumen maintenance: L90 B10=50,000h							
Driver	Version		Optics	LED	K	CRI	lm	SDCM	Finishes	
0 On-Off	MS42	Standard	A 8° Very narrow	HW	2700	>90	550	<3	12	
D DALI			B 16° Narrow	HQ	3000	>90	594	<3	31	
			E 23° Medium	HN	4000	>90	640	<3	01	
			H 34° Wide	LED nominal lumen DT (Warm Dimming) on request					B0	
								C0		
								D0		
								E0		
								L0		
								M0		
								N0		
								T1		

9 W	POWER LED		Lumen delivered up to 1070 lm / Lumen maintenance: L90 B10=50,000h							
Driver	Version		Optics	LED	K	CRI	lm	SDCM	Finishes	
0 On-Off	MS43	Standard	A 8° Very narrow	HW	2700	>90	1027	<3	12	
D DALI			B 16° Narrow	HQ	3000	>90	1101	<3	31	
			E 23° Medium	HN	4000	>90	1186	<3	B0	
			H 34° Wide	LED nominal lumen DT (Warm Dimming) on request					C0	
								D0		
								E0		
								L0		
								M0		
								N0		
								T1		

Ø 43 mm | Precision Curved

Risk 1 0.19 IP20 850°



Code example:

0 . MS62 A . HW 12

Accessories: p. 33

Track Outline 24V: p.91-108

Finishes: p.56-57

Photometric data:

www.reggiani.net

Notes:

2000K; 2200K; 2500K; 3500K

with accessories p.33

5 W	POWER LED		Lumen delivered up to 535lm / Lumen maintenance: L90 B10=50,000h									
Driver		Version		Optics		LED	K	CRI	lm	SDCM	Finishes	
0	On-Off	MS62	Standard	A	8° Very narrow	HW	2700	>90	550	<3	12	
				B	16° Narrow	HQ	3000	>90	594	<3	31	
				E	23° Medium	HN	4000	>90	640	<3	01	
				H	34° Wide	LED nominal lumen					B0	
												C0
								D0				
								E0				
								L0				
								M0				
								N0				
								T1				

9 W		POWER LED		Lumen delivered up to 1070 lm / Lumen maintenance: L90 B10=50,000h									
Driver		Version		Optics		LED	K	CRI	lm	SDCM	Finishes		
0	On-Off	MS63	Standard	A	8° Very narrow	HW	2700	>90	1027	<3	12		
				B	16° Narrow	HQ	3000	>90	1101	<3	31		
				E	23° Medium	HN	4000	>90	1186	<3	B0		
				H	34° Wide	LED nominal lumen					C0		
											D0		
											E0		
											L0		
											M0		
											N0		
											T1		

Accessories

Yori Outline 24V | Ø 22 mm | Precision

Optics accessories/ Accessori ottiche

	Description Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm Holder included	Code 0.26700.00	Finishes 4A Red 5A Green 6A Blue 7A Pink 8A Yellow 9A Orange		Description Selective filter 3000K - 3500K / Filtro selettivo 3000K - 3500K Holder included	Code 0.26705.00	
					Description Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K Holder included	Code 0.26706.00	
	Description Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K Holder included	Code 0.26701.00			Description Elliptical beam lens / Lente per fascio ellittico Holder included	Code 0.26707.00	
	Description Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K Holder included	Code 0.26702.00			Description Opal lens/ Lente opale Holder included	Code 0.26708.00	
	Description Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K Holder included	Code 0.26703.00			Description Spread lens/ Lente diffondente Holder included	Code 0.26709.00	
	Description Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K Holder included	Code 0.26704.00			Description Concentric circles/ Cerchi concentrici Only for light beam B/ Solo per fascio di luce B	Code 0.26582.00	Finishes 31

Yori Outline 24V | Ø 35 mm | Precision

Optics accessories/ Accessori ottiche

	Description Colored glass filter 1 mm / Filtro in vetro colorato 1 mm Holder included	Code 0.26710.00	Finishes 4A Red 5A Green 6A Blue 7A Pink 8A Yellow 9A Orange		Description Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K Holder included	Code 0.26714.00
					Description Selective filter 3000K - 3500K / Filtro selettivo 3000K - 3500K Holder included	Code 0.26715.00
		Description Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K Holder included			Description Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K Holder included	Code 0.26716.00
		Description Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K Holder included			Description Elliptical beam lens / Lente per fascio ellittico Holder included	Code 0.26717.00
		Description Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K Holder included			Description Opal lens / Lente opale Holder included	Code 0.26718.00

	Description Spread lens/ Lente diffondente Holder included	Code <u>0.26719.00</u>			Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta Holder included	Code <u>0.26398.0000</u>
	Description Concentric circles/ Cerchi concentrici Only for light beam B/ Solo per fascio di luce B	Code <u>0.26583.00</u>	Finishes <u>31</u> 		Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga Holder included	Code <u>0.26399.0000</u>

Yori Outline 24V | Ø 43 mm | Precision

Optics accessories/
Accessori ottiche



	Description Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm Holder included	Code <u>0.26400.00</u>	Finishes <u>4A</u> Red  <u>5A</u> Green  <u>6A</u> Blue  <u>7A</u> Pink  <u>8A</u> Yellow  <u>9A</u> Orange 		Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga Holder included	Code <u>0.26448.0000</u>
	Description Colored gel slides (2 pieces)/ Vetrini per gel colorato (2 pezzi)/ Holder included	Code <u>0.26408.0000</u>			Description Elliptical beam lens / Lente per fascio ellittico Holder included	Code <u>0.26456.0000</u>
	Description Opal lens/ Lente opale Holder included	Code <u>0.26460.0000</u>			Description Opal lens/ Lente opale Holder included	Code <u>0.26460.0000</u>
	Description Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K Holder included	Code <u>0.26557.0000</u>			Description Spread lens/ Lente diffondente Holder included	Code <u>0.26468.0000</u>
	Description Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K Holder included	Code <u>0.26416.0000</u>			Description Cross blade louvre/ Griglia a croce Holder included	Code <u>0.26476.0000</u>
	Description Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K Holder included	Code <u>0.26424.0000</u>			Description Barn doors/ Alette rompiflusso Holder included	Code <u>0.26484.0000</u>
	Description Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K Holder included	Code <u>0.26432.0000</u>			Description Cone 45° wall washer/ Cono 45° wall washer Holder included	Code <u>0.26488.00</u>
	Description Selective filter 3000K - 3500K / Filtro selettivo 3000K - 3500K Holder included	Code <u>0.26565.0000</u>			Description Short snoot/ Cilindro corto Holder included	Code <u>0.26556.00</u>
	Description Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K Holder included	Code <u>0.26573.0000</u>			Description Concentric circles/ Cerchi concentrici Only for light beam A and B/ Solo per fascio di luce A e B	Code <u>0.26584.00</u>
	Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta Holder included	Code <u>0.26440.0000</u>				Finishes <u>12</u>  <u>31</u> 
						Finishes <u>12</u>  <u>31</u> 
						Finishes <u>31</u> 

Yori Outline 24V Zoom

EN Yori Outline 24V - Zoom is an excellent solution for accent lighting. The knurled ring on the projector allows to adjust the beam angle from 7° to 37° with the same soft and even distribution. Yori Outline 24V Zoom is available in Ø22mm, Ø35mm, Ø43mm.

IT Yori Outline 24V - Zoom è una soluzione eccellente per l'illuminazione d'accento. L'anello zigrinato sul proiettore permette l'aggiustamento del fascio di luce dai 7° ai 37° e conferisce così alla luce una distribuzione morbida ed uniforme. Yori Outline 24V è disponibile in Ø22mm, Ø35mm, Ø43mm.



Versions/ Versioni			
Yori Outline 24V - Zoom			
	Yori Outline 24V - Zoom	Yori Outline 24V - Zoom Curved	
Finishes/ Finiture			
Special finishes/ Finiture speciali			
	12 Embossed matte white/ Bianco opaco goffrato	31 Embossed matte black/ Nero opaco goffrato	
			
	01 Chrome/ Cromo	B0 Royal matte black/ Nero opaco royal	C0 Royal matte white/ Bianco opaco royal
			
	D0 Brushed brass/ Ottone spazzolato	E0 Brushed gold/ Oro spazzolato	L0 Antiqued brushed bronze/ Bronzo antico spazzolato
			
	M0 Brushed aluminium/ Alluminio spazzolato	N0 Brushed copper/ Rame spazzolato	T1 Anodized Bronze/ Bronzo Anodizzato
Adjustability/ Orientabilità			
			
	Horizontal axis/ Asse orizzontale	Vertical axis/ Asse verticale	
IP	20		
Control systems	On/Off, DALI		
Insulation class			
Certifications	CE UK CA ENEC		



Ø22

7° ————— 14°

Ø35

9° ————— 21°

Ø43

13° ————— 37°


^{EN} The knurled ring on the projector allows to adjust the beam angle from 7° to 37° depending on fitting diameter.







^{IT} L'anello zigrinato sul proiettore permette l'orientamento del fascio da 7° a 37° in base al diametro.



^{EN} Yori Outline 24V - Zoom is available with the curved adapter too.


^{IT} Yori Outline 24V - Zoom è disponibile anche con adattatore curvo.

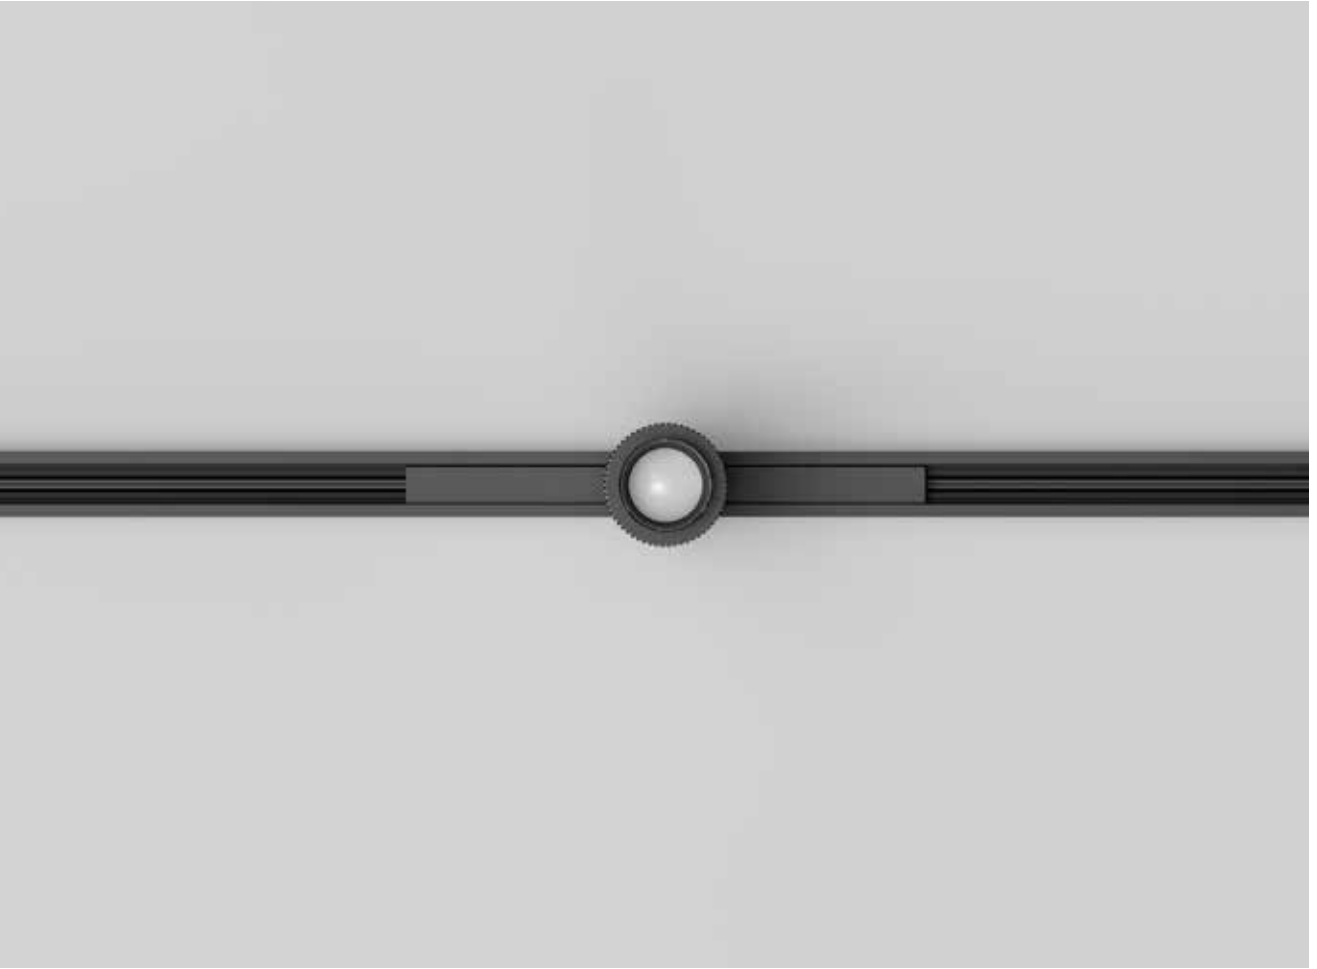

	Ø 22 mm	Ø 35 mm	Ø 43 mm
Yori Outline 24V - Zoom	 p.42	 p.43	 p.44
Yori Outline 24V - Zoom Curved	 p.42	 p.43	 p.44
	Zoom (7° - 14°)	Zoom (9° - 21°)	Zoom (13°-37°)
Light source/ Sorgente luminosa	POWER LED 2 W 140 lm - 145 lm L90 B10=50,000 h 2700 K; 3000 K SDCM <3 CRI >90	POWER LED 2,5 W 195 lm - 200 lm L90 B10=50,000 h 2700 K; 3000 K SDCM <3 CRI >90	POWER LED 4 W; 9 W 410 lm - 730 lm L90 B10=50,000 h 2700 K; 3000 K SDCM <3 CRI >90

Ø 22mm | Precision

Risk 1 0.07 IP20 850° CE UK CA




Code example:
0 - GS41 0 - HW 12

Track Outline 24V: p.91-108
Finishes: p.56-57
Photometric data:
www.reggiani.net

2 W	POWER LED			Lumen delivered up to 64 lm / Lumen maintenance: L90 B10=50,000h							
Driver	Version		Optics zoom	LED	K	CRI	lm	SDCM	Finishes		
0 On-Off	GS41	Standard	0 7°-14°	HW	2700	>90	140	<3	12		
D DALI				HQ	3000	>90	145	<3	31		
				LED nominal lumen					01		
									B0		
									C0		
									D0		
									E0		
									L0		
									M0		
									N0		
									T1		

Ø 22mm | Precision Curved

Risk 1 0.07 IP20 850° CE UK CA





Code example:
0 - GS61 0 - HW 12

Track Outline 24V: p.91-108
Finishes: p.56-57
Photometric data:
www.reggiani.net

2 W	POWER LED			Lumen delivered up to 64 lm / Lumen maintenance: L90 B10=50,000h									
Driver		Version		Optics zoom		LED	K	CRI	lm	SDCM	Finishes		
0 On-Off		GS61 Curved		0 7°-14°		HW	2700	>90	140	<3	12		
						HQ	3000	>90	145	<3	31		
						LED nominal lumen					01		
											B0		
											C0		
											D0		
											E0		
											L0		
											M0		
											N0		
											T1		

Ø 35mm | Precision

Risk 1 0.13 IP20 850° CE UK CA



Code example:

0 . NS41 0 . HW 12

Track Outline 24V: p.91-108

Finishes: p.56-57

Photometric data:

www.reggiani.net



2.5 W POWER LED

Lumen delivered up to 117 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics zoom	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	NS41 Standard	0 9°-21°	HW	2700	>90	195	<3	12
D DALI			HQ	3000	>90	200	<3	31
LED nominal lumen								
								01
								B0
								C0
								D0
								E0
								L0
								M0
								N0
								T1

Ø 35mm | Precision Curved

Risk 1 0.13 IP20 850° CE UK CA



Code example:

0 . NS61 0 . HW 12

Track Outline 24V: p.91-108

Finishes: p.56-57

Photometric data:

www.reggiani.net


2.5 W POWER LED

Lumen delivered up to 117 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics zoom	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	NS61 Curved	0 9°-21°	HW	2700	>90	195	<3	12
			HQ	3000	>90	200	<3	31
LED nominal lumen								
								01
								B0
								C0
								D0
								E0
								L0
								M0
								N0
								T1

Ø 43mm | Precision

Risk 1 0.17 IP20 850° CE UK CA



Code example:
0 - PS41 0 - HW 12


Track Outline 24V: p.91-108
Finishes: p.56-57
Photometric data:
www.reggiani.net

4 W	POWER LED		Lumen delivered up to 205 lm / Lumen maintenance: L90 B10=50,000h							
Driver	Version		Optics zoom	LED	K	CRI	lm	SDCM	Finishes	
0 On-Off	PS41	Standard	0 13°-37°	HW	2700	>90	410	<3	12	
D DALI				HQ	3000	>90	415	<3	31	
LED nominal lumen										01
										B0
										C0
										D0
										E0
										L0
										M0
										N0
										T1

9 W	POWER LED		Lumen delivered up to 456 lm / Lumen maintenance: L90 B10=50,000h							
Driver	Version		Optics	LED	K	CRI	lm	SDCM	Finishes	
0 On-Off	PS42	Standard	0 13°-37°	HW	2700	>90	725	<3	12	
D DALI				HQ	3000	>90	730	<3	31	
LED nominal lumen									B0	
									C0	
									D0	
									E0	
									L0	
									M0	
									N0	
									T1	

Ø 43mm | Precision Curved

Risk 1 0.17 IP20 850° CE UK CA



Code example:
0 - PS61 0 - HW 12

Track Outline 24V: p.91-108
Finishes: p.56-57
Photometric data:
www.reggiani.net

4 W	POWER LED		Lumen delivered up to 205 lm / Lumen maintenance: L90 B10=50,000h								
Driver		Version	Optics zoom	LED	K	CRI	lm	SDCM	Finishes		
0	On-Off	PS61	Curved	0	13°-37°	HW	2700	>90	410	<3	12
				HQ	3000	>90	415	<3	31		
				LED nominal lumen							
				01							
				B0							
				C0							
				D0							
				E0							
				L0							
				M0							
				N0							
				T1							

9 W	POWER LED				Lumen delivered up to 456 lm / Lumen maintenance: L90 B10=50,000h							
Driver		Version		Optics	LED	K	CRI	lm	SDCM	Finishes		
0 On-Off		PS62 Curved		0 13°-37°	HW	2700	>90	725	<3	12		
					HQ	3000	>90	730	<3	31		
LED nominal lumen											B0	
											C0	
											D0	
											E0	
											L0	
											M0	
											N0	
											T1	

Yori Pendant Outline 24V


Yori Pendant Outline 24V









EN Yori Pendant Outline 24V is the new suspension solution for 24V track characterized by sleek design and excellent lighting results. It is available in 3 diameters (Ø22mm, Ø35mm, Ø43mm) and 3 heights (H 150mm, H 220mm, H 400mm). The 11 color finishes make the product extremely applicable for every project.

IT Yori Pendant Outline 24V è la nuova soluzione di illuminazione a sospensione per binari a 24V caratterizzata da design pulito ed eccellenti risultati illuminotecnici. E' disponibile in 3 diametri (Ø22mm, Ø35mm, Ø43mm) e due altezze (H 150mm, H 220mm, H 400mm). Le 11 finiture disponibili e l'ampia gamma di accessori tecnici rendono il prodotto estremamente versatile per ogni progetto.



Versions/ Versioni			
Yori Pendant Outline 24V			
	Yori Pendant Outline 24V	Yori Pendant Outline 24V - Curved	
Finishes/ Finiture	 12 Embossed matte white/ Bianco opaco goffrato	 31 Embossed matte black/ Nero opaco goffrato	
Special finishes/ Finiture speciali	 01 Chrome/ Cromo	 B0 Royal matte black/ Nero opaco royal	 C0 Royal matte white/ Bianco opaco royal
	 D0 Brushed brass/ Ottone spazzolato	 E0 Brushed gold/ Oro spazzolato	 L0 Antiqued brushed bronze/ Bronzo antico spazzolato
	 M0 Brushed aluminium/ Alluminio spazzolato	 N0 Brushed copper/ Rame spazzolato	 T1 Anodized Bronze/ Bronzo Anodizzato
IP	20		
Control systems	On/Off, DALI		
Insulation class			
Certifications	CE UK ENEC		

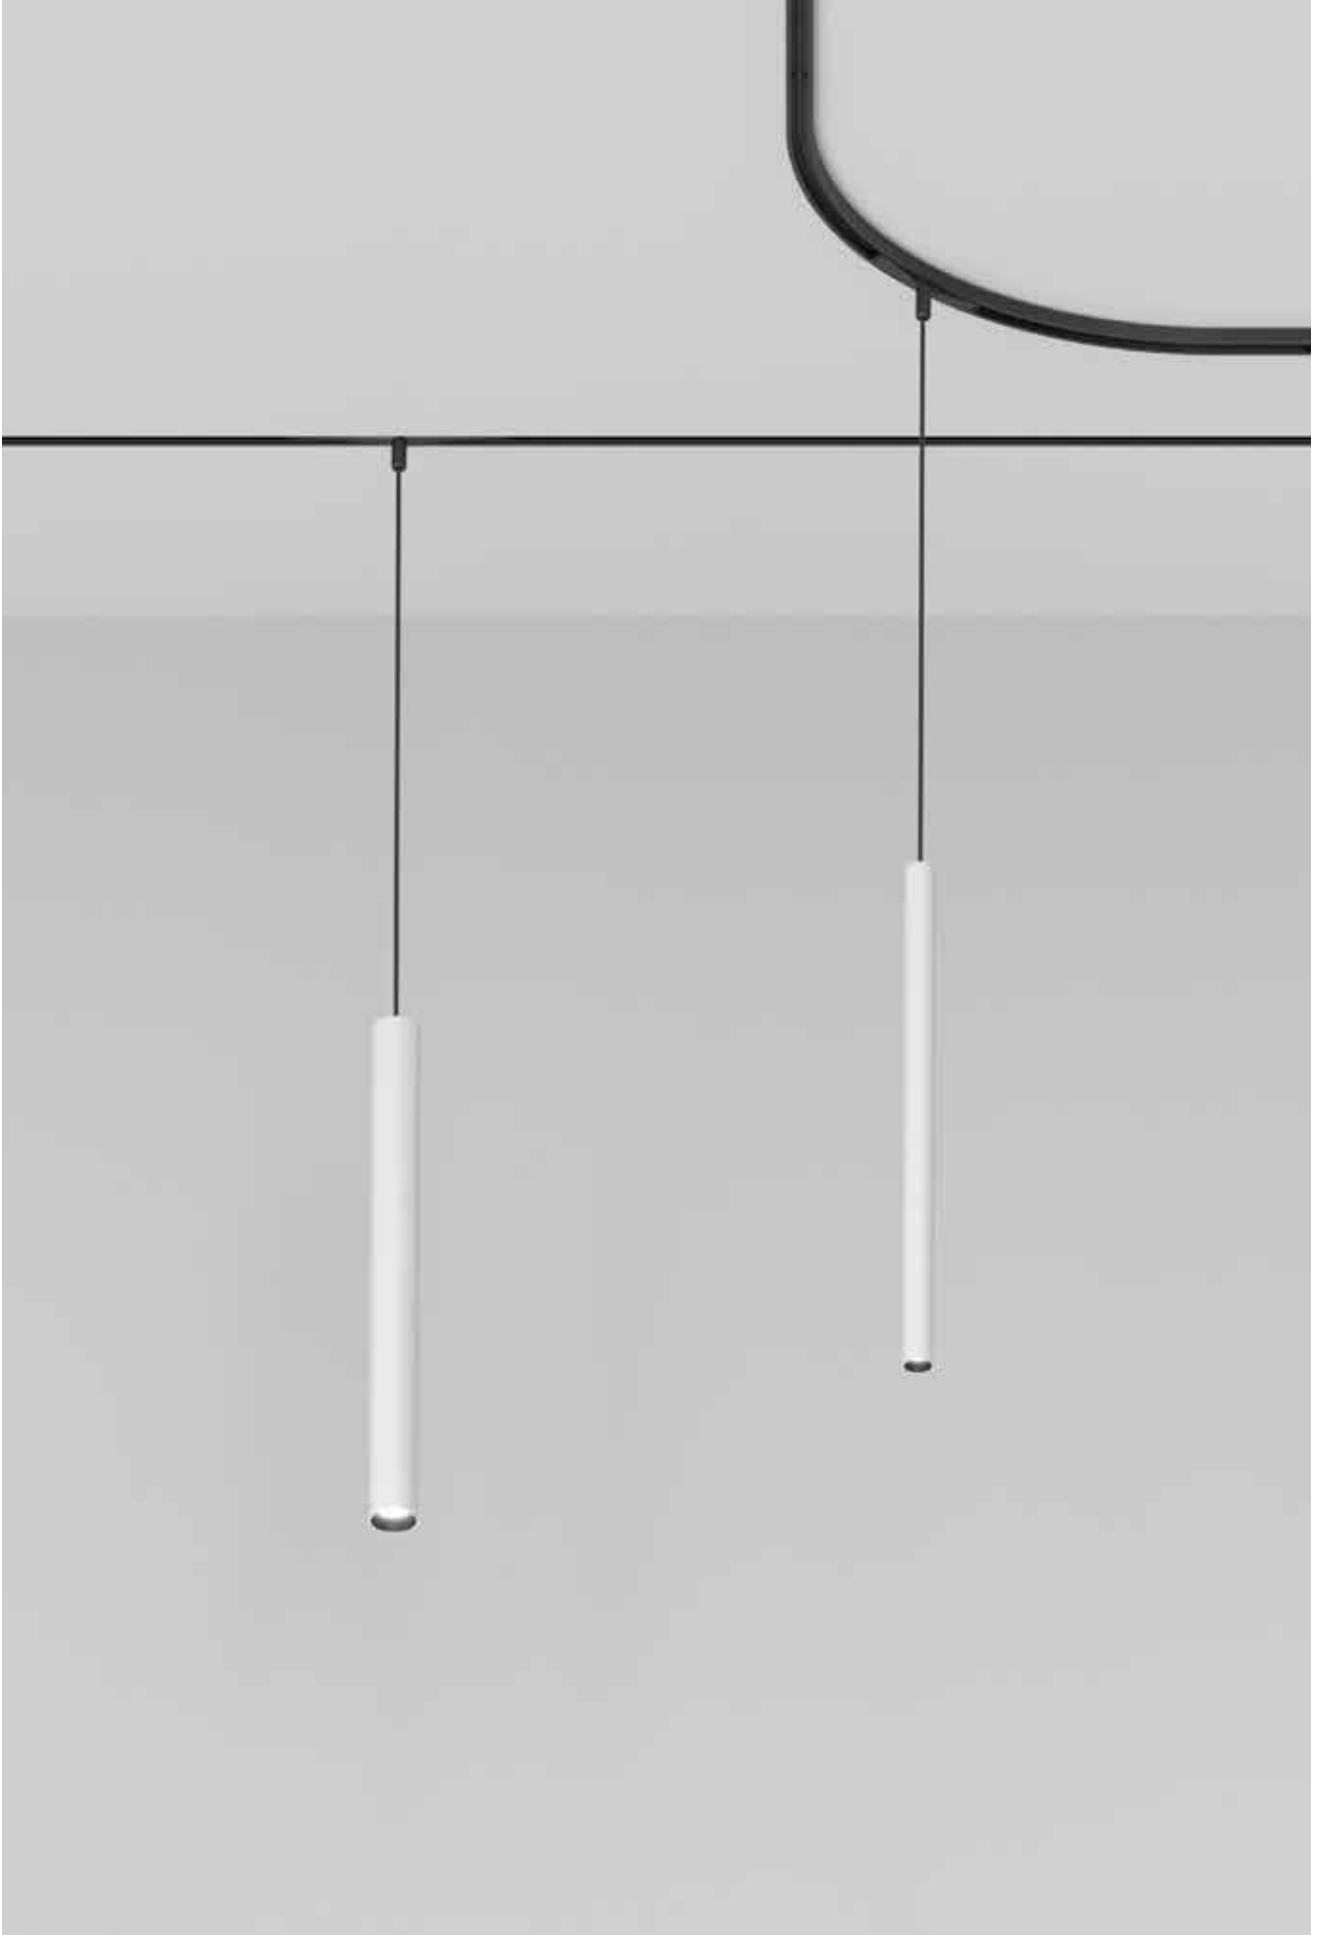

	Ø 22 mm	Ø 35 mm	Ø 43 mm
Yori Pendant Outline 24V		 p.59	 p.61
	 p.58	 p.60	 p.62
Yori Pendant Outline 24V Curved		 p.59	 p.61
	 p.58	 p.60	 p.62
△	Narrow (10°) Medium (28°) Wide (33°)	Narrow (11°) Medium (26°) Wide (33°)	Narrow (16°) Medium (23°) Wide (34°)
Light source/ Sorgente luminosa	POWER LED 2 W 245 lm - 286 lm L90 B10=50,000 h 2700 K; 3000 K; 4000 K SDCM <3 CRI >90 2000 K; 2200 K; 2500 K; 3500 K with accessories p.63	POWER LED 3,5 W 355 lm - 406 lm L90 B10=50,000 h 2700 K; 3000 K; 4000 K SDCM <3 CRI >90 2000 K; 2200 K; 2500 K; 3500 K with accessories p.64 7W available on request	POWER LED 5 W 550 lm - 640 lm L90 B10=50,000 h 2700 K; 3000 K; 4000 K SDCM <3 CRI >90 2000 K; 2200 K; 2500 K; 3500 K with accessories p.65 On request: DT (Warm Dimming) 9W available on request






^{EN} The "lock-in" system of the adapter sustains the product weight in total security and assures stability on the track.

^{IT} Il sistema "lock-in" dell'adattatore sostiene il peso del prodotto in totale sicurezza e assicura stabilità sul binario.




^{EN} Linear adapter for linear track mounting.

^{IT} Adattatore lineare per montaggio su binari lineari.

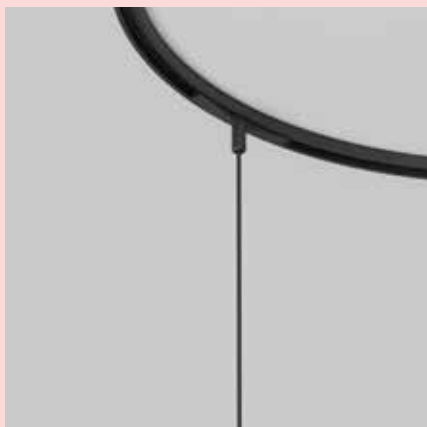

^{EN} Curved adapter for curved track mounting.

^{IT} Adattatore curvo per montaggio su binari curvi.

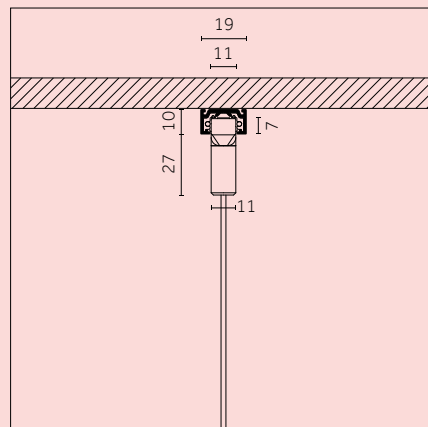

^{EN} Adapter for Outline track mounting.

^{IT} Adattatore per binari Outline.

EN Yori Pendant Outline 24V permits to personalize the light beam through the use of solid and hollow decorative cylinders that guarantee soft, diffused lighting to enable suggestive, elegant applications.

IT Yori Pendant Outline 24V permette la personalizzazione del fascio di luce attraverso cilindri decorativi pieni e vuoti, che permettono un effetto luminoso morbido e diffuso, realizzando suggestivi scenari luminosi.



EN The solid decorative cylinders, thanks to the frosted external surface, guarantee a diffused light and a soft and wide beam, with a minimum glare. Ideal for elegant and out-of-the-ordinary lighting effects.


IT I cilindri decorativi pieni, grazie all'acidatura presente sulla parte esterna, garantiscono una luce diffusa e un fascio morbido, con un abbaglio minimo. Ideale per effetti di luce eleganti e non banali.



EN The hollow cylinders, on the other hand, guarantee a more precise light. With the Warm Dimming technology, the cylinders' colors adjust to the different color temperatures, creating even more unique and striking lighting scenarios.

IT I cilindri vuoti garantiscono una luce più precisa. Con la tecnologia Warm Dimming, i cilindri si colorano grazie alle diverse temperature di colore, realizzando scenari luminosi ancora più unici e suggestivi.

Diameter/ Diametro	Length/ Lunghezza	
	Hollow opal cylinder/ Cilindro opale cavo	Solid opal cylinder/ Cilindro opale pieno
Ø 22 mm		
Ø 35 mm		
Ø 43 mm		




EN Decorative cylinders can also be used with colored filters and selective filters (p.63-65).

IT I cilindri decorativi possono essere utilizzati anche con filtri colorati e filtri selettivi (p.63-65).



Yori Pendant Outline 24V

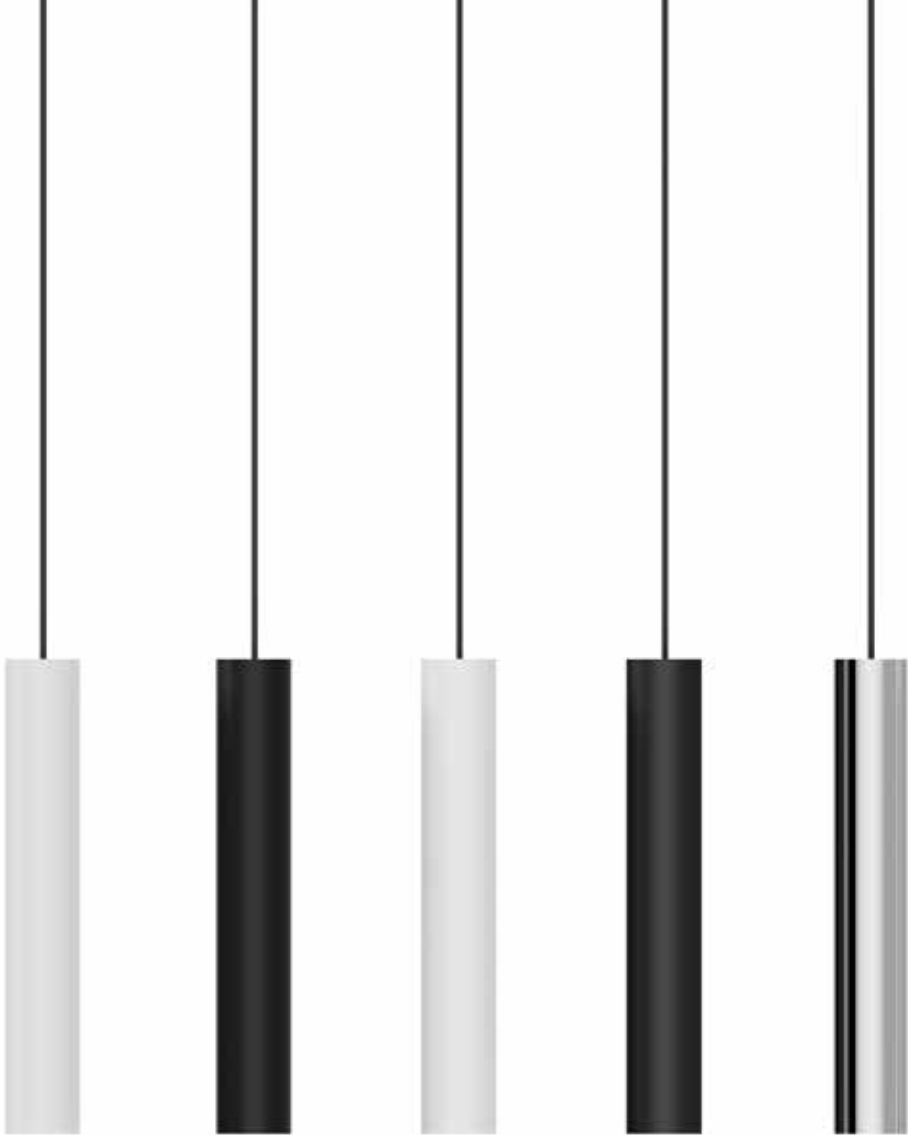

12 31 C0 B0 01

- | | |
|--|--|
|  12 Embossed matte white/
Bianco opaco goffrato |  E0 Brushed gold/
Oro spazzolato |
|  31 Embossed matte black/
Nero opaco goffrato |  D0 Brushed brass/
Ottone spazzolato |
|  C0 Royal matte white/
Bianco opaco royal |  N0 Brushed copper/
Rame spazzolato |
|  B0 Royal matte black/
Nero opaco royal |  L0 Antiqued brushed bronze/
Bronzo spazzolato anticato |
|  01 Chrome/
Cromo |  T1 Anodized bronze/
Bronzo anodizzato |
|  M0 Brushed aluminium/
Alluminio spazzolato | |



Yori Pendant Outline 24V

Ø 22mm | H 400mm

Risk 1

0.65

IP20

850°

CE

UK

CA



Code example:

0 - RS40 B - HW 12

Accessories: p.63
Track Outline 24V: p.91-108
Finishes: p.56-57
Photometric data:
www.reggiani.net

Notes:
2000 K; 2200 K; 2500 K; 3500 K
with accessories p.63

2 W		POWER LED		Lumen delivered up to 87 lm / Lumen maintenance: L90 B10=50,000h									
Driver		Version		Optics		LED	K	CRI	lm	SDCM	Finishes		
0 On-Off		RS40 Standard		B 10° Narrow		HW	2700	>90	245	<3	12		
D DALI				E 28° Medium		HQ	3000	>90	265	<3	31		
				H 33° Wide		HN	4000	>90	286	<3	01		
												B0	
												C0	
												D0	
												E0	
												L0	
												M0	
												N0	
												T1	

Ø 22mm | H 400mm Curved

Risk 1

0.65

IP20

850°

CE

UK

CA



Code example:

0 - RS60 B - HW 12



Accessories: p.63
Track Outline 24V: p.91-108
Finishes: p.56-57
Photometric data:
www.reggiani.net

Notes:
2000 K; 2200 K; 2500 K; 3500 K
with accessories p.63

2 W		POWER LED		Lumen delivered up to 87 lm / Lumen maintenance: L90 B10=50,000h								
Driver		Version		Optics		LED	K	CRI	lm	SDCM	Finishes	
0 On-Off		RS60 Curved		B 10° Narrow		HW	2700	>90	245	<3	12	
				E 28° Medium		HQ	3000	>90	265	<3	31	
				H 33° Wide		HN	4000	>90	286	<3	01	
						LED nominal lumen					B0	
											C0	
											D0	
											E0	
											L0	
											M0	
											N0	
											T1	

Ø 35mm | H 150mm

Risk 1 0.20 IP20 850° CE UK CA



Code example:

0 . TS41 B . HW 12

Accessories: p.64

Track Outline 24V: p.91-108

Finishes: p.56-57

Photometric data:

www.reggiani.net

Notes:

2000K; 2200K; 2500K; 3500K
with accessories p.647W available on request /
7W disponibili su richiesta



3.5 W POWER LED

Lumen delivered up to 282 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	TS41 Standard	B 11° Narrow	HW	2700	>90	355	<3	12
D DALI		E 26° Medium	HQ	3000	>90	375	<3	31
		H 33° Wide	HN	4000	>90	405	<3	01
LED nominal lumen								
								B0
								C0
								D0
								E0
								L0
								M0
								N0
								T1

Ø 35mm | H 150mm Curved

Risk 1 0.20 IP20 850° CE UK CA



Code example:

0 . TS61 B . HW 12

Accessories: p.64

Track Outline 24V: p.91-108

Finishes: p.56-57

Photometric data:

www.reggiani.net

Notes:

2000K; 2200K; 2500K; 3500K
with accessories p.647W available on request /
7W disponibili su richiesta

3.5 W POWER LED

Lumen delivered up to 282 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	TS61 Curved	B 11° Narrow	HW	2700	>90	355	<3	12
		E 26° Medium	HQ	3000	>90	375	<3	31
		H 33° Wide	HN	4000	>90	405	<3	01
LED nominal lumen								
								B0
								C0
								D0
								E0
								L0
								M0
								N0
								T1

Ø 35mm | H 400mm

Risk 1 0.35 IP20 850° CE UK CA



Code example:

0 - TS42 B - HW 12

Accessories: p.65
Track Outline 24V: p.91-108
Finishes: p.56-57
Photometric data:
www.reggiani.net

Notes:
2000K; 2200K; 2500K; 3500K
with accessories p.64

7W available on request/
7W disponibili su richiesta

3.5 W	POWER LED		Lumen delivered up to 282 lm / Lumen maintenance: L90 B10=50,000h							
Driver	Version		Optics	LED	K	CRI	lm	SDCM	Finishes	
0 On-Off	TS42	Standard	B 11° Narrow	HW	2700	>90	355	<3	12	
D DALI			E 26° Medium	HQ	3000	>90	375	<3	31	
			H 33° Wide	HN	4000	>90	405	<3	01	
LED nominal lumen									B0	
									C0	
									D0	
									E0	
									L0	
									M0	
									N0	
									T1	

Ø 35mm | H 400mm Curved

Risk 1 0.35 IP20 850° CE UK CA



Code example:

0 - TS62 B - HW 12

Accessories: p.65
Track Outline 24V: p.91-108
Finishes: p.56-57
Photometric data:
www.reggiani.net


Notes:
2000K; 2200K; 2500K; 3500K
with accessories p.64

7W available on request/
7W disponibili su richiesta

3.5 W	POWER LED		Lumen delivered up to 282 lm / Lumen maintenance: L90 B10=50,000h								
Driver		Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
0	On-Off	TS62	Curved	B 11° Narrow	HW	2700	>90	355	<3	12	
				E 26° Medium	HQ	3000	>90	375	<3	31	
				H 33° Wide	HN	4000	>90	405	<3	01	
										B0	
										C0	
										D0	
										E0	
										L0	
										M0	
										N0	
										T1	

Ø 43mm | H 220mm

Risk 1 0.25 IP20 850°



Code example:

0 . VS41 B . HW 12

Accessories: p.65

Track Outline 24V: p.91-108

Finishes: p.56-57

Photometric data:

www.reggiani.net

Notes:


2000K; 2200K; 2500K; 3500K
with accessories p.65

9W available on request/
9W disponibili su richiesta

5 W POWER LED		Lumen delivered up to 535 lm / Lumen maintenance: L90 B10=50,000h									
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes			
0 On-Off	VS41 Standard	B 16° Narrow	HW	2700	>90	550	<3	12			
D DALI		E 23° Medium	HQ	3000	>90	595	<3	31			
		H 34° Wide	HN	4000	>90	640	<3	01			
LED nominal lumen								B0			
								C0			
								D0			
								E0			
								L0			
								M0			
								N0			
								T1			

Ø 43mm | H 220mm Curved

Risk 1 0.25 IP20 850°



Code example:

0 . VS61 B . HW 12

Accessories: p.65

Track Outline 24V: p.91-108

Finishes: p.56-57

Photometric data:

www.reggiani.net


Notes:

2000K; 2200K; 2500K; 3500K
with accessories p.65

9W available on request/
9W disponibili su richiesta

5 W POWER LED		Lumen delivered up to 535 lm / Lumen maintenance: L90 B10=50,000h									
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes			
0 On-Off	VS61 Curved	B 16° Narrow	HW	2700	>90	550	<3	12			
		E 23° Medium	HQ	3000	>90	595	<3	31			
		H 34° Wide	HN	4000	>90	640	<3	01			
LED nominal lumen								B0			
								C0			
								D0			
								E0			
								L0			
								M0			
								N0			
								T1			

Ø 43mm | H 400mm



Code example:

0 - VS42 B - HW 12

Accessories: p.65

Track Outline 24V: p.91-108

Finishes: p.56-57

Photometric data:

www.reggiani.net


Notes:

2000 K; 2200 K; 2500 K; 3500 K
with accessories p.65

9W available on request/
9W disponibili su richiesta

5 W		POWER LED		Lumen delivered up to 535 lm / Lumen maintenance: L90 B10=50,000h								Finishes	
Driver		Version		Optics	LED	K	CRI	lm	SDCM				
0 On-Off		VS42	Standard	B 16° Narrow	HW	2700	>90	550	<3	12			
D DALI				E 23° Medium	HQ	3000	>90	595	<3	31			
				H 34° Wide	HN	4000	>90	640	<3	01			
				LED nominal lumen								B0	
				DT (Warm Dimming) on request								C0	
												D0	
												E0	
												L0	
												M0	
												N0	
												T1	

Ø 43mm | H 400mm Curved



Code example:

0 - VS62 B - HW 12

Accessories: p.65

Track Outline 24V: p.91-108

Finishes: p.56-57

Photometric data:

www.reggiani.net

Notes:

2000 K; 2200 K; 2500 K; 3500 K
with accessories p.65

9W available on request/
9W disponibili su richiesta



5 W		POWER LED		Lumen delivered up to 535 lm / Lumen maintenance: L90 B10=50,000h								Finishes	
Driver		Version		Optics	LED	K	CRI	lm	SDCM				
0 On-Off		VS62	Curved	B 16° Narrow	HW	2700	>90	550	<3	12			
				E 23° Medium	HQ	3000	>90	595	<3	31			
				H 34° Wide	HN	4000	>90	640	<3	01			
				LED nominal lumen								B0	
												C0	
												D0	
												E0	
												L0	
												M0	
												N0	
												T1	

Yori Pendant Outline 24V | Ø 22mm

Optics accessories/ Accessori ottiche

	Description Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm Holder included	Code 0.26700.00	Finishes 4A Red 5A Green 6A Blue 7A Pink 8A Yellow 9A Orange		Description Selective filter 3000K - 3500K / Filtro selettivo 3000K - 3500K Holder included	Code 0.26705.00	
					Description Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K Holder included	Code 0.26706.00	
		Description Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K Holder included	Code 0.26701.00		Description Elliptical beam lens / Lente per fascio ellittico Holder included	Code 0.26707.00	
		Description Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K Holder included	Code 0.26702.00		Description Opal lens/ Lente opale Holder included	Code 0.26708.00	
		Description Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K Holder included	Code 0.26703.00		Description Spread lens/ Lente diffondente Holder included	Code 0.26709.00	
		Description Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K Holder included	Code 0.26704.00			Description Concentric circles/ Cerchi concentrici Only for light beam B/ Solo per fascio di luce B	Code 0.26582.00

Decorative accessories/ Accessori decorativi





		Description Cylinder, solid version (Ø 22 mm, h 22 mm) / Cilindro versione piena (Ø 22 mm, h 22 mm)	Code 0.26040.0000			Description Cylinder, solid version (Ø 22 mm, h 80 mm) / Cilindro versione piena (Ø 22 mm, h 80 mm)	Code 0.26041.0000
---	---	--	------------------------------------	---	--	--	------------------------------------

Yori Pendant Outline 24V | Ø 35 mm

Optics accessories/
Accessori ottiche

	Description Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm Holder included	Code 0.26710.00	Finishes 4A Red 5A Green 6A Blue 7A Pink 8A Yellow 9A Orange		Description Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K Holder included	Code 0.26716.00		
					Description Elliptical beam lens / Lente per fascio ellittico Holder included	Code 0.26717.00		
		Description Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K Holder included	Code 0.26711.00			Description Opal lens/ Lente opale Holder included	Code 0.26718.00	
		Description Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K Holder included	Code 0.26712.00			Description Spread lens/ Lente diffondente Holder included	Code 0.26719.00	
		Description Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K Holder included	Code 0.26713.00			Description Concentric circles/ Cerchi concentrici Only for light beam A and B / Solo per fascio di luce A e B	Code 0.26583.00	Finishes 31
		Description Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K Holder included	Code 0.26714.00			Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta Holder included	Code 0.26398.0000	
	Description Selective filter 3000K - 3500K / Filtro selettivo 3000K - 3500K Holder included	Code 0.26715.00			Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga Holder included	Code 0.26399.0000		

Decorative accessories/
Accessori decorativi





		Description Cylinder, solid version (Ø 35 mm, h 35 mm) / Cilindro versione piena (Ø 35 mm, h 35 mm)	Code 0.26042.0000			Description Cylinder, hollow version (Ø 35 mm, h 35 mm) / Cilindro versione cava (Ø 35 mm, h 35 mm)	Code 0.26044.0000
		Description Cylinder, solid version (Ø 35 mm, h 70 mm) / Cilindro versione piena (Ø 35 mm, h 70 mm)	Code 0.26043.0000			Description Cylinder, hollow version (Ø 35 mm, h 70 mm) / Cilindro versione cava (Ø 35 mm, h 70 mm)	Code 0.26045.0000

Yori Pendant Outline 24V | Ø 43 mm

Optics accessories/
Accessori ottiche

	Description Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm Holder included	Code 0.26400.00	Finishes 4A Red 5A Green 6A Blue 7A Pink 8A Yellow 9A Orange		Description Wide texture honeycomb louvre/ Griglia alveolare a maglia larga Holder included	Code 0.26448.0000		
	Description Colored gel slides (2 pieces)/ Vetrini per gel colorato (2 pezzi)/ Holder included	Code 0.26408.0000			Description Elliptical beam lens / Lente per fascio ellittico Holder included	Code 0.26456.0000		
	Description Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K Holder included	Code 0.26557.0000			Description Opal lens/ Lente opale Holder included	Code 0.26460.0000		
	Description Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K Holder included	Code 0.26416.0000			Description Spread lens/ Lente diffondente Holder included	Code 0.26468.0000		
	Description Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K Holder included	Code 0.26424.0000			Description Cross blade louvre/ Griglia a croce Holder included	Code 0.26476.0000		
	Description Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K Holder included	Code 0.26432.0000			Description Barn doors/ Alette rompiflusso Holder included	Code 0.26484.0000		
	Description Selective filter 3000K - 3500K / Filtro selettivo 3000K - 3500K Holder included	Code 0.26565.0000			Description Cone 45° wall washer/ Cono 45° wall washer Holder included	Code 0.26488.00	Finishes 12 31	
	Description Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K Holder included	Code 0.26573.0000			Description Short snoot/ Cilindro corto Holder included	Code 0.26556.00	Finishes 12 31	
	Description Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta Holder included	Code 0.26440.0000			Description Concentric circles/ Cerchi concentrici Only for light beam A and B/ Solo per fascio di luce A e B	Code 0.26584.00	Finishes 31	

Decorative accessories/
Accessori decorativi

		Description Cylinder, solid version (Ø 43 mm, h 43 mm)/ Cilindro versione piena (Ø 43 mm, h 43 mm)	Code 0.26162.0000			Description Cylinder, hollow version (Ø 43 mm, h 43 mm)/ Cilindro versione cava (Ø 43 mm, h 43 mm)	Code 0.26164.0000
		Description Cylinder, solid version (Ø 43 mm, h 86 mm)/ Cilindro versione piena (Ø 43 mm, h 86 mm)	Code 0.26163.0000			Description Cylinder, hollow version (Ø 43 mm, h 86 mm)/ Cilindro versione cava (Ø 43 mm, h 86 mm)	Code 0.26165.0000

Incline Outline 24V - Adjustable



^{EN} A linear, adjustable lighting solution completely integrated within the 24V track, characterized by miniaturized dimensions and adjustable body. Incline Outline 24V – Adjustable represents a sound retail lighting solution, especially in shop windows and other architectural structures. The 90° adjustability makes it possible to direct the light where it is needed. The custom-made optics ensure excellent performances with minimal glare.

^{IT} Soluzione d'illuminazione lineare orientabile integrata nei binari a 24V, caratterizzata da dimensioni ultra miniaturizzate e corpo orientabile. Incline Outline 24V - Adjustable rappresenta una soluzione di illuminazione perfetta per vetrine ed altre strutture architettoniche. L'orientabilità di 90° permette di direzionare il fascio di luce dove necessario. Le ottiche sviluppate appositamente garantiscono inoltre l'assenza di abbaglio.



Versions/ Versioni	
Incline Outline 24V Adjustable	  62,5 mm 125 mm
Finishes/ Finiture	 31 Embossed matte black/ Nero opaco goffrato
Adjustability/ Orientabilità	 Horizontal axis/ Asse orizzontale
IP	20
Control systems	On/Off, DALI
Insulation class	□
Certifications	CE UK ENEC





	62,5 mm	125 mm
Incline Outline 24V Adjustable	 p.78	 p.78
△	Narrow (18°) Medium (24°) Medium-wide (35°) Wide (50°)	Narrow (18°) Medium (24°) Medium-wide (35°) Wide (50°)
Light source/ Sorgente luminosa	HIGH POWER LED 3 W 408 lm - 439 lm L90 B10=50,000 h 2700 K; 3000 K; 4000 K SDCM <3 CRI >90 2000 K; 2200 K; 2500K; 3500K with accessories p.79	HIGH POWER LED 6 W 752 lm - 878 lm L90 B10=50,000 h 2700 K; 3000 K; 4000 K SDCM <3 CRI >90 2000 K; 2200 K; 2500K; 3500K with accessories p.80




EN Thanks to the miniaturized dimensions characterizing the 24V track and Incline Outline 24V - Adjustable, the system can be easily hidden between beam clamps and wooden slatts. The $\pm 45^\circ$ adjustability of Incline Outline 24V - Adjustable allows orientation of the beam, assuring an exceptional lighting result.

IT Grazie alle dimensioni miniaturizzate del binario 24V e di Incline Outline 24V - Adjustable, il sistema può essere facilmente integrato in strutture architettoniche come tra travi e doghe di legno. La possibilità di orientare Incline Outline 24V - Adjustable di $\pm 45^\circ$ permette di indirizzare il fascio garantendo l'eccellente risultato illuminotecnico.

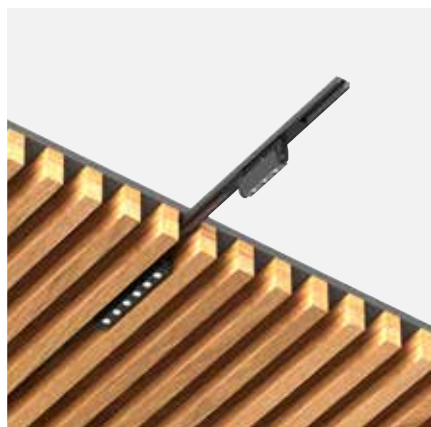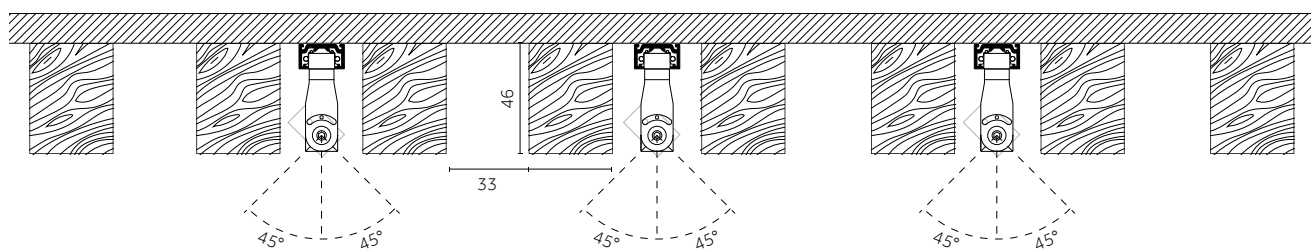

EN Complete integration with the structure.
IT Integrazione completa con ogni struttura.

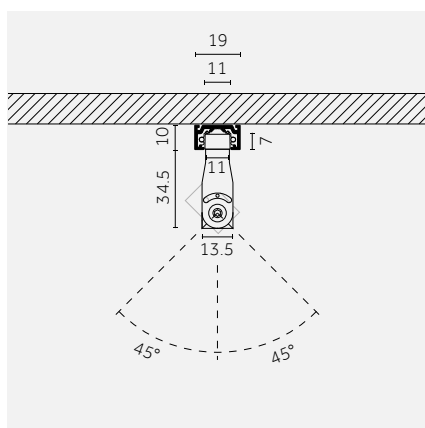


EN $\pm 45^\circ$ adjustability.
IT Orientabilità di $\pm 45^\circ$.




EN Incline Outline 24V - Adjustable represents an excellent solution for retail spaces, shop windows and other architectural structures. Thanks to its miniaturized dimensions, it can be easily integrated within shop window frames. Additionally, the 90° adjustability allows precise adjustment of the beam towards the product or object to be highlighted.

IT Incline Outline 24V - Adjustable rappresenta la soluzione migliore per gli spazi retail, soprattutto per le vetrine e per le altre strutture architettoniche. Grazie alla dimensione ultra-miniaturizzata, può essere facilmente integrato all'interno dei telai di struttura delle vetrine. In aggiunta, la possibilità di orientare il prodotto di 90° permette un corretto aggiustamento del fascio di luce verso ciò che deve essere illuminato.

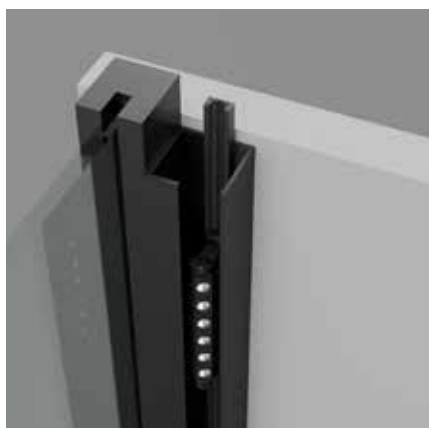

EN Complete integration with the structure.

IT Integrazione completa con la struttura.

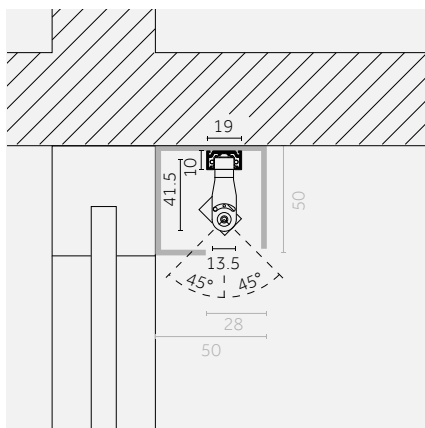

EN +/- 45° adjustability.

IT Orientabilità di +/- 45°.



Customise your light



EN Incline Outline 24V - Adjustable can be personalised with a wide variety of technical and decorative accessories for unique flexibility (selective filters, honeycomb, spread lens accessory).

IT Incline Outline 24V - Adjustable può essere personalizzato grazie all'utilizzo di un'ampia varietà di accessori tecnici e decorativi, per una flessibilità di progettazione unica (filtri selettivi, griglia alveolare, lente prismatica).



Coloured filters/
Filtri colorati



Selective filters/
Filtri selettivi



Spread lens/
Lente prismatica



Honeycomb louvre/
Griglia alveolare



Opal lens/
Lente opale



Elliptical lens/
Lente ellittica




Snoot/
Cilindro anti-abbaglio



Snoot with opal filter/
Cilindro anti-abbaglio con
filtro opale



Decorative accessory/
Accessorio decorativo





EN Accessories available in two different lengths.

IT Accessori disponibili in due diverse lunghezze.

62,5 mm

0.09 Risk 1 IP20 850° CE UK CA

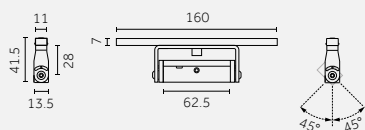

Code example:

0 - BS01 B - HW 31

Accessories: p.79

Track Outline 24V: p.91-108

Photometric data:

www.reggiani.net

62,5 mm (3LED)

3 W HIGHPOWERLED - 49 W/m



Lumen delivered up to 394 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Length	Diffuser	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	BS01	62,5 mm	Dark Performance	B 18° Narrow	HW	2700	>90	376	<3	31
D DALI				E 24° Medium	HQ	3000	>90	408	<3	
				H 35° Medium-wide	HN	4000	>90	439	<3	
				M 50° Wide						

LED nominal lumen

125 mm

0.14 Risk 1 IP20 850° CE UK CA

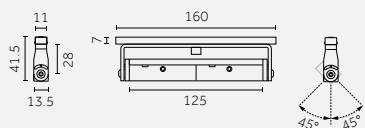

Code example:

0 - CS02 B - HW 31

Accessories: p.80

Track Outline 24V: p.91-108

Photometric data:

www.reggiani.net

125 mm (6LED)

6 W HIGHPOWERLED - 49 W/m

Lumen delivered up to 788 lm / Lumen maintenance: L90 B10=50,000h


Driver	Version	Length	Diffuser	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	CS02	125 mm	Dark Performance	B 18° Narrow	HW	2700	>90	752	<3	31
D DALI				E 24° Medium	HQ	3000	>90	815	<3	
				H 35° Medium-wide	HN	4000	>90	878	<3	
				M 50° Wide						

LED nominal lumen

Accessories

Incline Outline 24V - Adjustable | 62,5 mm

Colored filters/ Filtri colorati




Description
Square holder with colored filter/
Holder quadrato con filtro colorato
For 3X LED

Code
0.27305.00

Finishes


4A Red
5A Green
6A Blue
7A Pink
8A Yellow
9A Orange

Selective filters/ Filtri selettivi




Description
Square holder with 3000K-2700K filter/
Holder con filtro 3000K-2700K
For 3X LED

Code
0.27306.0000



Description
Square holder with 2700K-2000K filter/
Holder con filtro 2700K-2000K
For 3X LED

Code
0.27309.0000




Description
Square holder with 2700K-2500K filter/
Holder con filtro 2700K-2500K
For 3X LED

Code
0.27307.0000



Description
Square holder with 3000K-3500K filter/
Holder con filtro 3000K-3500K
For 3X LED

Code
0.27310.0000



Description
Square holder with 2700K-2200K filter/
Holder con filtro 2700K-2200K
For 3X LED

Code
0.27308.0000



Description
Square holder with 3000K-4000K filter/
Holder con filtro 3000K-4000K
For 3X LED

Code
0.27311.0000

Optics accessories/ Accessori ottiche



Description
Snoot with opal filter/
Cilindro anti-abbaglio con filtro opale
For 3X LED

Code
0.27301.00

Finishes

21



Description
Square holder with opal lens/
Holder con lente opale
For 3X LED

Code
0.27313.0000



Description
Snoot/
Cilindro anti-abbaglio
For 3X LED

Code
0.27302.00

Finishes

21



Description
Square holder with spread lens/
Holder con lente prismatica
For 3X LED

Code
0.27314.0000



Description
Square holder with elliptical lens /
Holder con filtro ellittico rigato
For 3X LED


Code
0.27312.0000



Description
Square holder with honeycomb/
Holder con griglia alveolare
For 3X LED

Code
0.27325.0000

Decorative accessories/ Accessori decorativi



Description
Decorative frosted attachment /
Accessorio decorativo opaco
For 3X LED

Code
0.27327.0000

Incline Outline 24V - Adjustable | 125 mm

Colored filters/
Filtri colorati

Description

Square holder with colored filter/
Holder quadrato con filtro colorato
For 6X LED

Code

0.27332.00

Finishes

4A Red	
5A Green	
6A Blue	
7A Pink	
8A Yellow	
9A Orange	


Selective filters/
Filtri selettivi

Description

Square holder with 3000K-2700K filter/
Holder con filtro 3000K-2700K
For 6X LED

Code

0.27333.0000




Description

Square holder with 2700K-2000K filter/
Holder con filtro 2700K-2000K
For 6X LED

Code

0.27336.0000



Description

Square holder with 2700K-2500K filter/
Holder con filtro 2700K-2500K
For 6X LED

Code

0.27334.0000



Description

Square holder with 3000K-3500K filter/
Holder con filtro 3000K-3500K
For 6X LED

Code

0.27337.0000



Description

Square holder with 2700K-2200K filter/
Holder con filtro 2700K-2200K
For 6X LED

Code

0.27335.0000



Description

Square holder with 3000K-4000K filter/
Holder con filtro 3000K-4000K
For 6X LED

Code

0.27338.0000

Optics accessories/
Accessori ottiche

Description

Snoot with opal filter/
Cilindro anti-abbaglio con filtro opale
For 6X LED

Code

0.27331.00

Finishes

21	
-----------	--



Description

Square holder with opal lens/
Holder con lente opale
For 6X LED

Code

0.27340.0000



Description

Snoot/
Cilindro anti-abbaglio
For 6X LED

Code

0.27328.0000

Finishes

21	
-----------	--



Description

Square holder with spread lens/
Holder con lente prismatica
For 6X LED

Code

0.27341.0000



Description

Square holder with elliptical lens /
Holder con filtro ellittico rigato
For 6X LED

Code

0.27339.0000




Description

Square holder with honeycomb/
Holder con griglia alveolare
For 6X LED

Code

0.27329.0000

Decorative accessories/
Accessori decorativi

Description

Decorative frosted attachment /
Accessorio decorativo opaco
For 6X LED

Code

0.27342.0000

Linear Outline 24V




EN Linear Outline 24V - Opal is the linear lighting solution for our Outline system. It represents a non-intrusive solution that assures a comfortable, diffused lighting result. Its height, of 8mm only, guarantees complete integration within the Track Outline 24V - Surface. Linear Outline 24V - Opal is available with 3 color temperatures, 2700K, 3000K and 4000K, with CRI>90.


IT Linear Outline 24V - Opal è la soluzione d'illuminazione lineare del sistema Outline. Rappresenta una soluzione d'illuminazione non intrusiva ed assicura un effetto d'illuminazione diffusa. La sua altezza, di soli 8mm, garantisce completa integrazione con il binario Outline 24V - Surface. Linear Outline 24V - Opal è disponibile con 3 temperature di colore, 2700K, 3000K, 4000K e CRI>90.




Versions/ Versioni	
Linear Outline 24V Opal	Linear Outline 24V - Opal
IP	20
Control systems	On/Off, DALI
Insulation class	
Certifications	  




	674 mm	1174 mm	1674 mm
Linear Outline 24V Opal	 p.89	 p.89	 p.89
	115°	115°	115°
Light source/ Sorgente luminosa	MID POWER LED 7.4 W 840 lm - 945 lm L80 B10=50,000 h 2700 K; 3000 K; 4000 K SDCM <3 CRI >90 On request: QT (Tunable white) DT (Warm Dimming)	MID POWER LED 14.5 W 1680 lm - 1890 lm L80 B10=50,000 h 2700 K; 3000 K; 4000 K SDCM <3 CRI >90 On request: QT (Tunable white) DT (Warm Dimming)	MID POWER LED 21.6 W 2520 lm - 2835 lm L80 B10=50,000 h 2700 K; 3000 K; 4000 K SDCM <3 CRI >90 On request: QT (Tunable white) DT (Warm Dimming)

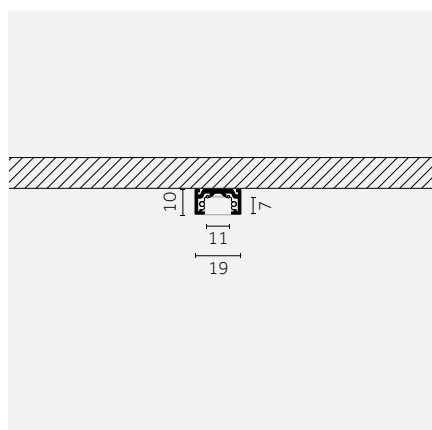

EN Linear Outline 24V in a Outline surface track.
IT Linear Outline 24V in binario Outline surface.

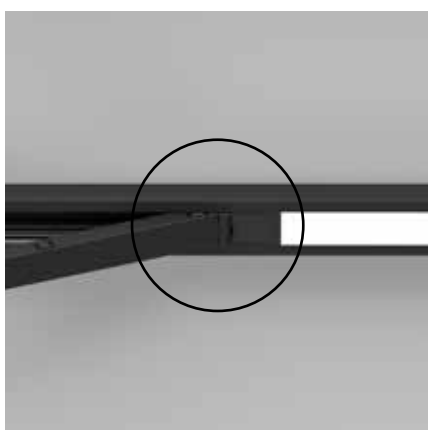


EN Easy mounting/dismounting device.
IT Dispositivo di montaggio/smontaggio.

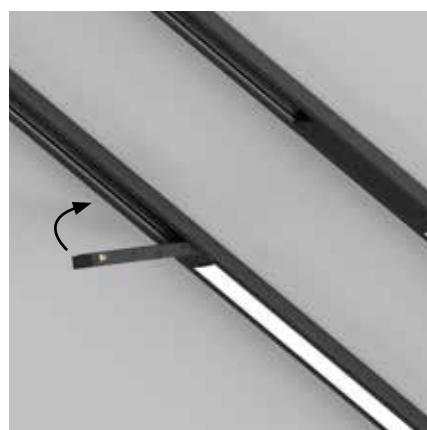

Opal | 674mm

0.04 Risk 1 IP20 850° CE UK CA

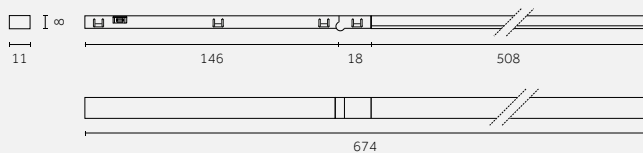

Code example:

D . BC920 . HW 00

Track Outline surface 24V: p.103

Photometric data:
www.reggiani.net**7.4 W** MID POWER LED - 14,4 W/m

Lumen delivered up to 450 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Length	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	BC920	674 mm	Opal	115°	HW	2700	>90	840	<3	00
D DALI					HQ	3000	>90	900	<3	
					HN	4000	>90	945	<3	


LED nominal lumen

QT (Tunable white) available soon

DT (Warm Dimming) available soon

Opal | 1174mm

0.07 Risk 1 IP20 850° CE UK CA

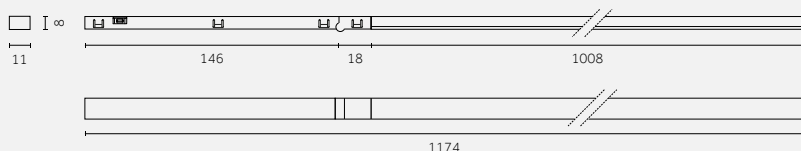

Code example:

D . BC940 . HW 00

Track Outline surface 24V: p.103

Photometric data:
www.reggiani.net**14.5 W** MID POWER LED - 14,4 W/m

Lumen delivered up to 900 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Length	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	BC940	1174 mm	Opal	115°	HW	2700	>90	1680	<3	00
D DALI					HQ	3000	>90	1800	<3	
					HN	4000	>90	1890	<3	


LED nominal lumen

QT (Tunable white) available soon

DT (Warm Dimming) available soon

Opal | 1674mm

0.10 Risk 1 IP20 850° CE UK CA

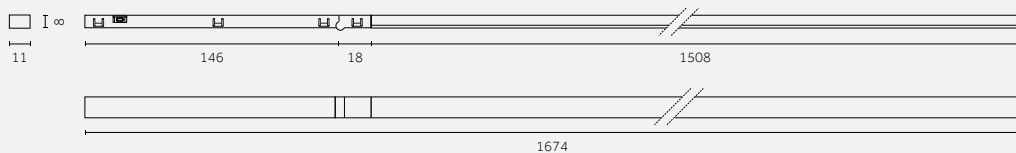

Code example:

D . BC950 . HW 00

Track Outline surface 24V: p.103

Photometric data:
www.reggiani.net**21.6 W** MID POWER LED - 14,4 W/m

Lumen delivered up to 1351 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Length	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	BC950	1674 mm	Opal	115°	HW	2700	>90	2520	<3	00
D DALI					HQ	3000	>90	2700	<3	
					HN	4000	>90	2835	<3	

LED nominal lumen

QT (Tunable white) available soon

DT (Warm Dimming) available soon

Track Outline

24V

Track Outline 24V
Recessed

Track Outline 24V
Surface



Track Outline 24V
Pendant


Track Outline 24V
Pendant Round

Track Outline 24V
Surface curved














EN The Outline system includes 24V track in recessed, surface and pendant configurations. A key characteristic of the system is the ability to create different, more organic configurations using the available curved options, allowing to use the track in a creative way, adapting to architectural details and personalized layouts. Outline 24V track is available in 4 different color finishes: embossed matte white, embossed matte black, brushed gold, anodized bronze.


IT Il sistema Outline comprende binari a 24V ad incasso, a superficie e a sospensione. La caratteristica chiave del sistema è la possibilità di creare diverse configurazioni: Outline 24V è infatti disponibile anche in versione curva, permettendo di utilizzare i binari in modo creativo, adattandosi a particolari dettagli architettonici o per disegnare layout personalizzati. I binari Outline 24V sono disponibili in 4 finiture colore: bianco opaco goffrato, nero opaco goffrato, oro spazzolato e bronzo anodizzato.

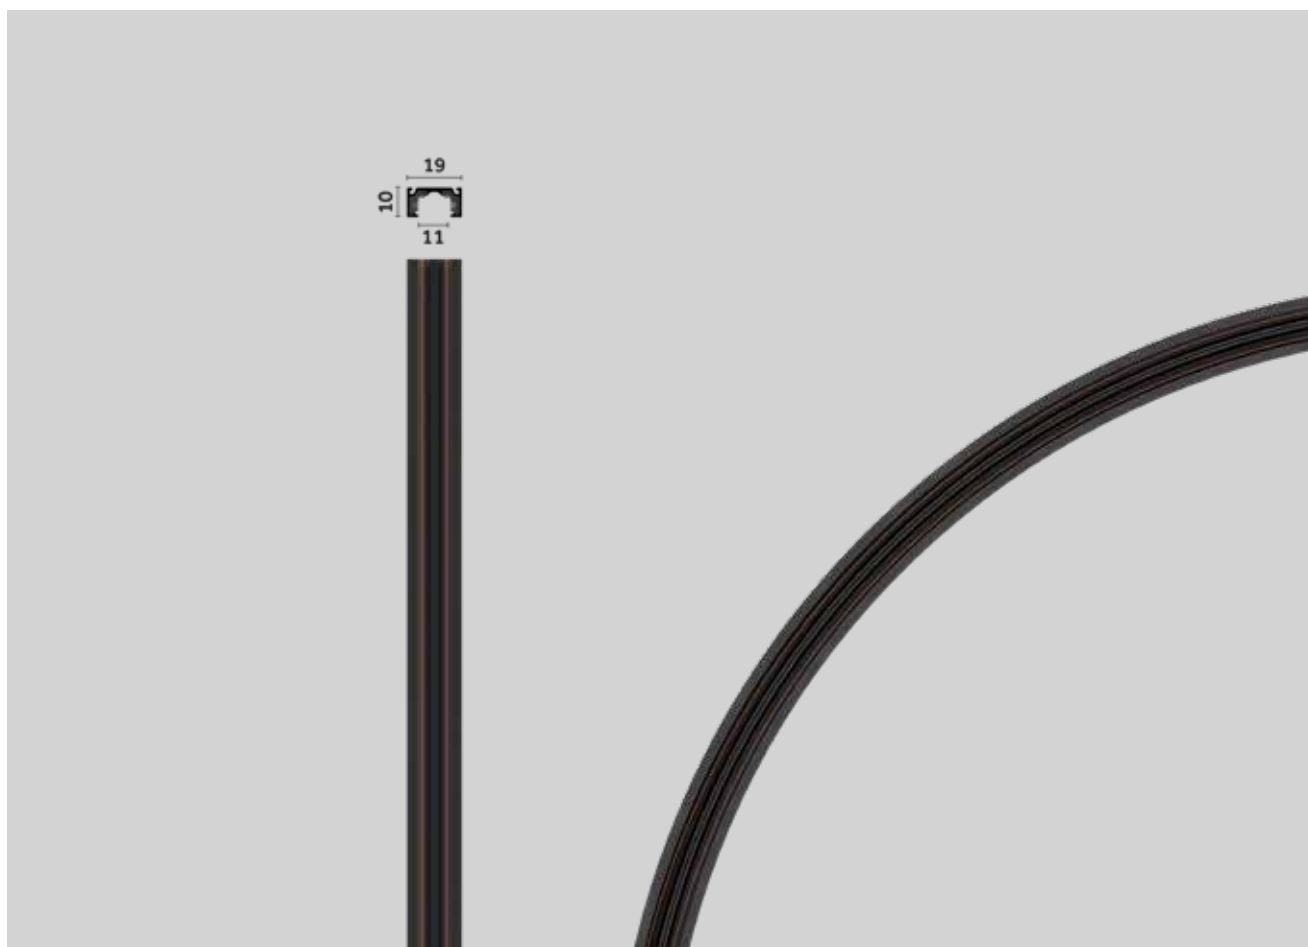


Versions/ Versioni	
Track Outline 24V	    Recessed Trimless Surface Pendant Round Pendant
Track Outline 24V Curved	 Surface Curved
Finishes/ Finiture Special finishes/ Finiture speciali	  12 Embossed matte white/ Bianco opaco goffrato 31 Embossed matte black/ Nero opaco goffrato   E0 Brushed gold/ Oro spazzolato T1 Anodized Bronze/ Bronzo Anodizzato
IP	20
Supported control systems	On/Off, DALI, Bluetooth (Casambi)
Insulation class	
Certifications	    

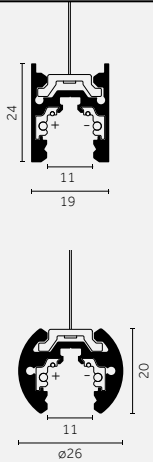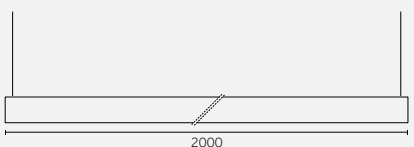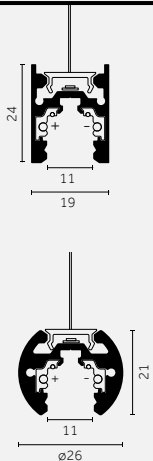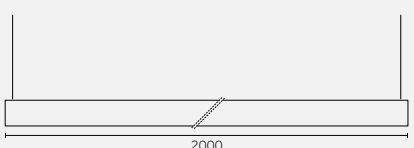		1000 mm	2000 mm
Track Outline 24V Recessed Trimless			
		p.102	p.102
Track Outline 24V Surface			
		p.103	p.103
Track Outline 24V Pendant			
		p.105 / 107	p.105 / 107
Track Outline 24V Pendant Indirect			
		p.105 / 107	p.105 / 107
▽		105°	105°
Light source/ Sorgente luminosa		MID POWER LED 14 W 1580 lm - 1825 lm L80 B10=50,000 h 2700 K; 3000 K; 4000 K SDCM <3 CRI >90	MID POWER LED 28 W 3160 lm - 3650 lm L80 B10=50,000 h 2700 K; 3000 K; 4000 K SDCM <3 CRI >90


3000 mm	r 300 mm	r 500 mm
---------	----------	----------




p.102




p.103




p.103



p.103

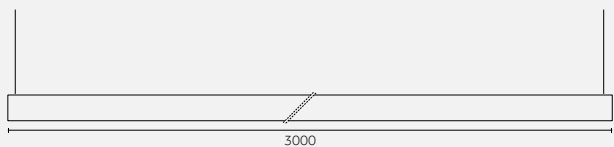

p.105 / 107

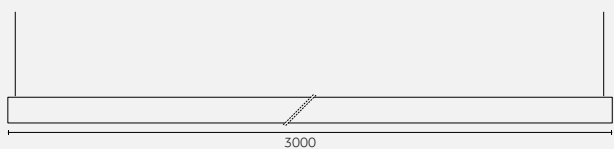

p.105 / 107


105°

MID POWER LED
 42 W
 4740 lm - 5475 lm
 L80 B10=50,000 h
 2700 K; 3000 K; 4000 K
 SDCM <3
 CRI >90




EN Outline Track 24V - Surface is available in curved segments.

IT Outline Track 24V - Surface è disponibile anche in segmento curvi.

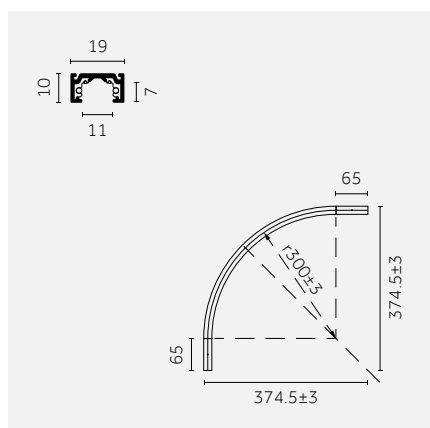

EN 300mm r curve.

IT Curva raggio 300mm.

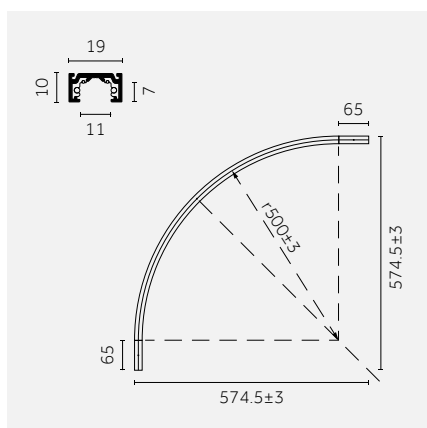


EN 500mm r curve.


IT Curva raggio 500mm.

EN Track Outline 24V Pendant is available also with indirect light. The linear LED positioned on top of the track allows to combine diffused and accent lighting. Track Outline 24V Pendant - Indirect is available in round version too, to create an infinite range of lighting configurations.


IT Track Outline 24V Pendant è disponibile anche in versione con luce indiretta. Il lineare LED posizionato nella parte superiore del binario permette di combinare illuminazione diffusa e d'accento. Track Outline 24V Pendant - Indirect è disponibile anche in versione tonda e può essere abbinato a qualsiasi apparecchio del sistema Outline 24V, per creare un'infinita gamma di configurazioni illuminotecniche.

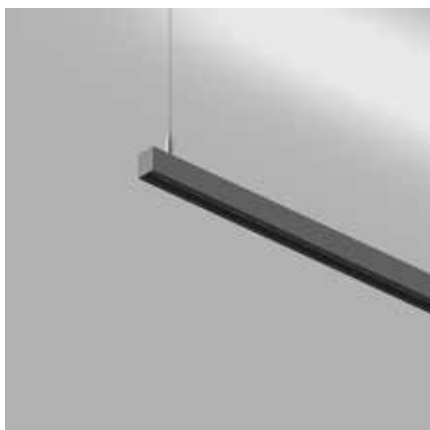


EN Outline 24V Track Pendant Indirect.
IT Binario Outline 24V Pendant Indirect.

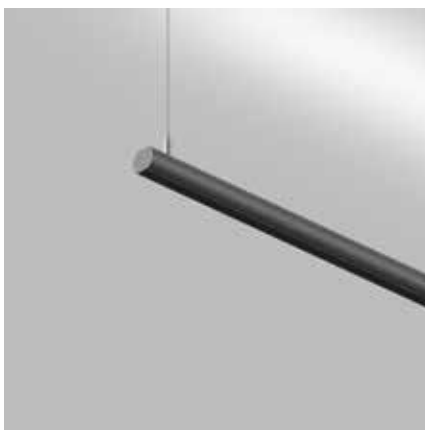


EN Outline 24V Track Pendant Indirect - Round.
IT Binario Outline 24V Pendant Indirect - Round.

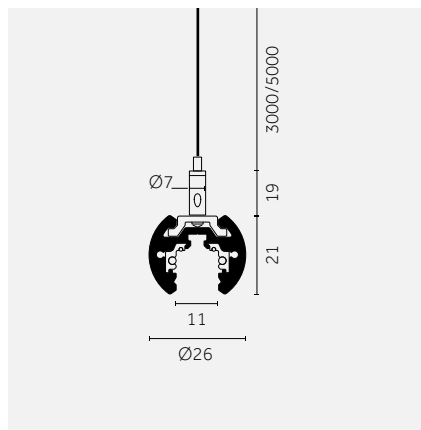


EN Outline 24V Track Pendant Indirect.
IT Binario Outline 24V Pendant Indirect.

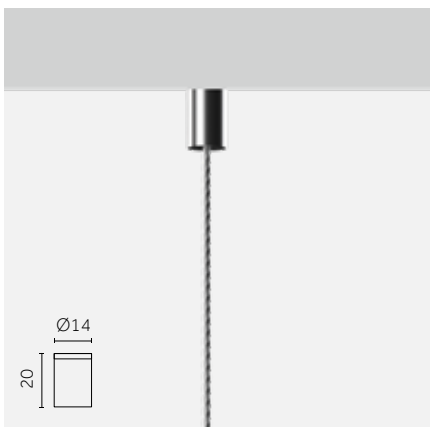


EN Pendant base.
IT Rosone.

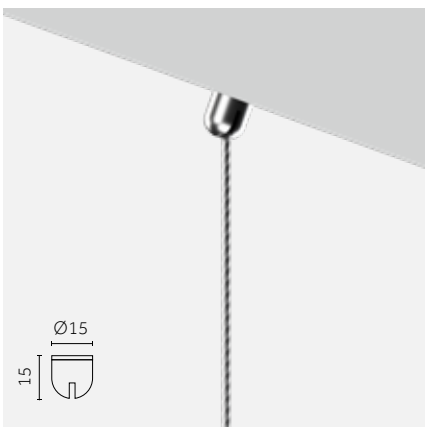

EN Adjustable pendant base.
IT Rosone orientabile.

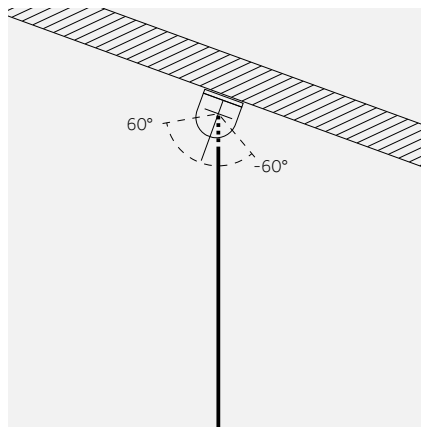


EN +/- 60° adjustability of the Track Pendant base.
IT +/- 60° di orientabilità del rosone.

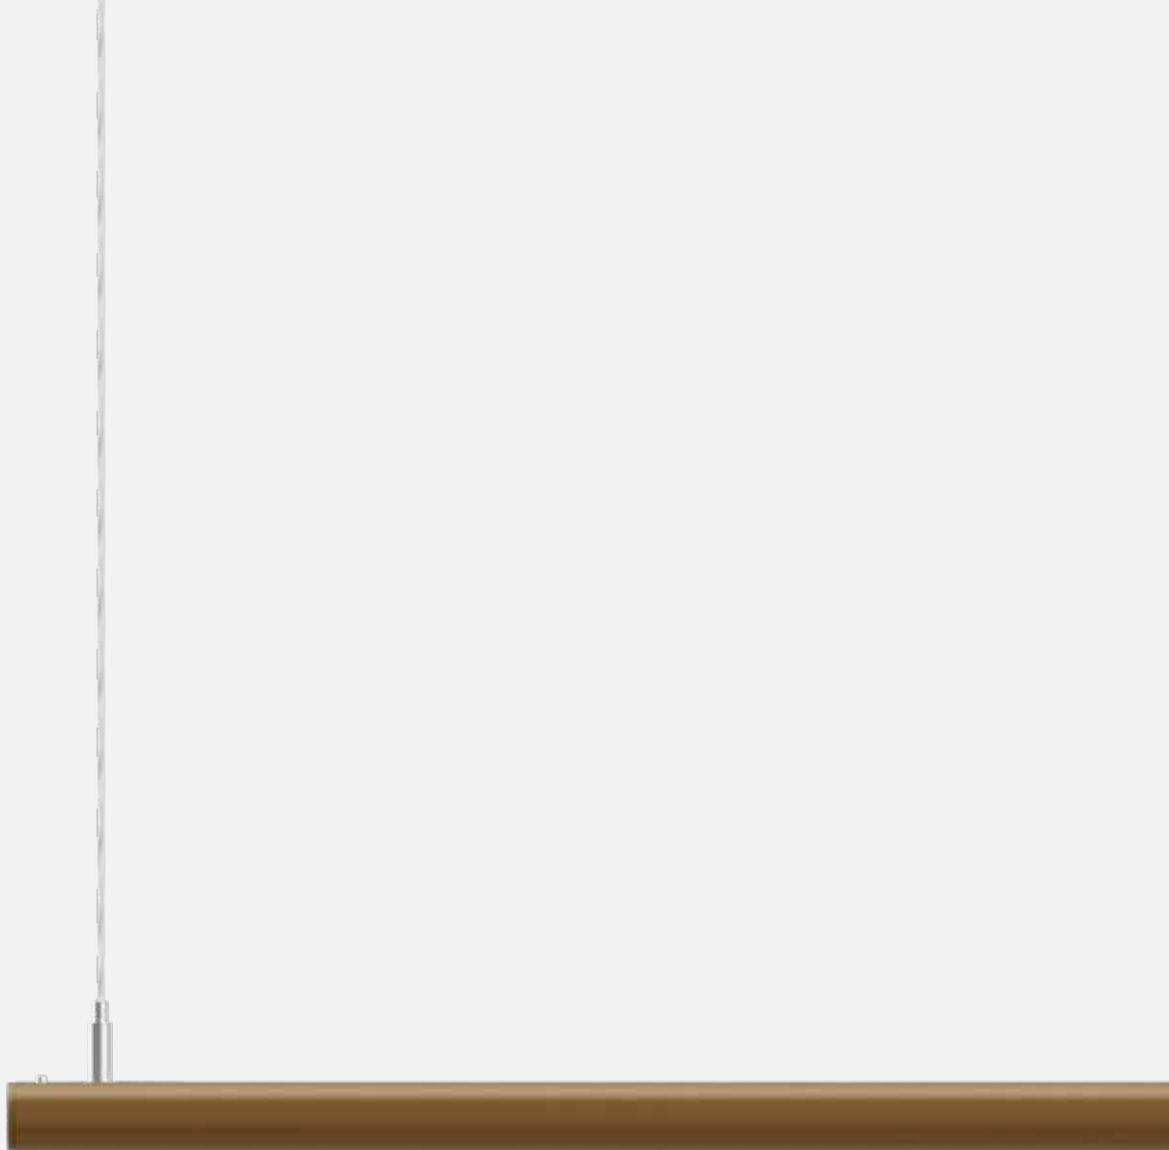


EN Outline 24V track is available in 4 different color finishes, to guarantee the maximum personalization of the project: embossed matte white, embossed matte black, brushed gold, anodized bronze.

IT I binari Outline 24V sono disponibili in 4 diverse finiture, per garantire la massima personalizzazione del progetto: bianco opaco goffrato, nero opaco goffrato, oro spazzolato, bronzo anodizzato.


Surface track




12
EN Embossed matte white/
IT Bianco opaco goffrato



31
EN Embossed matte black/
IT Nero opaco goffrato



E0
EN Brushed gold/
IT Oro spazzolato



T1
EN Anodized Bronze/
IT Bronzo Anodizzato


Pendant track



12
EN Embossed matte white/
IT Bianco opaco goffrato



31
EN Embossed matte black/
IT Nero opaco goffrato




E0
EN Brushed gold/
IT Oro spazzolato



T1
EN Anodized Bronze/
IT Bronzo Anodizzato

Recessed Trimless

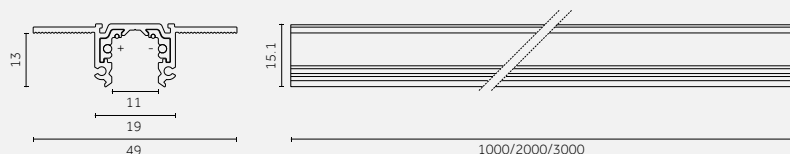


Code example:
0.02151.00 21

Track Driver: p.109
Control systems: p.109

Version	Length mm	Weight kg	Finishes
0.02151.00	1000	0.40	21
0.02152.00	2000	0.80	
0.02153.00	3000	1.20	

Recessed Trimless | Accessories

Power supply/ Alimentazioni




Description

Concealed end-feed with wire (2500mm)/
Testata di alimentazione a scomparsa con cavo (2500mm)

Code
0.02159.00

Finishes
21

Electromechanical connections/ Conessioni elettromeccaniche




Description

Jointing connector/
Giunto passante

Code
0.02161.00

Finishes
21




Description

L joint/
Giunto passante per angolo 90°

Code
0.02162.0021

Finishes
21





Description

L feed ceiling-wall/
Giunto a L soffitto-parete

Code
0.02163.00

Finishes
21




Description

Adjustable corner/
Giunto flessibile

Code
0.02166.00

Finishes
21

Accessories/ Accessori




Description

Plastic end cap/
Tappo di chiusura in plastica

Code
0.02164.00

Finishes
10
21



Description

Aesthetic track cover (length: 3m)/
Cover di chiusura estetica (lunghezza: 3m)

Code
0.02186.00


Finishes
10
21



Description

Locking tool for PVC to be used in case of track cutting/
Tronchese per bloccaggio PVC in caso di taglio binario

Code
0.02169.0000




Description

Template for track installation/
Dima per installazione binario

Code
0.02187.0000

Surface



Code example:



0.02155.00 12

Track Driver: p.109

Control systems: p.109

Version	Length mm	Weight kg	Finishes
0.02155.00	1000	0.30	12
0.02156.00	2000	0.60	31
0.02157.00	3000	0.90	E0
			T1

Surface Curved

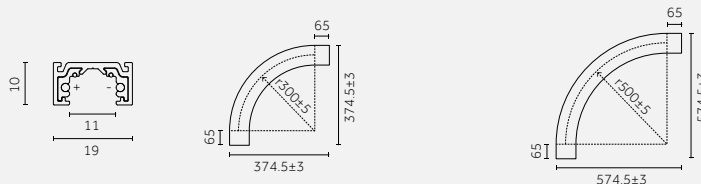

Code example:

0.02184.00 12


Track Driver: p.109

Control systems: p.109

Version	r mm	Weight kg	Finishes
0.02184.00	300	0,17	12
			31
			E0
			T1

Version	r mm	Weight kg	Finishes
0.02185.00	500	0,26	12
			31
			E0
			T1

Surface | Accessories

Power supply/
Alimentazioni


Description

End feed /
Testata di alimentazione

Code

0.02158.00

Finishes

21


Description

Concealed end-feed with wire (2500mm)/
Testata di alimentazione a scomparsa con cavo (2500mm)

Code

0.02159.00

Finishes

21Electromechanical connections/
Conessioni elettromeccaniche


Description

Jointing connector/
Giunto passante

Code

0.02161.00

Finishes

21


Description

L joint/
Giunto passante per angolo 90°

Code

0.02162.0021

Finishes

21


Description

L feed ceiling-wall/
Giunto a L soffitto-parete

Code

0.02163.00

Finishes

21

Description

Adjustable corner/
Giunto flessibile


Code

0.02166.00

Finishes

21

Accessories/
Accessori

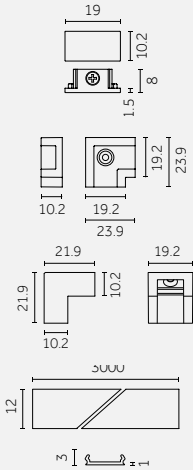

Description
Plastic end cap/ Tappo di chiusura in plastica

Code	Finishes
0.02160.00	10 ☐
	21 ☒

Description
Horizontal mechanical corner joint cover for surface track/ Coprigiunto meccanico angolare orizzontale per binario da superficie

Code	Finishes
0.02167.00	21 ☒

Description
Vertical mechanical corner joint cover for surface track/ Coprigiunto meccanico angolare verticale per binari da superficie

Code	Finishes
0.02168.00	21 ☒


Description
Aesthetic track cover (length: 3m)/ Cover di chiusura estetica (lunghezza: 3m)

Code	Finishes
0.02173.00	10 ☐
	21 ☒

Description
Locking tool for PVC to be used in case of track cutting/ Tronchese per bloccaggio PVC in caso di taglio binario

Code
0.02169.0000

Pendant

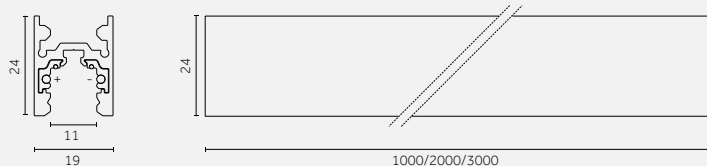

Code example:

0.02175.00 12

Track Driver: p.109


Control systems: p.109

Notes:

Kit for suspended application to be ordered separately p.107/ Kit per l'applicazione a sospensione da ordinare separatamente vedi p.107

Version	Length mm	Weight kg	Finishes
0.02175.00	1000	0.60	12
0.02176.00	2000	1.10	31
0.02177.00	3000	1.60	E0
			T1

Pendant - Indirect

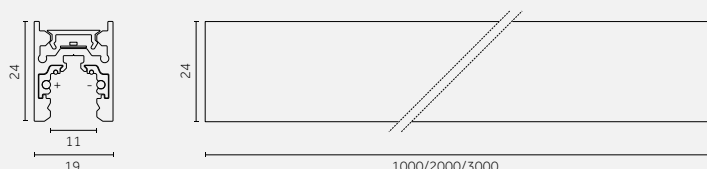

Code example:

X - 02195 - HW 12

Track Driver: p.109

Control systems: p.109


Notes:

Kit for suspended application to be ordered separately p.107/ Kit per l'applicazione a sospensione da ordinare separatamente vedi p.107

14 W	MID POWER LED				Lumen delivered up to 935 lm / Lumen maintenance: L80 B10=50,000h							
Driver		Version	Length mm	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes	
X	Not included	02195 On/Off	1000	Opal	105°	HW	2700	>90	1580	<3	12	
		D2195 DALI				HQ	3000	>90	1740	<3	31	
						HN	4000	>90	1825	<3	E0	
		LED nominal lumen					T1					
28 W	MID POWER LED				Lumen delivered up to 1869 lm / Lumen maintenance: L80 B10=50,000h							
Driver		Version	Length mm	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes	
X	Not included	02196 On/Off	2000	Opal	105°	HW	2700	>90	3160	<3	12	
		D2196 DALI				HQ	3000	>90	3480	<3	31	
						HN	4000	>90	3650	<3	E0	
		LED nominal lumen					T1					
42 W	MID POWER LED				Lumen delivered up to 2805 lm / Lumen maintenance: L80 B10=50,000h							
Driver		Version	Length mm	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes	
X	Not included	02197 On/Off	3000	Opal	105°	HW	2700	>90	4740	<3	12	
		D2197 DALI				HQ	3000	>90	5220	<3	31	
						HN	4000	>90	5475	<3	E0	
		LED nominal lumen					T1					

Pendant | Accessories

Power supply/ Alimentazioni



Description

Concealed end-feed with wire (2500mm)/
Testata di alimentazione a scomparsa con cavo (2500mm)


Code

0.02159.00

Finishes

21

Electromechanical connections/ Connessioni elettromeccaniche



Description


Jointing connector/
Giunto passante

Code











0.02161.00

Finishes



21

		Description L joint/ Giunto passante per angolo 90°	Code <u>0.02162.0021</u>	Finishes <u>21</u>
		Description Adjustable corner/ Giunto flessibile	Code <u>0.02166.00</u>	Finishes <u>21</u>

Accessories/
Accessori

		Description End cap for round track/ Tappo di chiusura per binario round	Code <u>0.02174.00</u>	Finishes <u>10</u> <u>21</u>
		Description Suspension kit with short cable bracket L3000/ Kit sospensione con staffa corta cavo L3000	Code <u>0.02188.00</u>	Finishes <u>10</u> <u>21</u>
		Description Suspension kit with short cable bracket L5000/ Kit sospensione con staffa corta cavo L5000	Code <u>0.02189.00</u>	Finishes <u>10</u> <u>21</u>
		Description Suspension kit with long cable bracket L3000/ Kit sospensione con staffa lunga cavo L3000	Code <u>0.02190.00</u>	Finishes <u>10</u> <u>21</u>
		Description Adjustable suspension kit with short cable bracket L3000/ Kit sospensione orientabile con staffa corta cavo L3000	Code <u>0.02118.00</u>	Finishes <u>10</u> <u>21</u>
		Description Adjustable suspension kit with short cable bracket L5000/ Kit sospensione orientabile con staffa corta cavo L5000	Code <u>0.02119.00</u>	Finishes <u>10</u> <u>21</u>
		Description Adjustable suspension kit with long cable bracket L3000/ Kit sospensione con staffa lunga cavo L3000	Code <u>0.02198.00</u>	Finishes <u>10</u> <u>21</u>
		Description Adjustable suspension kit with long cable bracket L5000/ Kit sospensione orientabile con staffa lunga cavo L5000	Code <u>0.02199.00</u>	Finishes <u>10</u> <u>21</u>
		Description Locking tool for PVC to be used in case of track cutting/ Tronchese per bloccaggio PVC in caso di taglio binario	Code <u>0.02169.0000</u>	

Pendant Round

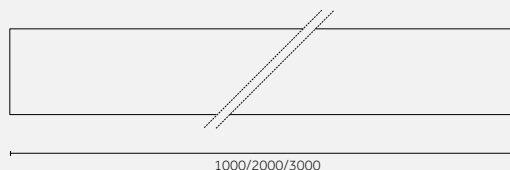

Code example:

0.02181.00 12

Track Driver: p.109



Control systems: p.109

Notes:

Kit for suspended application to be ordered separately p.108/ Kit per l'applicazione a sospensione da ordinare separatamente vedi p.108

Version	Length mm	Weight kg	Finishes
0.02181.00	1000	0.70	12
0.02182.00	2000	1.30	31
0.02183.00	3000	2.00	E0
			T1

Pendant Round - Indirect

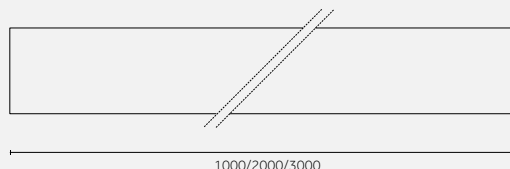

Code example:

X - 02192 - HW 12

Track Driver: p.109

Control systems: p.109


Notes:

Kit for suspended application to be ordered separately p.108/ Kit per l'applicazione a sospensione da ordinare separatamente vedi p.108

14 W	MID POWER LED				Lumen delivered up to 935 lm / Lumen maintenance: L80 B10=50,000h									
Driver		Version	Length mm	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes			
X	Not included	02192	On/Off	1000	Opal	105°	HW	2700	>90	1580	<3	12		
							HQ	3000	>90	1740	<3	31		
							HN	4000	>90	1825	<3	E0		
							LED nominal lumen					T1		
28 W	MID POWER LED				Lumen delivered up to 1869 lm / Lumen maintenance: L80 B10=50,000h									
	Driver		Version	Length mm	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes		
	X	Not included	02193	On/Off	2000	Opal	105°	HW	2700	>90	3160	<3	12	
								HQ	3000	>90	3480	<3	31	
								HN	4000	>90	3650	<3	E0	
					LED nominal lumen					T1				
42 W	MID POWER LED				Lumen delivered up to 2805 lm / Lumen maintenance: L80 B10=50,000h									
	Driver		Version	Length mm	Diffuser	Beam width	LED	K	CRI	lm	SDCM	Finishes		
	X	Not included	02194	On/Off	3000	Opal	105°	HW	2700	>90	4740	<3	12	
								HQ	3000	>90	5220	<3	31	
								HN	4000	>90	5475	<3	E0	
					LED nominal lumen					T1				

Pendant Round | Accessories

Power supply/ Alimentazioni



Description

Concealed end-feed with wire (2500mm)/
Testata di alimentazione a scomparsa con cavo (2500mm)


Code

0.02159.00

Finishes

21

Electromechanical connections/ Conessioni elettromeccaniche



Description


Jointing connector/
Giunto passante

Code











0.02161.00

Finishes

21

		Description L joint/ Giunto passante per angolo 90°	Code <u>0.02162.0021</u>	Finishes <u>21</u>
		Description Adjustable corner/ Giunto flessibile	Code <u>0.02166.00</u>	Finishes <u>21</u>

Accessories/ Accessori

		Description End cap for round track/ Tappo di chiusura per binario round	Code <u>0.02165.00</u>	Finishes <u>10</u> <u>21</u>
		Description Suspension kit with short cable bracket L3000/ Kit sospensione con staffa corta cavo L3000	Code <u>0.02188.00</u>	Finishes <u>10</u> <u>21</u>
		Description Suspension kit with short cable bracket L5000/ Kit sospensione con staffa corta cavo L5000	Code <u>0.02189.00</u>	Finishes <u>10</u> <u>21</u>
		Description Suspension kit with long cable bracket L3000/ Kit sospensione con staffa lunga cavo L3000	Code <u>0.02190.00</u>	Finishes <u>10</u> <u>21</u>
		Description Adjustable suspension kit with short cable bracket L3000/ Kit sospensione orientabile con staffa corta cavo L3000	Code <u>0.02118.00</u>	Finishes <u>10</u> <u>21</u>
		Description Adjustable suspension kit with short cable bracket L5000/ Kit sospensione orientabile con staffa corta cavo L5000	Code <u>0.02119.00</u>	Finishes <u>10</u> <u>21</u>
		Description Adjustable suspension kit with long cable bracket L3000/ Kit sospensione con staffa lunga cavo L3000	Code <u>0.02198.00</u>	Finishes <u>10</u> <u>21</u>
		Description Adjustable suspension kit with long cable bracket L5000/ Kit sospensione orientabile con staffa lunga cavo L5000	Code <u>0.02199.00</u>	Finishes <u>10</u> <u>21</u>
		Description Locking tool for PVC to be used in case of track cutting/ Tronchese per bloccaggio PVC in caso di taglio binario	Code <u>0.02169.0000</u>	

Electrical Devices

Electrical devices

Driver/ Alimentazioni

75 W

Type	Code	Watt	Size (mm)	Cut-out	IP	Tech. specification / Input	Output	Connectable fixtures	Max.distance	Cable section
On/Off	0.30823.0000	75 W		-	20	220-240 Vac / 50/60 Hz	24 Vdc	-	10 m	1.5 mm ²


120 W

Type	Code	Watt	Size (mm)	Cut-out	IP	Tech. specification / Input	Output	Connectable fixtures	Max.distance	Cable section
On/Off	0.31558.0000	120 W		80 mm	20	220-240 Vac / 50/60 Hz	24 Vdc	-	10 m	1.5 mm ²
On/Off	0.31558.AV00	120 W		-	65	120/277 Vac / 50/60 Hz	24 Vdc	-	10 m	1.5 mm ²

180 W

Type	Code	Watt	Size (mm)	Cut-out	IP	Tech. specification / Input	Output	Connectable fixtures	Max.distance	Cable section
On/Off	0.31553.0000	180 W		62 mm	20	220-240 Vac / 50/60 Hz	24 Vdc	-	10 m	1.5 mm ²

Control systems



Description

Casambi Bluetooth Track Control device - 24V/
Dispositivo di controllo Casambi Bluetooth per binario - 24V

Code

H.26106.00

Finishes

21

Reggiani

©

2023

Reggiani Lighting S.r.l

All rights reserved

Art direction

Reggiani

Graphic design

Reggiani

Pictures

Reggiani

Lens visual

^{EN} Reggiani S.p.A. Illuminazione reserves the right to make technical, design and size changes at any time, without prior notice. Total or partial reproduction of this document is prohibited. Luminaire sizes are given in millimetres. All technical and design innovations are patented. Watts and lumens refer to the nominal values of the LED source; for photometric data and lumen output of the luminaires, visit www.reggiani.net

^{IT} Reggiani S.p.A. Illuminazione si riserva la facoltà di effettuare in qualsiasi momento senza preavviso, variazioni tecniche, formali e dimensionali. Sono vietate le riproduzioni anche parziali del presente documento. Le dimensioni degli apparecchi sono espresse in millimetri. Tutte le innovazioni tecniche e formali sono coperte da brevetto. Watt e lumen fanno riferimento ai valori nominali della sorgente LED, per i dati fotometrici e i lumen output degli apparecchi visitare www.reggiani.net

HEADQUARTERS

Reggiani S.p.A. Illuminazione

Viale Monza 16
20845 Sovico (MB), Italy
T. (+39) 039 20711
contact@reggiani.net



Reggiani

