

Same Mood,
different soul.
Combine style and
substance with
outstanding lumen
packages and optics.


MOOD PRO

Reggiani


Reggiani

Contents

Index overview	10
Mood Pro Fixed	13
Mood Pro Adjustable	45
Mood Pro Wall Washer	83

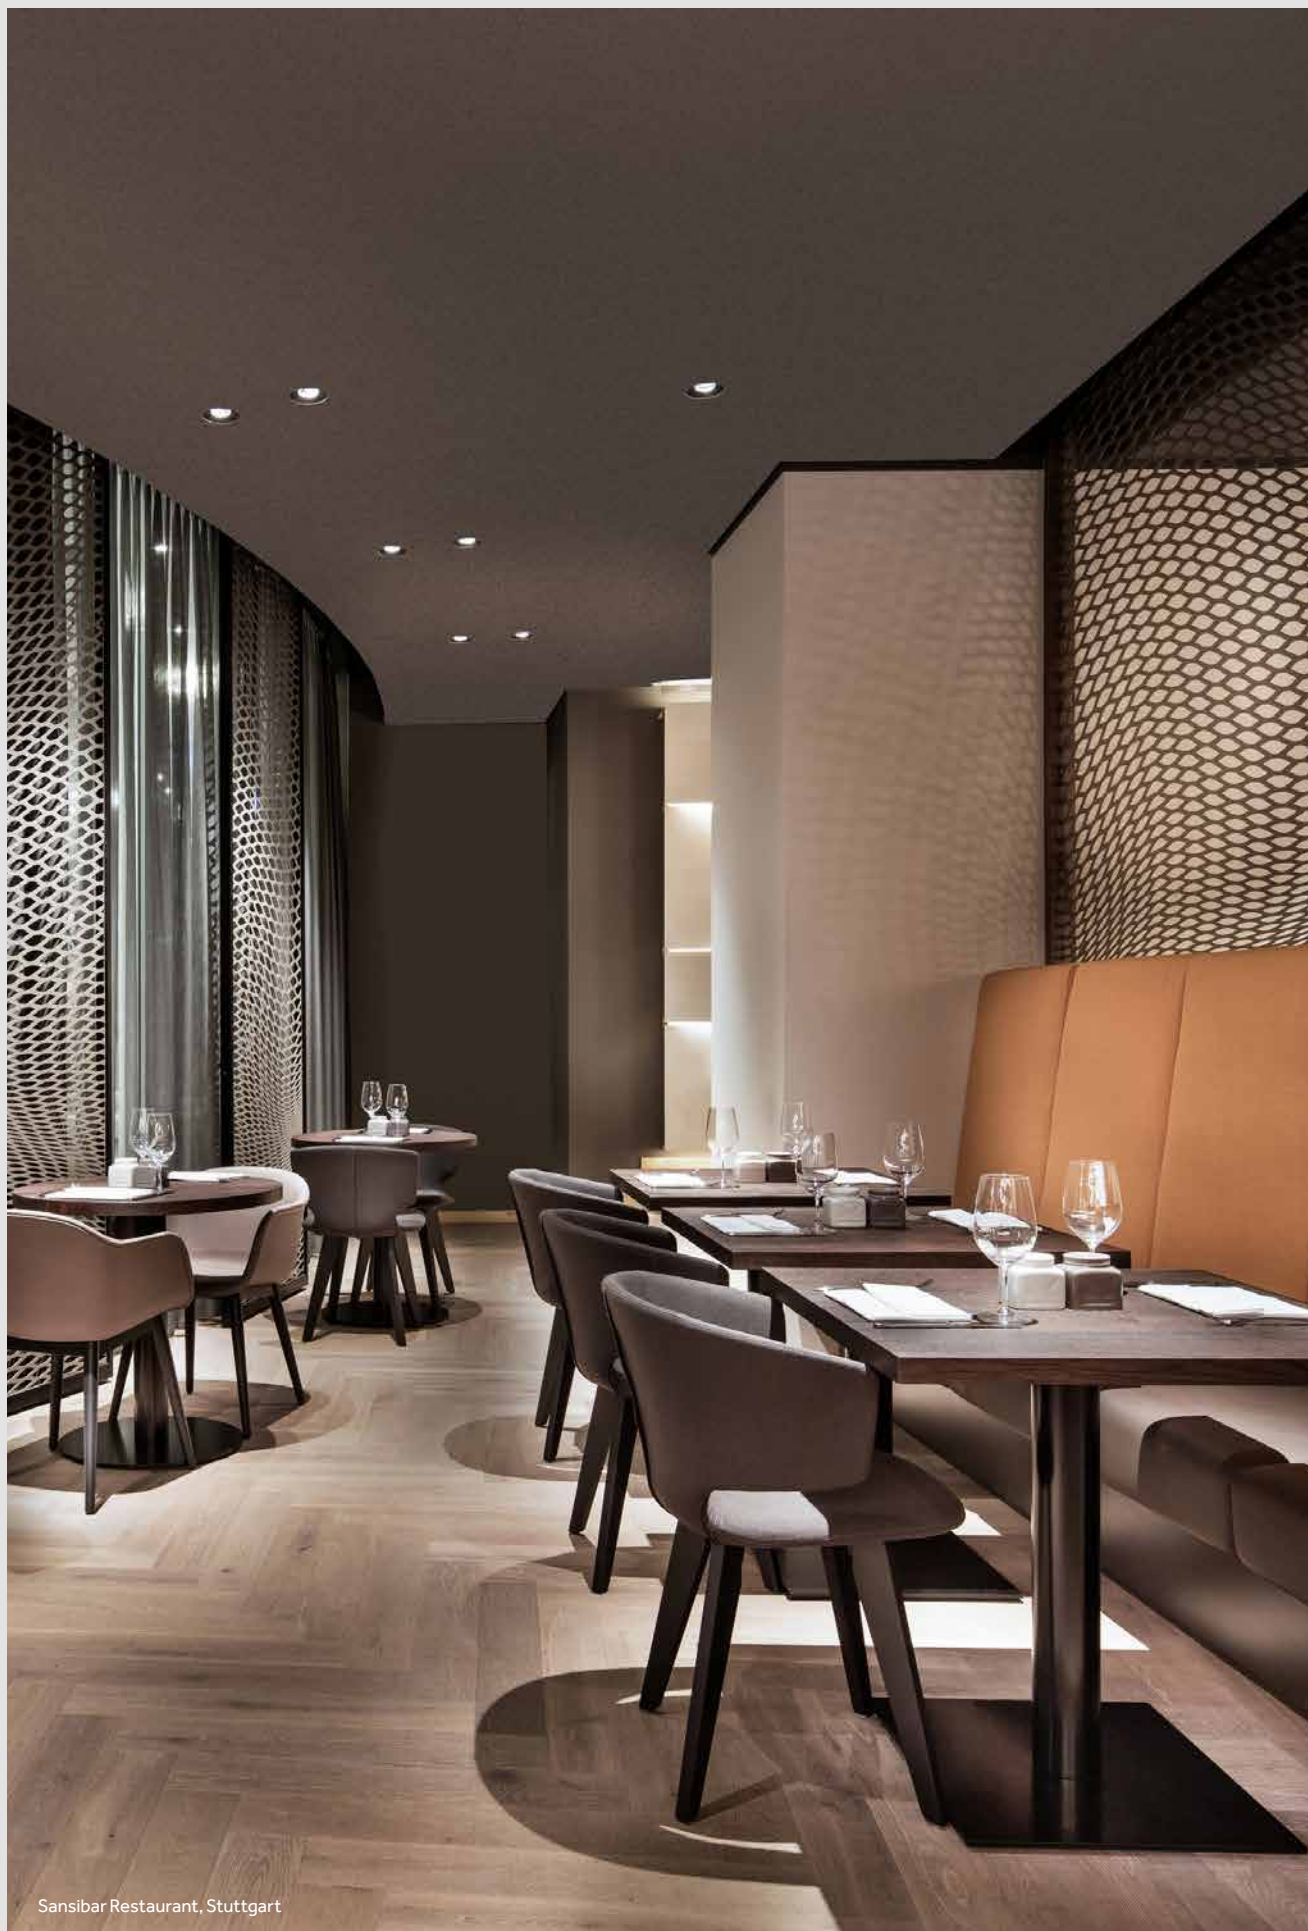

Sansibar Restaurant, Stuttgart

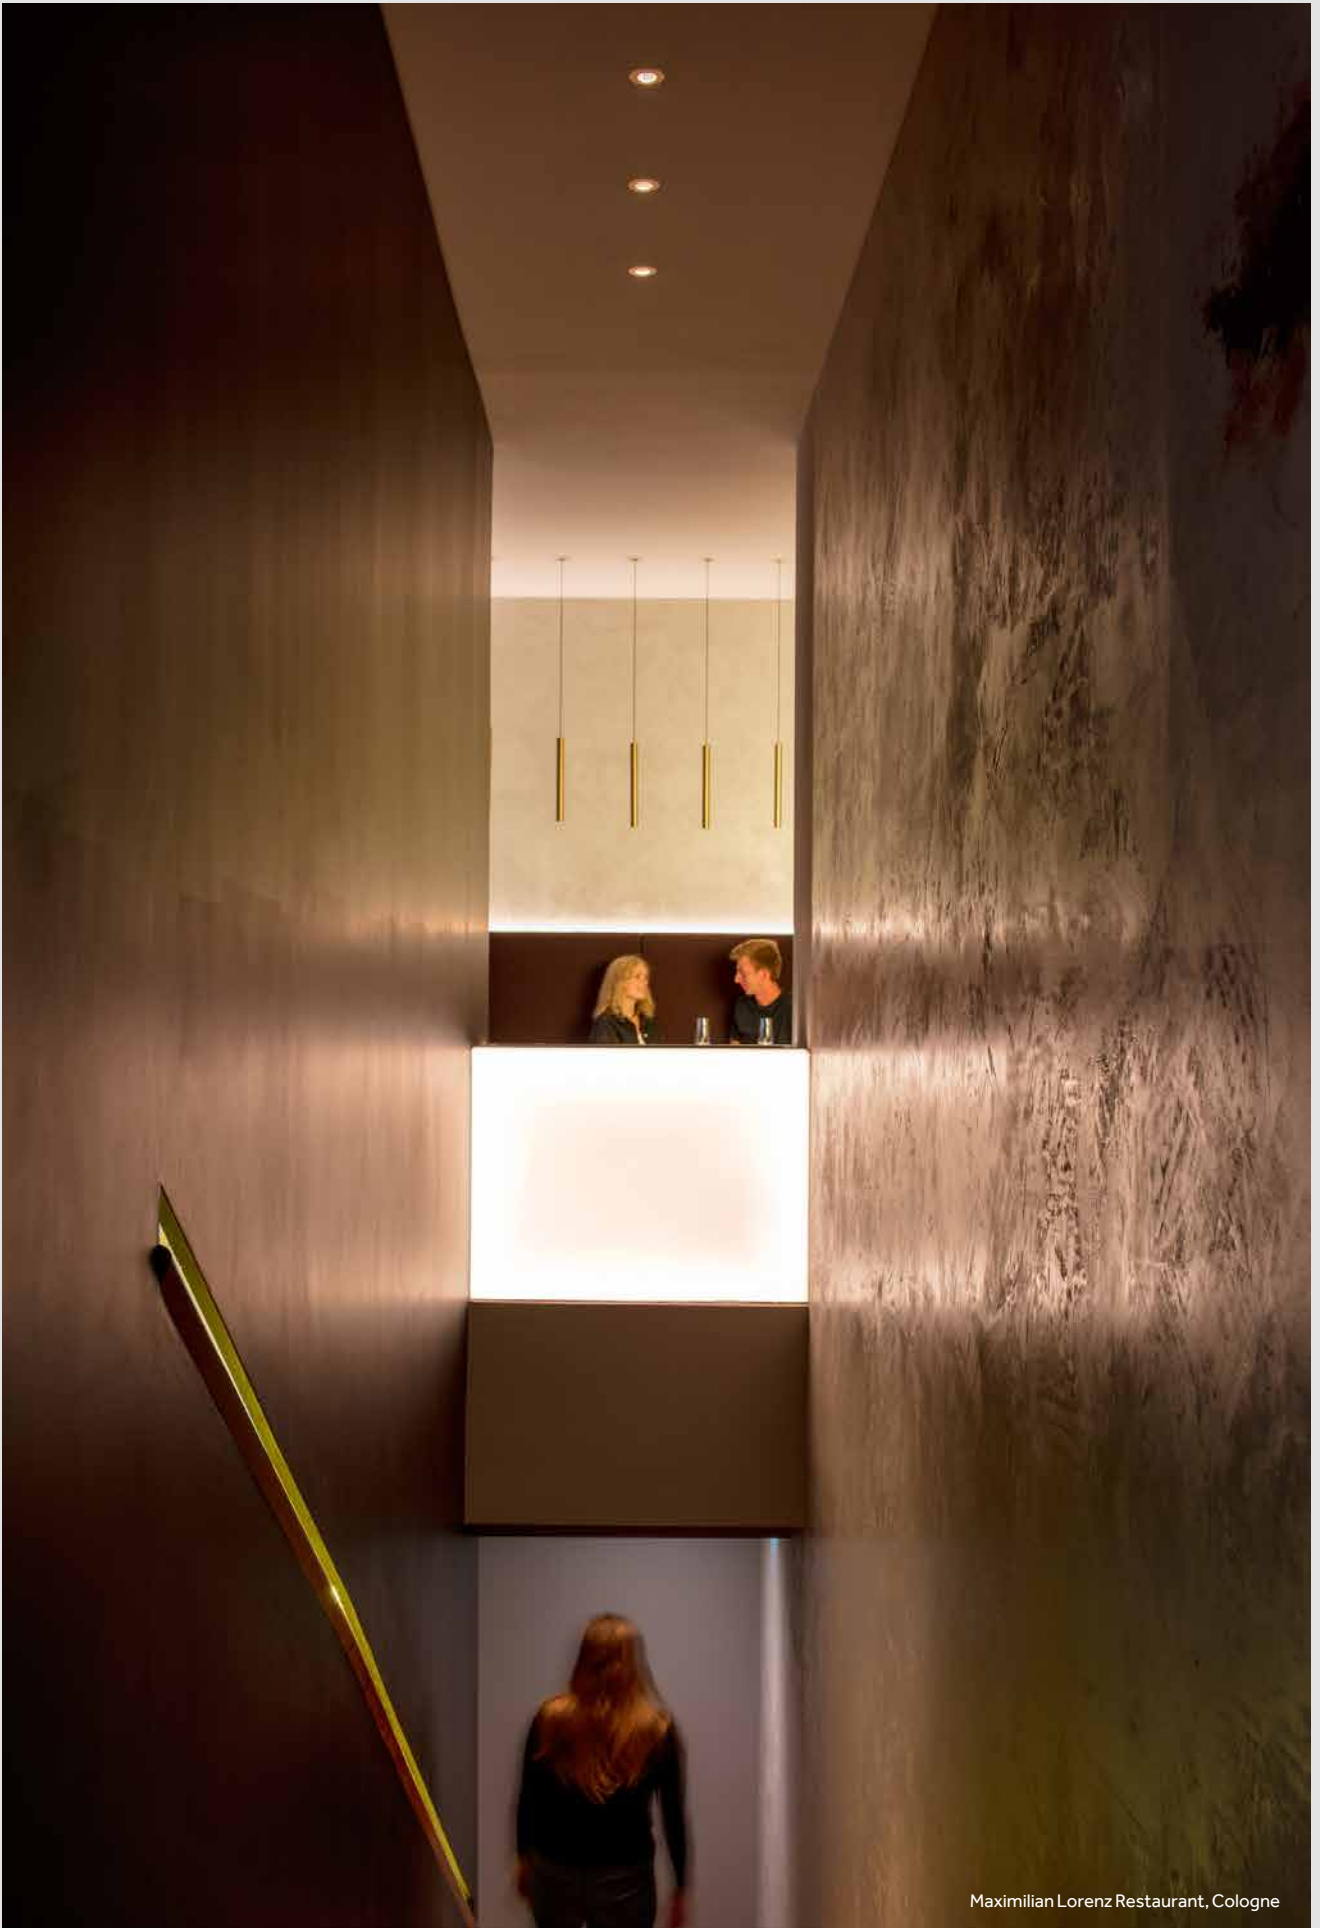

Maximilian Lorenz Restaurant, Cologne

EN Combine style and substance with outstanding lumen packages and optical control. Mood Pro represents a wide range of recessed fixtures available in fixed, adjustable and wall wash versions. All characterized by minimal design and exceptional lighting performances.

IT Combina stile e sostanza con lumen output ed ottiche eccezionali. Mood Pro rappresenta un'ampia gamma di prodotti ad incasso disponibili in versione fissa, orientabile e wall wash, caratterizzati da design minimale ed ottime performance illuminotecniche.



Spoon Restaurant, Milan

Pick your favourite

EN Mood Pro series is available in the Adjustable, Fixed and Wall Washer version. Based on your necessities, you can choose the one that better suits your lighting configuration.

IT Mood Pro è disponibile in versione orientabile, fissa e wall washer. In base alle tue necessità, puoi scegliere la versione che più si adatta al tuo progetto di illuminazione.







Mood Pro
Fixed







Mood Pro
Adjustable



Mood Pro
Wall Washer


Index overview

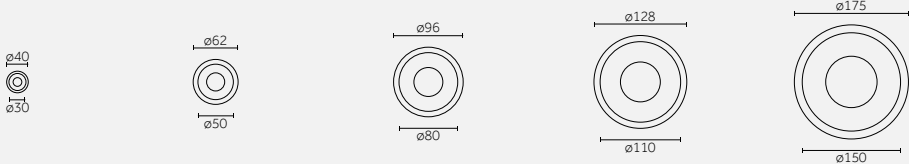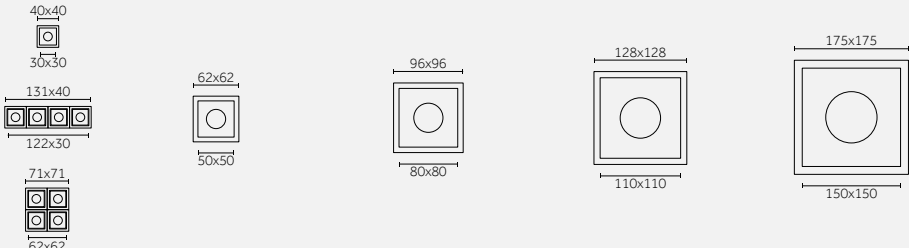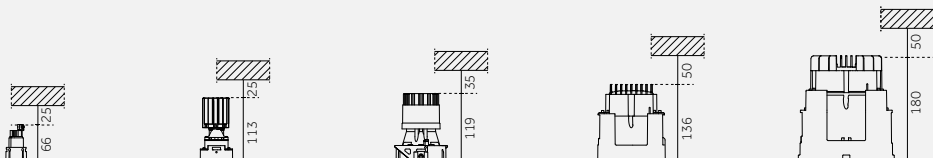Mood Pro	Fixed p.30					Adjustable p.60
	XS	S	M	L	XL	S
Round						
Square						
I						
△	Narrow (11°) Medium (24°) Wide (32°)	Narrow (18°) Medium (28°) Wide (33°)	Narrow (17°) Medium (28°) Wide (33° - 35°)	Medium (23°-24°) Wide (30°-37°)	Narrow (20°) Medium (31°) Wide (36°-37°)	Narrow (9°) Medium (23°) Wide (30°)
Light source/ Sorgente luminosa	3,2 W; 4x3,2 W 285 lm - 348 lm 2700 K 3000 K 4000 K CRI >90 SDCM <3	4 W; 8,5 W 391 lm - 902 lm 2700 K 3000 K 4000 K CRI >90 SDCM <2	8,5 W; 12 W 924 lm - 1601 lm 2700 K 3000 K 4000 K CRI >90 SDCM <2  Warm Dimming 12 W 31 lm - 1150 lm 1800 K-3000 K CRI >95 SDCM <3-<5	12 W; 17 W; 21 W 1475 lm - 2846 lm 2700 K 3000 K 4000 K CRI >90 SDCM <2  Warm Dimming 21 W 47 lm - 2015 lm 1800 K-3000 K CRI >95 SDCM <3-<5  Tunable white 21 W 2265 lm - 2584 lm 2700 K-6500 K CRI >90 SDCM <3-<5	25 W; 34 W 2633 lm - 4107 lm 2700 K 3000 K 4000 K CRI >90 SDCM <2  Warm Dimming 34 W 47 lm - 3300 lm 1700 K-3000 K CRI >95 SDCM <3-<5  Tunable white 34 W 3698 lm - 4178 lm 2700 K-6500 K CRI >90 SDCM <3-<5	4 W; 8,5 W 391 lm - 902 lm 2700 K 3000 K 4000 K CRI >90 SDCM <2

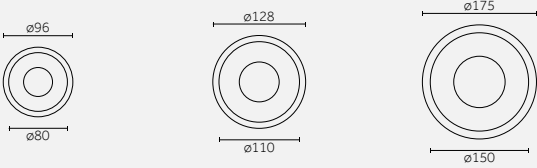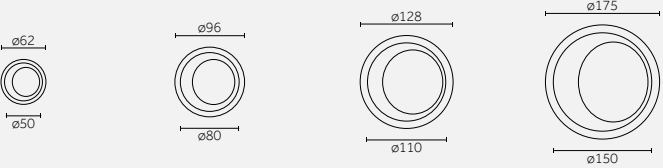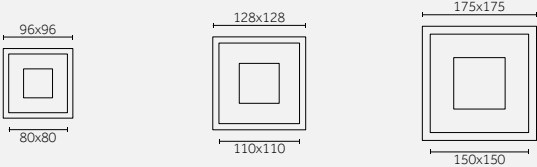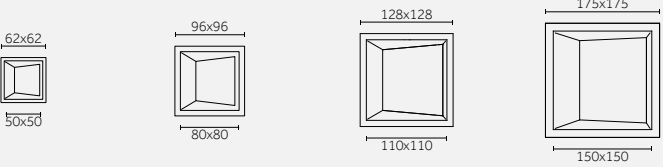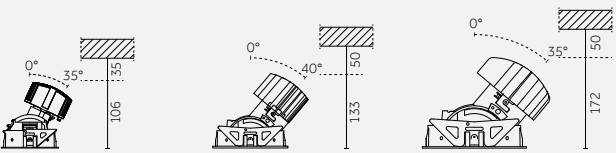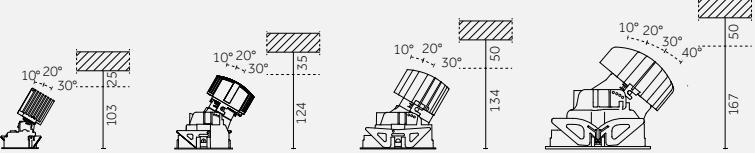			Wall Washer p.94			
M	L	XL	S	M	L	XL
						
						
						
Very narrow (8°) Narrow (12°) Medium (22°) Wide (30°-32°)			Wall Washer Wall Washer Wall Washer Wall Washer			
8,5 W; 12 W 781 lm - 1353 lm 2700 K 3000 K 4000 K CRI >90 SDCM <2  Warm Dimming 12 W 31 lm - 1150 lm 1800 K-3000 K CRI >95 SDCM <3-<5			8,5 W 12 W 21 W 34 W 781 lm - 902 lm 1386 lm - 1601 lm 2528 lm - 2846 lm 3574 lm - 4107 lm 2700 K 2700 K 2700 K 2700 K 3000 K 3000 K 3000 K 3000 K 4000 K 4000 K 4000 K 4000 K CRI >90 CRI >90 CRI >90 CRI >90 SDCM <2 SDCM <2 SDCM <2 SDCM <2			
 Warm Dimming 21 W 47 lm - 2015 lm 1800 K-3000 K CRI >95 SDCM <3-<5  Tunable white 21 W 2265 lm - 2584 lm 2700 K-6500 K CRI >90 SDCM <3-<5			 Warm Dimming 34 W 47 lm - 3300 lm 1700 K-3000 K CRI >95 SDCM <3-<5  Tunable white 34 W 3698 lm - 4178 lm 2700 K-6500 K CRI >90 SDCM <3-<5			


Mood Pro Fixed

Mood Pro Fixed

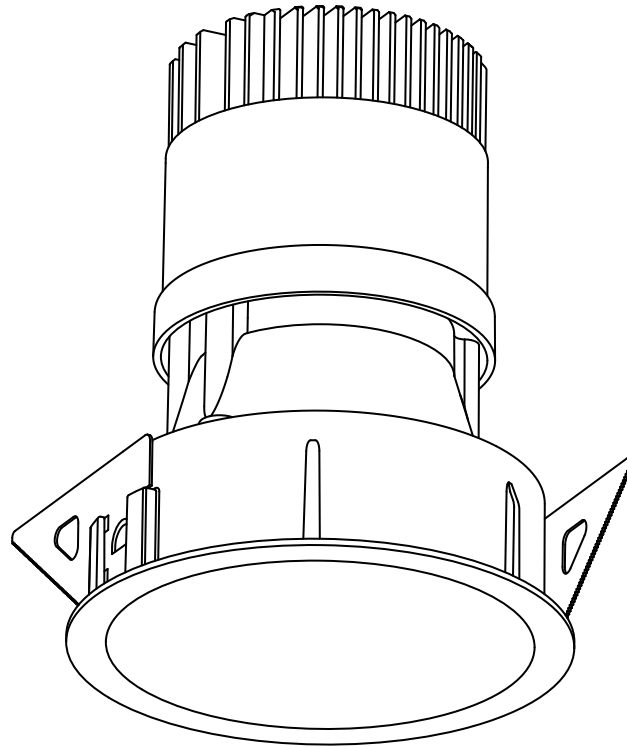


EN Mood Pro Fixed is available both in round and square, and either trim or trimless. A discreet lighting tool that creates a soft ambience with exceptional glare control thanks to the deep recessed lens. The fixed range offers the largest choice of sizes, from the smallest (XS - Ø30mm), to the largest (XL - Ø150mm), both in textured matte white or black finishes.

IT Mood Pro Fixed è disponibile sia in forma tonda che quadrata, con o senza flangia. L'uso della lente arretrata permette un'eccezionale controllo dell'abbaglio, e di conseguenza un'illuminazione discreta ed un ambiente soft. Mood Pro Fixed è disponibile dal diametro più piccolo (XS - Ø30mm), al più grande (XL - Ø150mm), in finitura colore bianco o nero opaco goffrato.

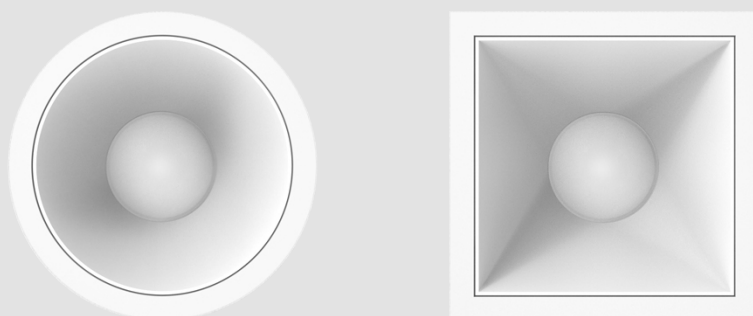


Versions/ Versioni			
Mood Pro Fixed			
	Round	Square	Specialities
Finishes/ Finiture	 12 Textured matte white/ Bianco opaco goffrato 31 Textured matte black/ Nero opaco goffrato Special finishes (on request) / Finiture speciali (su richiesta)  C0 Royal matte white/Bianco opaco Royal  W1 White super glossy/Bianco super lucido  U1 Glossy gold/Oro lucido  W4 Galvanized shiny copper/Rame lucido galvanizzato  U4 Shiny copper/Rame lucido  W0 Super glossy black/Nero super lucido  B0 Royal matte black/Nero opaco Royal		
Color temperature	2700K, 3000K, 4000K,  Warm Dimming,  Tunable white		
IP	Recessed section	20	
	Exposed section	44 65 Dome	
Control systems	On/Off, Phase-cut, Dimm 1-10V, DALI, Bluetooth		
Certifications	 		



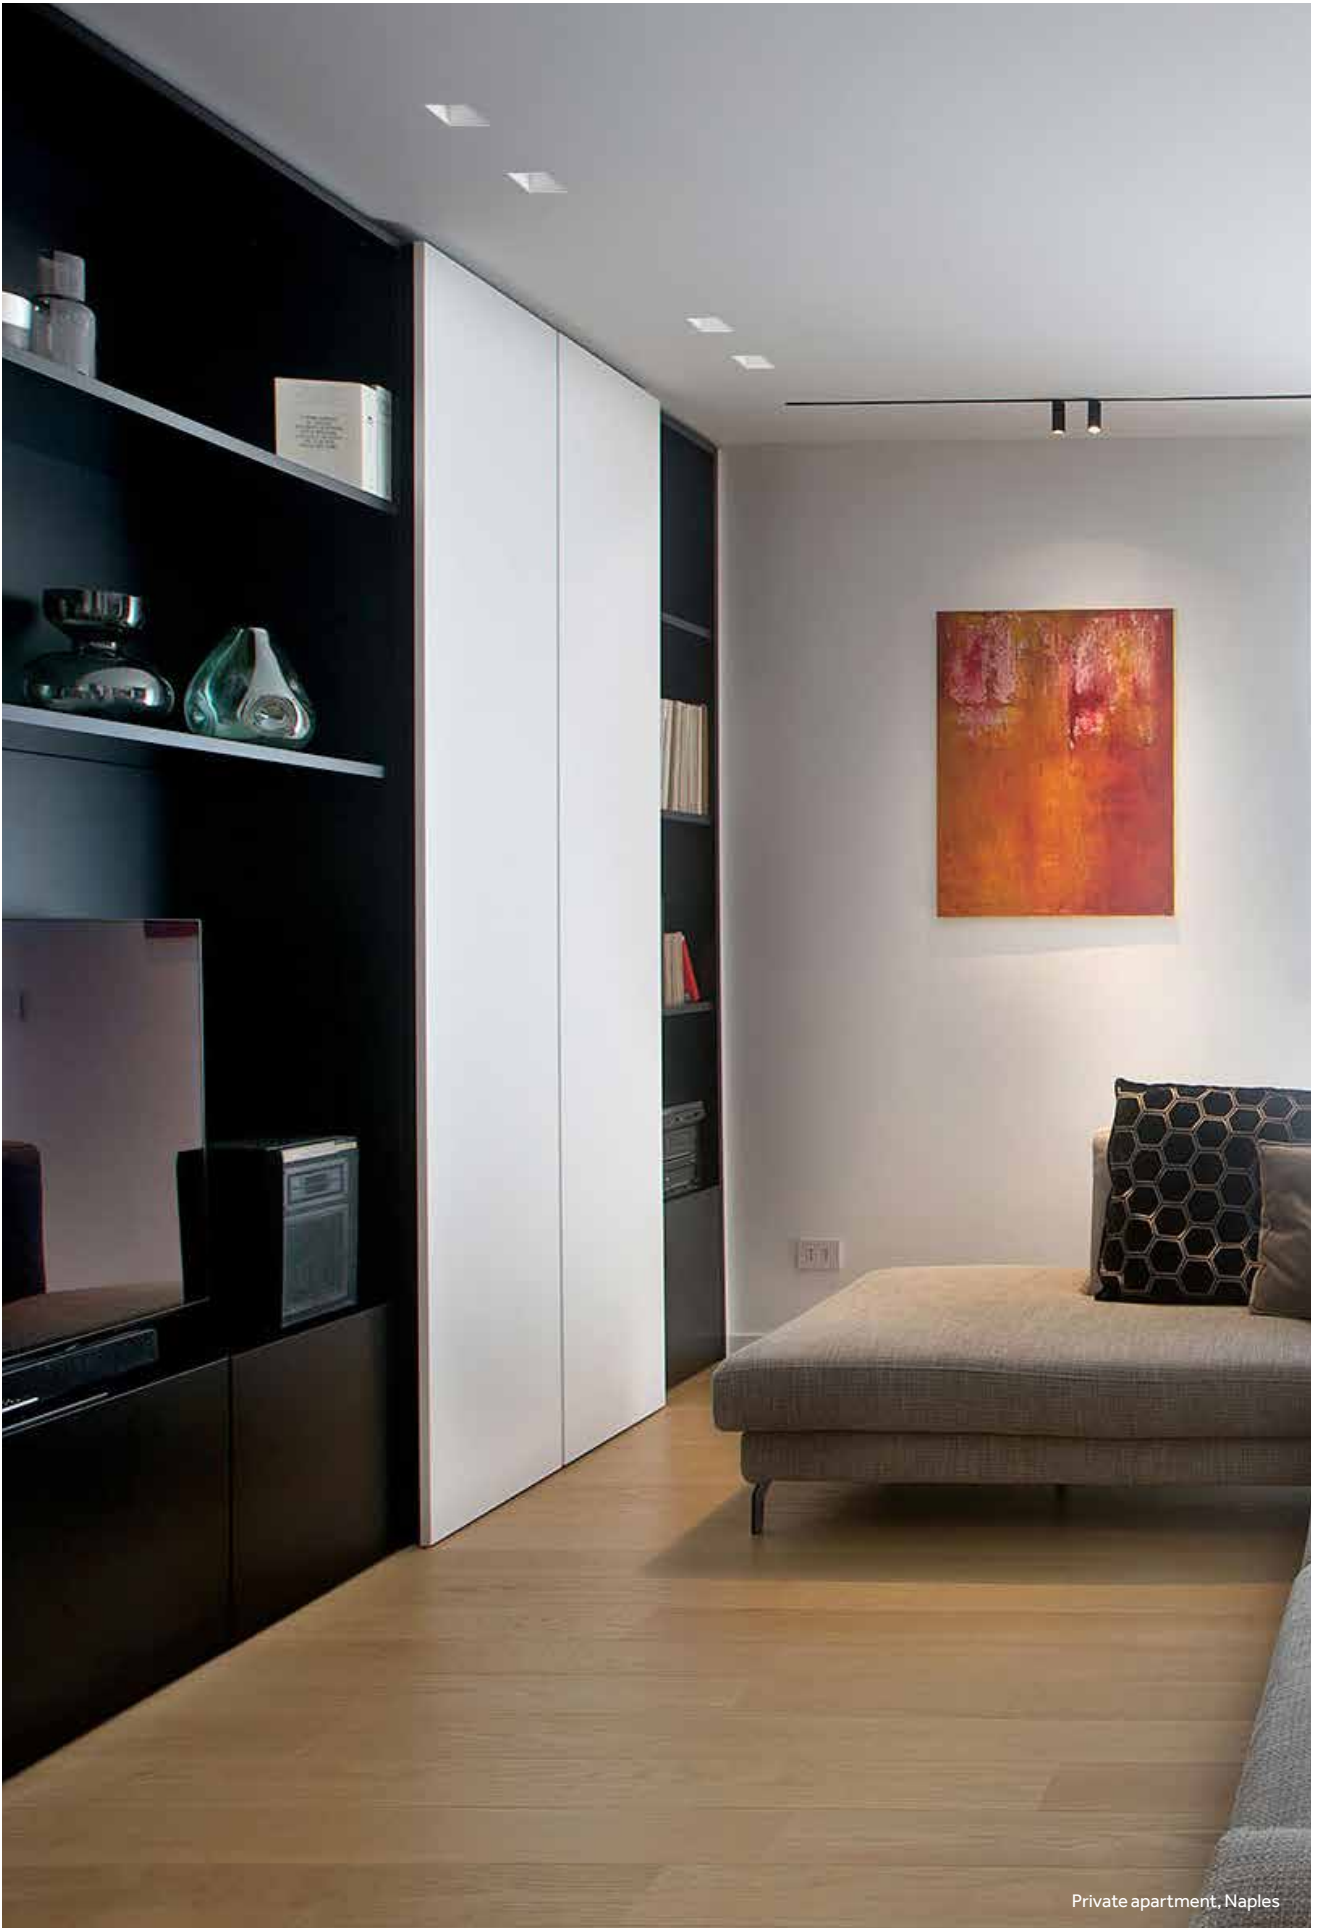


Private apartment, Naples

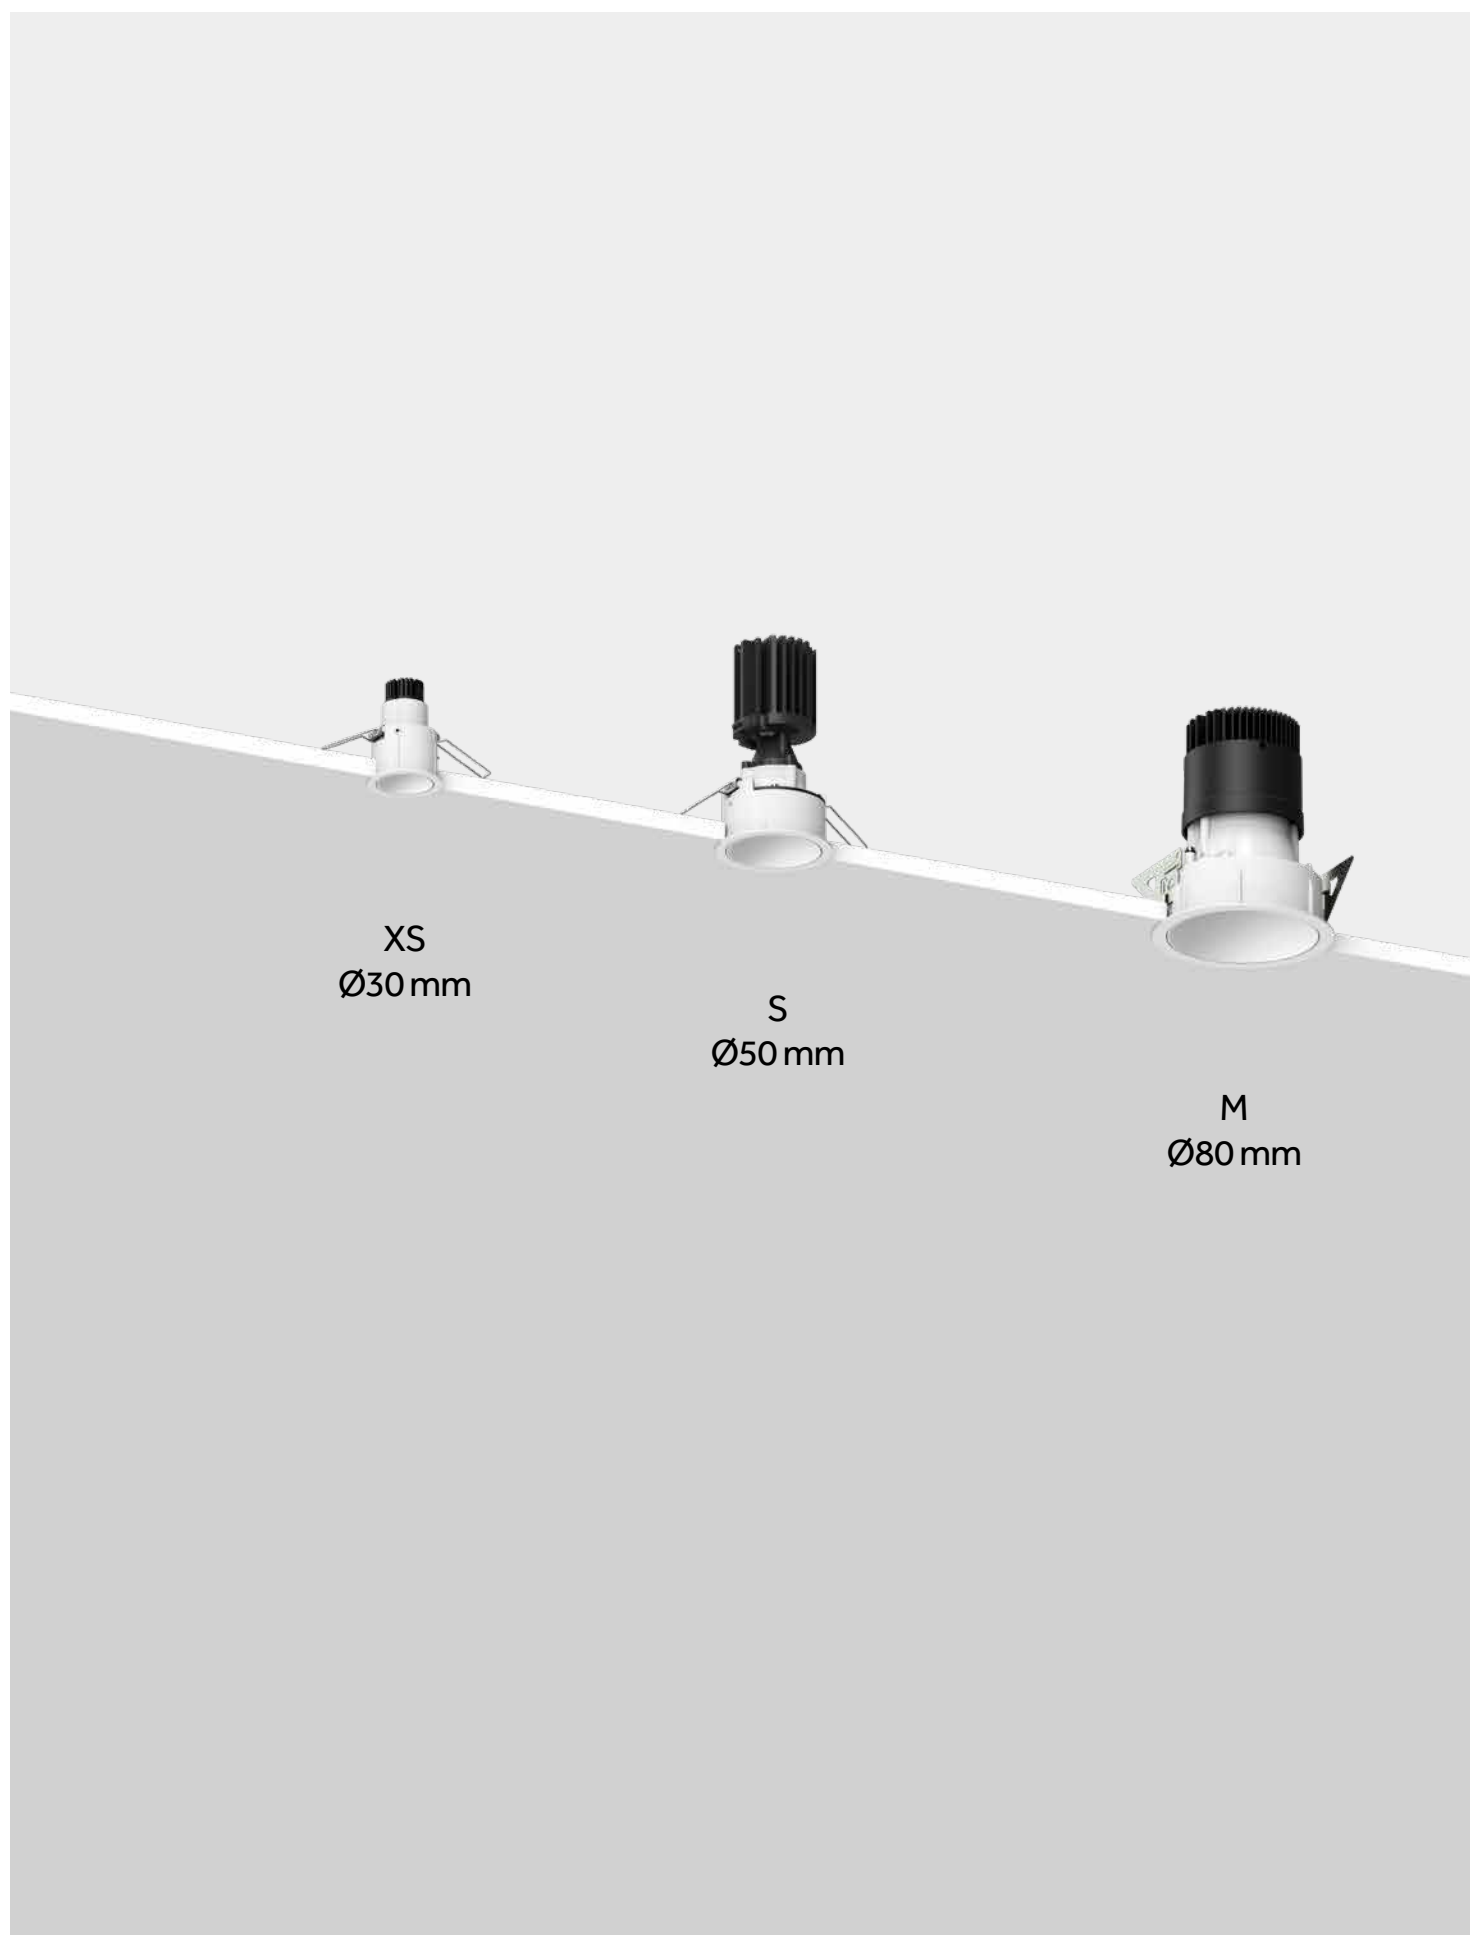



EN The Mood Pro series features technical aspects that allow the creation of soft and uniform illumination, making it the ideal solution for general lighting. There are different light distributions and color temperatures available, with Warm Dimming and Tunable White options included, as well as different control options, making it the perfect tool for all applications.


IT La serie Mood Pro è caratterizzata da aspetti tecnici che la rendono una soluzione in grado di creare un risultato di illuminazione uniforme e morbido. Sono disponibili diversi fasci e temperature colore, incluse le versioni con Warm Dimming e Tunable White, così come diversi sistemi di controllo, il che rende il prodotto adatto a diverse applicazioni.

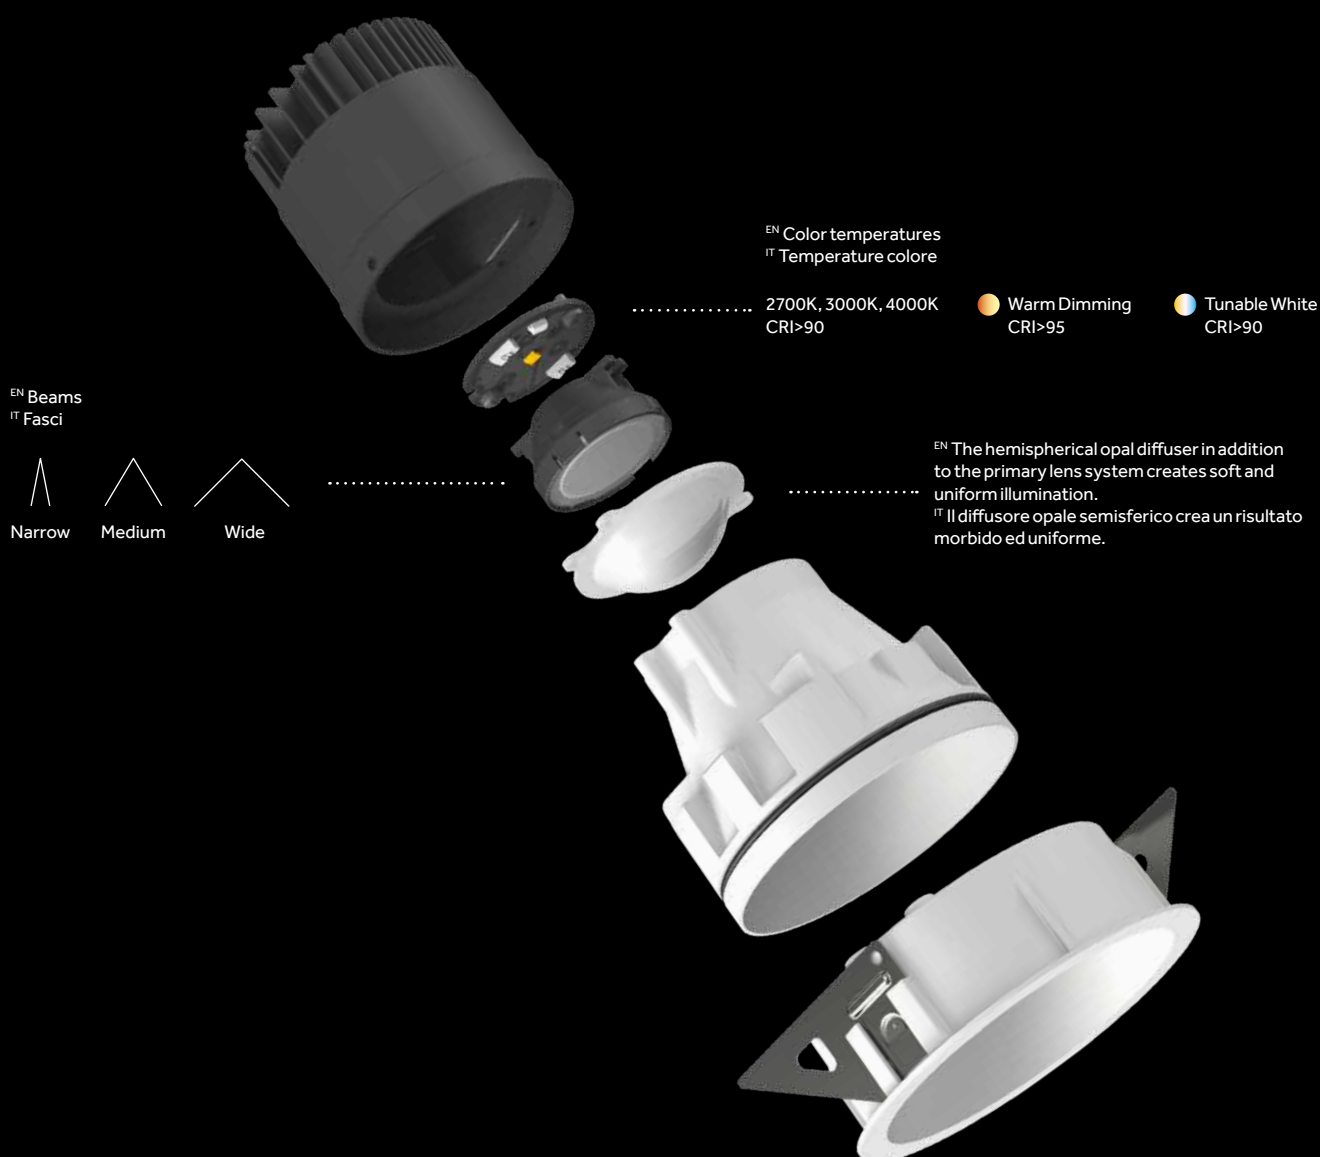

Control Systems (p.38)
On/Off
DALI
Dimm 1-10V
Bluetooth

High lumen output

Size/Misure	○	□	Output (lm)
XS	Ø30 mm	30x30 mm	up to 210 lm
S	Ø50 mm	50x50 mm	up to 500 lm
M	Ø80 mm	80x80 mm	up to 1000 lm
L	Ø110 mm	110x110 mm	up to 2000 lm
XL	Ø150 mm	150x150 mm	up to 3000 lm

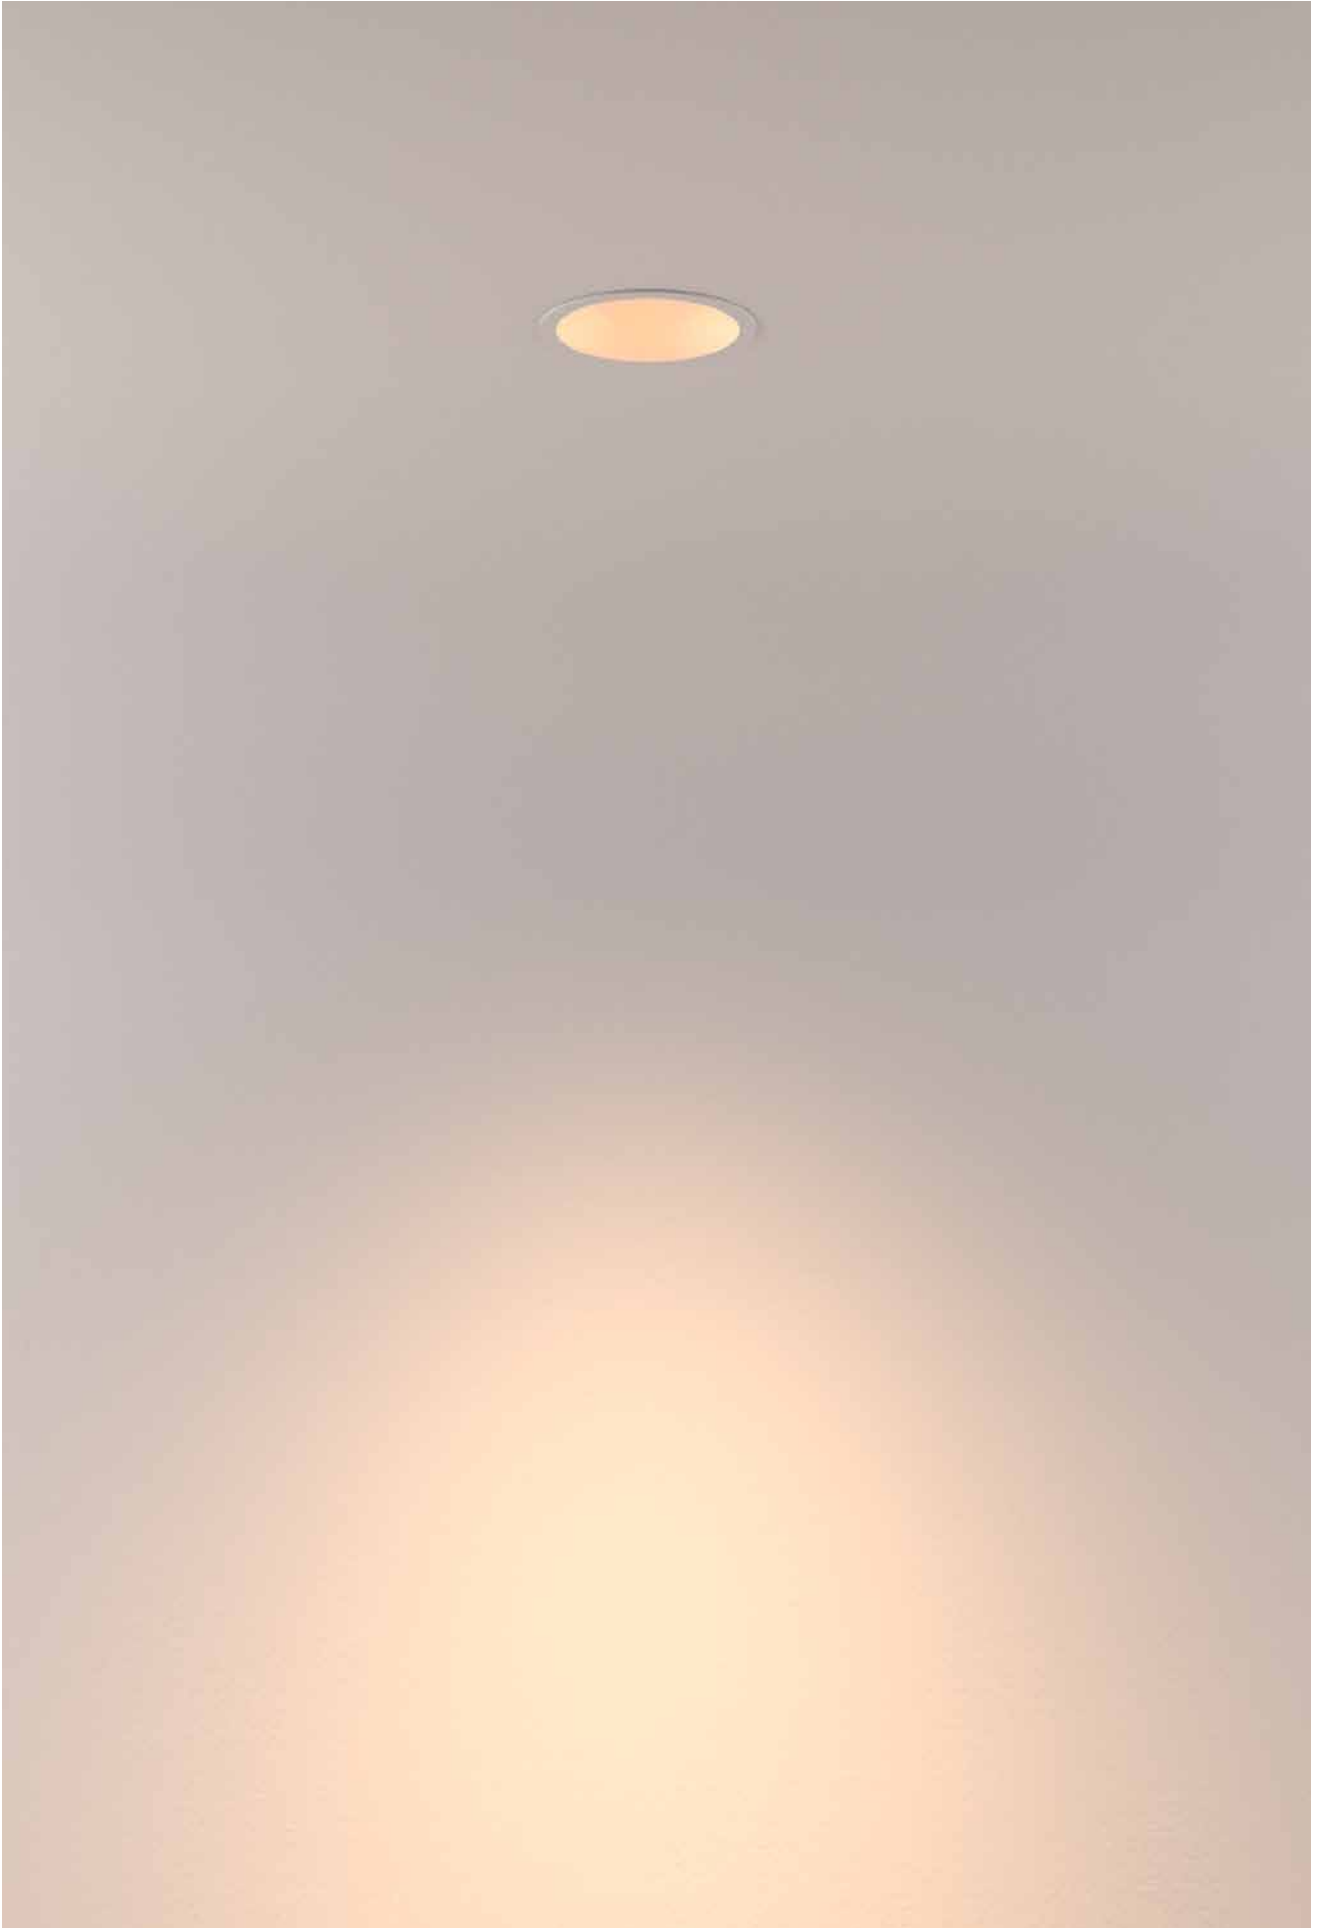


EN Warm Dimming LED technology allows users to completely change the warmth and feel of the space, in the same way as incandescent and halogen technologies in the past, from 1800K to 3000K. Reducing the lighting levels results in a warmer colour temperature, for a more intimate and warm feel. Perfect for setting the mood in hospitality spaces, restaurants, wellness centres and residences.

IT La tecnologia LED Warm Dimming offre la possibilità di creare atmosfere luminose mutevoli a seconda dell'esigenza, ricreando il piacevole effetto della dimmerazione alogena, da 1800K a 3000K. Quando si riducono i livelli di illuminazione si ottiene una temperatura di colore più calda, per una sensazione più intima e calda. Una soluzione ideale in ambienti quali hotel, ristoranti, spazi wellness e residenziali.




Warm Dimming 1800K - 3000K

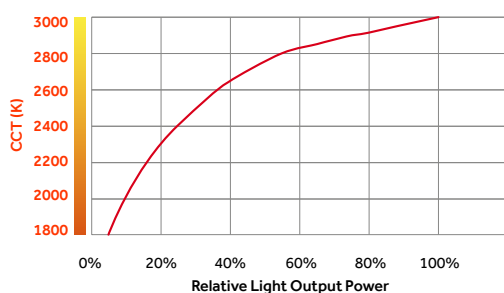

EN Colour temperature (CCT) changes according to light output levels (relative Light Output Power) dictated by the current provided to the LED (forward current). The lower the lighting level, the warmer the CCT.

IT La temperatura colore cambia in base al livello di emissione luminosa definita dalla corrente del LED (corrente diretta). Più basso è il livello di illuminazione, più calda è la temperatura colore.

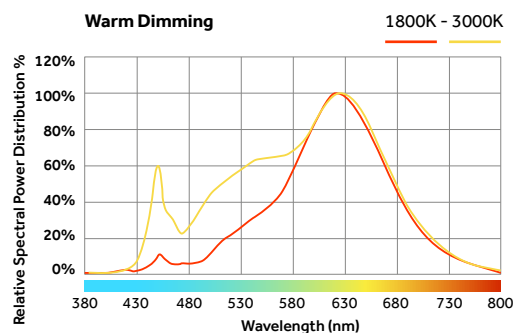

EN The spectral power distribution shows intensity of each wavelength (colour) emitted by the light source.


IT Lo spettro della distribuzione della potenza mostra l'intensità di ciascuna lunghezza d'onda (colore) emessa dalla sorgente luminosa.



Tunable White 2700K - 6500K

EN Mood Pro Fixed is also available with LED Tunable White Technology, offering flexibility of colour temperature between 2700K and 6500K.

IT Mood Pro Fixed è disponibile anche con tecnologia LED Tunable White che offre una flessibilità di temperatura colore tra 2700K e 6500K.

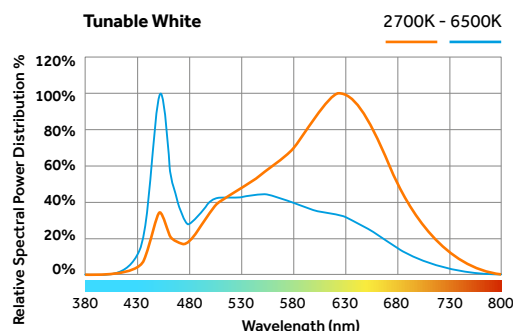

EN The spectral power distribution shows intensity of each wavelength (colour) emitted by the light source.

IT Lo spettro della distribuzione della potenza mostra l'intensità di ciascuna lunghezza d'onda (colore) emessa dalla sorgente luminosa.



Discover the XS family





J*GAST 21st Century Kitchen - Showroom Munich

EN Mood Pro Fixed also offers miniaturization at its finest with an XS size available with only Ø30mm diameter, that features efficacy values up to 37lm/W. The XS version is also available in 4x Cluster, in either line or square configuration.



IT Mood Pro Fixed offre anche la massima miniaturizzazione con una versione extra small di soli Ø30mm, caratterizzata da valori di efficacy fino a 37lm/W. La versione XS è disponibile anche in configurazione 4X (in linea e quadrato).





EN Mood Pro Fixed XS Round
IT Mood Pro Fisso XS Tondo



EN Mood Pro Fixed XS Square
IT Mood Pro Fisso XS Quadrato

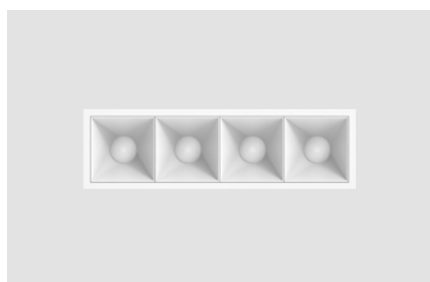

EN Mood Pro Fixed XS Square Line 4X
IT Mood Pro Fisso XS Square Line 4X




EN Mood Pro Fixed XS Square 4X
IT Mood Pro Fisso XS Square 4X

Something special?




EN Mood Pro Fixed Round doesn't stop at being a minimal, efficient lighting solution. Use the cylinder or the dome versions to obtain a refined and upmarket result. The Dome version has an external IP65 rating: this makes it the ideal solution for indoor spaces that are humid or subject to splashes of water.

IT Mood Pro Fisso Round non si limita ad essere una soluzione di illuminazione minimale ed efficiente. Utilizza la versione con cilindro o con dome per ottenere un risultato raffinato ed esclusivo. La versione con Dome rende il prodotto esternamente IP65, caratteristica che lo rende ideale per ambienti interni umidi e soggetti a schizzi d'acqua.

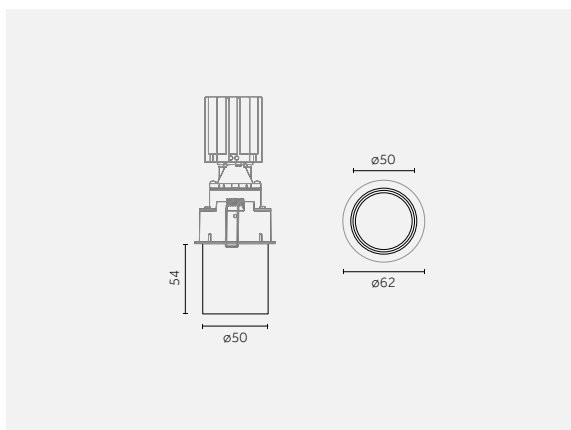

EN Mood Pro Fixed Round with cylinder





IT Mood Pro Fisso Tondo con cilindro

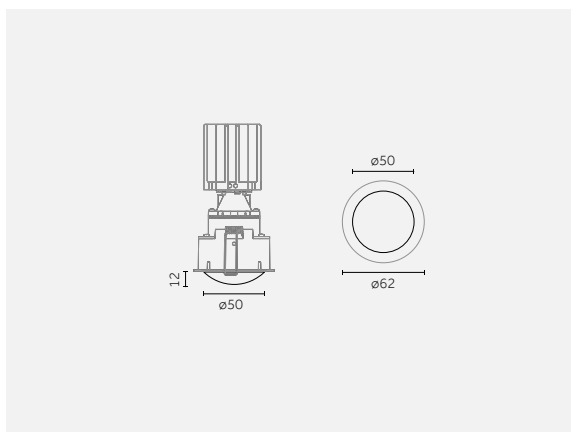

EN Mood Pro Fixed Round with Dome IP65


IT Mood Pro Fisso Tondo con cupola IP65

Technical info & codes


	XS	S	M	L	XL
Mood Pro Fixed Round	 p.30	 p.30-31	 p.32	 p.32-33	 p.33
Mood Pro Fixed Square	 p.34	 p.35	 p.35	 p.36	 p.37
	Narrow (11°) Medium (24°) Wide (32°)	Narrow (18°) Medium (28°) Wide (33°)	Narrow (17°) Medium (28°) Wide (33° - 35°)	Medium (23° - 24°) Wide (30° - 37°)	Narrow (20°) Medium (31°) Wide (36°-37°)
Light source/ Sorgente luminosa	POWERLED 3,2 W; 4x3,2 W 285 lm - 348 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K CRI >90 SDCM <3 On request: (3500K, CRI>90)	POWERLED 4 W; 8,5 W 391 lm - 902 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K CRI >90 SDCM <2 On request: (3500K, CRI>90)	POWERLED 8,5 W; 12 W 924 lm - 1601 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K CRI >90 SDCM <2  Warm Dimming COB LED 12 W 31 lm - 1150 lm L80 B10=50,000h 1800 K-3000 K CRI >95 SDCM <3-<5 On request: (3500K, CRI>90)	COB LED 12 W; 17 W; 21 W 1475 lm - 2846 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K CRI >90 SDCM <2  Warm Dimming COB LED 21 W 47 lm - 2015 lm L80 B10=50,000h 1800 K-3000 K CRI >95 SDCM <3-<5  Tunable white COB LED 21 W 2265 lm - 2584 lm L80 B10=50,000h 2700 K-6500 K CRI >90 SDCM <3-<5 On request: (3500K, CRI>90)	COB LED 25 W; 34 W 2633 lm - 4107 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K CRI >90 SDCM <2  Warm Dimming COB LED 34 W 47 lm - 3300 lm L80 B10=50,000h 1800 K-3000 K CRI >95 SDCM <3-<5  Tunable white COB LED 34 W 3698 lm - 4178 lm L80 B10=50,000h 2700 K-6500 K CRI >90 SDCM <3-<5 On request: (3500K, CRI>90)

Round


Round | XS



Visible trim/
Con flangia



Trimless/
Senza flangia



Code example:

X . BP10 B . HW 12


Drivers: p. 38
Accessories: p. 43
Photometric data:
www.reggiani.net

3.2 W Power LED		Lumen delivered up to 210 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	BP10	Visible trim	B	11° Narrow	HW	2700	>90 285	<3
	CP10	Trimless	E	24° Medium	HQ	3000	>90 325	<3
			H	32° Wide	HN	4000	>90 348	<3
3500K (CRI >90) on request LED nominal lumen								


Round | S



Visible trim/
Con flangia



Trimless/
Senza flangia



Code example:

X . BP1A B . HW 12



Drivers: p. 39
Accessories: p. 43
Photometric data:
www.reggiani.net

4 W Power LED		Lumen delivered up to 205 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	BP1A	Visible trim	B	18° Narrow	HW	2700	>90 391	<2
	CP1A	Trimless	E	28° Medium	HQ	3000	>90 418	<2
			H	33° Wide	HN	4000	>90 451	<2
3500K (CRI >90) on request LED nominal lumen								

8.5 W Power LED		Lumen delivered up to 466 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	BP12	Visible trim	B	18° Narrow	HW	2700	>90 781	<2
	CP12	Trimless	E	28° Medium	HQ	3000	>90 836	<2
			H	33° Wide	HN	4000	>90 902	<2
3500K (CRI >90) on request LED nominal lumen								

Round | S | With cylinder/Con cilindro

Risk 1 0.13 IP20 IP44 Recycle 850° CE UK CA

Visible trim/
Con flangiaTrimless/
Senza flangia

Code example:

X . **RG22** . B . **HW** . **12**

Drivers: p. 39

Accessories: p. 43

Photometric data:

www.reggiani.net

8.5 W Power LED



Lumen delivered up to 192 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	RG22 Visible trim	B 17° Narrow	HW	2700	>90	781	<2	12
	TG22 Trimless		HQ	3000	>90	836	<2	31
			HN	4000	>90	902	<2	

3500K (CRI>90) on request
LED nominal lumen

Round | S | With dome IP65/Con cupola IP65

Risk 1 0.11 IP20 IP65 Recycle 850° CE UK CA

Visible trim/
Con flangiaTrimless/
Senza flangia

Code example:

X . **XP1A** . H . **HW** . **12**

Drivers: p. 39

Accessories: p. 43

Photometric data:

www.reggiani.net




4 W Power LED

Lumen delivered up to 135 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	XP1A Visible trim	H 41° Wide	HW	2700	>90	391	<2	12
	YP1A Trimless		HQ	3000	>90	418	<2	31
			HN	4000	>90	451	<2	

3500K (CRI>90) on request
LED nominal lumen

Round | M

Visible trim/
Con flangiaTrimless/
Senza flangia

Code example:

X . BP1C B . HW 12

Drivers: p. 40
Accessories: p. 43
Photometric data:
www.reggiani.net

8.5 W Power LED

Lumen delivered up to 774 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
X Not included	BP1C	Visible trim	B	17°	Narrow	HW	2700	>90 924 <2	12
	CP1C	Trimless	E	28°	Medium	HQ	3000	>90 990 <2	31
			H	35°	Wide	HN	4000	>90 1067 <2	

3500K (CRI >90) on request
LED nominal lumen

12 W Power LED

Lumen delivered up to 965 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version		Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	BP1D	Visible trim	B 17° Narrow	HW	2700	>90	1386	<2	12
	CP1D	Trimless	E 28° Medium	HQ	3000	>90	1485	<2	31
			H 35° Wide	HN	4000	>90	1601	<2	

3500K (CRI >90) on request
LED nominal lumen




12 W WarmDimming COB LED

Lumen delivered up to 476 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	BP1D Visible trim	H 33° Wide	DT	1800-3000	>95	31-1150	<3- <5	12
	CP1D Trimless			LED nominal lumen				31

LED nominal lumen

Round | L

Visible trim/
Con flangiaTrimless/
Senza flangia

Code example:

X . BP13 E . HW 12

Drivers: p. 41
Accessories: p. 43
Photometric data:
www.reggiani.net

12 W COB LED

Lumen delivered up to 1200 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
X Notincluded	BP13	Visible trim	E	24° Medium	HW	2700	>90 1475	<2	12
	CP13	Trimless	H	37° Wide	HQ	3000	>90 1545	<2	31
			HN	4000	>90 1660	<2			

3500K (CRI >90) on request
LED nominal lumen

17 W COB LED

Lumen delivered up to 1650 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
X Notincluded	BP14	Visible trim	E	24° Medium	HW	2700	>90 2107	<2	12
	CP14	Trimless	H	37° Wide	HQ	3000	>90 2207	<2	31
			HN	4000	>90	2372	<2		

3500K (CRI >90) on request
LED nominal lumen

21 W COB LED

Lumen delivered up to 1929 lm / Lumen maintenance: L90 B10=50,000h




Driver	Version		Optics	LED	K	CRI	lm	SDCM	Finishes	
X Not included	BP15	Visible trim	E 24° Medium	HW	2700	>90	2528	<2	12	
	CP15	Trimless	H 37° Wide	HQ	3000	>90	2648	<2	31	
				HN	4000	>90	2846	<2		

3500K (CRI >90) on request
LED nominal lumen

21 W		Warm Dimming COB LED		Lumen delivered up to 627 lm / Lumen maintenance: L80 B10=50,000h				
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	BP15 Visible trim	E 30° Medium	DT	1800-3000	>95	47-2015	<3-~5	12
	CP15 Trimless							31
LED nominal lumen								

21 W		Tunable white COB LED		Lumen delivered up to 1571 lm / Lumen maintenance: L80 B10=50,000h				
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	BP15 Visible trim	E 23° Medium	QT	2700-6500	>90	2265-2584	<3-~5	12
	CP15 Trimless							31
LED nominal lumen								

Round | XL



Code example:

X . BG16 . B . HW 12

Drivers: p. 42

Accessories: p. 43

Photometric data:

www.reggiani.net

25 W		COB LED		Lumen delivered up to 2062 lm / Lumen maintenance: L90 B10=50,000h				
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	BG16 Visible trim	B 20° Narrow	HW	2700	>90	2633	<2	12
	CG16 Trimless	E 31° Medium	HQ	3000	>90	2818	<2	31
		H 37° Wide	HN	4000	>90	3026	<2	
3500K (CRI >90) on request								
LED nominal lumen								

34 W		COB LED		Lumen delivered up to 2615 lm / Lumen maintenance: L90 B10=50,000h				
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	BG17 Visible trim	B 20° Narrow	HW	2700	>90	3574	<2	12
	CG17 Trimless	E 31° Medium	HQ	3000	>90	3825	<2	31
		H 37° Wide	HN	4000	>90	4107	<2	
3500K (CRI >90) on request								
LED nominal lumen								




34 W		Warm Dimming COB LED		Lumen delivered up to 1738 lm / Lumen maintenance: L80 B10=50,000h				
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	BG17 Visible trim	B 20° Narrow	DT	1800-3000	>95	47-3300	<3-~5	12
	CG17 Trimless							31
3500K (CRI >90) on request								

34 W		Tunable white COB LED		Lumen delivered up to 1753 lm / Lumen maintenance: L80 B10=50,000h				
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	BG17 Visible trim	E 36° Medium	QT	2700-6500	>90	3698-4178	<3-~5	12
	CG17 Trimless							31
LED nominal lumen								

Square

Square | XS

Risk 1 0.06 IP20 IP44 850° CE UK CA



Code example:

X . DP10 B . HW 12

Drivers: p. 38
Accessories: p. 43
Photometric data:
www.reggiani.net

3.2 W Power LED




Lumen delivered up to 214 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	DP10 Visible trim	B 11° Narrow	HW	2700	>90	285	<3	12
	FP10 Trimless	E 24° Medium	HQ	3000	>90	325	<3	31
		H 32° Wide	HN	4000	>90	348	<3	

3500K (CRI >90) on request
LED nominal lumen

Square | XS 4x Line

Risk 1 0.24 IP20 IP44 850° CE UK CA



Code example:

X . GP10 B . HW 12

Drivers: p. 38
Accessories: p. 43
Photometric data:
www.reggiani.net

4x3.2 W Power LED




Lumen delivered up to 4x214 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GP10 Visible trim	B 11° Narrow	HW	2700	>90	4x285	<3	12
	HP10 Trimless	E 24° Medium	HQ	3000	>90	4x325	<3	31
		H 32° Wide	HN	4000	>90	4x348	<3	

3500K (CRI >90) on request
LED nominal lumen

Square | XS 4x

Risk 1 0.24 IP20 IP44 850° CE UK CA



Code example:

X . LP10 B . HW 12

Drivers: p. 38
Accessories: p. 43
Photometric data:
www.reggiani.net



4x3.2 W Power LED

Lumen delivered up to 4x214 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LP10 Visible trim	B 11° Narrow	HW	2700	>90	4x285	<3	12
	MP10 Trimless	E 24° Medium	HQ	3000	>90	4x325	<3	31
		H 32° Wide	HN	4000	>80	4x348	<3	

3500K (CRI >90) on request
LED nominal lumen

Square | S

Visible trim/
Con flangiaTrimless/
Senza flangia

Code example:

X . **DP1A** B . **HW** **12**

Drivers: p. 39

Accessories: p. 43



Photometric data:

www.reggiani.net

4 W		Power LED		Lumen delivered up to 205 lm / Lumen maintenance: L90 B10=50,000h					
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
X Not included	DP1A Visible trim	B 18° Narrow	HW	2700	>90	391	<2	12	☐
	FP1A Trimless	E 28° Medium	HQ	3000	>90	418	<2	31	☐
		H 33° Wide	HN	4000	>90	451	<2		
3500K (CRI >90) on request LED nominal lumen									

8.5 W		Power LED		Lumen delivered up to 489 lm / Lumen maintenance: L90 B10=50,000h					
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
X Not included	DP12 Visible trim	B 18° Narrow	HW	2700	>90	781	<2	12	☐
	FP12 Trimless	E 28° Medium	HQ	3000	>90	836	<2	31	☐
		H 33° Wide	HN	4000	>90	902	<2		
3500K (CRI >90) on request LED nominal lumen									

Square | M

Visible trim/
Con flangiaTrimless/
Senza flangia

Code example:

X . **DP1C** B . **HW** **12**

Drivers: p. 40

Accessories: p. 43

Photometric data:



www.reggiani.net

8.5 W		Power LED		Lumen delivered up to 778 lm / Lumen maintenance: L90 B10=50,000h					
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
X Not included	DP1C Visible trim	B 17° Narrow	HW	2700	>90	924	<2	12	☐
	FP1C Trimless	E 28° Medium	HQ	3000	>90	990	<2	31	☐
		H 35° Wide	HN	4000	>90	1067	<2		
3500K (CRI >90) on request LED nominal lumen									


12 W		Power LED		Lumen delivered up to 970 lm / Lumen maintenance: L90 B10=50,000h					
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
X Not included	DP1D Visible trim	B 17° Narrow	HW	2700	>90	1386	<2	12	☐
	FP1D Trimless	E 28° Medium	HQ	3000	>90	1485	<2	31	☐
		H 35° Wide	HN	4000	>90	1601	<2		
3500K (CRI >90) on request LED nominal lumen									

12 W		Warm Dimming COB LED		Lumen delivered up to 486 lm / Lumen maintenance: L80 B10=50,000h					
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
X Not included	DP1D Visible trim	H 33° Wide	DT	1800-3000	>95	31-1150	<3-5	12	☐
	FP1D Trimless							31	☐
LED nominal lumen									

Square | L

Visible trim/
Con flangiaTrimless/
Senza flangia

Risk 1 0.61 IP20 P44 850° CE UK CA



Code example:

X . DP13 E . HW 12

Drivers: p. 41
Accessories: p. 43
Photometric data:
www.reggiani.net

12 W COB LED Lumen delivered up to 1215 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	DP13 Visible trim	E 24° Medium	HW	2700	>90	1475	<2	12
	FP13 Trimless	H 37° Wide	HQ	3000	>90	1545	<2	31
			HN	4000	>90	1660	<2	

3500K (CRI >90) on request
LED nominal lumen

17 W COB LED Lumen delivered up to 1675 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	DP14 Visible trim	E 24° Medium	HW	2700	>90	2107	<2	12
	FP14 Trimless	H 37° Wide	HQ	3000	>90	2207	<2	31
			HN	4000	>90	2372	<2	

3500K (CRI >90) on request
LED nominal lumen

21 W COB LED Lumen delivered up to 1958 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	DP15 Visible trim	E 24° Medium	HW	2700	>90	2528	<2	12
	FP15 Trimless	H 37° Wide	HQ	3000	>90	2648	<2	31
			HN	4000	>90	2846	<2	

3500K (CRI >90) on request
LED nominal lumen

21 W Warm Dimming COB LED Lumen delivered up to 644 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	DP15 Visible trim	E 30° Medium	DT	1800-3000	>95	47-2015	<3-<5	12
	FP15 Trimless							31


LED nominal lumen

21 W Tunable white COB LED Lumen delivered up to 1602 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	DP15 Visible trim	E 23° Medium	QT	2700-6500	>90	2265-2584	<3-<5	12
	FP15 Trimless							31

LED nominal lumen

Square | XL



Code example:



X . **DG16** . **B** . **HW** **12**

Drivers: p. 42



Accessories: p. 43

Photometric data:
www.reggiani.net

Visible trim/
Con flangia



Trimless/
Senza flangia



25 W COB LED Lumen delivered up to 2083 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	DG16 Visible trim	B 20° Narrow	HW	2700	>90	2633	<2	12
	FG16 Trimless	E 31° Medium	HQ	3000	>90	2818	<2	31
		H 37° Wide	HN	4000	>90	3026	<2	

3500K (CRI >90) on request
LED nominal lumen

34 W COB LED Lumen delivered up to 2652 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	DG17 Visible trim	B 20° Narrow	HW	2700	>90	3574	<2	12
	FG17 Trimless	E 31° Medium	HQ	3000	>90	3825	<2	31
		H 37° Wide	HN	4000	>90	4107	<2	

3500K (CRI >90) on request
LED nominal lumen

34 W Warm Dimming COB LED Lumen delivered up to 1773 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	DG17 Visible trim	B 20° Narrow	DT	1800-3000	>95	47-3300	<3-~5	12
	FG17 Trimless							31

LED nominal lumen

34 W Tunable white COB LED Lumen delivered up to 1788 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	DG17 Visible trim	E 36° Medium	QT	2700-6500	>90	3698-4178	<3-~5	12
	FG17 Trimless							31

LED nominal lumen

Electrical Devices

Some drivers may not fit through the XS and S fitting cut out, check the QR Code./ Alcuni driver potrebbero non passare dal foro di incasso dei prodotti XS e S, verifica tramite il codice QR.



XS | Electrical Devices

Driver/ Alimentazioni

3,2 W Power LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max. distance	Cable section
On/Off	0.30423.0000	42		52 mm	220-240Vac / 0/50/60Hz	1050	Min: 1 - Max: 12	20 m	1.5 mm ²
Phase-cut	T.30422.0000	22		52 mm	220-240Vac / 50/60Hz	1050	Min: 3 - Max: 6	20 m	1.5 mm ²
Phase-cut	T.30423.0000	45		90 mm	220-240Vac / 0/50/60Hz	1050	Min: 1 - Max: 13	20 m	1.5 mm ²
Dimm 1-10V	V.30422.0000	20		52 mm	220-240Vac / 50/60Hz	1050	Min: 1 - Max: 5	20 m	1.5 mm ²
Dimm 1-10V	V.30423.0000	36		53 mm	220-240Vac / 0,50/60Hz	1050	Min: 4 - Max: 10	20 m	1.5 mm ²
DALI	D.30422.0000	20		52 mm	220-240Vac / 50/60Hz	1050	Min: 1 - Max: 5	20 m	1.5 mm ²
DALI	D.30423.0000	38		54 mm	220-240Vac / 0,50/60Hz	1050	Min: 7 - Max: 11	20 m	1.5 mm ²

Other devices/ Altri dispositivi

Type	Code	Size (mm)	Cut-out	Tech. specifications	Connectable fixtures	Max. distance	Cable section
•))) Casambi control unit for wireless Bluetooth control/ Unità di controllo Casambi per controllo wireless Bluetooth	0.26101.0000		45 mm	220-240V, 50-60Hz 0,6A for DALI drivers	Max: 1	-	1.5 mm ²
+ 1h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 1h	0.35070.0000		58 mm	220-240V / 50/60Hz	Min: 4	5 m	1.5 mm ²
+ 3h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 3h	0.35070.UK00		58 mm	220-240V / 50/60 Hz	Min: 4	5 m	1.5 mm ²

^{EN} Emergency pack for LED luminaires including Ni/Cd battery with 1h/3h back-up.


For Mood Pro range products in XS sizes, the emergency pack will not pass through the product's cut-out so this accessory needs to be positioned remotely, no more than 5 m away from the product/. Moreover, for Mood Pro range products in XS size, the emergency pack must be connected in series to at least four products.

^{IT} Gruppo di emergenza per apparecchi LED con batterie Ni/Cd autonomia 1h/3h.

Per i prodotti della gamma Mood Pro nelle dimensioni XS, il gruppo di emergenza non può passare dal foro di incasso del prodotto; l'accessorio deve quindi essere posizionato in posizione remota ad una distanza di max 5m dal prodotto. Inoltre, per i prodotti della gamma Mood Pro nelle dimensioni XS il gruppo di emergenza deve essere collegato ad almeno quattro prodotti in serie.

Installation and connection accessories/ Accessori di installazione e collegamento

Type	Code	Tech. specifications
⦿ Accessory for series connection/ Accessorio per collegamento in serie	0.26070.0000	Max 60V/dc



S | Electrical Devices

Driver/ Alimentazioni

4 W Power LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30383.0000	12		41 mm	120-240V / 50/60Hz	350	Max: 1	5 m	1.5 mm ²
On/Off	0.30431.0000	42		52 mm	198-264Vac / 0/50/60Hz	350	Min: 1 - Max: 3	20 m	1.5 mm ²
Phase-cut	T.30383.0000	10		57 mm	220-240Vac / 50/60Hz	350	Max: 1	20 m	1.5 mm ²
Phase-cut	T.30386.0000	32		57 mm	220-240Vac / 0,50/60Hz	350	Min: 1 - Max: 3	20 m	1.5 mm ²
Dimm 1-10V	V.30383.0000	20		56 mm	220-240Vac / 0,50/60Hz	350	Min: 1 - Max: 2	20 m	1.5 mm ²
Dimm 1-10V	V.30431.0000	36		53 mm	220-240Vac / 50/60Hz	350	Min: 1 - Max: 3	20 m	1.5 mm ²
DALI	D.30386.0000	42		48 mm	220-240Vac / 0,50/60Hz	350	Min: 1 - Max: 4	20 m	1.5 mm ²

8,5 W Power LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30419.0000	12		39 mm	120-240V / 50/60Hz	700	Max: 1	5 m	1.5 mm ²
On/Off	0.30041.0000	32		49 mm	220-240Vac / 0/50/60Hz	700	Min: 1 - Max: 3	20 m	1.5 mm ²
Phase-cut	T.30420.0000	10		37 mm	220-240Vac / 50/60Hz	700	Max: 1	20 m	1.5 mm ²
Phase-cut	T.30421.0000	32		57 mm	220-240Vac / 0,50/60Hz	700	Min: 1 - Max: 3	20 m	1.5 mm ²
Dimm 1-10V	V.30420.0000	20		56 mm	220-240Vac / 0,50/60Hz	700	Min: 1 - Max: 2	20 m	1.5 mm ²
Dimm 1-10V	V.30421.0000	36		53 mm	220-240Vac / 50/60Hz	700	Min: 1 - Max: 3	20 m	1.5 mm ²
DALI	D.30420.0000	20		56 mm	220-240Vac / 0,50/60Hz	700	Min: 1 - Max: 2	20 m	1.5 mm ²
DALI	D.30421.0000	38		54 mm	220-240Vac / 0,50/60Hz	700	Min: 3 - Max: 4	20 m	1.5 mm ²

Other devices/ Altri dispositivi

Type	Code	Size (mm)	Cut-out	Tech. specifications	Connectable fixtures	Max. distance	Cable section
• Casambi control unit for wireless Bluetooth control/ Unità di controllo Casambi per controllo wireless Bluetooth	0.26101.0000		45 mm	220-240V, 50-60Hz 0,6A for DALI drivers	Max: 1	-	1.5 mm ²
1h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 1h	0.35081.0000		58 mm	220-240V / 50/60Hz	Max: 1	5 m	1.5 mm ²
3h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 3h	0.35081.UK00		58 mm	220-240V / 50/60Hz	Max: 1	5 m	1.5 mm ²

^{EN} Emergency pack for LED luminaires including Ni/Cd battery with 1h/3h back-up.


For Mood Pro range products in S sizes, the emergency pack will not pass through the product's cut-out so this accessory needs to be positioned remotely, no more than 5 m away from the product/. Moreover, for Mood Pro range products in S size, the emergency pack must be connected in series to at least four products.

^{IT} Gruppo di emergenza per apparecchi LED con batterie Ni/Cd autonomia 1h/3h.

Per i prodotti della gamma Mood Pro nelle dimensioni S, il gruppo di emergenza non può passare dal foro di incasso del prodotto; l'accessorio deve quindi essere posizionato in posizione remota ad una distanza di max 5 m dal prodotto. Inoltre, per i prodotti della gamma Mood Pro nelle dimensioni S il gruppo di emergenza deve essere collegato ad almeno quattro prodotti in serie.

Installation and connection accessories/ Accessori di installazione e collegamento

Type	Code	Tech. specifications
 Accessory for series connection/ Accessorio per collegamento in serie	0.26070.0000	Max 60V/dc



M | Electrical Devices

Driver/ Alimentazioni

8,5 W Power LED									
Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30419.0000	12		39 mm	120-240V / 50/60Hz	700	Max: 1	5 m	1.5 mm ²
On/Off	0.30041.0000	32		49 mm	220-240Vac / 0/50/60Hz	700	Min: 1 - Max: 3	20 m	1.5 mm ²
Phase-cut	T.30420.0000	10		37 mm	220-240Vac / 50/60Hz	700	Max: 1	20 m	1.5 mm ²
Phase-cut	T.30421.0000	32		57 mm	220-240Vac / 0, 50/60Hz	700	Min: 1 - Max: 3	20 m	1.5 mm ²
Dimm 1-10V	V.30420.0000	20		56 mm	220-240Vac / 0, 50/60Hz	700	Min: 1 - Max: 2	20 m	1.5 mm ²
Dimm 1-10V	V.30421.0000	36		53 mm	220-240Vac / 50/60Hz	700	Min: 1 - Max: 3	20 m	1.5 mm ²
DALI	D.30420.0000	20		56 mm	220-240Vac / 0, 50/60Hz	700	Min: 1 - Max: 2	20 m	1.5 mm ²
DALI	D.30421.0000	38		54 mm	220-240Vac / 0, 50/60Hz	700	Min: 3 - Max: 4	20 m	1.5 mm ²

12 W Power LED									
Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30423.0000	42		52 mm	220-240Vac / 0/50/60Hz	1050	Min: 1 - Max: 3	20 m	1.5 mm ²
Phase-cut	T.30422.0000	22		52 mm	220-240Vac / 50/60Hz	1050	Max: 1	20 m	1.5 mm ²
Dimm 1-10V	V.30423.0000	36		53 mm	220-240Vac / 50/60Hz	1050	Min: 1 - Max: 2	20 m	1.5 mm ²
DALI	D.30422.0000	20		52 mm	220-240Vac / 50/60Hz	1050	Max: 1	20 m	1.5 mm ²

12 W Warm Dimming COB LED									
Type	Code	W	Size (mm)	Cut-out	Tech. specifications / Input	mA	Connectable fixtures	Max.distance	Cable section
Dimm 1-10V	V.30431.0000	36		53 mm	170-280Vdc / 0/50/60Hz	350	Max: 1	20 m	1.5 mm ²
DALI	D.30431.0000	38		54 mm	170-280Vdc / 0/50/60Hz	350	Max: 1	20 m	1.5 mm ²

Other devices/ Altri dispositivi

Type	Code	Size (mm)	Cut-out	Tech. specifications	Connectable fixtures	Max. distance	Cable section
•)) Casambi control unit for wireless Bluetooth control/ Unità di controllo Casambi per controllo wireless Bluetooth	0.26101.0000		45 mm	220-240V, 50-60Hz 0,6A for DALI drivers	Max: 1	-	1.5 mm ²
+ 1h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 1h	0.35081.0000		58 mm	220-240V / 50/60 Hz	Max: 1	5 m	1.5 mm ²
+ 3h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 3h	0.35081.UK00		58 mm	220-240V / 50/60 Hz	Max: 1	5 m	1.5 mm ²

^{EN} Emergency pack for LED luminaires including Ni/Cd battery with 1h/3h back-up.


For Mood Pro range products in M sizes, the emergency pack will not pass through the product's cut-out so this accessory needs to be positioned remotely, no more than 5 m away from the product/. Moreover, for Mood Pro range products in M size, the emergency pack must be connected in series to at least four products.

^{IT} Gruppo di emergenza per apparecchi LED con batterie Ni/Cd autonomia 1h/3h.

Per i prodotti della gamma Mood Pro nelle dimensioni M, il gruppo di emergenza non può passare dal foro di incasso del prodotto; l'accessorio deve quindi essere posizionato in posizione remota ad una distanza di max 5m dal prodotto. Inoltre, per i prodotti della gamma Mood Pro nelle dimensioni M il gruppo di emergenza deve essere collegato ad almeno quattro prodotti in serie.

Installation and connection accessories/ Accessori di installazione e collegamento

Type	Code	Tech. specifications
Accessory for series connection/ Accessorio per collegamento in serie	0.26070.0000	Max 60V/dc



L | Electrical Devices

Driver/ Alimentazioni

12 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30412.0000	32		49 mm	220-240Vac / 0/50/60Hz	350	Max: 1	20 m	1.5 mm ²
Phase-cut	T.30412.0000	20		57 mm	220-240Vac / 0/50/60Hz	350	Max: 1	20 m	1.5 mm ²
Dimm 1-10V	V.30040.0000	36		53 mm	220-240Vac / 0/50/60Hz	350	Max: 1	20 m	1.5 mm ²
DALI	D.30040.0000	38		54 mm	220-240Vac / 0/50/60Hz	350	Max: 1	20 m	1.5 mm ²

17 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30400.0000	32		49 mm	220-240Vac / 0/50/60Hz	500	Max: 1	20 m	1.5 mm ²
Phase-cut	T.30400.0000	20		57 mm	220-240Vac / 0/50/60Hz	500	Max: 1	20 m	1.5 mm ²
Dimm 1-10V	V.30400.0000	36		53 mm	220-240Vac / 0/50/60Hz	500	Max: 1	20 m	1.5 mm ²
DALI	D.30400.0000	38		54 mm	220-240Vac / 0/50/60Hz	500	Max: 1	20 m	1.5 mm ²

21 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30426.0000	32		49 mm	220-240Vac / 0/50/60Hz	600	Max: 1	20 m	1.5 mm ²
Phase-cut	T.30426.0000	36		57 mm	220-240Vac / 50/60Hz	550	Max: 1	20 m	1.5 mm ²
Dimm 1-10V	V.30426.0000	36		53 mm	220-240Vac / 0/50/60Hz	600	Max: 1	20 m	1.5 mm ²
DALI	D.30426.0000	38		54 mm	220-240Vac / 0/50/60Hz	600	Max: 1	20 m	1.5 mm ²

21 W Warm Dimming COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
Phase-cut	T.30426.0000	36		57 mm	220-240Vac / 50/60Hz	550	Max: 1	20 m	1.5 mm ²
Dimm 1-10V	V.30426.0000	36		53 mm	220-240Vac / 0/50/60Hz	600	Max: 1	20 m	1.5 mm ²
DALI	D.30426.0000	38		54 mm	220-240Vac / 0/50/60Hz	600	Max: 1	20 m	1.5 mm ²

21 W Tunable white COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
DALI	D.30509.0000	45		86 mm	220-240Vac / 0/50/60Hz	600	Max: 1	20 m	1.5 mm ²

Other devices/ Altri dispositivi

Type	Code	Size (mm)	Cut-out	Tech. specifications	Connectable fixtures	Max. distance	Cable section
••• Casambi control unit for wireless Bluetooth control/ Unità di controllo Casambi per controllo wireless Bluetooth	0.26101.0000		45 mm	220-240V, 50-60Hz 0,6A for DALI drivers	Max: 1	-	1.5 mm ²
 1h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 1h	0.35081.0000		58 mm	220-240V / 50/60Hz	Max: 1	5 m	1.5 mm ²
 3h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 3h	0.35081.UK00		58 mm	220-240V / 50/60Hz	Max: 1	5 m	1.5 mm ²

^{EN} For LED fixtures (12-21W), Ni/Cd battery

^{IT} Per apparecchi LED (12-21W), batterie Ni/Cd

XL | Electrical Devices

Driver/
Alimentazioni

25 W		COB LED							
Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30041.0000	32		49 mm	220-240Vac / 0/50/60Hz	700	Max: 1	20 m	1.5 mm ²
Phase-cut	T.30041.0000	36		52 mm	220-240Vac / 0/50/60Hz	700	Max: 1	20 m	1.5 mm ²
Dimm 1-10V	V.30041.0000	36		53 mm	220-240Vac / 0/50/60Hz	700	Max: 1	20 m	1.5 mm ²
DALI	D.30041.0000	38		54 mm	220-240Vac / 0/50/60Hz	700	Max: 1	20 m	1.5 mm ²

34 W		COB LED							
Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30408.0000	40		49 mm	220-240Vac / 0/50/60Hz	950	Max: 1	20 m	1.5 mm ²
Phase-cut	T.30408.0000	40		50 mm	220-240Vac / 50/60Hz	900	Max: 1	20 m	1.5 mm ²
Dimm 1-10V	V.30408.0000	36		53 mm	220-240Vac / 0/50/60Hz	950	Max: 1	20 m	1.5 mm ²
DALI	D.30408.0000	38		54 mm	220-240Vac / 0/50/60Hz	950	Max: 1	20 m	1.5 mm ²

34 W		Warm Dimming COB LED							
Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
Phase-cut	T.30348.0000	40		50 mm	220-240Vac / 50/60Hz	900	Max: 1	20 m	1.5 mm ²
Dimm 1-10V	V.30425.0000	36		53 mm	220-240Vac / 0/50/60Hz	950	Max: 1	20 m	1.5 mm ²
DALI	D.30425.0000	38		54 mm	220-240Vac / 0/50/60Hz	950	Max: 1	20 m	1.5 mm ²

34 W		Tunable white COB LED							
Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
DALI	D.30512.0000	45		86 mm	220-240Vac / 50/60Hz	800	Max: 1	20 m	1.5 mm ²

Other devices/
Altri dispositivi

Type	Code	Size (mm)	Cut-out	Tech. specifications	Connectable fixtures	Max. distance	Cable section
 Casambi control unit for wireless Bluetooth control/ Unità di controllo Casambi per controllo wireless Bluetooth	0.26101.0000		45 mm	220-240V, 50-60Hz 0,6A for DALI drivers	Max: 1	-	1.5 mm ²
 1h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 1h	0.35081.0000		58 mm	220-240V / 50/60Hz	Max: 1	5 m	1.5 mm ²
 3h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 3h	0.35081.UK00		58 mm	220-240V / 50/60 Hz	Max: 1	5 m	1.5 mm ²

^{EN} For LED fixtures (25-34W), Ni/Cd battery


^{IT} Per apparecchi LED (25-34W), batterie Ni/Cd

Mounting accessories

Mounting accessories

Formwork/ Cassaforma

Mood Pro Fixed | S




Description

Formwork (S)/
Cassaforma (S)

Code

0.40190.0000

Mood Pro Fixed | M




Description

Formwork (M)/
Cassaforma (M)

Code

0.40194.0000

Mood Pro Fixed | L - XL



Description


Formwork (L-XL)/
Cassaforma (L-XL)

Code

0.40196.0000


Mood Pro Adjustable


Mood Pro Adjustable

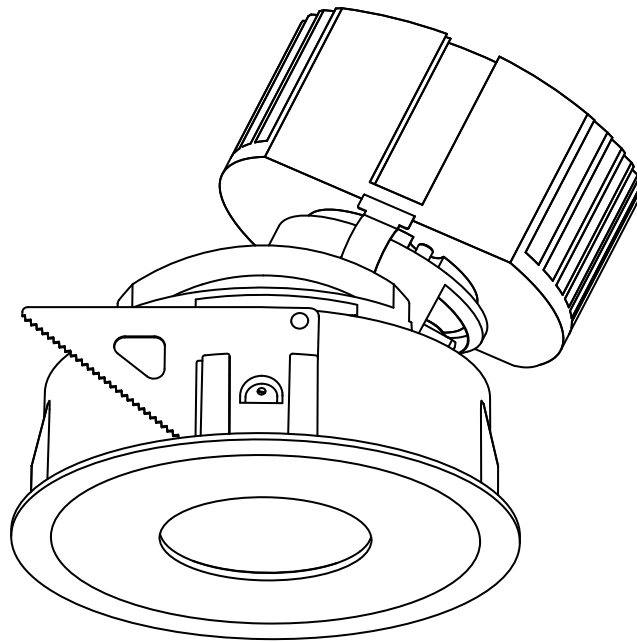

EN Mood Pro Adjustable represents the perfect family for creating extraordinary accent lighting when discreet lighting tools are required. Thanks to its broad range of adjustability (horizontal 0°-35°/40°, vertical 358°), it's easy to focus the beam where it's needed the most.

IT Mood Pro Adjustable è la soluzione perfetta per ottenere uno straordinario risultato di luce d'accento, grazie alla sua orientabilità su entrambi gli assi: orizzontale 0°-35°/40°, verticale 358°.

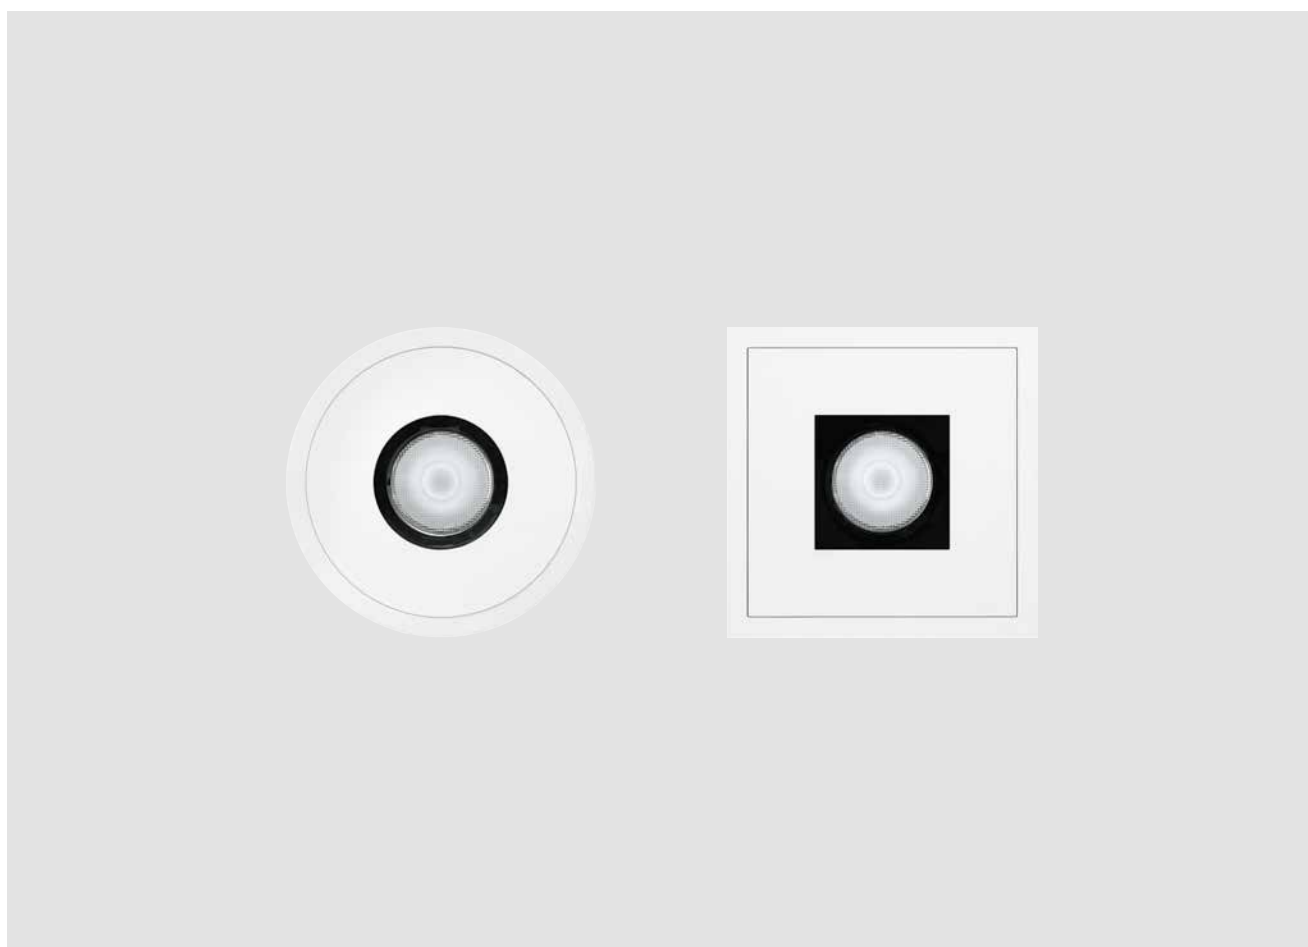

Versions/ Versioni	
Mood Pro Adjustable	 Round Round Cone Square Square Pyramid
Finishes/ Finiture	 12 Textured matte white/ Bianco opaco goffrato  31 Textured matte black/ Nero opaco goffrato Special finishes (on request) / Finiture speciali (su richiesta)  C0 Royal matte white/Bianco opaco Royal  W1 White super glossy/Bianco super lucido  01 Chrome plated/Cromo  W5 Galvanized shiny nickel/Nickel lucido galvanizzato  U1 Glossy gold/Oro lucido  05 Gold plated/Cromo oro  W4 Galvanized shiny copper/Rame lucido galvanizzato  U4 Shiny copper/Rame lucido  W0 Super glossy black/Nero super lucido  B0 Royal matte black/Nero opaco Royal
Adjustability/ Orientabilità	 Horizontal axis/ Asse orizzontale  Vertical axis/ Asse verticale
Color temperature	2700K, 3000K, 4000K,  Warm Dimming,  Tunable white
IP	Recessed section Exposed section
Control systems	On/Off, Phase-cut, Dimm 1-10V, DALI, Bluetooth
Certifications	CE UK CA




Rimadesio Showroom, New York



Grand Hyatt Hotel, Jakarta

EN Mood Pro Adjustable can be adjusted on both axes by a simple and precise system that allows adjustment without the need of special tools. The wide range of size, lens and wattage options, ensure the ability to accurately and intensely accent objects of interest, no matter the ceiling height.

IT Mood Pro Adjustable è orientabile su entrambi gli assi tramite un sistema di regolazione semplice e preciso e non necessita l'utilizzo di utensili. L'ampia scelta di dimensioni, lenti e potenze, assicura una precisa luce d'accento qualunque sia l'altezza del progetto.

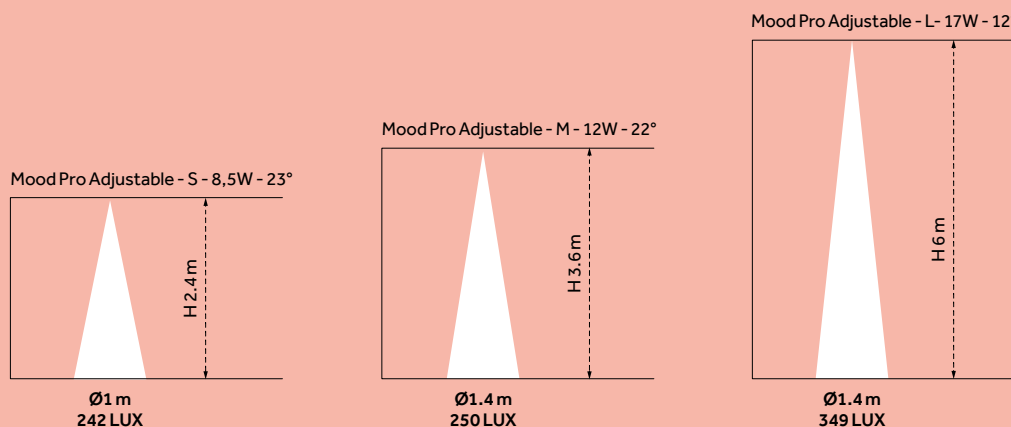




Accessories

EN Mood Pro Adjustable comes with a variety of aesthetic and optical accessories, to obtain a tailored result for every project. Choose among the wide range of optical accessories, plate accessories or interchangeable plates (also with IP54) for every project need.


IT Mood Pro Adjustable è caratterizzato da una serie di accessori di personalizzazione del prodotto e del fascio, per ottenere un risultato su misura per ogni progetto. La possibilità di scelta è tra gli accessori ottici, a piattello e i piattelli sostitutivi (anche con IP54) per ogni necessità progettuale.

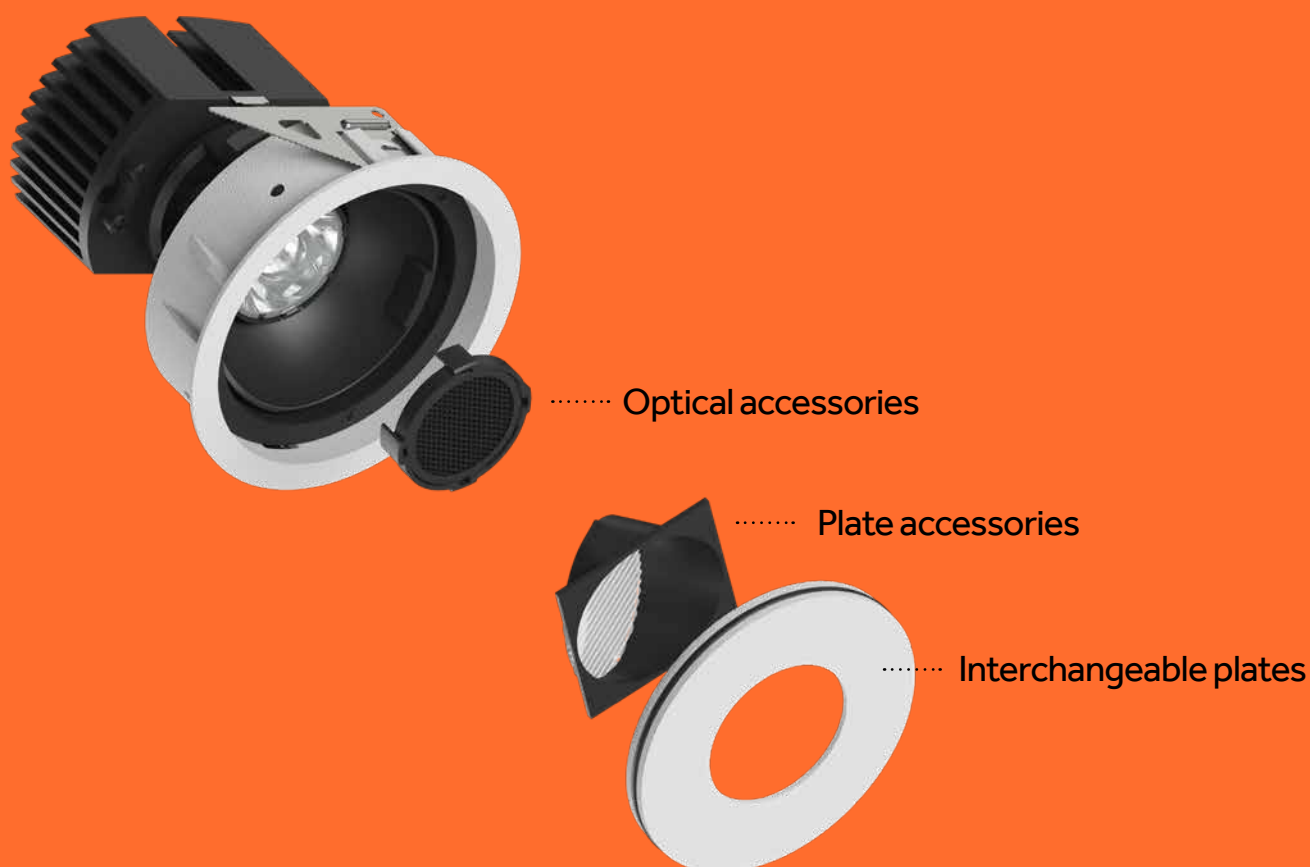


Optic accessories

^{EN} Choose between honeycomb louvres, anti-glare accessories or coloured filters to customize the lighting result.

^{IT} Per personalizzare il risultato, scegli tra le griglie alveolari disponibili, l'accessorio antiabbagliamento o i filtri colorati.



Wide texture honeycomb louvre/
Griglia alveolare larga




Dense texture honeycomb louvre/
Griglia alveolare densa



Anti-glare/
Antiabbagliamento



Holder for coloured filters/
Supporto per filtri colorati




Holder for selective filters/
Supporto per filtri selettivi

Plate accessories

^{EN} Compose the product based on your needs and choose among different plate accessories:

Opal, Transparent or spread lenses, snoots and honeycomb louvres.

^{IT} Componi il prodotto in base alle tue necessità e scegli tra diversi accessori a piattello: lente opale, trasparente o diffondente, snoot e griglia alveolare.




Opal lens IP44/
Lente opale IP44




Transparent glass IP44/
Vetro trasparente IP44



Honeycomb louvre/
Griglia alveolare



Spread lens IP44/
Lente diffondente IP44



Elliptical beam lens IP44/
Lente per fascio ellittico IP44



Snoot/
Snoot



Snoot with diffusive lens IP44/
Snoot con lente diffondente IP44



^{EN} The optical accessories allow tailoring of the light beam, glare control or adjusting the colour temperature.


^{IT} Gli accessori ottici permettono di personalizzare il fascio di luce, controllandone l'abbaglio o modificando la temperatura colore.

^{EN} Support for plate accessories in-built to allow for seamless integration.

^{IT} Supporto per il montaggio degli accessori posto nella parte interna del piattello.



^{EN} The magnetic system for plate installation allows personalisation of the product, also providing IP54 as an option (exposed section).
^{IT} Il sistema magnetico per la sostituzione del piattello permette di personalizzare il prodotto e renderlo anche IP54 (sezione esposta).

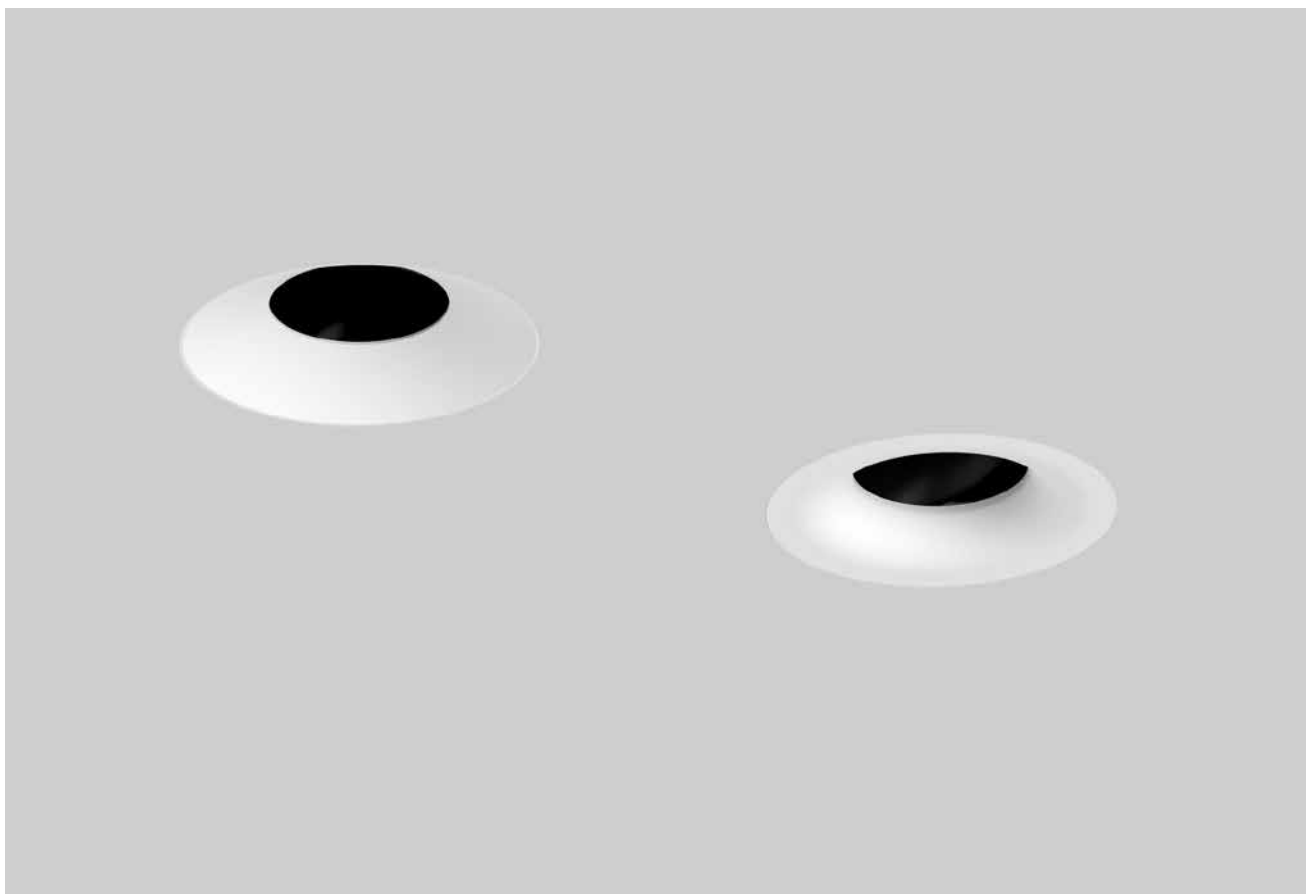

^{EN} Customize the aesthetics of Mood Pro Adjustable with the conical and curved plates (also available in IP54 version).
^{IT} Personalizza l'estetica di Mood Pro Adjustable con i piattelli conici e curvi (disponibili anche in versione IP54).

EN Choose the aesthetic plate that best suits your project. The use of different plates does not affect the focal distance, the beam therefore remains the same guaranteeing a coherent lighting effect.

IT Scegli il piattello estetico che si sposa meglio con il tuo progetto. L'uso dei diversi piattelli non influenza la distanza focale, il fascio rimane quindi lo stesso garantendo un effetto luminoso coerente.




Standard plate



Cone plate



Curve plate

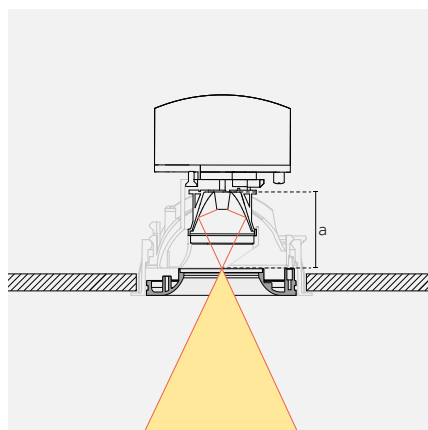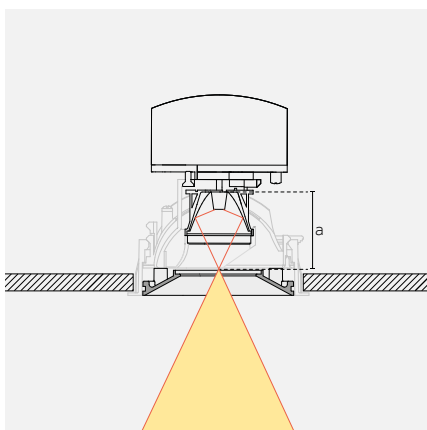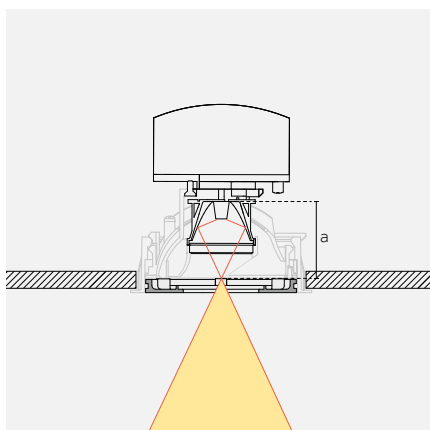

EN The focal distance (a) is the same with all the plate alternatives.




IT La distanza focale (a) è la stessa in tutte le alternative piattello.





Grand Hyatt Hotel, Jakarta


Technical info & codes

	S	M	L	XL
Mood Pro Adjustable Round	 p.60	 p.60-61	 p.62-63	 p.64-65
Mood Pro Adjustable Square	 p.66	 p.66-67	 p.68-69	 p.70-71
	Narrow (9°) Medium (23°) Wide (30°)	Very narrow (8°) Narrow (12°) Medium (22°) Wide (30°-32°)	Very narrow (8°) Narrow (12°) Medium (27°) Wide (30°-33°)	Very narrow (10°) Narrow (15°) Medium (20°-25°) Wide (34°)
Light source/ Sorgente luminosa	POWER LED 4 W; 8,5 W 391 lm - 902 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K CRI >90 SDCM <2 On request: (3500K, CRI>90)	POWER LED 8,5 W; 12 W 781 lm - 1600 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K CRI >90 SDCM <2  Warm Dimming COB LED 12 W 31 lm - 1150 lm L80 B10=50,000h 1800 K-3000 K CRI >95 SDCM <3-<5 On request: (3500K, CRI>90)	POWER LED 8,5 W 924 lm - 1667 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K CRI >90 SDCM <2 COB LED 12 W; 17 W; 21 W 1475 lm - 2846 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K CRI >90 SDCM <2  Warm Dimming COB LED 21 W 47 lm - 2015 lm L80 B10=50,000h 1800 K-3000 K CRI >95 SDCM <3-<5  Tunable white COB LED 21 W 2265 lm - 2584 lm L80 B10=50,000h 2700 K-6500 K CRI >90 SDCM <3-<5 On request: (3500K, CRI>90)	COB LED 17 W; 22 W; 34 W 1886 lm - 4107 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K CRI >90 SDCM <2  Warm Dimming COB LED 34 W 47 lm - 3300 lm L80 B10=50,000h 1800 K-3000 K CRI >95 SDCM <3-<5  Tunable white COB LED 34 W 3698 lm - 4178 lm L80 B10=50,000h 2700 K-6500 K CRI >90 SDCM <3-<5 On request: (3500K, CRI>90)


Round

Round | S | Flush/A filo


Risk 1 0.09 IP20 IP20 IP54* 850° CE UK CA



Visible trim/
Con flangia



Trimless/
Senza flangia



Code example:

X . GP1A B . HW 12

Drivers: p. 72

Accessories: p. 77/81

Photometric data:

www.reggiani.net

Notes:


*IP54: see "plate accessories" section/vedi accessori piattelli

4 W Power LED		Lumen delivered up to 242 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GP1A	Visible trim	B 9° Narrow	HW	2700	>90	391	<2
	LP1A	Trimless	E 23° Medium	HQ	3000	>90	418	<2
			H 30° Wide	HN	4000	>90	451	<2
3500K (CRI >90) on request LED nominal lumen								


8.5 W Power LED		Lumen delivered up to 551 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GP12	Visible trim	B 9° Narrow	HW	2700	>90	781	<2
	LP12	Trimless	E 23° Medium	HQ	3000	>90	836	<2
			H 30° Wide	HN	4000	>90	902	<2
3500K (CRI >90) on request LED nominal lumen								

Round | M | Flush/A filo



Risk 1 0.27 IP20 IP20 IP54* 850° CE UK CA



Visible trim/
Con flangia



Trimless/
Senza flangia



Code example:

X . GP1B 0 . HW 12

Drivers: p. 72-73

Accessories: p. 78/81

Photometric data:

www.reggiani.net

Notes:

*IP54: see "plate accessories" section/vedi accessori piattelli

8.5 W Power LED		Lumen delivered up to 605 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GP1B	Visible trim	0 8° Very narrow	HW	2700	>90	781	<2
	LP1B	Trimless		HQ	3000	>90	836	<2
				HN	4000	>90	902	<2
3500K (CRI >90) on request LED nominal lumen								




8.5 W Power LED		Lumen delivered up to 659 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GP1C	Visible trim	A 12° Narrow	HW	2700	>90	924	<2
	LP1C	Trimless	E 22° Medium	HQ	3000	>90	990	<2
			H 32° Wide	HN	4000	>90	1067	<2
3500K (CRI >90) on request LED nominal lumen								

12 W		Power LED		Lumen delivered up to 988 lm / Lumen maintenance: L90 B10=50,000h							
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes			
X Not included	GP1D	Visible trim	A	12° Narrow	HW	2700	>90	1386	<2	12	
	LP1D	Trimless	E	22° Medium	HQ	3000	>90	1485	<2	31	
			H	32° Wide	HN	4000	>90	1601	<2		
3500K (CRI >90) on request											
LED nominal lumen											

12 W		Warm Dimming COB LED		Lumen delivered up to 360 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
X Not included	GP1D Visible trim	H 30° Wide	DT	1800-3000	>95	31-1150	<3-~5	12		
	LP1D Trimless			LED nominal lumen				31		

Round | M | Cone/A cono

Risk 1 0.27 IP20 IP20 IP54 850° CE UK CA

Visible trim/
Con flangiaTrimless/
Senza flangia

Code example:

X . HP1B 0 . HW 12

Drivers: p. 72-73

Accessories: p. 78/81

Photometric data:

www.reggiani.net

Notes:

*IP54: see "plate accessories" section/vedi accessori piatti

8.5 W		Power LED		Lumen delivered up to 605 lm / Lumen maintenance: L90 B10=50,000h									
Driver		Version		Optics		LED		K	CRI	lm	SDCM	Finishes	
X	Not included	HP1B	Visible trim	0	8°	Very narrow	HW	2700	>90	781	<2	12	
		KP1B	Trimless				HQ	3000	>90	836	<2	31	
							HN	4000	>90	902	<2		
		3500K (CRI >90) on request											
LED nominal lumen													



8.5 W		Power LED		Lumen delivered up to 659 lm / Lumen maintenance: L90 B10=50,000h						
Driver		Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
X Not included		HP1C Visible trim	A 12° Narrow	HW	2700	>90	924	<2	12 	
		KP1C Trimless	E 22° Medium	HQ	3000	>90	990	<2	31 	
			H 32° Wide	HN	4000	>90	1067	<2		
3500K (CRI >90) on request										
LED nominal lumen										

12 W		Power LED		Lumen delivered up to 988 lm / Lumen maintenance: L90 B10=50,000h								
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes				
X Not included	HP1D	Visible trim	A	12°	Narrow	HW	2700	>90	1386	<2	12	
	KP1D	Trimless	E	22°	Medium	HQ	3000	>90	1485	<2	31	
			H	32°	Wide	HN	4000	>90	1601	<2		
3500K (CRI >90) on request												
LED nominal lumen												

12 W		Warm Dimming COB LED		Lumen delivered up to 360lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes		
X Not included	HP1D Visible trim	H 30° Wide	DT	1800-3000	>95	31-1150	<3-~5	12		
	KP1D Trimless			LED nominal lumen				31		

Round | L | Flush/A filo

Risk 1 0.54 IP20 IP20 IP54 850° CE UK CA

Visible trim/
Con flangiaTrimless/
Senza flangia

Code example:

X - GP1B A - HW 12

Drivers: p. 74-75

Accessories: p. 79/81

Photometric data:

www.reggiani.net

Notes:

*IP54: see "plate accessories" section/vedi accessori piattell

8,5 W Power LED Lumen delivered up to 477 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GP1B Visible trim	A 8° Very narrow	HW	2700	>90	924	<2	12
	LP1B Trimless		HQ	3000	>90	990	<2	31
			HN	4000	>90	1067	<2	

3500K (CRI >90) on request
LED nominal lumen**12 W COB LED** Lumen delivered up to 1312 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GP13 Visible trim	B 12° Narrow	HW	2700	>90	1475	<2	12
	LP13 Trimless	E 27° Medium	HQ	3000	>90	1545	<2	31
		H 34° Wide	HN	4000	>90	1660	<2	

3500K (CRI >90) on request
LED nominal lumen**17 W COB LED** Lumen delivered up to 1874 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GP14 Visible trim	B 12° Narrow	HW	2700	>90	2107	<2	12
	LP14 Trimless	E 27° Medium	HQ	3000	>90	2207	<2	31
		H 34° Wide	HN	4000	>90	2372	<2	

3500K (CRI >90) on request
LED nominal lumen**21 W COB LED** Lumen delivered up to 2296 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GP15 Visible trim	E 27° Medium	HW	2700	>90	2528	<2	12
	LP15 Trimless	H 34° Wide	HQ	3000	>90	2648	<2	31
			HN	4000	>90	2846	<2	

3500K (CRI >90) on request
LED nominal lumen**21 W Warm Dimming COB LED** Lumen delivered up to 696 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GP15 Visible trim	E 30° Medium	DT	1800-3000	>95	47-2015	<3- <5	12
	LP15 Trimless							31

LED nominal lumen

21 W Tunable white COB LED Lumen delivered up to 1468 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GP15 Visible trim	E 33° Wide	QT	2700-6500	>90	2265-2584	<3- <5	12
	LP15 Trimless							31


LED nominal lumen

Round | L | Cone/Acono



Risk 1 0.54 IP20 IP20 IP54 850° CE UK CA



Visible trim/
Con flangia



Trimless/
Senza flangia



Code example:

X - HP1B A - HW 12

Drivers: p. 74-75

Accessories: p. 79/81

Photometric data:

www.reggiani.net

Notes:

*IP54: see "plate accessories" section/vedi accessori piattelli

8,5 W Power LED Lumen delivered up to 477 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	HP1B Visible trim	A 8° Very narrow	HW	2700	>90	924	<2	12
	KP1B Trimless		HQ	3000	>90	990	<2	31
			HN	4000	>90	1067	<2	

3500K (CRI>90) on request
LED nominal lumen

12 W COB LED Lumen delivered up to 1312 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	HP13 Visible trim	B 12° Narrow	HW	2700	>90	1475	<2	12
	KP13 Trimless	E 27° Medium	HQ	3000	>90	1545	<2	31
		H 34° Wide	HN	4000	>90	1660	<2	

3500K (CRI>90) on request
LED nominal lumen

17 W COB LED Lumen delivered up to 1874 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	HP14 Visible trim	B 12° Narrow	HW	2700	>90	2107	<2	12
	KP14 Trimless	E 27° Medium	HQ	3000	>90	2207	<2	31
		H 34° Wide	HN	4000	>90	2372	<2	

3500K (CRI>90) on request
LED nominal lumen

21 W COB LED Lumen delivered up to 2296 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	HP15 Visible trim	E 27° Medium	HW	2700	>90	2528	<2	12
	KP15 Trimless	H 34° Wide	HQ	3000	>90	2648	<2	31
			HN	4000	>90	2846	<2	

3500K (CRI>90) on request
LED nominal lumen

21 W Warm Dimming COB LED Lumen delivered up to 696 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	HP15 Visible trim	E 30° Medium	DT	1800-3000	>95	47-2015	<3-~5	12
	KP15 Trimless							31

LED nominal lumen



21 W Tunable white COB LED Lumen delivered up to 1468 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	HP15 Visible trim	E 33° Wide	QT	2700-6500	>90	2265-2584	<3-~5	12
	KP15 Trimless							31

LED nominal lumen

Round | XL | Flush/A filo

Risk 1 1.17 IP20 IP20 IP54 850° CE UK CA

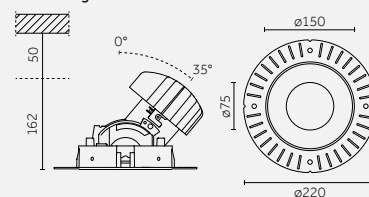Visible trim/
Con flangiaTrimless/
Senza flangia

Code example:

X - GG1E A - HW 12

Drivers: p. 76

Accessories: p. 80-81

Photometric data:

www.reggiani.net

Notes:

*IP54: see "plate accessories" section/vedi accessori piatti

17 W COB LED Lumen delivered up to 1226 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
X Not included	GG1E	Visible trim	A	10°	Very narrow	HW	2700	>90 1886 <2	12
	LG1E	Trimless	HQ	3000	>90	1886	<2	31	
			HN	4000	>90	2169	<2		
			3500K (CRI >90) on request LED nominal lumen						

3500K (CRI >90) on request
LED nominal lumen**25 W COB LED** Lumen delivered up to 2147 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes			
X Not included	GG16	Visible trim	B	15°	Narrow	HW	2700	>90	2633	<2	12
	LG16	Trimless	E	22°	Medium	HQ	3000	>90	2818	<2	31
			H	34°	Wide	HN	4000	>90	3026	<2	
	3500K (CRI >90) on request LED nominal lumen										

3500K (CRI >90) on request
LED nominal lumen**34 W COB LED** Lumen delivered up to 2921 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes			
X Not included	GG17	Visible trim	B	15°	Narrow	HW	2700	>90	3574	<2	12
	LG17	Trimless	E	22°	Medium	HQ	3000	>90	3825	<2	31
			H	34°	Wide	HN	4000	>90	4107	<2	
	3500K (CRI >90) on request LED nominal lumen										

3500K (CRI >90) on request
LED nominal lumen**34 W Warm Dimming COB LED** Lumen delivered up to 2226 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes				
X Not included	GG17	Visible trim	B	20°	Medium	DT	1800-3000	>95	47-3300	<3-<5	12	
	LG17	Trimless					LED nominal lumen				31	

LED nominal lumen

34 W Tunable white COB LED Lumen delivered up to 1828 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes			
X Not included	GG17	Visible trim	E	25°	Medium	QT	2700-6500	>90	3698-4178	<3-<5	12
	LG17	Trimless					LED nominal lumen				31


LED nominal lumen

Round | XL | Cone/A cono


Risk 1 1.17 IP20 IP20 IP54 850° CE UK CA



Visible trim/
Con flangia



Trimless/
Senza flangia

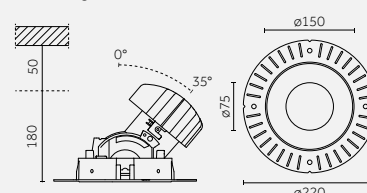

Code example:

X . HG1E A . HW 12

Drivers: p. 76

Accessories: p. 80-81

Photometric data:

www.reggiani.net

Notes:

*IP54: see "plate accessories" section/vedi accessori piattelli

17 W COB LED Lumen delivered up to 1226 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	HG1E Visible trim	A 10° Very narrow	HW	2700	>90	1886	<2	12
	KG1E Trimless		HQ	3000	>90	1886	<2	31
			HN	4000	>90	2168	<2	

3500K (CRI>90) on request
LED nominal lumen

25 W COB LED Lumen delivered up to 2147 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	HG16 Visible trim	B 15° Narrow	HW	2700	>90	2633	<2	12
	KG16 Trimless	E 22° Medium	HQ	3000	>90	2818	<2	31
		H 34° Wide	HN	4000	>90	3026	<2	

3500K (CRI>90) on request
LED nominal lumen

34 W COB LED Lumen delivered up to 2921 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	HG17 Visible trim	B 15° Narrow	HW	2700	>90	3574	<2	12
	KG17 Trimless	E 22° Medium	HQ	3000	>90	3574	<2	31
		H 34° Wide	HN	4000	>90	4107	<2	

3500K (CRI>90) on request
LED nominal lumen

34 W Warm Dimming COB LED Lumen delivered up to 2226 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	HG17 Visible trim	B 20° Medium	DT	1800-3000	>95	47-3300	<3-5	12
	KG17 Trimless							31

LED nominal lumen

34 W Tunable white COB LED Lumen delivered up to 1828 lm / Lumen maintenance: L80 B10=50,000h


Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	HG17 Visible trim	E 25° Medium	QT	2700-6500	>90	3698-4178	<3-5	12
	KG17 Trimless							31

LED nominal lumen


Square

Square | S | Flush/A filo


Risk 1 0.09 IP20 IP20 P64* 850° CE UK CA



Visible trim/
Con flangia



Trimless/
Senza flangia



Code example:

X . MP1A B . HW 12

Drivers: p. 72

Accessories: p. 77/81

Photometric data:

www.reggiani.net

Notes:


*IP54: see "plate accessories" section/vedi accessori piatti

4 W Power LED		Lumen delivered up to 235 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	MP1A Visible trim	B 9° Narrow	HW	2700	>90	391	<2	12
	PP1A Trimless	E 23° Medium	HQ	3000	>90	418	<2	31
		H 30° Wide	HN	4000	>90	451	<2	
3500K (CRI >90) on request LED nominal lumen								


8.5 W Power LED		Lumen delivered up to 575 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	MP12 Visible trim	B 11° Narrow	HW	2700	>90	781	<2	12
	PP12 Trimless	E 25° Medium	HQ	3000	>90	836	<2	31
		H 33° Wide	HN	4000	>90	902	<2	
3500K (CRI >90) on request LED nominal lumen								

Square | M | Flush/A filo



Risk 1 0.27 IP20 IP20 P54* 850° CE UK CA



Visible trim/
Con flangia



Trimless/
Senza flangia



Code example:

X . MP1B 0 . HW 12

Drivers: p. 73

Accessories: p. 78/81

Photometric data:

www.reggiani.net

Notes:

*IP54: see "plate accessories" section/vedi accessori piatti

8.5 W Power LED		Lumen delivered up to 627 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	MP1B Visible trim	0 8° Very narrow	HW	2700	>90	781	<2	12
	PP1B Trimless		HQ	3000	>90	836	<2	31
			HN	4000	>90	902	<2	
3500K (CRI >90) on request LED nominal lumen								


8.5 W Power LED		Lumen delivered up to 671 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	MP1C Visible trim	A 12° Narrow	HW	2700	>90	924	<2	12
	PP1C Trimless	E 22° Medium	HQ	3000	>90	990	<2	31
		H 32° Wide	HN	4000	>90	1067	<2	
3500K (CRI >90) on request LED nominal lumen								

12 W Power LED		Lumen delivered up to 1007 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	MP1D Visible trim	A 12° Narrow	HW	2700	>90	1386	<2	12
	PP1D Trimless	E 22° Medium	HQ	3000	>90	1485	<2	31
		H 32° Wide	HN	4000	>90	1600	<2	
3500K (CRI >90) on request LED nominal lumen								


12 W Warm Dimming COB LED		Lumen delivered up to 367 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	MP1D Visible trim	H 30° Wide	DT	1800-3000	>95	31-1150	<3-<5	12
	PP1D Trimless							31
LED nominal lumen								

Square | M | Pyramid/A piramide


Risk 1 0.27 IP20 IP20 IP54 850° 850° 850° 850° 850° 850° 850° 850° 850° 850°



Visible trim/
Con flangia



Trimless/
Senza flangia



Code example:

X . NP1B 0 . HW 12

Drivers: p. 73

Accessories: p. 78/81

Photometric data:

www.reggiani.net

Notes:

*IP54: see "plate accessories" section/vedi accessori piattelli

8.5 W		PowerLED		Lumen delivered up to 627 lm / Lumen maintenance: L90 B10=50,000h									
Driver		Version		Optics		LED		K	CRI	lm	SDCM	Finishes	
X	Not included	NP1B	Visible trim	0	8°	Very narrow	HW	2700	>90	781	<2	12	
		QP1B	Trimless				HQ	3000	>90	836	<2	31	
							HN	4000	>90	836	<2		
3500K (CRI>90) on request													
LED nominal lumen													





8.5 W		Power LED		Lumen delivered up to 671 lm / Lumen maintenance: L90 B10=50,000h								
Driver	Version	Optics		LED	K	CRI	lm	SDCM	Finishes			
X Not included	NP1C	Visible trim	A	12°	Narrow	HW	2700	>90	924	<2	12	
	QP1C	Trimless	E	22°	Medium	HQ	3000	>90	990	<2	31	
			H	32°	Wide	HN	4000	>90	1067	<2		
3500K (CRI>90) on request LED nominal lumen												

12 W	Power LED		Lumen delivered up to 1007 lm / Lumen maintenance: L90 B10=50,000h								
Driver	Version		Optics	LED	K	CRI	lm	SDCM	Finishes		
X Not included	NP1D	Visible trim	A 12° Narrow	HW	2700	>90	1386	<2	12		
	QP1D	Trimless	E 22° Medium	HQ	3000	>90	1485	<2	31		
			H 32° Wide	HN	4000	>90	1601	<2			
3500K (CRI>90) on request LED nominal lumen											

12 W		Warm Dimming COB LED		Lumen delivered up to 367 lm / Lumen maintenance: L90 B10=50,000h									
Driver		Version		Optics		LED		K	CRI	lm	SDCM	Finishes	
X	Not included	NP1D	Visible trim	H	30°	Wide	DT	1800-3000	>95	31-1150	<3-~5	12	
		QP1D	Trimless									31	
LED nominal lumen													

Square | L | Flush/A filo

Risk 1 0.54 IP20 IP20 IP54 850° CE UK CA

Visible trim/
Con flangiaTrimless/
Senza flangia

Code example:

X - MP1B A - HW 12

Drivers: p. 74-75

Accessories: p. 79/81

Photometric data:

www.reggiani.net

Notes:

*IP54: see "plate accessories" section/vedi accessori piatti

8,5 W Power LED

Lumen delivered up to 455 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	MP1B Visible trim	A 8° Very narrow	HW	2700	>90	924	<2	12
	PP1B Trimless		HQ	3000	>90	990	<2	31
			HN	4000	>90	1067	<2	

3500K (CRI >90) on request
LED nominal lumen

12 W COB LED

Lumen delivered up to 1316 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	MP13 Visible trim	B 12° Narrow	HW	2700	>90	1475	<2	12
	PP13 Trimless	E 27° Medium	HQ	3000	>90	1545	<2	31
		H 34° Wide	HN	4000	>90	1660	<2	

3500K (CRI >90) on request
LED nominal lumen

17 W COB LED

Lumen delivered up to 1865 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	MP14 Visible trim	B 12° Narrow	HW	2700	>90	2107	<2	12
	PP14 Trimless	E 27° Medium	HQ	3000	>90	2207	<2	31
		H 34° Wide	HN	4000	>90	2372	<2	

3500K (CRI >90) on request
LED nominal lumen

21 W COB LED

Lumen delivered up to 2304 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	MP15 Visible trim	E 27° Medium	HW	2700	>90	2528	<2	12
	PP15 Trimless	H 34° Wide	HQ	3000	>90	2648	<2	31
			HN	4000	>90	2846	<2	

3500K (CRI >90) on request
LED nominal lumen

21 W Warm Dimming COB LED

Lumen delivered up to 706 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	MP15 Visible trim	E 30° Medium	DT	1800-3000	>95	47-2015	<3-<5	12
	PP15 Trimless							31

LED nominal lumen

21 W Tunable white COB LED


Lumen delivered up to 1497 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	MP15 Visible trim	E 33° Wide	QT	2700-6500	>90	2265-2584	<3-<5	12
	PP15 Trimless							31


LED nominal lumen

Square | L | Pyramid/A piramide



Risk 1 0.54 IP20 IP20 IP54 850° CE UK CA



Visible trim/
Con flangia



Trimless/
Senza flangia



Code example:

X . NP1B A . HW 12

Drivers: p. 74-75

Accessories: p. 79/81

Photometric data:

www.reggiani.net

Notes:

*IP54: see "plate accessories" section/vedi accessori piattelli

8,5 W Power LED

Lumen delivered up to 455 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
X Not included	NP1B	Visible trim	A	8°	Very narrow	HW	2700	>90 924 <2	12
	QP1B	Trimless				HQ	3000	>90 990 <2	31
						HN	4000	>90 1067 <2	
							3500K (CRI >90) on request LED nominal lumen		

3500K (CRI>90) on request
LED nominal lumen

12 W COB LED

Lumen delivered up to 1316 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
X Not included	NP13	Visible trim	B	12°	Narrow	HW	2700	>90 1475 <2	12
	QP13	Trimless	E	27°	Medium	HQ	3000	>90 1545 <2	31
			H	34°	Wide	HN	4000	>90 1660 <2	
	3500K (CRI >90) on request LED nominal lumen								

3500K (CRI>90) on request
LED nominal lumen

17 W COB LED

Lumen delivered up to 1865 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
X Not included	NP14	Visible trim	B	12°	Narrow	HW	2700	>90 2107 <2	12
	QP14	Trimless	E	27°	Medium	HQ	3000	>90 2207 <2	31
			H	34°	Wide	HN	4000	>90 2372 <2	
3500K (CRI >90) on request									
LED nominal lumen									

3500K (CRI>90) on request
LED nominal lumen

21 W COB LED

Lumen delivered up to 2304 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	NP15	Visible trim	HW	2700	>90	2528	<2	12
	QP15	Trimless	HQ	3000	>90	2648	<2	31
			HN	4000	>90	2846	<2	
	3500K (CRI >90) on request LED nominal lumen							

3500K (CRI>90) on request
LED nominal lumen

21 W Warm Dimming COB LED

Lumen delivered up to 706 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
X Not included	NP15	Visible trim	E	30°	Medium	DT	1800-3000	>95 47-2015 <3-<5	12
	QP15	Trimless					LED nominal lumen		31

LED nominal lumen

21 W Tunable white COB LED




Lumen delivered up to 1497 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes	
X Not included	NP15	Visible trim	E	33°	Wide	QT	2700-6500	>90 2265-2584 <3-<5	12
	QP15	Trimless					LED nominal lumen		31

LED nominal lumen

Square | XL | Flush/A filo

Risk 1 1.17 IP20 IP20 IP54 850° CE UK CA

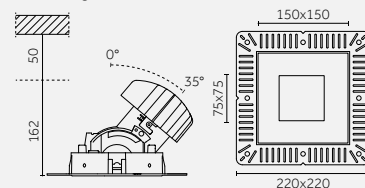Visible trim/
Con flangiaTrimless/
Senza flangia

Code example:

X - PG1E A - HW 12

Drivers: p. 76

Accessories: p. 80-81

Photometric data:

www.reggiani.net

Notes:

*IP54: see "plate accessories" section/vedi accessori piatti

17 W COB LED Lumen delivered up to 1250 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	MG1E Visible trim	A 10° Very narrow	HW	2700	>90	1886	<2	12
	PG1E Trimless		HQ	3000	>90	1886	<2	31
			HN	4000	>90	2169	<2	

3500K (CRI >90) on request
LED nominal lumen**25 W COB LED** Lumen delivered up to 2202 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	MG16 Visible trim	B 15° Narrow	HW	2700	>90	2633	<2	12
	PG16 Trimless	E 22° Medium	HQ	3000	>90	2818	<2	31
		H 34° Wide	HN	4000	>90	3026	<2	

3500K (CRI >90) on request
LED nominal lumen**34 W COB LED** Lumen delivered up to 2995 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	MG17 Visible trim	B 15° Narrow	HW	2700	>90	3574	<2	12
	PG17 Trimless	E 22° Medium	HQ	3000	>90	3825	<2	31
		H 34° Wide	HN	4000	>90	4107	<2	

3500K (CRI >90) on request
LED nominal lumen**34 W Warm Dimming COB LED** Lumen delivered up to 2271 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	MG17 Visible trim	B 20° Medium	DT	1800-3000	>95	47-3300	<3-<5	12
	PG17 Trimless							31

LED nominal lumen

34 W Tunable white COB LED Lumen delivered up to 1865 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	MG17 Visible trim	E 25° Medium	QT	2700-6500	>90	3698-4178	<3-<5	12
	PG17 Trimless							31


LED nominal lumen

Square | XL | Pyramid/A piramide


Risk 1 1.17 IP20 IP20 IP54 850° CE UK CA



Visible trim/
Con flangia



Trimless/
Senza flangia

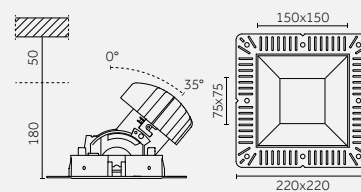

Code example:

X . NG1E A . HW 12

Drivers: p. 76

Accessories: p. 80-81

Photometric data:

www.reggiani.net

Notes:

*IP54: see "plate accessories" section/vedi accessori piattelli

17 W COB LED Lumen delivered up to 1250 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	NG1E Visible trim	A 10° Very narrow	HW	2700	>90	1886	<2	12
	QG1E Trimless		HQ	3000	>90	1886	<2	31
			HN	4000	>90	2169	<2	

3500K (CRI>90) on request
LED nominal lumen

25 W COB LED Lumen delivered up to 2202 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	NG16 Visible trim	B 15° Narrow	HW	2700	>90	2633	<2	12
	QG16 Trimless	E 22° Medium	HQ	3000	>90	2818	<2	31
		H 34° Wide	HN	4000	>90	3026	<2	

3500K (CRI>90) on request
LED nominal lumen

34 W COB LED Lumen delivered up to 2995 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	NG17 Visible trim	B 10° Narrow	HW	2700	>90	3574	<2	12
	QG17 Trimless	E 22° Medium	HQ	3000	>90	3825	<2	31
		H 34° Wide	HN	4000	>90	4107	<2	

3500K (CRI>90) on request
LED nominal lumen

34 W Warm Dimming COB LED Lumen delivered up to 2271 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	NG17 Visible trim	B 20° Medium	DT	1800-3000	>95	47-3300	<3-<5	12
	QG17 Trimless							31

LED nominal lumen

34 W Tunable white COB LED Lumen delivered up to 1865 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	NG17 Visible trim	E 25° Medium	QT	2700-6500	>90	3698-4178	<3-<5	12
	QG17 Trimless							31

LED nominal lumen

Electrical Devices

Some drivers may not fit through the XS and S fitting cut out, check the QR Code./ Alcuni driver potrebbero non passare dal foro di incasso dei prodotti XS e S, verifica tramite il codice QR.



S | Electrical Devices

Driver/ Alimentazioni

4W Power LED									
Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30383.0000	12		41 mm	120-240V / 50/60Hz	350	Max: 1	5 m	1.5 mm ²
On/Off	0.30431.0000	42		52 mm	198-264Vac / 0/50/60Hz	350	Min: 1 - Max: 3	20 m	1.5 mm ²
Phase-cut	T.30383.0000	10		57 mm	220-240Vac / 50/60Hz	350	Max: 1	20 m	1.5 mm ²
Phase-cut	T.30386.0000	32		57 mm	220-240Vac / 0,50/60Hz	350	Min: 1 - Max: 3	20 m	1.5 mm ²
Dimm 1-10V	V.30383.0000	20		56 mm	220-240Vac / 0,50/60Hz	350	Min: 1 - Max: 2	20 m	1.5 mm ²
Dimm 1-10V	V.30431.0000	36		53 mm	220-240Vac / 50/60Hz	350	Min: 1 - Max: 3	20 m	1.5 mm ²
DALI	D.30386.0000	42		48 mm	220-240Vac / 0,50/60Hz	350	Min: 1 - Max: 4	20 m	1.5 mm ²

8,5W Power LED									
Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30419.0000	12		39 mm	120-240V / 50/60Hz	700	Max: 1	5 m	1.5 mm ²
On/Off	0.30041.0000	32		49 mm	220-240Vac / 0/50/60Hz	700	Min: 1 - Max: 3	20 m	1.5 mm ²
Phase-cut	T.30420.0000	10		37 mm	220-240Vac / 50/60Hz	700	Max: 1	20 m	1.5 mm ²
Phase-cut	T.30421.0000	32		57 mm	220-240Vac / 0,50/60Hz	700	Min: 1 - Max: 3	20 m	1.5 mm ²
Dimm 1-10V	V.30420.0000	20		56 mm	220-240Vac / 0,50/60Hz	700	Min: 1 - Max: 2	20 m	1.5 mm ²
Dimm 1-10V	V.30421.0000	36		53 mm	220-240Vac / 50/60Hz	700	Min: 1 - Max: 3	20 m	1.5 mm ²
DALI	D.30420.0000	20		56 mm	220-240Vac / 0,50/60Hz	700	Min: 1 - Max: 2	20 m	1.5 mm ²
DALI	D.30421.0000	38		54 mm	220-240Vac / 0,50/60Hz	700	Min: 3 - Max: 4	20 m	1.5 mm ²

Other devices/ Altri dispositivi

Type	Code	Size (mm)	Cut-out	Tech. specifications	Connectable fixtures	Max. distance	Cable section
•))) Casambi control unit for wireless Bluetooth control/ Unità di controllo Casambi per controllo wireless Bluetooth	0.26101.0000		45 mm	220-240V, 50-60Hz 0,6A for DALI drivers	Max: 1	-	1.5 mm ²
+ 1h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 1h	0.35081.0000		58 mm	220-240V / 50/60Hz	Max: 1	5 m	1.5 mm ²
+ 3h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 3h	0.35081.UK00		58 mm	220-240V / 50/60 Hz	Max: 1	5 m	1.5 mm ²

^{EN} Emergency pack for LED luminaires including Ni/Cd battery with 1h/3h back-up.


For MoodPro range products in S sizes, the emergency pack will not pass through the product's cut-out so this accessory needs to be positioned remotely, no more than 5 m away from the product/. Moreover, for Mood Pro range products in S size, the emergency pack must be connected in series to at least four products.

^{IT} Gruppo di emergenza per apparecchi LED con batterie Ni/Cd autonomia 1h/3h.

Per i prodotti della gamma Mood Pro nelle dimensioni S, il gruppo di emergenza non può passare dal foro di incasso del prodotto; l'accessorio deve quindi essere posizionato in posizione remota ad una distanza di max 5 m dal prodotto. Inoltre, per i prodotti della gamma Mood Pro nelle dimensioni S il gruppo di emergenza deve essere collegato ad almeno quattro prodotti in serie.

Installation and connection accessories/ Accessori di installazione e collegamento

Type	Code	Tech. specifications
+ Accessory for series connection/ Accessorio per collegamento in serie	0.26070.0000	Max 60V/dc



M | Electrical Devices

Driver/ Alimentazioni

8,5 W Power LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30419.0000	12		39 mm	120-240V / 50/60Hz	700	Max: 1	5 m	1.5 mm ²
On/Off	0.30041.0000	32		49 mm	220-240Vac / 0/50/60Hz	700	Min: 1 - Max: 3	20 m	1.5 mm ²
Phase-cut	T.30420.0000	10		37 mm	220-240Vac / 50/60Hz	700	Max: 1	20 m	1.5 mm ²
Phase-cut	T.30421.0000	32		57 mm	220-240Vac / 0,50/60Hz	700	Min: 1 - Max: 3	20 m	1.5 mm ²
Dimm 1-10V	V.30420.0000	20		56 mm	220-240Vac / 0,50/60Hz	700	Min: 1 - Max: 2	20 m	1.5 mm ²
Dimm 1-10V	V.30421.0000	36		53 mm	220-240Vac / 50/60Hz	700	Min: 1 - Max: 3	20 m	1.5 mm ²
DALI	D.30420.0000	20		56 mm	220-240Vac / 0,50/60Hz	700	Min: 1 - Max: 2	20 m	1.5 mm ²
DALI	D.30421.0000	38		54 mm	220-240Vac / 0,50/60Hz	700	Min: 3 - Max: 4	20 m	1.5 mm ²

12W Power LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30423.0000	42		52 mm	220-240Vac / 0/50/60Hz	1050	Min: 1 - Max: 3	20 m	1.5 mm ²
Phase-cut	T.30422.0000	22		52 mm	220-240Vac / 50/60Hz	1050	Max: 1	20 m	1.5 mm ²
Dimm 1-10V	V.30423.0000	36		53 mm	220-240Vac / 50/60Hz	1050	Min: 1 - Max: 2	20 m	1.5 mm ²
DALI	D.30422.0000	20		52 mm	220-240Vac / 50/60Hz	1050	Max: 1	20 m	1.5 mm ²

12W Warm Dimming COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications / Input	mA	Connectable fixtures	Max.distance	Cable section
Dimm 1-10V	V.30431.0000	36		53 mm	170-280Vdc / 0/50/60Hz	350	Max: 1	20 m	1.5 mm ²
DALI	D.30431.0000	38		54 mm	170-280Vdc / 0/50/60Hz	350	Max: 1	20 m	1.5 mm ²

Other devices/ Altri dispositivi

Type	Code	Size (mm)	Cut-out	Tech. specifications	Connectable fixtures	Max. distance	Cable section
• Casambi control unit for wireless Bluetooth control/ Unità di controllo Casambi per controllo wireless Bluetooth	0.26101.0000		45 mm	220-240V, 50-60Hz 0,6A for DALI drivers	Max: 1	-	1.5 mm ²
1h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 1h	0.35081.0000		58 mm	220-240V / 50/60Hz	Max: 1	5 m	1.5 mm ²
3h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 3h	0.35081.UK00		58 mm	220-240V / 50/60Hz	Max: 1	5 m	1.5 mm ²

^{EN} Emergency pack for LED luminaires including Ni/Cd battery with 1h/3h back-up.


For Mood Pro range products in M sizes, the emergency pack will not pass through the product's cut-out so this accessory needs to be positioned remotely, no more than 5 m away from the product/. Moreover, for Mood Pro range products in M size, the emergency pack must be connected in series to at least four products.

^{IT} Gruppo di emergenza per apparecchi LED con batterie Ni/Cd autonomia 1h/3h.

Per i prodotti della gamma Mood Pro nelle dimensioni M, il gruppo di emergenza non può passare dal foro di incasso del prodotto; l'accessorio deve quindi essere posizionato in posizione remota ad una distanza di max 5 m dal prodotto. Inoltre, per i prodotti della gamma Mood Pro nelle dimensioni M il gruppo di emergenza deve essere collegato ad almeno quattro prodotti in serie.

Installation and connection accessories/ Accessori di installazione e collegamento

Type	Code	Tech. specifications
 Accessory for series connection/ Accessorio per collegamento in serie	0.26070.0000	Max 60V/dc



L | Electrical Devices

Driver/ Alimentazioni

8,5 W Power LED									
Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30419.0000	12		39 mm	120-240V / 50/60Hz	700	Max: 1	5 m	1.5 mm ²
On/Off	0.30041.0000	32		49 mm	220-240Vac / 0/50/60Hz	700	Min: 1 - Max: 3	20 m	1.5 mm ²
Phase-cut	T.30420.0000	10		37 mm	220-240Vac / 50/60Hz	700	Max: 1	20 m	1.5 mm ²
Phase-cut	T.30421.0000	32		57 mm	220-240Vac / 0,50/60Hz	700	Min: 1 - Max: 3	20 m	1.5 mm ²
Dimm 1-10V	V.30420.0000	20		56 mm	220-240Vac / 0,50/60Hz	700	Min: 1 - Max: 2	20 m	1.5 mm ²
Dimm 1-10V	V.30421.0000	36		53 mm	220-240Vac / 50/60Hz	700	Min: 1 - Max: 3	20 m	1.5 mm ²
DALI	D.30420.0000	20		56 mm	220-240Vac / 0,50/60Hz	700	Min: 1 - Max: 2	20 m	1.5 mm ²
DALI	D.30421.0000	38		54 mm	220-240Vac / 0,50/60Hz	700	Min: 3 - Max: 4	20 m	1.5 mm ²
12 W COB LED									
Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30412.0000	32		49 mm	220-240Vac / 0/50/60Hz	350	Max: 1	20 m	1.5 mm ²
Phase-cut	T.30412.0000	20		57 mm	220-240Vac / 0/50/60Hz	350	Max: 1	20 m	1.5 mm ²
Dimm 1-10V	V.30040.0000	36		53 mm	220-240Vac / 0/50/60Hz	350	Max: 1	20 m	1.5 mm ²
DALI	D.30040.0000	38		54 mm	220-240Vac / 0/50/60Hz	350	Max: 1	20 m	1.5 mm ²
17 W COB LED									
Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30400.0000	32		49 mm	220-240Vac / 0/50/60Hz	500	Max: 1	20 m	1.5 mm ²
Phase-cut	T.30400.0000	20		57 mm	220-240Vac / 0/50/60Hz	500	Max: 1	20 m	1.5 mm ²
Dimm 1-10V	V.30400.0000	36		53 mm	220-240Vac / 0/50/60Hz	500	Max: 1	20 m	1.5 mm ²
DALI	D.30400.0000	38		54 mm	220-240Vac / 0/50/60Hz	500	Max: 1	20 m	1.5 mm ²
21 W COB LED									
Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30426.0000	32		49 mm	220-240Vac / 0/50/60Hz	600	Max: 1	20 m	1.5 mm ²
Phase-cut	T.30426.0000	36		57 mm	220-240Vac / 50/60Hz	550	Max: 1	20 m	1.5 mm ²
Dimm 1-10V	V.30426.0000	36		53 mm	220-240Vac / 0/50/60Hz	600	Max: 1	20 m	1.5 mm ²
DALI	D.30426.0000	38		54 mm	220-240Vac / 0/50/60Hz	600	Max: 1	20 m	1.5 mm ²
21 W Warm Dimming COB LED									
Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
Phase-cut	T.30426.0000	36		57 mm	220-240Vac / 50/60Hz	550	Max: 1	20 m	1.5 mm ²
Dimm 1-10V	V.30426.0000	36		53 mm	220-240Vac / 0/50/60Hz	600	Max: 1	20 m	1.5 mm ²
DALI	D.30426.0000	38		54 mm	220-240Vac / 0/50/60Hz	600	Max: 1	20 m	1.5 mm ²
21 W Tunable white COB LED									
Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
DALI	D.30509.0000	45		86 mm	220-240Vac / 0/50/60Hz	600	Max: 1	20 m	1.5 mm ²

**Other devices/
Altri dispositivi**

Type	Code	Size (mm)	Cut-out	Tech. specifications	Connectable fixtures	Max. distance	Cable section
•))) Casambi control unit for wireless Bluetooth control/ Unità di controllo Casambi per controllo wireless Bluetooth	0.26101.0000		45 mm	220-240V, 50-60Hz 0,6A for DALI drivers	Max: 1	-	1.5 mm ²
 1h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 1h	0.35081.0000		58 mm	220-240V / 50/60Hz	Max: 1	5 m	1.5 mm ²
 3h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 3h	0.35081.UK00		58 mm	220-240V / 50/60Hz	Max: 1	5 m	1.5 mm ²

^{EN} For LED fixtures (8,5-21W), Ni/Cd battery

^{IT} Per apparecchi LED (8,5-21W), batterie Ni/Cd

XL | Electrical Devices

Driver/ Alimentazioni

17 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30400.0000	32		49 mm	220-240Vac / 0/50/60Hz	500	Max: 1	20 m	1.5 mm ²
Phase-cut	T.30400.0000	20		57 mm	220-240Vac / 0/50/60Hz	500	Max: 1	20 m	1.5 mm ²
Dimm 1-10V	V.30400.0000	36		53 mm	220-240Vac / 0/50/60Hz	500	Max: 1	20 m	1.5 mm ²
DALI	D.30400.0000	38		54 mm	220-240Vac / 0/50/60Hz	500	Max: 1	20 m	1.5 mm ²

25 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30041.0000	32		49 mm	220-240Vac / 0/50/60Hz	700	Max: 1	20 m	1.5 mm ²
Phase-cut	T.30041.0000	36		52 mm	220-240Vac / 0/50/60Hz	700	Max: 1	20 m	1.5 mm ²
Dimm 1-10V	V.30041.0000	36		53 mm	220-240Vac / 0/50/60Hz	700	Max: 1	20 m	1.5 mm ²
DALI	D.30041.0000	38		54 mm	220-240Vac / 0/50/60Hz	700	Max: 1	20 m	1.5 mm ²

34 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30408.0000	40		49 mm	220-240Vac / 0/50/60Hz	950	Max: 1	20 m	1.5 mm ²
Phase-cut	T.30408.0000	40		50 mm	220-240Vac / 50/60Hz	900	Max: 1	20 m	1.5 mm ²
Dimm 1-10V	V.30408.0000	36		53 mm	220-240Vac / 0/50/60Hz	950	Max: 1	20 m	1.5 mm ²
DALI	D.30408.0000	38		54 mm	220-240Vac / 0/50/60Hz	950	Max: 1	20 m	1.5 mm ²

34 W Warm Dimming COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
Phase-cut	T.30348.0000	40		50 mm	220-240Vac / 50/60Hz	900	Max: 1	20 m	1.5 mm ²
Dimm 1-10V	V.30425.0000	36		53 mm	220-240Vac / 0/50/60Hz	950	Max: 1	20 m	1.5 mm ²
DALI	D.30425.0000	38		54 mm	220-240Vac / 0/50/60Hz	950	Max: 1	20 m	1.5 mm ²

34 W Tunable white COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
DALI	D.30512.TW00	45		86 mm	220-240Vac / 50/60Hz	800	Max: 1	20 m	1.5 mm ²

Other devices/ Altri dispositivi

Type	Code	Size (mm)	Cut-out	Tech. specifications	Connectable fixtures	Max. distance	Cable section
•))) Casambi control unit for wireless Bluetooth control/ Unità di controllo Casambi per controllo wireless Bluetooth	0.26101.0000		45 mm	220-240V, 50-60Hz 0,6A for DALI drivers	Max: 1	-	1.5 mm ²
+ 1h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 1h	0.35070.0000		58 mm	220-240V / 50/60 Hz	Max: 1	5 m	1.5 mm ²
+ 3h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 3h	0.35070.3H00		58 mm	220-240V / 50/60 Hz	Max: 1	5 m	1.5 mm ²


^{EN} For LED fixtures (17-34W), Ni/Cd battery

^{IT} Per apparecchi LED (17-34W), batterie Ni/Cd

Accessories

Mood Pro Adjustable | S


Optics accessories/ Accessori ottiche



Description	Code
Honeycomb louvre/ Griglia alveolare/	0.26029.0000



Description	Code
Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm	0.26076.004A
	0.26076.005A
Colour:	0.26076.006A
4A Red	0.26076.006A
5A Green	0.26076.008A
6A Blue	0.26076.009A
7A Pink	
8A Yellow	
9A Orange	




Description	Code
Selective filter/ Filtro selettivo	0.26076.004B
	0.26076.005B
	0.26076.006B
Kelvin:	0.26076.006B
4B 3000K - 2700K	0.26076.006B
5B 2700K - 2500K	0.26076.008B
6B 2700K - 2200K	0.26076.008B
7B 2700K - 2000K	0.26076.009B
8B 3000K - 3500K	
9B 3000K - 4000K	


Plate accessories/ Accessori piattello



Description	Code
Transparent glass, IP44/ Vetro trasparente IP44	0.26023.0000



Description	Code
Elliptical beam lens, IP44/ Lente per fascio ellittico IP44	0.26024.0000




Description	Code
Spread lens, IP44/ Lente diffondente IP44	0.26009.0000




Description	Code
Snoot/ Snoot (for round)	0.26208.0000



Description	Code
Snoot with diffusive lens IP44/ Snoot con lente diffondente IP44 (for round)	0.26211.0000



Description	Code
Opal lens, IP44/ Lente opale IP44	0.26031.0000



Description	Code
Honeycomb louvre for plate/ Griglia alveolare per piattello	0.26036.0000




Description	Code
Snoot/ Snoot (for square)	0.26224.0000



Description	Code
Snoot with diffusive lens IP44/ Snoot con lente diffondente IP44 (for square)	0.26227.0000

Plate/ Piattello

Round Flush/A filo



Description	Code
Flush round plate IP54/ Piattello tondo a filo IP54	0.26252.0012
	0.26252.0031
Finishes:	
12 Textured matte white / 31 Textured matte black	



Description	Code
Flush square plate IP54/ Piattello quadrato a filo IP54	0.26253.0012
	0.26253.0031
Finishes:	
12 Textured matte white / 31 Textured matte black	

Mood Pro Adjustable | M

Optics accessories/
Accessori ottiche

	Description Wide texture honeycomb louvre/ Griglia alveolare larga	Code 0.26016.0000
	Description Dense texture honeycomb louvre/ Griglia alveolare densa	Code 0.26027.0000
	Description Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm	Code 0.26075.004A 0.26075.005A 0.26075.006A 0.26075.006A 0.26075.008A 0.26075.009A
	Colour: 4A Red 7A Pink 5A Green 8A Yellow 6A Blue 9A Orange	

	Description Anti-glare accessory/ Accessorio antiabbagliamento	Code 0.26048.0000
	Description Selective filter/ Filtro selettivo	Code 0.26075.004B 0.26075.005B 0.26075.006B 0.26075.006B 0.26075.008B 0.26075.009B
	Kelvin: 4B 3000K - 2700K 7B 2700K - 2000K 5B 2700K - 2500K 8B 3000K - 3500K 6B 2700K - 2200K 9B 3000K - 4000K	

Plate accessories/
Accessori piattello

	Description Opal lens, IP44/ Lente opale IP44	Code 0.26014.0000
	Description Transparent glass, IP44/ Vetro trasparente IP44	Code 0.26015.0000
	Description Elliptical beam lens, IP44/ Lente per fascio ellittico IP44	Code 0.26026.0000
	Description Snoot/ Snoot (for round)	Code 0.26212.0000
	Description Snoot with diffusive lens IP44/ Snoot con lente diffondente IP44 (for round)	Code 0.26215.0000

	Description Honeycomb louvre for plate/ Griglia alveolare per piattello	Code 0.26033.0000
	Description Spread lens, IP44/ Lente diffondente IP44	Code 0.26072.0000
	Description Snoot/ Snoot (for square)	Code 0.26228.0000
	Description Snoot with diffusive lens IP44/ Snoot con lente diffondente IP44 (for square)	Code 0.26231.0000

Plate/
Piattello

Curve round plate

	Description Curve round plate/ Piattello tondo curvo	Code 0.26017.0012 0.26017.0031
	Finishes: 12 Textured matte white / 31 Textured matte black	

IP54

	Description Flush round plate IP54/ Piattello tondo a filo IP54	Code 0.26248.0012 0.26248.0031
	Finishes: 12 Textured matte white / 31 Textured matte black	
	Description Cone round plate IP54/ Piattello tondo a cono IP54	Code 0.26250.0012 0.26250.0031
	Finishes: 12 Textured matte white / 31 Textured matte black	
	Description Curve round plate IP54/ Piattello tondo curvo IP54	Code 0.26246.0012 0.26246.0031
	Finishes: 12 Textured matte white / 31 Textured matte black	

Curve square plate

	Description Curve square plate/ Piattello quadrato curvo	Code 0.26018.0012 0.26018.0031
	Finishes: 12 Textured matte white / 31 Textured matte black	

IP54

	Description Flush square plate IP54/ Piattello quadrato a filo IP54	Code 0.26249.0012 0.26249.0031
	Finishes: 12 Textured matte white / 31 Textured matte black	
	Description Pyramid square plate IP54/ Piattello quadrato a piramide IP54	Code 0.26251.0012 0.26251.0031
	Finishes: 12 Textured matte white / 31 Textured matte black	
	Description Curve square plate IP54/ Piattello quadrato curvo IP54	Code 0.26247.0012 0.26247.0031
	Finishes: 12 Textured matte white / 31 Textured matte black	

Mood Pro Adjustable | L

Optics accessories/
Accessori ottiche

	Description Wide texture honeycomb louvre/ Griglia alveolare larga	Code <u>0.26007.0000</u>
	Description Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm	Code <u>0.26074.004A</u> <u>0.26074.005A</u> <u>0.26074.006A</u> <u>0.26074.006A</u> <u>0.26074.008A</u> <u>0.26074.009A</u>
Colour:		
4A Red		7A Pink
5A Green		8A Yellow
6A Blue		9A Orange

	Description Dense texture honeycomb louvre/ Griglia alveolare densa	Code <u>0.26008.0000</u>
	Description Selective filter/ Filtro selettivo	Code <u>0.26074.004B</u> <u>0.26074.005B</u> <u>0.26074.006B</u> <u>0.26074.006B</u> <u>0.26076.008B</u> <u>0.26076.009B</u>
Kelvin:		
4B 3000K - 2700K		7B 2700K - 2000K
5B 2700K - 2500K		8B 3000K - 3500K
6B 2700K - 2200K		9B 3000K - 4000K

Plate accessories/
Accessori piattello

	Description Transparent glass, IP44/ Vetro trasparente IP44	Code <u>0.26006.0000</u>
	Description Elliptical beam lens, IP44/ Lente per fascio ellittico IP44	Code <u>0.26025.0000</u>
	Description Opal lens, IP44/ Lente opale IP44	Code <u>0.26028.0000</u>
	Description Snoot/ Snoot (for round)	Code <u>0.26216.0000</u>
	Description Snoot with diffusive lens IP44/ Snoot con lente diffondente IP44 (for round)	Code <u>0.26219.0000</u>

	Description Honeycomb louvre for plate/ Griglia alveolare per piattello	Code <u>0.26032.0000</u>
	Description Spread lens, IP44/ Lente diffondente IP44	Code <u>0.26073.0000</u>
	Description Snoot/ Snoot (for square)	Code <u>0.26232.0000</u>
	Description Snoot with diffusive lens IP44/ Snoot con lente diffondente IP44 (for square)	Code <u>0.26235.0000</u>

Plate/
Piattello

Curve round plate

	Description Curve round plate/ Piattello tondo curvo	Code <u>0.26002.0012</u> <u>0.26002.0031</u>
Finishes: 12 Textured matte white / 31 Textured matte black		

IP54

	Description Flush round plate IP54/ Piattello tondo a filo IP54	Code <u>0.26240.0012</u> <u>0.26240.0031</u>
Finishes: 12 Textured matte white / 31 Textured matte black		
	Description Cone round plate IP54/ Piattello tondo a cono IP54	Code <u>0.26241.0012</u> <u>0.26241.0031</u>
Finishes: 12 Textured matte white / 31 Textured matte black		
	Description Curve round plate IP54/ Piattello tondo curvo IP54	Code <u>0.26246.0012</u> <u>0.26246.0031</u>
Finishes: 12 Textured matte white / 31 Textured matte black		

Curve square plate

	Description Curve square plate/ Piattello quadrato curvo	Code <u>0.26003.0012</u> <u>0.26003.0031</u>
Finishes: 12 Textured matte white / 31 Textured matte black		

IP54

	Description Flush square plate IP54/ Piattello quadrato a filo IP54	Code <u>0.26245.0012</u> <u>0.26245.0031</u>
Finishes: 12 Textured matte white / 31 Textured matte black		
	Description Pyramid square plate IP54/ Piattello quadrato a piramide IP54	Code <u>0.26244.0012</u> <u>0.26244.0031</u>
Finishes: 12 Textured matte white / 31 Textured matte black		
	Description Curve square plate IP54/ Piattello quadrato curvo IP54	Code <u>0.26243.0012</u> <u>0.26243.0031</u>
Finishes: 12 Textured matte white / 31 Textured matte black		

Mood Pro Adjustable | XL

Optics accessories/ Accessori ottiche

	Description Wide texture honeycomb louvre/ Griglia alveolare larga	Code 0.26035.0000		Description Dense texture honeycomb louvre/ Griglia alveolare densa	Code 0.26038.0000
	Description Colored glass filter 1 mm/ Filtro in vetro colorato 1 mm	Code 0.26039.004A 0.26039.005A 0.26039.006A 0.26039.006A 0.26039.008A 0.26039.009A		Description Selective filter/ Filtro selettivo	Code 0.26039.004B 0.26039.005B 0.26039.006B 0.26039.006B 0.26039.008B 0.26039.009B
	Colour: 4A Red 5A Green 6A Blue	7A Pink 8A Yellow 9A Orange		Kelvin: 4B 3000K - 2700K 5B 2700K - 2500K 6B 2700K - 2200K	2700K - 2000K 8B 3000K - 3500K 9B 3000K - 4000K

Plate accessories/ Accessori piattello

	Description Elliptical beam lens, IP44/ Lente per fascio ellittico IP44	Code 0.26083.0000		Description Transparent glass, IP44/ Vetro trasparente IP44	Code 0.26088.0000
	Description Opal lens, IP44/ Lente opale IP44	Code 0.26084.0000		Description Honeycomb louvre for plate/ Griglia alveolare per piattello	Code 0.26071.0000
	Description Spread lens, IP44/ Lente diffondente IP44	Code 0.26087.0000		Description Snoot/ Snoot	Code 0.26220.0000
	Description Snoot with diffusive lens IP44/ Snoot con lente diffondente IP44 (for round)	Code 0.26223.0000		Description Snoot with diffusive lens IP44/ Snoot con lente diffondente IP44 (for square)	Code 0.26236.0000
	Description Snoot with diffusive lens IP44/ Snoot con lente diffondente IP44 (for round)	Code 0.26223.0000		Description Snoot with diffusive lens IP44/ Snoot con lente diffondente IP44 (for square)	Code 0.26239.0000

Plate/ Piattello

Curve round plate

	Description Curve round plate/ Piattello tondo curvo	Code 0.26079.0012 0.26079.0031
	Finishes: 12 Textured matte white / 31 Textured matte black	

IP54

	Description Flush round plate IP54/ Piattello tondo a filo IP54	Code 0.26254.0012 0.26254.0031
	Finishes: 12 Textured matte white / 31 Textured matte black	

	Description Cone round plate IP54/ Piattello tondo a cono IP54	Code 0.26255.0012 0.26255.0031
	Finishes: 12 Textured matte white / 31 Textured matte black	

	Description Curve round plate IP54/ Piattello tondo curvo IP54	Code 0.26256.0012 0.26256.0031
	Finishes: 12 Textured matte white / 31 Textured matte black	

Curve square plate

	Description Curve square plate/ Piattello quadrato curvo	Code 0.26080.0012 0.26080.0031
	Finishes: 12 Textured matte white / 31 Textured matte black	

IP54

	Description Flush square plate IP54/ Piattello quadrato a filo IP54	Code 0.26259.0012 0.26259.0031
	Finishes: 12 Textured matte white / 31 Textured matte black	

	Description Pyramid square plate IP54/ Piattello quadrato a piramide IP54	Code 0.26258.0012 0.26258.0031
	Finishes: 12 Textured matte white / 31 Textured matte black	


	Description Curve square plate IP54/ Piattello quadrato curvo IP54	Code 0.26257.0012 0.26257.0031
	Finishes: 12 Textured matte white / 31 Textured matte black	

Mounting accessories

Mounting accessories

Formwork/ Cassaforma

Mood Pro Fixed | S




Description

Formwork (S)/
Cassaforma (S)

Code

0.40190.0000

Mood Pro Fixed | M




Description

Formwork (M)/
Cassaforma (M)

Code

0.40194.0000

Mood Pro Fixed | L-XL



Description


Formwork (L-XL)/
Cassaforma (L-XL)

Code

0.40196.0000

Mood Pro Wall Washer


Mood Pro Wall Washer

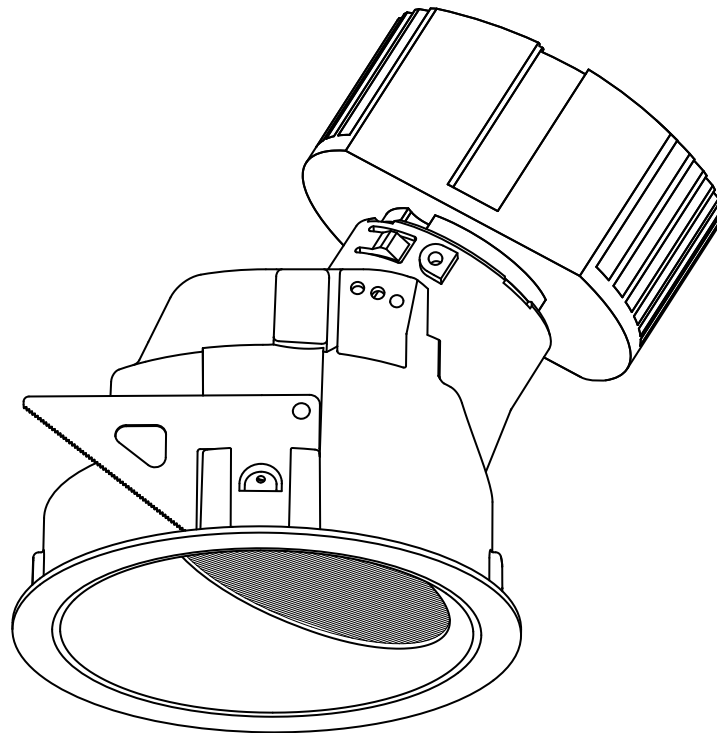

EN Mood Pro Wall Washer is the ultimate solution for consistent, soft and comfortable wall washing. Available in four sizes (from Ø50mm to Ø150mm), both in round and square shapes, with lumen outputs up to 2000lm, allowing ambient lighting from walls or other vertical surfaces as high as 4 meters.

IT Mood Pro Wall Washer è la soluzione definitiva per un risultato di wall washing preciso, morbido e confortevole. È disponibile in quattro diametri (da Ø50mm a Ø150mm), sia in forma tonda che quadrata, con lumen output fino a 2000lm, permettendo un'illuminazione wallwashing su superfici verticali alte fino a 4 metri.

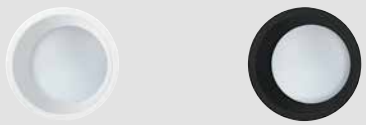

Versions/ Versioni				
Mood Pro Wall Washer	 Round Flush/A Filo Round Drop/Esposto Square Flush/A Filo Square Drop/Esposto			
Finishes/ Finiture	 12 Textured matte white/ Bianco opaco goffrato 31 Textured matte black/ Nero opaco goffrato Special finishes (on request) / Finiture speciali (su richiesta) - C0 Royal matte white/Bianco opaco Royal - W1 White super glossy/Bianco super lucido 01 Chrome plated/Cromo - W5 Galvanized shiny nickel/Nickel lucido galvanizzato - U1 Glossy gold/Oro lucido 05 Gold plated/Cromo oro - W4 Galvanized shiny copper/Rame lucido galvanizzato - U4 Shiny copper/Rame lucido - W0 Super glossy black/Nero super lucido - B0 Royal matte black/Nero opaco Royal			
Adjustability/ Orientabilità	 Step 1: 10° Step 2: 20° Step 3: 30° Step 4: 40° (XL only)			
Color temperature	2700K, 3000K, 4000K			
IP	Recessed section Exposed section 20 44			
Control systems	On/Off, Phase-cut, Dimm 1-10V, DALI, Bluetooth			
Certifications				






One, two, three steps



EN Mood Pro Wall Washer features different pre-set positions, depending on the size of the product, allowing adjustment of angles when using the product at different ceiling heights.

Mood Pro Wall Washer is also available with a drop plate that guarantees an impactful and defined aesthetic with optimum wall washing performance.

IT Mood Pro Wall Washer è dotato di diverse posizioni pre impostate, in base alla dimensione del prodotto, per consentire la regolazione durante l'installazione a diverse altezze del soffitto. Mood Pro Wall Washer è disponibile anche nella versione con piattello esposto per un risultato estetico più d'impatto e definito.

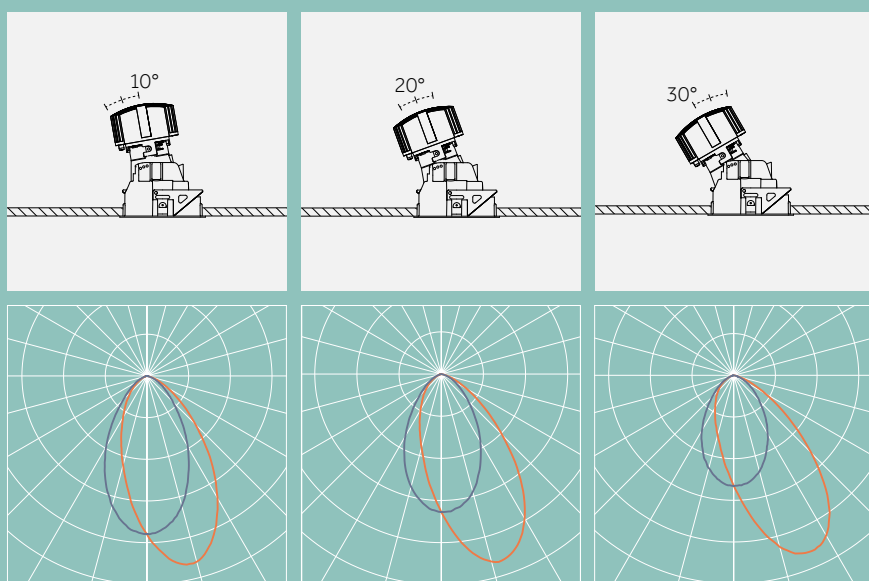

EN Lighting result with a 10° adjustment of the product
IT Resa illuminotecnica con il prodotto posizionato a 10°

EN Lighting result with a 20° adjustment of the product
IT Resa illuminotecnica con il prodotto posizionato a 20°

EN Lighting result with a 30° adjustment of the product
IT Resa illuminotecnica con il prodotto posizionato a 30°




EN Mood Pro Wall Washer Fluish, with flush plate
IT Mood Pro Wall Washer Flush, con piattello a filo



EN Mood Pro Wall Washer Drop, with drop plate
IT Mood Pro Wall Washer Drop, con piattello esposto

EN For optimal wall washing results when using Mood Pro Wall Washer, pay attention to the distance between the luminaires and the wall (b), the height of the wall (h) and the spacing between the luminaires themselves (a). The table below can be followed as a reference.

IT Per ottenere le massime prestazioni con Mood Pro Wall Washer, presta particolare attenzione alla distanza tra i prodotti (a), all'altezza della parete (h) ed alla distanza tra gli apparecchi e la parete (b). La tabella sottostante può essere utilizzata come riferimento.

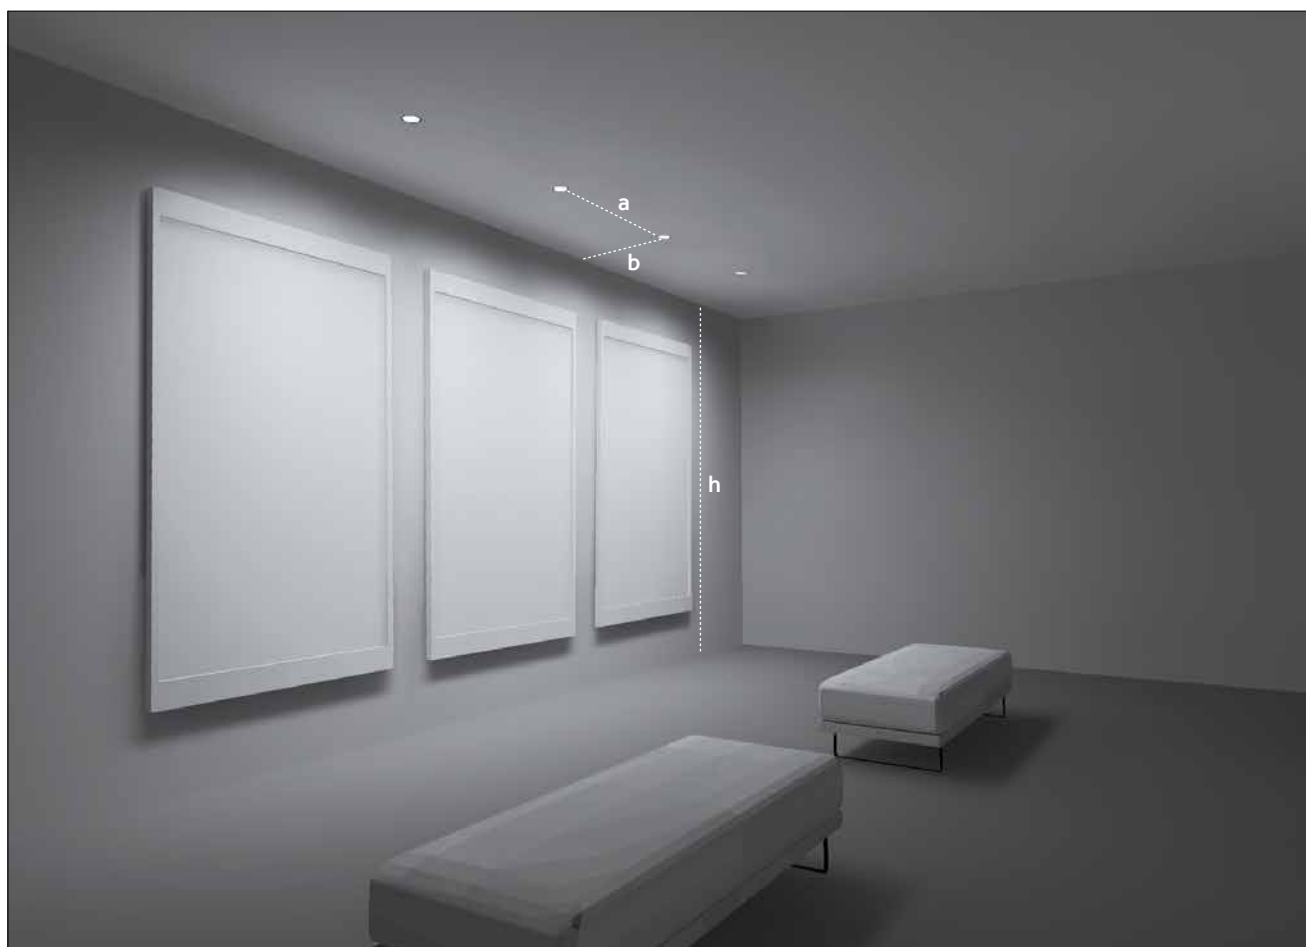


Size/Misure	Power/Potenze	Distances/Distanze		
		a	b	h
S	8,5W	800 mm	600 mm	< 2,5m
M	12W	1000 mm	800 mm	2,5m/3,5m
L	21W	1000 mm	1000 mm	2,5m/3,5m
XL	34W	1200 mm	1200 mm	> 3,5m

Mood Wall Washer Flush

a: fixture spacing / distanza tra gli apparecchi





b: distance from wall / distanza dal muro

h: ceiling height / altezza celino

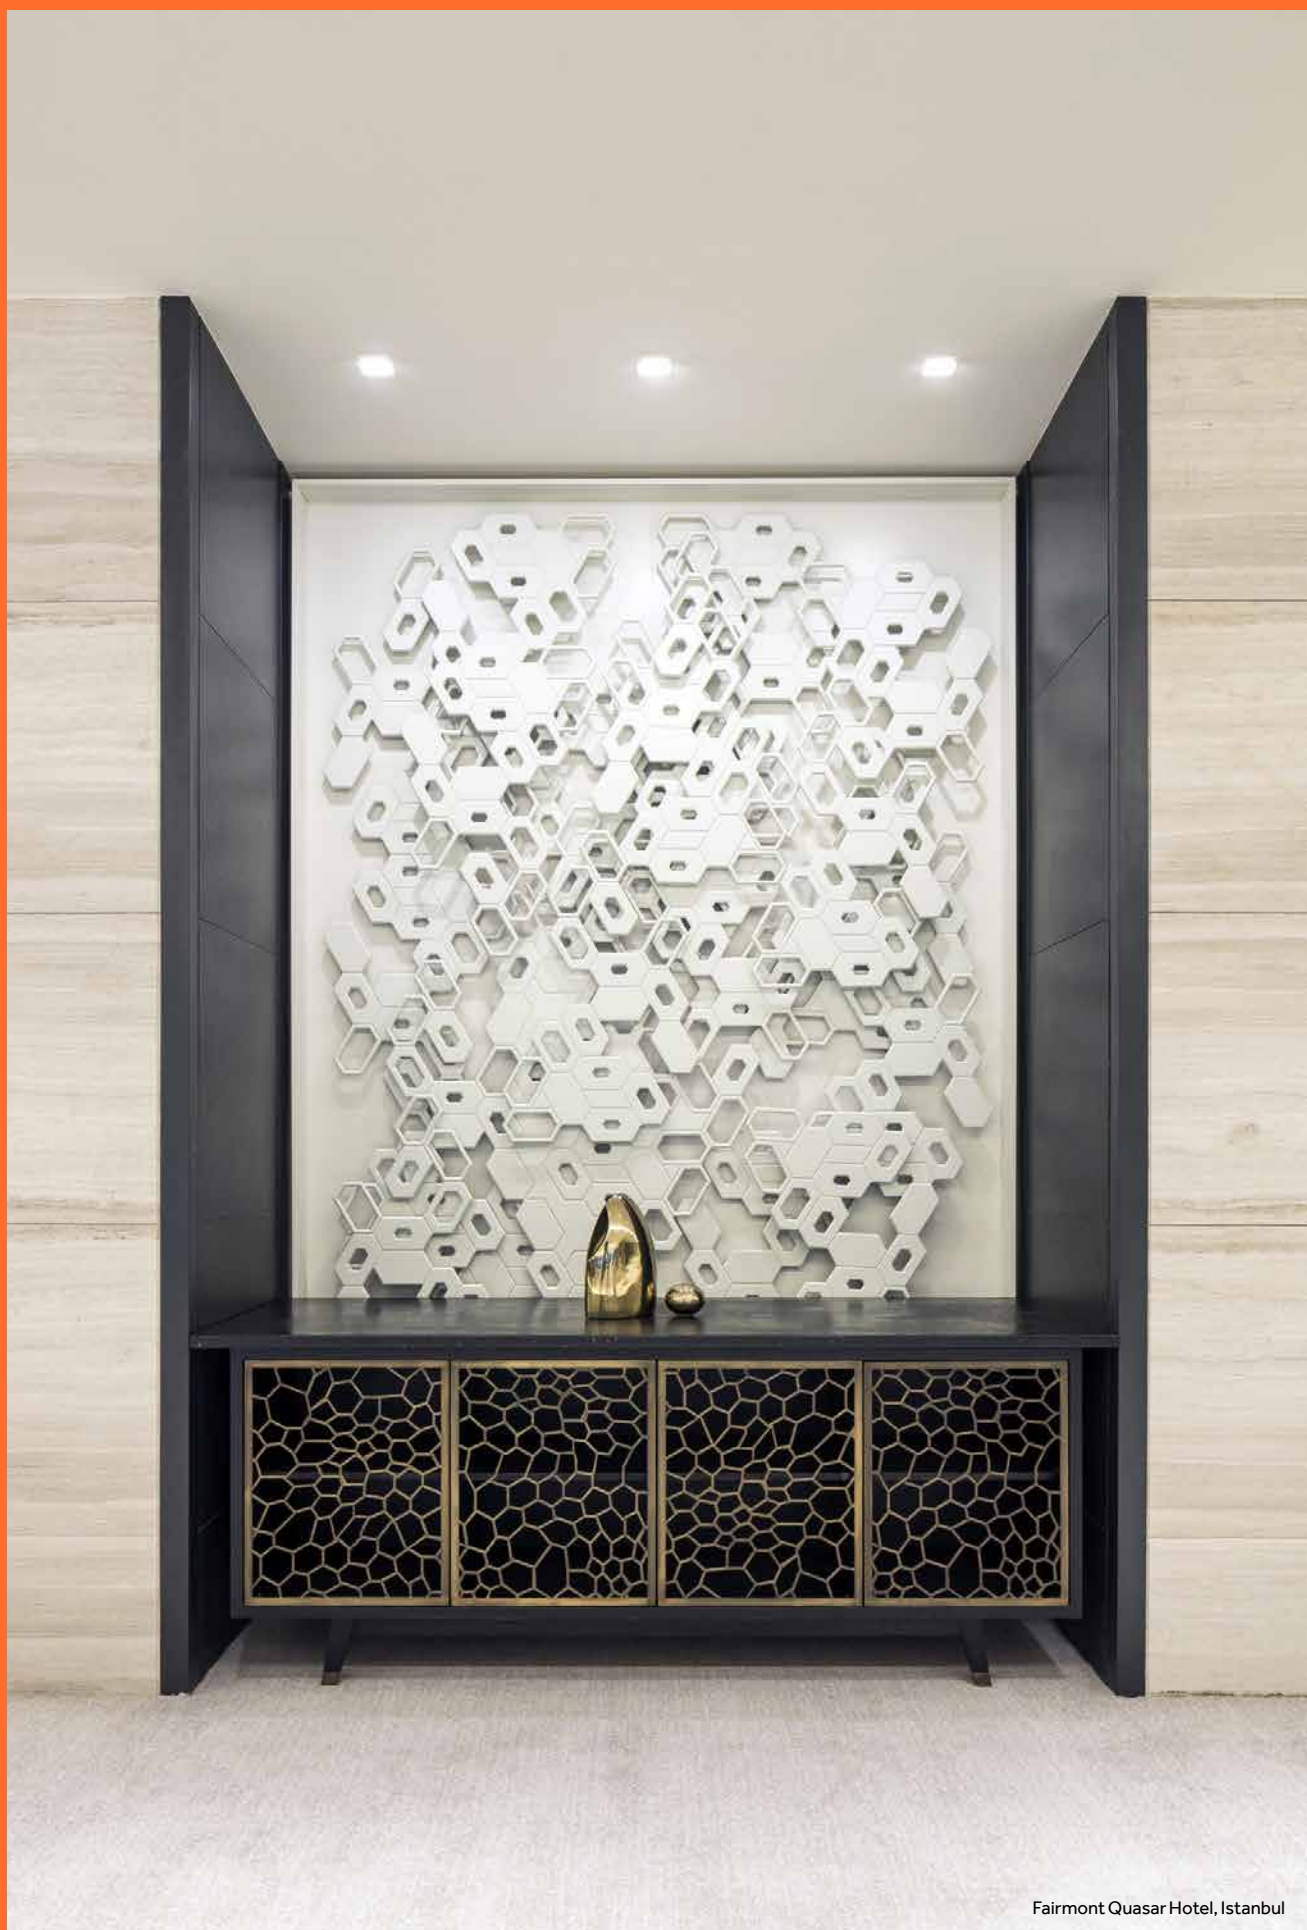

Fairmont Quasar Hotel, Istanbul


Technical info & codes

	S	M	L	XL
Mood Wall Washer Round	 ø62 ø50 p.94	 ø96 ø80 p.95	 ø128 ø110 p.95-96	 ø175 ø150 p.96
Mood Wall Washer Square	 62x62 50x50 p.97	 96x96 80x80 p.98	 128x128 110x110 p.98-99	 175x175 150x150 p.99
	Wall Washer	Wall Washer	Wall Washer	Wall Washer
Light source/ Sorgente luminosa	POWER LED 8,5 W 781 lm - 902 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K CRI >90 SDCM <2 On request: (3500K, CRI>90)	POWER LED 12 W 1386 lm - 1601 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K CRI >90 SDCM <2 On request: (3500K, CRI>90)	COB LED 21 W 2528 lm - 2846 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K CRI >90 SDCM <2 On request: (3500K, CRI>90)	COB LED 34 W 3574 lm - 4107 lm L90 B10=50,000h 2700 K, 3000 K, 4000 K CRI >90 SDCM <2 On request: (3500K, CRI>90)


Round

Round | S | Flush/A filo



Risk 1 0.09



Visible trim/
Con flangia



Trimless/
Senza flangia



Code example:

X . RP12 H . HW 12

Drivers: p. 100

Accessories: p. 103

Photometric data:
www.reggiani.net

8.5 W Power LED

Lumen delivered up to 290 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	RP12 Visible trim	H Wall Washer	HW	2700	>90	781	<2	12
	UP12 Trimless		HQ	3000	>90	836	<2	31
			HN	4000	>90	902	<2	

LED nominal lumen


3500K (CRI >90) on request

Round | S | Drop/Esposito



Risk 1 0.09



Visible trim/
Con flangia



Trimless/
Senza flangia



Code example:

X . TP12 H . HW 12

Drivers: p. 100

Accessories: p. 103

Photometric data:
www.reggiani.net

8.5 W Power LED

Lumen delivered up to 259 lm / Lumen maintenance: L90 B10=50,000h



Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	TP12 Visible trim	H Wall Washer	HW	2700	>90	781	<2	12
	VP12 Trimless		HQ	3000	>90	836	<2	31
			HN	4000	>90	902	<2	

LED nominal lumen

3500K (CRI >90) on request

Round | M | Flush/A filo

Risk 1 0.28 IP20 TP44 850° CE UK CA

Visible trim/
Con flangiaTrimless/
Senza flangia

Code example:

X . RP1D H . HW 12

Drivers: p. 101

Accessories: p. 103

Photometric data:

www.reggiani.net

12 W Power LED

Lumen delivered up to 377 lm / Lumen maintenance: L90 B10=50,000h




Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	RP1D Visible trim	H Wall Washer	HW	2700	>90	1386	<2	12
	UP1D Trimless		HQ	3000	>90	1485	<2	31
			HN	4000	>90	1601	<2	

LED nominal lumen

3500K (CRI >90) on request

Round | M | Drop/Esposto

Risk 1 0.28 IP20 TP44 850° CE UK CA

Visible trim/
Con flangiaTrimless/
Senza flangia

Code example:

X . TP1D H . HW 12

Drivers: p. 101

Accessories: p. 103

Photometric data:

www.reggiani.net

12 W Power LED

Lumen delivered up to 366 lm / Lumen maintenance: L90 B10=50,000h




Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	TP1D Visible trim	H Wall Washer	HW	2700	>90	1386	<2	12
	VP1D Trimless		HQ	3000	>90	1485	<2	31
			HN	4000	>90	1601	<2	

LED nominal lumen

3500K (CRI >90) on request

Round | L | Flush/A filo

Risk 1 0.56 IP20 TP44 850° CE UK CA

Visible trim/
Con flangiaTrimless/
Senza flangia

Code example:

X . RP15 H . HW 12

Drivers: p. 101

Accessories: p. 103

Photometric data:

www.reggiani.net

21 W COB LED

Lumen delivered up to 1195 lm / Lumen maintenance: L90 B10=50,000h




Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	RP15 Visible trim	H Wall Washer	HW	2700	>90	2528	<2	12
	UP15 Trimless		HQ	3000	>90	2648	<2	31
			HN	4000	>90	2846	<2	

LED nominal lumen

3500K (CRI >90) on request

Round | L | Drop/Esposto

Risk 1 0.56 IP20 P44 850° CE UK CA

Visible trim/
Con flangiaTrimless/
Senza flangia

Code example:

X . TP15 H . HW 12

Drivers: p. 101

Accessories: p. 103

Photometric data:

www.reggiani.net

21 W COBLED

Lumen delivered up to 1312 lm / Lumen maintenance: L90 B10=50,000h




Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	TP15 Visible trim	H Wall Washer	HW	2700	>90	2528	<2	12
	VP15 Trimless		HQ	3000	>90	2648	<2	31
			HN	4000	>90	2846	<2	

LED nominal lumen

3500K (CRI >90) on request

Round | XL | Flush/A filo

Risk 1 1.19 IP20 P44 850° CE UK CA

Visible trim/
Con flangiaTrimless/
Senza flangia

Code example:

X . RG17 H . HW 12

Drivers: p. 102

Accessories: p. 103

Photometric data:

www.reggiani.net

34 W COBLED

Lumen delivered up to 2006 lm / Lumen maintenance: L90 B10=50,000h




Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	RG17 Visible trim	H Wall Washer	HW	2700	>90	3574	<2	12
	UG17 Trimless		HQ	3000	>90	3825	<2	31
			HN	4000	>90	4107	<2	

LED nominal lumen

3500K (CRI >90) on request

Round | XL | Drop/Esposto

Risk 1 1.19 IP20 P44 850° CE UK CA

Visible trim/
Con flangiaTrimless/
Senza flangia

Code example:

X . TG17 H . HW 12

Drivers: p. 102

Accessories: p. 103

Photometric data:

www.reggiani.net

34 W COBLED

Lumen delivered up to 1997 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	TG17 Visible trim	H Wall Washer	HW	2700	>90	3574	<2	12
	VG17 Trimless		HQ	3000	>90	3825	<2	31
			HN	4000	>90	4107	<2	

LED nominal lumen

3500K (CRI >90) on request


Square

Square | S | Flush/A filo


Risk 1 0.10 P20 TP44 850° CE UK



Visible trim/
Con flangia



Trimless/
Senza flangia



Code example:

X . ZP12 H . HW 12

Drivers: p. 100
Accessories: p. 103
Photometric data:
www.reggiani.net


8.5 W Power LED		Lumen delivered up to 320 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	ZP12 Visible trim	H Wall Washer	HW	2700	>90	781	<2	12
	XP12 Trimless		HQ	3000	>90	836	<2	31
			HN	4000	>90	836	<2	
LED nominal lumen 3500K (CRI >90) on request								

Square | S | Drop/Esposto


Risk 1 0.10 P20 TP44 850° CE UK



Visible trim/
Con flangia



Trimless/
Senza flangia



Code example:




X . WP12 H . HW 12

Drivers: p. 100
Accessories: p. 103
Photometric data:
www.reggiani.net

8.5 W Power LED		Lumen delivered up to 277 lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	WP12 Visible trim	H Wall Washer	HW	2700	>90	781	<2	12
	YP12 Trimless		HQ	3000	>90	836	<2	31
			HN	4000	>90	836	<2	
LED nominal lumen 3500K (CRI >90) on request								

Square | M | Flush/A filo

Risk 1 0.30 IP20 IP44 Recycle 850° CE UK CA

Visible trim/
Con flangiaTrimless/
Senza flangia

Code example:

X . ZP1D H . HW 12

Drivers: p. 101

Accessories: p. 103

Photometric data:

www.reggiani.net

12 W Power LED

Lumen delivered up to 379 lm / Lumen maintenance: L90 B10=50,000h



Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	ZP1D Visible trim	H Wall Washer	HW	2700	>90	1386	<2	12
	XP1D Trimless		HQ	3000	>90	1485	<2	31
			HN	4000	>90	1600	<2	

LED nominal lumen

3500K (CRI >90) on request

Square | M | Drop/Esposto

Risk 1 0.30 IP20 IP44 Recycle 850° CE UK CA

Visible trim/
Con flangiaTrimless/
Senza flangia

Code example:

X . WP1D H . HW 12

Drivers: p. 101

Accessories: p. 103

Photometric data:

www.reggiani.net

12 W Power LED

Lumen delivered up to 356 lm / Lumen maintenance: L90 B10=50,000h




Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	WP1D Visible trim	H Wall Washer	HW	2700	>90	1386	<2	12
	YP1D Trimless		HQ	3000	>90	1485	<2	31
			HN	4000	>90	1600	<2	

LED nominal lumen

3500K (CRI >90) on request

Square | L | Flush/A filo

Risk 1 0.58 IP20 IP44 Recycle 850° CE UK CA

Visible trim/
Con flangiaTrimless/
Senza flangia

Code example:

X . ZP15 H . HW 12

Drivers: p. 101

Accessories: p. 103

Photometric data:

www.reggiani.net

21 W COB LED

Lumen delivered up to 1336 lm / Lumen maintenance: L90 B10=50,000h



Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	ZP15 Visible trim	H Wall Washer	HW	2700	>90	2528	<2	12
	XP15 Trimless		HQ	3000	>90	2648	<2	31
			HN	4000	>90	2846	<2	

LED nominal lumen

3500K (CRI >90) on request

Square | L | Drop/Esposto

Risk 1 0.58 IP20 TP44 850° CE UK CA



Code example:

X . WP15 H . HW 12

Drivers: p. 101

Accessories: p. 103

Photometric data:

www.reggiani.net

21 W COB LED

Lumen delivered up to 1382 lm / Lumen maintenance: L90 B10=50,000h



Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	WP15 Visible trim	H Wall Washer	HW	2700	>90	2528	<2	12
	YP15 Trimless		HQ	3000	>90	2648	<2	31
			HN	4000	>90	2846	<2	

LED nominal lumen

3500K (CRI >90) on request

Square | XL | Flush/A filo

Risk 1 1.43 IP20 TP44 850° CE UK CA



Code example:

X . ZG17 H . HW 12

Drivers: p. 102

Accessories: p. 103

Photometric data:

www.reggiani.net

34 W COB LED

Lumen delivered up to 1922 lm / Lumen maintenance: L90 B10=50,000h



Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	ZG17 Visible trim	H Wall Washer	HW	2700	>90	3574	<2	12
	XG17 Trimless		HQ	3000	>90	3825	<2	31
			HN	4000	>90	4107	<2	

LED nominal lumen

3500K (CRI >90) on request

Square | XL | Drop/Esposto

Risk 1 1.43 IP20 TP44 850° CE UK CA



Code example:

X . WG17 H . HW 12

Drivers: p. 102

Accessories: p. 103

Photometric data:

www.reggiani.net

34 W COB LED

Lumen delivered up to 1873 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	WG17 Visible trim	H Wall Washer	HW	2700	>90	3574	<2	12
	YG17 Trimless		HQ	3000	>90	3825	<2	31
			HN	4000	>90	4107	<2	

LED nominal lumen

3500K (CRI >90) on request

Electrical Devices

Some drivers may not fit through the XS and S fitting cut out, check the QR Code./ Alcuni driver potrebbero non passare dal foro di incasso dei prodotti XS e S, verifica tramite il codice QR.



S | Electrical Devices

Driver/ Alimentazioni

8,5 W Power LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max. distance	Cable section
On/Off	0.30419.0000	12		39 mm	120-240V / 50/60Hz	700	Max: 1	5 m	1.5 mm ²
On/Off	0.30041.0000	32		49 mm	220-240Vac / 0/50/60Hz	700	Min: 1 - Max: 3	20 m	1.5 mm ²
Phase-cut	T.30420.0000	10		37 mm	220-240Vac / 50/60Hz	700	Max: 1	20 m	1.5 mm ²
Phase-cut	T.30421.0000	32		57 mm	220-240Vac / 0, 50/60Hz	700	Min: 1 - Max: 3	20 m	1.5 mm ²
Dimm 1-10V	V.30420.0000	20		56 mm	220-240Vac / 0, 50/60Hz	700	Min: 1 - Max: 2	20 m	1.5 mm ²
Dimm 1-10V	V.30421.0000	36		53 mm	220-240Vac / 50/60Hz	700	Min: 1 - Max: 3	20 m	1.5 mm ²
DALI	D.30420.0000	20		56 mm	220-240Vac / 0, 50/60Hz	700	Min: 1 - Max: 2	20 m	1.5 mm ²
DALI	D.30421.0000	38		54 mm	220-240Vac / 0, 50/60Hz	700	Min: 3 - Max: 4	20 m	1.5 mm ²

Other devices/ Altri dispositivi

Type	Code	Size (mm)	Cut-out	Tech. specifications	Connectable fixtures	Max. distance	Cable section
•)) Casambi control unit for wireless Bluetooth control/ Unità di controllo Casambi per controllo wireless Bluetooth	0.26101.0000		45 mm	220-240V, 50-60Hz 0,6A for DALI drivers	Max: 1	-	1.5 mm ²
+ 1h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 1h	0.35081.0000		58 mm	220-240V / 50/60 Hz	Max: 1	5 m	1.5 mm ²
+ 3h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 3h	0.35081.UK00		58 mm	220-240V / 50/60 Hz	Max: 1	5 m	1.5 mm ²

^{EN} Emergency pack for LED luminaires including Ni/Cd battery with 1h/3h back-up.


For Mood Pro range products in S sizes, the emergency pack will not pass through the product's cut-out so this accessory needs to be positioned remotely, no more than 5 m away from the product/. Moreover, for Mood Pro range products in S size, the emergency pack must be connected in series to at least four products.

^{IT} Gruppo di emergenza per apparecchi LED con batterie Ni/Cd autonomia 1h/3h.

Per i prodotti della gamma Mood Pro nelle dimensioni S, il gruppo di emergenza non può passare dal foro di incasso del prodotto; l'accessorio deve quindi essere posizionato in posizione remota ad una distanza di max 5 m dal prodotto. Inoltre, per i prodotti della gamma Mood Pro nelle dimensioni S il gruppo di emergenza deve essere collegato ad almeno quattro prodotti in serie.

Installation and connection accessories/ Accessori di installazione e collegamento

Type	Code	Tech. specifications
Accessory for series connection/ Accessorio per collegamento in serie	0.26070.0000	Max 60V/dc



M | Electrical Devices

Driver/ Alimentazioni

12 W Power LED									
Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30423.0000	42		52 mm	220-240Vac / 0/50/60Hz	1050	Min: 1 - Max: 3	20 m	1.5 mm ²
Phase-cut	T.30422.0000	22		52 mm	220-240Vac / 50/60Hz	1050	Max: 1	20 m	1.5 mm ²
Dimm 1-10V	V.30423.0000	36		53 mm	220-240Vac / 50/60Hz	1050	Min: 1 - Max: 2	20 m	1.5 mm ²
DALI	D.30422.0000	20		52 mm	220-240Vac / 50/60Hz	1050	Max: 1	20 m	1.5 mm ²

Other devices/ Altri dispositivi

Type	Code	Size (mm)	Cut-out	Tech. specifications	Connectable fixtures	Max. distance	Cable section
• Casambi control unit for wireless Bluetooth control/ Unità di controllo Casambi per controllo wireless Bluetooth	0.26101.0000		45 mm	220-240V, 50-60Hz 0,6A for DALI drivers	Max: 1	-	1.5 mm ²
1h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 1h	0.35081.0000		58 mm	220-240V / 50/60Hz	Min: 4	5 m	1.5 mm ²
3h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 3h	0.35081.UK00		58 mm	220-240V / 50/60Hz	Min: 4	5 m	1.5 mm ²

^{EN} Emergency pack for LED luminaires including Ni/Cd battery with 1h/3h back-up.


For Mood Pro range products in M sizes, the emergency pack will not pass through the product's cut-out so this accessory needs to be positioned remotely, no more than 5 m away from the product/. Moreover, for Mood Pro range products in M size, the emergency pack must be connected in series to at least four products.

^{IT} Gruppo di emergenza per apparecchi LED con batterie Ni/Cd autonomia 1h/3h.

Per i prodotti della gamma Mood Pro nelle dimensioni M, il gruppo di emergenza non può passare dal foro di incasso del prodotto; l'accessorio deve quindi essere posizionato in posizione remota ad una distanza di max 5 m dal prodotto. Inoltre, per i prodotti della gamma Mood Pro nelle dimensioni M il gruppo di emergenza deve essere collegato ad almeno quattro prodotti in serie.

Installation and connection accessories/ Accessori di installazione e collegamento

Type	Code	Tech. specifications
• Accessory for series connection/ Accessorio per collegamento in serie	0.26070.0000	Max 60V/dc



L | Electrical Devices

Driver/ Alimentazioni

21 W COB LED									
Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30426.0000	32		49 mm	220-240Vac / 0/50/60Hz	600	Max: 1	20 m	1.5 mm ²
Phase-cut	T.30426.0000	36		57 mm	220-240Vac / 50/60Hz	550	Max: 1	20 m	1.5 mm ²
Dimm 1-10V	V.30426.0000	36		53 mm	220-240Vac / 0/50/60Hz	600	Max: 1	20 m	1.5 mm ²
DALI	D.30426.0000	38		54 mm	220-240Vac / 0/50/60Hz	600	Max: 1	20 m	1.5 mm ²

Other devices/ Altri dispositivi

Type	Code	Size (mm)	Cut-out	Tech. specifications	Connectable fixtures	Max. distance	Cable section
• Casambi control unit for wireless Bluetooth control/ Unità di controllo Casambi per controllo wireless Bluetooth	0.26101.0000		45 mm	220-240V, 50-60Hz 0,6A for DALI drivers	Max: 1	-	1.5 mm ²
1h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 1h	0.35081.0000		58 mm	220-240V / 50/60Hz	Max: 1	5 m	1.5 mm ²
3h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 3h	0.35081.UK00		58 mm	220-240V / 50/60Hz	Max: 1	5 m	1.5 mm ²

^{EN} For LED fixtures (21W), Ni/Cd battery

^{IT} Per apparecchi LED (21W), batterie Ni/Cd

XL | Electrical Devices

Driver/ Alimentazioni

34 W	COB LED								
Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max. distance	Cable section
On/Off	0.30408.0000	40		49 mm	220-240Vac / 0/50/60Hz	950	Max: 1	20 m	1.5 mm ²
Phase-cut	T.30408.0000	40		50 mm	220-240Vac / 50/60Hz	900	Max: 1	20 m	1.5 mm ²
Dimm 1-10V	V.30408.0000	36		53 mm	220-240Vac / 0/50/60Hz	950	Max: 1	20 m	1.5 mm ²
DALI	D.30408.0000	38		54 mm	220-240Vac / 0/50/60Hz	950	Max: 1	20 m	1.5 mm ²

Other devices/ Altri dispositivi

Type	Code	Size (mm)	Cut-out	Tech. specifications	Connectable fixtures	Max. distance	Cable section
•))) Casambi control unit for wireless Bluetooth control/ Unità di controllo Casambi per controllo wireless Bluetooth	0.26101.0000		45 mm	220-240V, 50-60Hz 0,6A for DALI drivers	Max: 1	-	1.5 mm ²
+ 1h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 1h	0.35070.0000		58 mm	220-240V / 50/60 Hz	Max: 1	5 m	1.5 mm ²
+ 3h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 3h	0.35070.3H00		58 mm	220-240V / 50/60 Hz	Max: 1	5 m	1.5 mm ²

^{EN} For LED fixtures (34W), Ni/Cd battery


^{IT} Per apparecchi LED (34W), batterie Ni/Cd

Mounting accessories

Mounting accessories

Formwork/ Cassaforma

Mood Pro Fixed | S




Description

Formwork (S)/
Cassaforma (S)

Code

0.40190.0000

Mood Pro Fixed | M




Description

Formwork (M)/
Cassaforma (M)

Code

0.40194.0000

Mood Pro Fixed | L-XL



Description

Formwork (L-XL)/
Cassaforma (L-XL)

Code

0.40196.0000

Reggiani

©
2024
Reggiani Lighting S.r.l
All rights reserved

^{EN} Reggiani Lighting S.r.l reserves the right to make technical, design and size changes at any time, without prior notice.
Total or partial reproduction of this document is prohibited.
Luminaire sizes are given in millimetres.
All technical and design innovations are patented.
Watts and lumens refer to the nominal values of the LED source; for photometric data and lumen output of the luminaires, visit www.reggiani.net

^{IT} Reggiani Lighting S.r.l si riserva la facoltà di effettuare in qualsiasi momento senza preavviso, variazioni tecniche, formali e dimensionali.
Sono vietate le riproduzioni anche parziali del presente documento.
Le dimensioni degli apparecchi sono espresse in millimetri. Tutte le innovazioni tecniche e formali sono coperte da brevetto.
Watt e lumen fanno riferimento ai valori nominali della sorgente LED, per i dati fotometrici e il lumen output degli apparecchi visitare www.reggiani.net

Art direction
Reggiani

Graphic design
Reggiani

Pictures
Dittel Architekten Gmbh (p.4)
Reimund Brau (p.5)
Andrea Manzini (p.7)
Officine Architetti (p. 17)
Oliver Jaist (p. 24)
Marco Reggi (p.26)
Rimadesio (p.48)
Nilai Asia Images (p.49, p.56- 57)
Manolo Espaliù (p.51, p.86-87)
Sahir Ugur Eren (p.91)

HEADQUARTERS
Reggiani Lighting S.r.l

Viale Monza 16
20845 Sovico (MB), Italy
T. (+39) 039 20711
contact@reggiani.net



A **NEMO** company

